

67071-6

1/24/2006

Page 184

## UNITED STATES ENVIRONMENTAL PROTECTION AGENCY

JAN 24 2006

Acti-Chem Specialties, Inc.  
Thor GMBH  
56 Quarry Road  
Trumbull, CT 06611

Attention: Lynn P. Tordo  
Regulatory Affairs Coordinator

Subject: Acticide 45  
EPA Registration No. 67071-6  
Amendment Dated November 9, 2005

The amendment, submitted in connection with registration under the Federal Insecticide, Fungicide and Rodenticide Act (FIFRA), as amended, to divide the present, existing, approved label into a Label and Information Sheet, is acceptable.

A stamped copy of the "accepted" label and Information Sheet is enclosed for your records.

If you have any questions concerning this letter, please contact Martha Terry at (703) 308-6217.

Sincerely,



Marshall Swindell  
Product Manager 33  
Regulatory Management Branch 1  
Antimicrobials Division (7510C)

Enclosure

CONCURRENCES							
SYMBOL							
SURNAME							
DATE							

**THOR**

**ENVIRONMENTAL HAZARDS**

This pesticide is toxic to fish and wildlife. Do not discharge effluent containing this product into lakes, streams, ponds, estuaries, oceans or public waters unless this product is specifically identified and addressed in an NPDES permit and the permitting authority has been notified in writing prior to discharge. Do not discharge effluent containing this product to sewer systems without previously notifying the sewage treatment plant authority. For guidance contact your State Water Board or Regional Office of the EPA. Do not contaminate water by cleaning of equipment or disposal of waste. Apply this pesticide only as specified on this label.

**STORAGE AND DISPOSAL**

Do not contaminate food or feed by storage, disposal or cleaning of equipment.

**STORAGE DISPOSAL:** Do not store or transport in unlined metal containers.

**Pesticide Disposal:** Pesticide wastes are acutely hazardous. Improper disposal of excess pesticide or rinsate is a violation of Federal Law. If these wastes cannot be disposed of by use according to label instructions, contact your State Pesticide or Environmental Control Agency or the Hazardous Waste representative at the nearest EPA Regional Office for guidance.

**Container Disposal:** Metal container: Triple rinse (or equivalent). Then offer for recycling or reconditioning, or puncture and dispose of in a sanitary landfill or by other procedures approved by state and local authorities. Plastic container: Triple rinse (or equivalent). Then offer for recycling or reconditioning, or puncture and dispose of in a sanitary landfill or by incinerator or, if allowed by state and local authorities, by burning. If burned, stay out of smoke.

**GENERAL:** CONSULT FEDERAL, STATE OR LOCAL DISPOSAL AUTHORITIES FOR APPROVED ALTERNATIVE PROCEDURES.

**CONDITIONS OF SALE AND WARRANTY**

Thor GmbH warrants that the product conforms to its chemical description and is reasonably fit for the purpose stated on the label only when used in accordance with label directions under normal conditions of use. THOR GMBH MAKES NO OTHER EXPRESS OR IMPLIED WARRANTIES EITHER OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR USE. Handling, storage and use of the product by Buyer or User are beyond the control of Thor GmbH and Seller. Risks such as ineffectiveness or other unintended consequences resulting from, but not limited to, failure to follow label directions will be assumed by the Buyer or User. IN NO CASE WILL THOR GMBH OR SELLER BE HELD LIABLE FOR CONSEQUENTIAL, SPECIAL OR INDIRECT DAMAGES RESULTING FROM THE HANDLING, STORAGE OR USE OF THIS PRODUCT.

**CORROSIVE LIQUID, N.O.S. (2-n-Octyl-4-isothiazolin-3-one), 8, UN 2922, PG-III**

**ACTICIDE® 45**

ACTIVE INGREDIENT:  
2-n-Octyl-4-isothiazolin-3-one 48.5%  
INERT INGREDIENTS: 53.5%  
TOTAL: 100.0%

**KEEP OUT OF REACH OF CHILDREN  
DANGER - PELIGRO**

See Side panel for additional precautionary statements

**FIRST AID**

- If Swallowed:** \*Call a poison control center or doctor immediately for treatment advice.  
\*Have person sip a glass of water if able to swallow.  
\*Do not induce vomiting unless told to do so by the poison control center or doctor.  
\*Do not give anything by mouth to an unconscious person.
- If on Skin:** \*Take off contaminated clothing.  
Or Clothing \*Rinse skin immediately with plenty of water for 15-20 minutes.  
\*Call a poison control center or doctor for treatment.
- If Inhaled:** \*Move person to fresh air.  
\*If person is not breathing, call 911 or an ambulance, then give artificial respiration, preferably by mouth-to-mouth, if possible.  
\*Call a poison control center or doctor for further treatment.
- If in Eyes:** \*Hold eye open and rinse slowly and gently with water for 15-20 minutes.  
\*Remove contact lenses, if present, after the first 5 minutes, then continue rinsing.  
\*Call a poison control center or doctor for treatment advice.

**HOT LINE NUMBER:** Have the product container or label with you when calling a poison control center or doctor, or going for treatment. You may also contact 1-800-424-9300 for emergency medical treatment information.

**Note to physician:** Probable mucosal damage may contraindicate the use of gastric lavage.

**Precautionary Statements:  
Hazards to Humans and Domestic**

**Animals  
DANGER**

**CORROSIVE.** CAUSES PERMANENT, IRREVOCABLE EYE DAMAGE AND SKIN BURNS. MAY CAUSE ALLERGIC SKIN REACTION. MAY BE FATAL IF SWALLOWED. HARMFUL IF ABSORBED THROUGH SKIN OR INHALED. PROLONGED OR REPEATED OVEREXPOSURE CAN CAUSE CENTRAL NERVOUS SYSTEM EFFECTS AND KIDNEY AND LIVER DAMAGE. DO NOT GET IN EYES, ON SKIN, ON CLOTHING. WEAR GOGGLES OR FACE SHIELD. WEAR PROTECTIVE CLOTHING AND RUBBER GLOVES. AVOID BREATHING VAPOR OR MIST. KEEP CONTAINER CLOSED. USE WITH ADEQUATE VENTILATION. DO NOT TAKE INTERNALLY. WASH THOROUGHLY WITH SOAP AND WATER AFTER HANDLING AND BEFORE EATING, DRINKING, OR USING TOBACCO.

**DIRECTIONS FOR USE**

**It is a violation of Federal Law to use this product in a manner inconsistent with its labeling.**

ACTICIDE® 45 is an industrial microbiocide to be used for the protection of paint films; coatings; including wood coatings and \*wood coating solutions; adhesives; \*sealants; \*mastics; \*caulks; \*applied film/wet state of adhesives, tackifiers, paints, coatings and other building materials; \*hides; \*leather; \*textiles; \*fibers; \*fabrics; \*plastic/PVC/vinyl products; \*Metalworking Fluids; \*Hydraulic Fluids against attack by mildew, and fungus. READ AND FOLLOW THE DIRECTIONS FOR USE ON THE ACCOMPANYING INFORMATION SHEET.

\* Not approved for these uses in the State of California

**EPA Reg. No. 67071-6**

Manufactured For/By: Thor GmbH  
D-67346 Speyer, Germany  
Tel. (06232) 6360

**EPA Est. No. 67071-DEU-001**

U.S. Office: Acti-Chem Specialties, Inc.  
56 Quarry Road  
Trumbull, CT 06611 USA  
Tel. (203) 365 6530

Batch:	Mfg Date:	ACCEPTED	Net Contents (pounds):
--------	-----------	----------	------------------------

JAN 24 2006

Under the Federal Insecticide, Fungicide, and Rodenticide, Act as amended, for the pesticide, registered under EPA Reg. No. 67071-6

2  
2  
4

3 8 4

# ACTICIDE® 45

## INFORMATION SHEET



**THIS ACTICIDE® 45 INFORMATION SHEET MUST ACCOMPANY EACH SHIPMENT OF ACTICIDE® 45**

### DIRECTIONS FOR USE

It is a violation of Federal Law to use this product in a manner inconsistent with its labeling.

**DRY FILM PRESERVATIVE FOR PAINTS, COATINGS, WOOD COATINGS, ADHESIVES, \*SEALANTS, \*MASTICS, \*CAULKS:** ACTICIDE® 45 mildewcide is recommended for the control of fungi in latex and oil-based paints, coatings and adhesives (non-food contact).

The amount of ACTICIDE® 45 needed to protect dry and the applied/wet-states of paint films and wood coatings varies with the type formulation and exposure conditions of the film (e.g., indoor vs. tropical climates). Add two to five pounds of ACTICIDE® 45 per 100 gallons of paint. Add 0.1 to 5 pounds ACTICIDE® 45 per 100 gallons of wood coatings or wood coating solutions. Similar application levels are used with oil-based paints, wood coatings or coatings. In industrial adhesives mildew resistance is obtained using such levels on a weight/weight basis -- i.e., two to five pounds of ACTICIDE® 45 per 1000 pounds of adhesive. The Acti-Chem Specialties Technical Department will assist in the determination of the optimum quantity required by your product. This facility is especially helpful where information is required about a formulation which has a greater than usual susceptibility to microbiological spoilage and/or is to be used in an area where the environmental conditions are particularly conducive to fungal growth.

**\*LEATHER PRESERVATION:** ACTICIDE® 45 is recommended for the prevention of bacterial and fungal growth on wet leather stock such as pickled, chrome-tanned and vegetable-tanned hides and leather, including wet-blues. Normal addition levels are in the range of 0.014% - 0.045% by weight of ACTICIDE® 45 calculated on the pelt weight. The optimum use concentrations will depend on the manufacturing process, the required properties of the product and the environment to which it will be exposed. Levels will be particularly affected by natural fat content, skin thickness, storage time and tannery conditions.


**\*TEXTILE, \*FIBER AND \*FABRIC PRESERVATION:** ACTICIDE® 45 is recommended for the prevention of bacterial and fungal growth, in the presence of moisture, in/on fibers, textiles and fabrics, including carpets and backing materials, natural and man-made. Normal addition levels are in the range of 0.1%-0.25% by weight of ACTICIDE® 45 calculated on the materials weight. The optimum use concentrations will depend on the manufacturing process, the properties of the product and the environment to which it will be exposed. Levels will be particularly affected by the fabric thickness, proximity to the air circulation, storage time and ambient humidity.

**\*PRESERVATION OF PLASTIC/PVC/VINYL PRODUCTS:** ACTICIDE® 45 mildewcide is recommended for the control of mildew and fungi in PVC flooring and wall coverings, coated fabrics for upholstery, interior automotive parts, refrigerator gaskets, shower curtains, mattress covers, artificial leather, rain wear, protective wear, shoes, boots, PVC slippers and gloves. For these uses, generally not subject to continuous external environmental conditions, use 0.1%-0.5% of ACTICIDE® 45 based on the total weight of the formulation/composition (or 0.05% to 0.5% based on plastisol).

ACTICIDE® 45 is also recommended in situations generally subject to external environmental variations such as use in automotive landau tops, external automotive trim, tarpaulins, tents, awnings, indoor/outdoor carpeting, garden hoses, pool and pond liners, marine upholstery, swimming pool liners, roof liners, lining foils, cable casings, PVC tiles and fibers. For these external-type uses apply 0.15%-0.75% of ACTICIDE® 45 based on the total weight of the formulation/composition (4.35 lbs/1000 lbs. of compound).

Mode of application for plastic/PVC/Vinyl Products. ACTICIDE® 45 can, in most of the standard methods of plastics production, be introduced in different phases of the process cycle. An absolutely homogeneous incorporation into the material is essential for a good antimicrobial (anti-fungal) activity. The mixture of the product with fluid additives should be ensured by the use of a good mechanical stirring device. The product may never be introduced directly into fillers and pigments. ACTICIDE® 45 is first dissolved in the plasticizer. Subsequently, the rest of the additives are mixed in and homogeneously worked together. The product can also be homogeneously distributed in finished plastisols by intensive mixing.

**\*APPLIED FILM/WET STATE PRESERVATIVE:** ACTICIDE® 45 microbicide is recommended for the control of bacteria and fungi in the applied film/wet state of adhesives, tackifiers, paints, coatings and building materials (such as fire-proofing and sound-proofing coatings) for the purpose of protecting the applied film/wet state prior to a full cure.

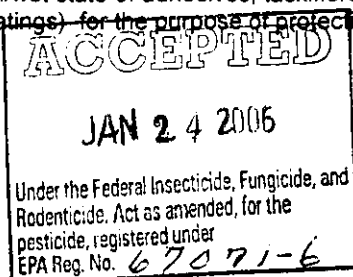

4 8 4

# ACTICIDE® 45

## INFORMATION SHEET



**THIS ACTICIDE® 45 INFORMATION SHEET MUST ACCOMPANY EACH SHIPMENT OF ACTICIDE® 45**

### DIRECTIONS FOR USE

It is a violation of Federal Law to use this product in a manner inconsistent with its labeling.

**\*METALWORKING FLUID PRESERVATION:** ACTICIDE® 45 is recommended for the control of fungi in the manufacture and use of soluble, synthetic, and semi-synthetic metalworking fluids. ACTICIDE® 45 is not recommended for use in systems or fluids which are subject to foaming or systems with high levels of tramp oil. ACTICIDE® 45 should be directly dispensed into the metalworking concentrate or use-dilution metalworking fluid using a metered pump or other point-of-use device and uniformly dispersed throughout the liquid. Greatly contaminated systems must be cleaned before treatment is begun.

#### FLUID CONCENTRATES:

ACTICIDE® 45 should be added to the metalworking concentrate at a level to ensure that the final use-dilution fluid will contain 55-167 ppm of product (25-75 ppm active ingredient).

#### USE-DILUTION FLUID:

For a noticeably fouled system, add 0.47 – 1.44 pounds of ACTICIDE® 45 per 1,000 gallons of emulsion. This will provide 25-75 ppm active ingredient. Repeat until control is achieved. For maintenance of a non-fouled system, add 0.09 – 0.58 pounds of ACTICIDE® 45 per 1,000 gallons of emulsion every 4 weeks. This will provide 5-30 ppm active ingredient. A higher dose range and/or increased frequency of treatment may be required, depending upon rate of dilution of the preservative with the makeup fluid, the nature and severity of contamination, level of control required, filtration effectiveness, system design, etc.

**\*HYDRAULIC FLUID PRESERVATION:** ACTICIDE® 45 is recommended as a preservative in the manufacture and use of soluble oils, high water-based and emulsion hydraulic fluids. ACTICIDE® 45 should be directly dispensed into the hydraulic concentrate or use-dilution hydraulic fluid using a metered pump or other point-of-use device and uniformly dispersed throughout the fluid. Greatly contaminated systems must be cleaned before treatment is begun.

#### FLUID CONCENTRATES:

ACTICIDE® 45 should be added to the hydraulic fluid concentrate at a level to ensure that the final use-dilution fluid will contain 55-167 ppm of product (25-75 ppm active ingredient).

#### USE-DILUTION FLUID:

For a noticeably fouled system, add 0.47 – 1.44 pounds of ACTICIDE® 45 per 1,000 gallons of emulsion. This will provide 25-75 ppm active ingredient. Repeat until control is achieved. For maintenance of a non-fouled system, add 0.09 – 0.58 pounds of ACTICIDE® 45 per 1,000 gallons of emulsion every 4 weeks. This will provide 5-30 ppm active ingredient. A higher dose range and/or increased frequency of treatment may be required, depending upon rate of dilution of the preservative with the makeup fluid, the nature and severity of contamination, level of control required, filtration effectiveness, system design, etc.

\* Not approved for these uses in the State of California

