

7/1/82 67262-1 1045

RWP  
MASTER DIHYDRATE GRANULAR

ACTIVE INGREDIENT:

Sodium dichloro-s-triazinetriene  
dihydrate

99.0%

Inert

1.0%

TOTAL INGREDIENTS

100.0%

KEEP OUT OF REACH OF CHILDREN


DANGER

**STATEMENTS OF PRACTICAL TREATMENT:** IF IN EYES: Hold eyelids open and flush with a steady, gentle stream of water for at least 15 minutes. Get medical attention. IF INHALED: Remove victim to fresh air. If not breathing, give artificial respiration preferably mouth-to-mouth. Get medical attention. IF ON SKIN: Wash with plenty of soap and water. Get medical attention if irritation persists. IF SWALLOWED: Drink promptly large amounts of water. Avoid alcohol. NOTE TO PHYSICIAN: Probable mucosal damage may contraindicate the use of gastric lavage. IN CASE OF MEDICAL EMERGENCY, CALL 1-303-623-5716.

See back panel for additional precautionary statements.

MANUFACTURED FOR:  
RECREATIONAL WATER PRODUCTS  
SCOTSDALE, GEORGIA

EPA REG. #67262-1  
EPA EST. # 5185-GA-1

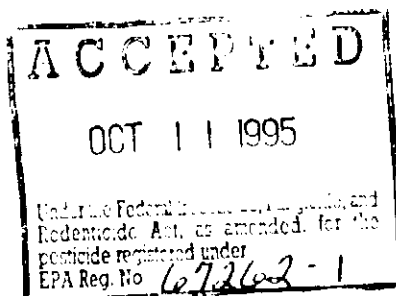

## **FOR POOL SANITIZING:**

**WHY TO USE THIS PRODUCT:** This product is a convenient and economical source of chlorine for routine sanitizing or for periodic superchlorinating of your pool. As granules dissolve, they release sufficient chlorine to reduce the growth of harmful algae and micro-organisms which can multiply to produce unsanitary water conditions. Unlike unstabilized pool sanitizers such as Calcium Hypochlorite or liquid chlorine (bleach), this product contains both chlorine and a stabilizer which reduces chlorine loss from sunlight.

### **IMPORTANT NOTES**

1. When using other products, as outlined in directions for this product, always follow label directions for those products.
2. Damage may be caused by direct contact of this product with pool surface or materials such as colored plaster, vinyl, wood or fiberglass.
3. This product may promote metal stains on pool surfaces. Always check water for metal content and if present, remove metals with a Stain & Scale Inhibitor prior to the addition of this product.
4. Sunlight, rainfall, temperature, number of swimmers and frequency of pool use affect the rate of chlorine loss. Adjust cleaning and chemical maintenance accordingly. To eliminate harmful algae and microorganisms, superchlorinate your pool every 2-4 weeks.

**DIRECTIONS FOR USE:** It is a violation of Federal Law to use this product in any manner inconsistent with its labeling. Read entire label and use strictly in accordance with precautionary statements and directions.

### **BEFORE YOUR BEGIN**

1. Make sure all pool equipment is working properly. Backwash pool filter following manufacturer's directions.
2. Adjust stabilizer levels to 40-50 ppm, by adding Stabilizer.
3. Check water pH, alkalinity and calcium hardness with a test kit. Adjust pH to 7.2 - 7.6 by adding pH Decreaser to lower pH, or by adding pH Add to raise pH. Adjust alkalinity to 80 - 125 ppm for plaster pools, 125 - 150 for vinyl or fiberglass pools by adding Alkalinity Increaser. Adjust Calcium Hardness to 200 - 275 ppm for plaster pools, 175 - 225 for vinyl or fiberglass pools by adding Calcium Hardness Increaser.

### **NOW USE THIS PRODUCT FOR ROUTINE SANITIZING:**

1. Check chlorine level with a test kit and adjust to 1-3 ppm by broadcasting 1 ounce of this product per 10,000 gallons directly into the water in the deep end of pool. Use a pool brush to disperse granules that may have settled to the bottom of the pool.
2. Operate recirculating pump while adding product and for at least 1 hour afterward to ensure even distribution of chemical in water.
3. Recheck chlorine with a test kit. If level is below 1.0 ppm, repeat application until chlorine level of 1-3 ppm is achieved.
4. To maintain chlorine levels, add this product at a rate of 2 to 3 ounces per 10,000 gallons of water every other day or whenever needed to maintain a chlorine levels of 1-3 ppm as measured by a test kit.

Reentry into treated swimming pools is prohibited above levels of 3 ppm chlorine due to risk of body injury.

#### **FOR SPA AND HOT TUB SANITIZING:**

**WHY TO USE THIS PRODUCT:** This product is a convenient and economical source of chlorine for routine sanitizing of your spa and hot tub. As granules dissolve, they release sufficient chlorine to reduce the growth of harmful algae and micro-organisms.

#### **IMPORTANT NOTES**

1. When using other products, as outlined in directions for this product, always follow label directions for those products.
2. Damage may be caused by direct contact of this product with spa or hot tub surfaces or materials such as colored plaster, vinyl, wood or fiberglass.
3. This product may promote metal stains on spa or hot tub surfaces. Always check water for metal content and if present, remove metals with a Stain & Scale Inhibitor prior to the addition of this product.
4. Sunlight, rainfall, temperature, number of bathers and frequency of spa and hot tub use affect the rate of chlorine loss. Adjust cleaning and chemical maintenance accordingly.

**DIRECTIONS FOR USE:** It is a violation of Federal Law to use this product in any manner inconsistent with its labeling. Read entire label and use strictly in accordance with precautionary statements and directions.

#### **BEFORE YOUR BEGIN**

1. Make sure all spa or hot tub equipment is working properly. Backwash filter following manufacturer's directions.
2. Check water pH, alkalinity and calcium hardness with a test kit. Adjust pH to 7.2 - 7.6 by adding pH Decreaser to lower pH, or pH Add to raise pH. Adjust alkalinity to 80 - 125 ppm for plaster spas, 125 - 150 for acrylic or fiberglass spas by adding Alkalinity Increaser. Adjust calcium hardness to 200 - 275 ppm for plaster spas or 175 - 225 for acrylic or fiberglass spas by adding Calcium Hardness Increaser.

#### **NOW USE THIS PRODUCT FOR ROUTINE SANITIZING:**

1. Check chlorine level with a test kit and adjust to 3-5 ppm. Scatter 2 tablespoons of product per 500 gallons of this product over water surface.
2. Operate recirculating pump while adding product and for at least 1 hour afterward to ensure even distribution of chemical in water.
3. Recheck chlorine with a test kit. If level is below 3 ppm, repeat application until chlorine level of 3-5 ppm is achieved.
4. To maintain chlorine levels, add this product at a rate of 1 teaspoon per 500 gallons of water whenever needed to maintain a chlorine level of 3-5 ppm as measured by a test kit.

Reentry into treated spa is prohibited above levels of 5 ppm chlorine due to risk of body injury.

4048

**STORAGE AND DISPOSAL** Keep this product dry in original tightly closed container when not in use. Store in a cool, dry, well ventilated area away from heat or open flame. Moisture may decompose this product and cause a violent reaction leading to fire and explosion. In case of decomposition, isolate container if possible and flood area with large amounts of water to dissolve all material before discarding this container. Do not contaminate food or feed by storage or disposal. **CONTAINER DISPOSAL:** Do not reuse container, but place in trash collection. Rinse thoroughly before discarding in trash.

### **PRECAUTIONARY STATEMENTS**

**HAZARDS TO HUMANS AND DOMESTIC ANIMALS** DANGER: Corrosive: Causes irreversible eye damage. May be fatal if inhaled. Harmful if swallowed or absorbed through skin. Do not get in eyes, on skin or on clothing. Do not breathe dust, vapor or spray mist. Wear goggles, face shield or safety glasses. Wash thoroughly with soap and water after handling. Remove and wash contaminated clothing before reuse.

**PHYSICAL OR CHEMICAL HAZARDS** STRONG OXIDIZING AGENT: Do not mix with other chemicals. Mix only with water. Never add water to product. Always add product to large quantities of water. Use clean dry utensils. Do not add this product to any dispensing device containing remnants of any other product. Such use may cause a violent reaction leading to fire or explosion. Contamination with moisture, organic matter or other chemicals will start a chemical reaction and generate heat, hazardous gas, possible fire and explosion. In case of contamination or decomposition, do not reseal container. If possible, isolate container in open air or well ventilated area. Flood area with large volumes of water.

**ENVIRONMENTAL HAZARDS** This pesticide is toxic to fish and aquatic organisms. Do not discharge effluent containing this product into lakes, streams, ponds, estuaries, oceans or other waters unless in accordance with the requirements of a National Pollutant Discharge Elimination System (NPDES) permit and the permitting authority has been notified in writing prior to discharge. Do not discharge effluent containing this product to sewer systems without previously notifying the local sewage treatment plant authority. For guidance contact your State Water Board or Regional Office of the EPA.

**NOTE:** Buyer assumes all responsibility for safety and use not in accordance with directions.

OPTIONAL INFORMATION TO BE ADDED IF SPACE ALLOWS:

**HOW TO CALCULATE POOL CAPACITY**

**Shape of Pool**                      **Gallons of water**

Rectangular    Average depth x average length x average width x 7.5

Circular                      Diameter x diameter x average depth x 5.9

Oval                      Full width x full length x average depth x 6.7

Irregular                      Consult pool builder