

6 7346-1

Ethylene Fluid®

ONLY FOR USE WITH A CATALYTIC GENERATOR TO PRODUCE ETHYLENE TO ACCELERATE RIPENING OF:

Avocados		Pears
Bananas	Melons	Tomatoes
Citrus	Papayas	Tobacco

ACTIVE INGREDIENT

Ethanol	90%
INERT INGREDIENTS	10%
TOTAL	100.00%

WARNING

KEEP OUT OF REACH OF CHILDREN

NOT INTENDED FOR HUMAN CONSUMPTION

FLAMMABLE

KEEP AWAY FROM HEAT AND FLAME

STATEMENT OF PRACTICAL TREATMENT

If Swallowed: Call physician or Poison Control Center. Drink 1 or 2 glasses of water and induce vomiting by touching back of throat with finger. If person is unconscious, do not give anything by mouth and do not induce vomiting.

If Inhaled: Remove victim to fresh air. If not breathing, give artificial respiration, preferably mouth-to-mouth. Get medical attention.

If in Eyes: Hold eyelids open and flush with a steady, gentle stream of water for 15 minutes. Get medical attention.

If on Skin: Wash with plenty of soap and water. Get medical attention.

Mfg. for: **PRECISION GENERATORS, INC.**

200 Golden Oak Court
Suite 250
Virginia Beach, VA 23452
757-498-4809

Establishment No. 37433-VA-1
E.P.A. Reg. No. 67346-1

Net Contents - 32 Ounces - One (1) U.S. Quart

FLAMMABLE
Keep away from heat and flame.

STORAGE AND DISPOSAL

Do not contaminate water, food, or feed by storage or disposal. **STORAGE**-Store in dry locked storage area, at temperatures below 125 F.

CONTAINER DISPOSAL-Triple rinse (or equivalent). Then offer for recycling or reconditioning, or puncture and dispose of in a sanitary landfill, or incineration, or if allowed by state and local authorities, by burning. If burned, stay out of smoke.

DIRECTIONS FOR USE

It is a violation of federal law to use this product in a manner inconsistent with its labeling.

Avocados, Bananas, Citrus Fruit, Melons, Papayas, Pears and Tomatoes.

Use in a Catalytic Generator the first 24 hours of ripening period. One (1) quart used as directed in 4,000 to 10,000 cubic feet ripening room produces ethylene concentrations varying from 4 to 1,200 P.P.M. over a period 12-48 hours. One (1) pint used as directed in 1,000 to 6,000 cubic feet ripening room produces ethylene concentrations varying from 5 to 500 P.P.M. over a period of 6-24 hours.

TOBACCO (FLUE-CURED)

Use in a Catalytic Generator immediately after filling curing system. Two (2) quarts used as directed in 1,500 to 2,500 cubic feet curing system produces ethylene concentrations varying from 15 to 300 P.P.M. over a period of 12-24 hours. Use additional two (2) quarts of Ethylene Fluid® as required.

USE PRECAUTIONS

Anyone using this product in any other type curing system or room size should contact us prior to use. The ripening room or curing system should be reasonably air-tight, all vents and doors closed, cracks or holes in walls and doors should be repaired or covered over. Do not use in enclosures less than 1,000 cubic feet.

WARRANTY


Seller's liability for breach of warranty, express or implied, in connection with the sale or lease of this product shall be limited to repairs or replacement at seller's expense of the defective product, and in no case shall seller be liable for incidental or consequential damages.

IMPORTANT NOTICE

Use of any other product other than Ethylene Fluid® may damage the catalytic generator supplied by Precision Generators, Inc. Also, use of other products in the generator may produce harmful by-products.

NOTE

Degreening citrus requires 1 to 5 P.P.M. of ethylene. Excess may cause damage.

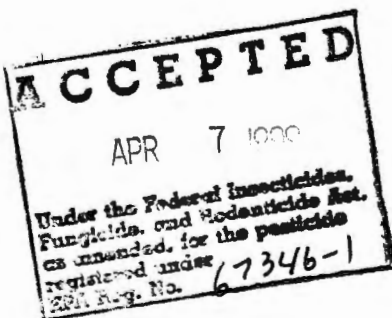

FEB 09 1999