

Super KL

KL-990 Anti-Fouling Coating

Red K90

- High Copper
- Long Lasting
- Hard Finish
- Use on wood, fiberglass and steel hulls
- High Strength Hard Fiberglass Antifoulant
- "Premium Protection without the premium price!"
- Full Season Power or Sail Performance
- Manufactured by Interlux, a division of International Paint Inc.

KEEP OUT OF REACH OF CHILDREN

WARNING

See back panel for additional Precautionary Statements

NET CONTENTS: ONE U.S. GALLON 3.79 LITERS

ACTIVE INGREDIENT

Cuprous Oxide 70.2%


INERT INGREDIENTS 29.8%

Total 100.0%

Copper as Metallic: 61.6%


CONTAINS PETROLEUM DISTILLATES

EPA Registration No.: 67543-7
EPA Establishment No.: 2693-NJ-1

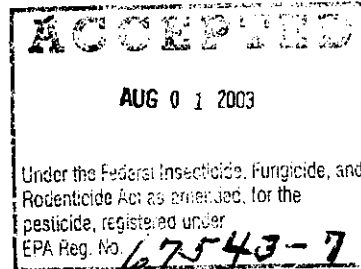

Super KL

Super KL is a premium anti-fouling coating that provides effective protection against barnacles, algae and hydroids for boats that are used in high fouling salt or fresh water areas, or which remain in the water for prolonged periods between haul outs. It forms a smooth surface and can be applied over most hard and soft bottom paints.

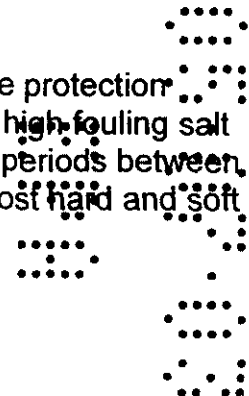

Directions for Use

It is a violation of federal law to use or dispose of this product in a manner inconsistent with its labeling.

New Fiberglass – No Sanding: Thoroughly clean with [702 Dewaxer; Interlux Fiberglass Solvent Wash 202], lifting the solvent, wax and contaminants off the surface with clean rags.

Apply one thin coat of [primer; 179 No Sanding Primer], allowing to dry a minimum of one hour and a maximum of four hours, then apply two coats of Super KL by brush, roller or spray.

New Fiberglass – Epoxy Barrier Coat: Thoroughly clean with [702 Dewaxer; Interlux Fiberglass Solvent Wash 202] lifting the solvent, wax and contaminants off the surface with clean rags.

Abrade with 80 grit sandpaper, then seal with [two coats of B370 Two-part Epoxy Primer; Interlux Interprotect 2000E]. Sand between coats and before applying the anti-fouling coating to improve adhesion. Apply two coats of Super KL by brush, roller or spray.

New Wood: Sand with 80 grit sandpaper, clean thoroughly and apply two coats of Super KL by brush, roller or spray.



Metal: Super KL contains cuprous oxide and is not recommended for aluminum surfaces.

Iron and steel should be cleaned to bright metal and then sealed with two coats of an anticorrosive primer such as [B274 Red Lead Epoxy; Interlux Interprotect 2000E]. Apply two coats of Super KL by brush, roller or spray.

Previously Coated Surfaces: Super KL can be applied over most other hard and soft bottom paints so long as they are clean and in good condition. Coatings that are cracked, damaged or peeling should be completely removed before painting.

Application Information

Mix thoroughly. Allow to dry at least overnight between coats and before launching. For best results apply at least two coats. Apply by spray, short-nap roller or brush. Use [mineral spirits; Interlux Special Thinner 216] for thinning and cleaning equipment. Recommended application temperature range is 65°F - 80°F. Expected coverage is 350-400 square feet per gallon.

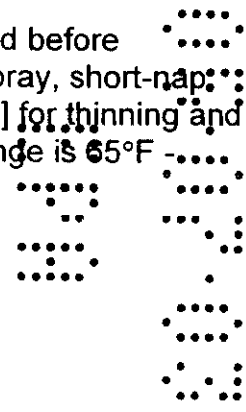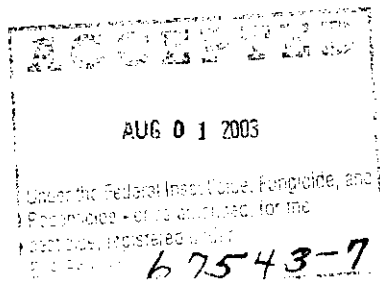

Maintenance

Physical damage, fuel spills and pollution can reduce the effectiveness of anti-fouling coatings. Therefore, it is recommended that the bottom be inspected periodically. If necessary, clean with a soft towel. Never use a stiff brush, scrub pad or abrasives.

Storage and Disposal

Do not contaminate water, food or feed by storage and disposal. Store anti-fouling coatings in their original tightly-sealed containers.

Pesticide Disposal

Pesticides wastes are toxic. Improper disposal of excess pesticide, spray mixture or rinsate is a violation of Federal law. If these wastes cannot be disposed of by use according to label instructions, contact your State Pesticide or Environmental Control Agency, or the Hazardous Waste representative at the nearest EPA Regional Office for guidance.

Container Disposal

Triple rinse (or equivalent). Then offer for recycling or reconditioning, or puncture and dispose of in a sanitary landfill, or by other procedures approved by state and local authorities.

PRECAUTIONARY STATEMENTS

Hazards to Humans and Domestic Animals.

WARNING

Causes eye irritation. Harmful if absorbed through skin. Avoid contact with skin, eyes or clothing. Wear protective clothing such as gloves, long-sleeved cotton shirt, long pants and hat. May be fatal if swallowed or inhaled. Do not breathe dust, vapor or spray mist. While spraying and/or sanding boat surfaces, wear a mask or respirator jointly approved by the Mining Enforcement and Safety Administration and the National Institute for Occupational Safety and Health. Remove contaminated clothing and wash before reuse. Wash thoroughly with soap and water after handling.

FIRST AID

If Swallowed:

- Immediately call a poison control center or doctor.
- Do not induce vomiting unless told to do so by a poison control center or doctor.
- Do not give any liquid to the person.
- Do not give anything by mouth to an unconscious person.

If on skin or clothing:

- Take off contaminated clothing.
- Rinse skin immediately with plenty of water for 15-20 minutes.
- Call a poison control center or doctor for treatment advice.

If inhaled:



- Move person to fresh air.
- If person is not breathing, call 911 or an ambulance, then give artificial respiration, preferably mouth-to-mouth if possible.
- Call a poison control center or doctor for further treatment advice.

If in eyes:

- Hold eye open and rinse slowly and gently with water for 15-20 minutes.
- Remove contact lenses, if present, after the first 5 minutes, then continue rinsing eye.
- Call a poison control center or doctor for treatment advice.

Other: Have the product container or label with you when calling a poison control center or doctor or going for treatment.

Note to Physician: Contains petroleum distillate – vomiting may cause aspiration pneumonia.

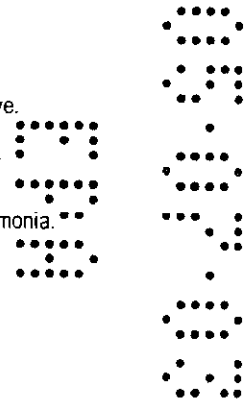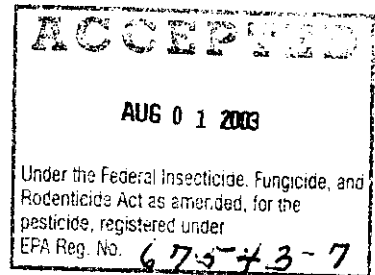

ENVIRONMENTAL HAZARD

This product is toxic to fish and other marine life. Do not apply directly to the water during cleaning of equipment or disposal of wastes. Do not allow chips and dust generated during paint removal to enter the water. Dispose of paint debris in an approved landfill.

PHYSICAL OR CHEMICAL HAZARD

Combustible. Do not use or store near heat or open flame.

Disclaimer: The performance of any marine paint or coating depends on many factors outside the control of International Paint Inc. including surface preparation, proper application and environmental conditions. Therefore, International Paint Inc. cannot guarantee the suitability of this product for your particular application. Implied warranties of fitness for a particular purpose and of merchantability are excluded. International Paint Inc. shall not under any circumstances be liable for incidental or consequential damages. By purchase or use, of this product, buyer agrees that the sole and exclusive remedy, if any, is limited to the refund of the purchase price or replacement of the product at the option of International Paint Inc.

Interlux

INTERNATIONAL PAINT INC., 2270 Morris Ave., Union, NJ 07083

ACCEPTED

AUG 0 1 2003

Under the Federal Insecticide, Fungicide, and Rodenticide Act as amended, for the pesticide, registered under EPA Reg. No. *67543-7*

