

Pm 33.

68575-1

11/4/99

Page 174



UNITED STATES ENVIRONMENTAL PROTECTION AGENCY

WASHINGTON, D.C. 20460

NOV 04 1999

OFFICE OF
PREVENTION, PESTICIDES
AND TOXIC SUBSTANCES

Trutec Industries, Inc.
4700 Gateway Blvd.
Springfield, OH 45502

Attention: Dan S. Shibata

Subject: Palene 610-C
EPA Registration Number 68575-1
Your Submission Dated October 1st, 1999
EPA Received Date October 14th, 1999

The submitted final printed labels have been placed in your file. They have not been reviewed in accordance with PR Notice 82-2.

If you have any questions concerning this letter, please contact Karen M. Leavy-Munk at (703)-308-6237.

Sincerely yours,

A handwritten signature in cursive script that reads "Marshall Swindell".

Marshall Swindell
Product Manager 33
Regulatory Management Branch I
Antimicrobial Division (7505C)

Palene 610-C

Precautionary Statements Hazards to Humans and Domestic Animals

Corrosive. Causes severe eye and skin damage. May cause allergic skin reactions. Do not get into eyes, on skin or clothing. Wear goggles or face shield and rubber gloves when handling. Harmful or fatal if swallowed. Wash thoroughly with soap and water after handling and before eating, drinking or using tobacco. Remove and wash contaminated clothing before reuse.

Harmful if inhaled or absorbed through the skin.

Environmental Hazards

Do not discharge effluent containing this product into lakes, rivers, streams, ponds, estuaries, marshes, oceans, or other waters unless in accordance with the requirements of a National Pollutant Discharge Elimination System (NPDES) permit, and the permitting authority has been notified in writing prior to discharge. Do not discharge effluent containing this product into sewer systems without previously notifying the local sewage treatment plant authority. For guidance, contact your State Water Board or Regional Office of the EPA.

Trutec Industries, Inc.

NOT REVIEWED
In Accordance with PR Notice 82-2
Based on Draft Labeling Dated

Batch Lot No. U-

Active Ingredient	
1,2-Benzisothiazolin-3-One.....	10%
Inert Ingredients.....	90%
Total	100%

KEEP OUT OF REACH OF CHILDREN

DANGER

STATEMENT OF PRACTICAL TREATMENT:

If in eyes, immediately flush with plenty of water. After initial flushing, remove any contact lenses and continue flushing for at least 15 minutes. Have eyes examined and treated by medical personnel.

If on skin, immediately wash material off skin with soap and plenty of water. If irritation persists, get medical attention. Wash contaminated clothing and decontaminate footwear before reuse.


If swallowed, do not induce vomiting. If conscious, give promptly, a large quantity of water to drink. Avoid alcohol. Never give anything by mouth to an unconscious person. Refer victim to medical personnel.

If inhaled, remove victim to fresh air. If not breathing, give artificial respiration, preferably, mouth-to-mouth. Get medical attention.

NOTE TO PHYSICIAN: Possible mucosal damage may contraindicate the use of gastric lavage. Measures against circulatory shock, respiratory depression and convulsions may be needed.

EPA Registration No. 68575-1
EPA Establishment No. 68575-011-1

4795 Upper Valley Pike
Urbana, Ohio 45078
Telephone: (800) 677-7622

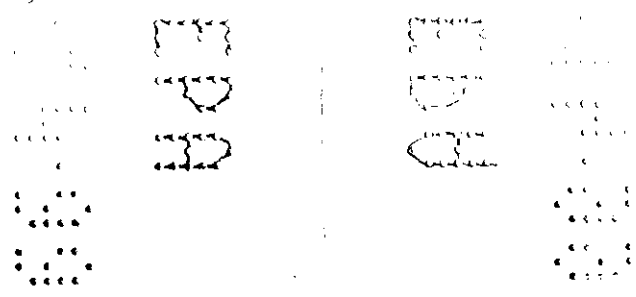

Directions for Use

It is a violation of Federal law to use this product in a manner inconsistent with its labeling

Palene 610-C is for use on aluminum automobile evaporator cores to inhibit mold & mildew growth and to decrease the surface tension of water. This product is to be mixed only on-site with Palene 610-A and Palene 610-B and is to be used to coat final product only. To Prepare the Palene bath for process treatment, use 4 gallons of Palene 610-C with every 100 gallons of Palene 610-A (Polymer/Resin) and 7 gallons of Palene 610-B (Chrome Solution). The evaporator core is then fully dipped in the bath for a minimum of 10 seconds and is then dried and cured in the dry-off oven at 280°F for 30 minutes.

STORAGE AND DISPOSAL

Do not contaminate water, food, or feed by storage or disposal. Open dumping is prohibited.

STORAGE - Protect from frost. Store between 40°F - 100°F. Moisture and sunlight will not affect the product.

PESTICIDE DISPOSAL - Pesticide wastes are acutely hazardous. Improper disposal of excess pesticide, spray mixture, or rinsate is a violation of federal law. If these wastes cannot be disposed of by use according to label instructions, contact your State Pesticide or Environmental Control Agency, or the Hazardous Waste representative at the nearest EPA Regional Office for guidance.

CONTAINER DISPOSAL - Triple rinse (or equivalent). Then offer for recycling or re-conditioning, or puncture and dispose of in a sanitary landfill, or incineration, or, if allowed by state and local authorities, by burning. If burned, stay out of smoke.

Net Weight : 200 kg