

69587-2

5/16/2013

118

MAY 16 2013

Mark Jackson, Agent for Rust-Oleum Corporation
c/o Arcadis G&M of Michigan, LLC
10559 Citation Drive, Suite 100
Brington, MI 48116

Subject: Woodlife® Classic Clear Wood Preservative
EPA Registration No.: 69587-2
Notification Date: April 17, 2013
EPA Receipt Date: April 18, 2013

Dear Mr. Jackson,

This letter acknowledges receipt of your notification submitted under the provisions of FIFRA PR Notice 98-10.

Proposed Notification


- Updated the mater label per PR Notice 2007-4, as requested on the Agency letter dated April 9, 2013.

General Comments

Based on a review of the submitted materials, your notification to update the label per PR Notice 2007-4 is acceptable. A copy of this letter has been made a part of the record on file for future reference.

Should you have any questions or comments concerning this letter, you may contact me by telephone at (703) 308-6416 or by e-mail at campbell.jacqueline@epa.gov or Lorena Rivas by telephone at (703) 305-5027 or by e-mail at rivas.lorena@epa.gov. When submitting information or data in response to this letter, a copy of this letter should accompany the submission to facilitate processing.

Sincerely,



Jacqueline Campbell
Product Manager (34)
Regulatory Management Branch II
Antimicrobials Division (7510P)

CONCURRENCES

SYMBOL	7510P						
SURNAME	J. Rivas						
DATE	5/15/13						

Please read instructions on reverse before completing form.

Form Approved, OMB No. 2070-0080

Print Form



United States
Environmental Protection Agency
Washington, DC 20480

<input type="checkbox"/>	Registration
<input type="checkbox"/>	Amendment
<input checked="" type="checkbox"/>	Other

OPP Identifier Number

Application for Pesticide - Section I

1. Company/Product Number 69587-2	2. EPA Product Manager Jacqueline Campbell-McFarlane	3. Proposed Classification <input checked="" type="checkbox"/> None <input type="checkbox"/> Restricted
4. Company/Product (Name) Woodlife Classic Clear Wood Preservative	PM# 34	
5. Name and Address of Applicant (Include ZIP Code) Rust-Oleum Corporation, 11 Hawthorne Parkway Vernon Hills, IL 60061 <input type="checkbox"/> Check if this is a new address	6. Expedited Review. In accordance with FIFRA Section 3(c)(3) (b)(i), my product is similar or identical in composition and labeling to: EPA Reg. No. _____ Product Name _____	

Section - II

<input type="checkbox"/> Amendment - Explain below.	<input type="checkbox"/> Final printed labels in response to Agency letter dated _____
<input type="checkbox"/> Resubmission in response to Agency letter dated _____	<input type="checkbox"/> "Me Too" Application.
<input checked="" type="checkbox"/> Notification - Explain below.	<input type="checkbox"/> Other - Explain below.

Explanation: Use additional page(s) if necessary. (For section I and Section II.)

"Notification of Storage and Disposal per PR - Notice 98-10." - "This notification is consistent with the provisions of PR Notice 98-10 and EPA regulations at 40 CFR 152.46, and no other changes have been made to the labeling or the confidential statement of formula of this product. I understand that it is a violation of 18 U.S.C. Sec. 1001 to willfully make any false statement to EPA. I further understand that if this notification is not consistent with the terms of PR Notice 98-10 and 40 CFR 152.46, this product may be in violation of FIFRA and I may be subject to enforcement action and penalties under sections 12 and 14 of FIFRA."

Section - III

1. Material This Product Will Be Packaged In:				2. Type of Container	
Child-Resistant Packaging <input type="checkbox"/> Yes* <input type="checkbox"/> No	Unit Packaging <input type="checkbox"/> Yes <input type="checkbox"/> No	Water Soluble Packaging <input type="checkbox"/> Yes <input type="checkbox"/> No	Metal Plastic Glass Paper Other (Specify) _____		
* Certification must be submitted		If "Yes" Unit Packaging wgt.	No. per container	If "Yes" Package wgt.	No. per container
3. Location of Net Contents Information <input type="checkbox"/> Label <input type="checkbox"/> Container		4. Size(s) Retail Container		5. Location of Label Directions <input type="checkbox"/> On Label <input type="checkbox"/> On Labeling accompanying product	
6. Manner in Which Label is Affixed to Product		<input type="checkbox"/> Lithograph <input type="checkbox"/> Paper glued <input type="checkbox"/> Stenciled		<input type="checkbox"/> Other _____	

Section - IV

1. Contact Point (Complete items directly below for identification of individual to be contacted, if necessary, to process this application.)		
Name Mark Jackson	Title Senior Toxicologist	Telephone No. (Include Area Code) 810 225-1947
Certification I certify that the statements I have made on this form and all attachments thereto are true, accurate and complete. I acknowledge that any knowingly false or misleading statement may be punishable by fine or imprisonment or both under applicable law.		6. Date Application Received (Stamped)
2. Signature 	3. Title Senior Toxicologist	
4. Typed Name Mark Jackson	5. Date 5/14/2013	



ARCADIS G&M of Michigan, LLC
10559 Citation Drive
Suite 100
Brighton
Michigan 48116
Tel 810 229 8594
Fax 810 229 8837
www.arcadis-us.com

Jacqueline Campbell-McFarlane
Product Manager (34)
1 Potomac Yards South
2777 Crystal Drive,
Arlington, Virginia 22202

ENVIRONMENT

Subject:
Product: Woodlife Classic Clear Wood Preservative
Registration#: 69587-2
Notification of Label Change per PR Notice 2007-4

Date:
April 17, 2013

Dear Ms. Campbell-McFarlane:

Contact:
Mark Jackson

Enclosed is the updated Master Label change notification for the above listed product per PR Notice 2007-4. The changes as requested in your letter dated April 9, 2013 have been included on the Master Label enclosed.

Phone:
810-225-1947

Specifically enclosed are:

Email:
Mark.Jackson@arcadis-us.com

1. Proposed label with updated language per PR Notice 2007-4 -- 1 copy
2. Copy of Letter dated April 9, 2013 requesting additional language on Master Label

Our ref:
B0030037.0003

Should you have any additional questions, please do not hesitate to contact me.

Respectfully submitted,

ARCADIS G&M of Michigan, LLC

Mark Jackson
Senior Toxicologist

Handwritten scribbles and marks on the right side of the page.

Imagine the result

04/17/2013

Package Copy:
Front Panel

Prod. No. 00902
Prod. No. 00903
Prod. No. 78904

WOODLIFE®
CLASSIC
Clear Wood Preservative

Banner: **Above Ground Use Only**

- **Protects against rot and decay**
- Resists mold, mildew and stain fungi
- Repels water; resists moisture damage
- Allows wood to gray naturally

Starburst 1: **100% Clear- Paintable and Stainable- Extends Top-Coat Life**

Starburst 2: Water-Base- **WATER REPELLENT**- Soap and Water Clean-up

SubHead: **Prolongs the life of non-pressure-treated wood**

Main Photo: **Clapboard Siding**

3 Photo Illustration Inset Copy: **Siding, Decks, Fencing, Outdoor Furniture and Decor and more.**

Illustrations: **Deck, Stockade Fence, Adirondack Chair**

FOR EXTERIOR USE ONLY

KEEP OUT OF REACH OF CHILDREN.

CAUTION

See Back Panel for Additional Precautionary Statements.

ACTIVE INGREDIENTS:

3-Iodo-2-Propynyl Butyl Carbamate	0.50%
Inert Ingredients:	99.50%
Total:	100.00%

EPA Reg. No. 69587-2

EPA Est. No. 60061-M0-1

EPA Est. No. 69587-NJ-001

1 U.S. Quart (.95 Liters)	
1 U.S. Gallon (3.8 Liters)	
5 U.S. Gallons (19 Liters)	

1 Qt. : 0 37772 00902 3
 1 Gal. : 0 37772 00903 0
 5 Gal. : 0 37772 78904 8

NOTIFICATION
 Date Reviewed: 5/16/2013
 Reviewed By: [Signature]

Back Panel (Left)

WOODLIFE® Classic Clear Wood Preservative

DIRECTIONS FOR USE

It is a violation of Federal Law to use this product in a manner inconsistent with its labeling.

WOODLIFE® CLASSIC Clear Wood Preservative is a totally clear, water-based, fungicidal exterior wood preservative with water repellent for use on above ground applications where either pressure-treated or non-pressure-treated wood has been used. When applied as directed, **WOODLIFE® CLASSIC** provides protection against rot, decay and moisture damage. **WOODLIFE® CLASSIC** resists wood decay by inhibiting the surface growth of mold, mildew and staining fungi. Its water repellency effectiveness (which exceeds the minimum requirement set by Federal specification TT-W-572B, parag. 3.7), coupled with its anti-wicking property, prevents surface and end cut moisture absorption providing greater resistance to dimensional warping, splitting and end-checking. Plus, **WOODLIFE® CLASSIC** can be top-coated with primer, paint or stain after 24 hours. **This preservative will dry 100% clear, allowing wood that is not painted or stained to gray naturally over time from UV exposure.**

- Provides effective control against decay fungi (brown or white rot), staining fungi (blue stain) and surface mold (black, brown or other colored mildew).
- Extends top-coat service life; prevents moisture absorption that can cause blistering and peeling.
- Can be applied immediately to new wood - no need to -wait for wood to weather or "season".
- Water-base formula requires only soap and water clean-up.

RECOMMENDED USES: Use to preserve brand new or existing wood decks, fencing, siding, outdoor furniture and decor, gazebos and arbors, storage sheds, play equipment/gym sets or other structural lumber, plywood or engineered wood items exposed to moisture contact. Especially suitable as a preservative primer for wood windows, doors, frames, trim, siding and other exterior wood intended to be over-coated with paint or stain.

SURFACE PREPARATION: All cutting, gluing and sanding should be done before applying **WOODLIFE® CLASSIC Clear Wood Preservative**. DO NOT use steel wool. Follow preparation instructions below to ensure adequate adhesion, penetration, coloration and optimum performance of this product.

New Wood: If wood is "brand new" (intended for outdoor installation and exposed to weather conditions for 30 days or less), first perform a "splash test" (see Splash Test below) to determine if there is any surface barrier present which would repel a new coating, such as paraffin wax (found on some types of pressure-treated wood) or mill glaze (found on cedar and redwood). Use *Wolman Deck & Fence Brightener* to remove any surface barrier detected, then conduct splash test again before applying **WOODLIFE® CLASSIC**.

Weathered Wood: For all outdoor wood structures except "brand new", the surface must first be stripped of any existing old stains or built-up finishes, or thoroughly cleaned to remove ground-in dirt, mildew stains, grayed wood fibers and any other surface contaminants. Use of *Wolman DeckStrip®* or *Wolman Deck & Fence Brightener* is recommended to properly prepare the surface before applying this product. After surface preparation is completed, perform a "splash test" to determine if the wood surface is ready to accept a coating.

Splash Test: Sprinkle a few drops of water on a representative portion of the surface to be coated. If the water is absorbed rapidly, surface is ready to be finished with **WOODLIFE® CLASSIC**. If the water beads or is not absorbed, a surface barrier exists which must be removed. Apply *Wolman Deck & Fence Brightener*, and then test again.

BEFORE YOU START: Protect plants, shrubs and vegetation from over-spray. Wood surface must be free from dust, dirt and debris. This product will adhere to dry or damp (not soaking wet) surfaces. If surface is in direct sunlight and hot to the touch, dampen with fresh water to cool. Remove any standing water before beginning application. Do not tint, dilute or mix this product with any other product. **Note: This product has a milky white appearance in the can, and a whitish appearance when applied, but dries clear. Perform a sample brush-out in an inconspicuous area to ensure the desired look is achieved.**

APPLICATION PROCEDURES: For best results, apply when outside temperatures are between 50°F and 90°F, and when 24 hours of precipitation-free weather is expected. Pre-treatment by dip method before construction is recommended. Immerse wood in product for 3 minutes or longer. Any surface cut after first treatment should be re-treated. For existing wood installations, or when dipping is not possible, apply by synthetic bristle brush, short nap roller, pump-style sprayer or airless sprayer. **APPLY ONE (1) LIBERAL COAT** to wood surfaces, and three (3) or more consecutive coats to end cuts to give full protection. Allow at least one (1) hour between applications. When rolling or spraying, work on a 30-40 square foot area at a time, making sure to back-brush along grain any drips, runs, uneven coverage or surface puddles. Allow wood to dry 24 hours before installation or using treated surface. Allow a minimum 24 hours before over-coating with primer, paint or stain. On humid days, longer initial drying time may be required.


COVERAGE: One gallon covers approximately 150-250 sq. ft. (14-23 m²), depending upon the wood age and species, surface porosity and method of application. Rough, weathered or highly porous surfaces will absorb more.

CAUTION: As with application of any protective coating, **WOOD SURFACES CAN BE SLIPPERY WHEN WET.**

CLEAN-UP: Clean tools and equipment after use with soap and water. Wipe up drips and spatters from surrounding surfaces before they dry. Dried spatters or spills should be removed with mineral spirits or lacquer thinner.

V.O.C. < 350 g/l (less water and exempt solvent)
V.O.S. < 2.92 lbs./gal

NEED HELP?
Call Toll Free:
1-800-556-7737
Email: info@wolman.com
Web Site: www.rustoleum.com

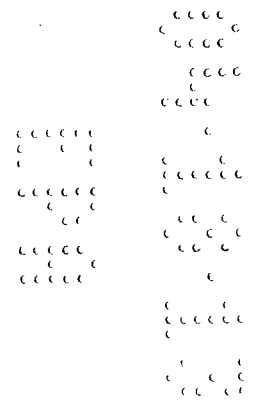

STORAGE AND DISPOSAL

PROHIBITIONS: Do not contaminate water, food or feed by storage or disposal.

PESTICIDE STORAGE: Store in original labeled container, and keep container closed when not in use. Store in a secure, well ventilated area protected from extreme temperatures. Do not store near excessive heat. Keep contents away from food. KEEP FROM FREEZING.

PESTICIDE DISPOSAL: Wastes resulting from use of this product may be disposed of on site or at an approved waste disposal facility.

CONTAINER DISPOSAL: Nonrefillable container. Do not reuse or refill this container. Offer recycling, if available or place in trash or in sanitary landfill.

In case of emergency involving this product, call Rust-Oleum at 847-367-7700.

PRECAUTIONARY STATEMENTS HAZARDS TO HUMANS (AND DOMESTIC ANIMALS)

**CAUTION -HARMFUL IF SWALLOWED OR ABSORBED THROUGH SKIN.
AVOID CONTACT WITH EYES, SKIN OR CLOTHING.
WASH THOROUGHLY WITH SOAP AND WATER AFTER HANDLING.**

Keep contents and freshly treated articles away from food and living plants. Use only in a well ventilated area. Do not breathe vapor or spray mist. DO NOT USE ON WOOD WHICH WILL COME IN CONTINUOUS CONTACT WITH SKIN UNLESS THE WOOD IS SEALED WITH PAINT. STAIN OR VARNISH AFTER TREATMENT. Wear goggles, rubber gloves and protective clothing when applying or handling treated lumber.

FIRST AID:

Have the product container or label with you when calling a poison control center or doctor, or going for treatment.

IF SWALLOWED: Call poison control center or doctor immediately for treatment advice. Have person sip a glass water if unable to swallow. Do not induce vomiting unless told to do so by the poison control center or doctor. Do not give anything by mouth to an unconscious person.

IF ON SKIN OR CLOTHING: Take off contaminated clothing. Rinse skin immediately with plenty of water for 15-20 minutes. Call a poison control center or doctor for treatment advice.

IF INHALED: Move person to fresh air. If person is not breathing, call 911 or an ambulance, then give artificial respiration, preferably by mouth-to-mouth, if possible. Call a poison control center or doctor for treatment advice.

IF IN EYES: Hold eye open and rinse slowly and gently with water for 15-20 minutes. Remove contact lenses, if present, after the first 5 minutes, then continue rinsing eye. Call a poison control center or doctor for treatment advice.

NOTE TO PHYSICIAN: This product is a cholinesterase inhibitor. If signs of cholinesterase inhibition appear, atropine only by injection is antidotal. Probable mucosal damage may contraindicate the use of gastric lavage.

ENVIRONMENTAL HAZARDS: This product is toxic to fish and wildlife. For terrestrial uses. Do not apply directly to water to areas where surface water is present Or to intertidal areas below the mean high water mark. Do not contaminate water by disposal of equipment washwaters or rinsate. Do not discharge effluent containing this product into lakes, streams, ponds, estuaries, oceans or other waters unless in accordance with the requirements of a National Pollutant Discharge Elimination System (NPDES) permit and the permitting authority has been notified in writing prior to discharge. Do not discharge effluent containing this product to sewer systems without previously notifying the local sewerage treatment plant authority. For guidance. Contact your State Water Board or Regional Office of the EPA.

LIMITED WARRANTY

Rust-Oleum Corp. warrants its *WOODLIFE[®] CLASSIC Clear Wood Preservative* to perform as claimed if directions are followed. Directions are as complete as possible but cannot encompass all conditions, applications, techniques, and/or surfaces which are beyond our control. Call 1-800-556-7737 if there are any questions about the directions or use of the Product. This warranty does not apply to conditions caused by use of other materials or failure to follow directions provided with the Product. The remedy under this warranty is limited to the replacement or refund value of any Product actually used. To obtain a warranty remedy, write to Rust-Oleum Corp., 11 Hawthorn Pkwy., Vernon Hills, IL 60061. No other warranty is expressed or implied.

WOODLIFE[®] is a registered trademark Rust-Oleum Corp.

Batch Code _____

Rust-Oleum Corporation Logo

Rust-Oleum Corporation

UPC Symbol

11 Hawthorn Pkwy.

RPM Logo

Vernon Hills, IL 60061

Made In U.S.A.

