



U.S. ENVIRONMENTAL PROTECTION AGENCY
 Office of Pesticide Programs
 Antimicrobials Division (7510P)
 1200 Pennsylvania Ave., N.W.
 Washington, D.C. 20460

EPA Reg. Number:

69587-6

Date of Issuance:

9/27/2016

NOTICE OF PESTICIDE:

Registration
 Reregistration
 (under FIFRA, as amended)

Term of Issuance:

Conditional

Name of Pesticide Product:

Mold Preventing Primer

Name and Address of Registrant (include ZIP Code):

Rust-Oleum
 11 Hawthorn Parkway
 Vernon Hills, IL 60061

Note: Changes in labeling differing in substance from that accepted in connection with this registration must be submitted to and accepted by the Antimicrobials Division prior to use of the label in commerce. In any correspondence on this product always refer to the above EPA registration number.

On the basis of information furnished by the registrant, the above named pesticide is hereby registered under the Federal Insecticide, Fungicide and Rodenticide Act.

Registration is in no way to be construed as an endorsement or recommendation of this product by the Agency. In order to protect health and the environment, the Administrator, on his motion, may at any time suspend or cancel the registration of a pesticide in accordance with the Act. The acceptance of any name in connection with the registration of a product under this Act is not to be construed as giving the registrant a right to exclusive use of the name or to its use if it has been covered by others.

This product is conditionally registered in accordance with FIFRA section 3(c)(7)(A). You must comply with the following conditions:

1. Submit and/or cite all data required for registration/reregistration/registration review of your product under FIFRA when the Agency requires all registrants of similar products to submit such data.
2. You are required to comply with the data requirements described in the DCI identified below:
 - a. 3-Iodo-2-Propynyl Butyl carbamate (IPBC): EPA-HQ-OPP-2011-0420

Signature of Approving Official:

Jacqueline Hardy, Product Manager 34
 Regulatory Management Branch II
 Antimicrobials Division (7510P)

Date:

9/27/2016

You must comply with all of the data requirements within the established deadlines. If you have questions about the Generic DCI listed above, you may contact the Reevaluation Team Leader (Team 36): <http://www2.epa.gov/pesticide-contacts/contacts-office-pesticide-programs-antimicrobial-division>

3. Make the following label changes before you release the product for shipment:
 - Revise the EPA Registration Number to read, “EPA Reg. No. 69587-6.”
4. Submit one copy of the final printed label for the record before you release the product for shipment.

Should you wish to add/retain a reference to the company’s website on your label, then please be aware that the website becomes labeling under the Federal Insecticide Fungicide and Rodenticide Act and is subject to review by the Agency. If the website is false or misleading, the product would be misbranded and unlawful to sell or distribute under FIFRA section 12(a)(1)(E). 40 CFR 156.10(a)(5) list examples of statements EPA may consider false or misleading. In addition, regardless of whether a website is referenced on your product’s label, claims made on the website may not substantially differ from those claims approved through the registration process. Therefore, should the Agency find or if it is brought to our attention that a website contains false or misleading statements or claims substantially differing from the EPA approved registration, the website will be referred to the EPA’s Office of Enforcement and Compliance.

If you fail to satisfy these data requirements, EPA will consider appropriate regulatory action including, among other things, cancellation under FIFRA section 6(e). Your release for shipment of the product constitutes acceptance of these conditions. A stamped copy of the label is enclosed for your records. Please also note that the record for this product currently contains the Basic CSF dated 1/15/2016.


If you have any questions, please contact Tom Luminello by phone at 703 308-8075, or via email at luminello.tom@epa.gov.

Sincerely,



Jacqueline Hardy, Product Manager 34
Regulatory Management Branch II,
Antimicrobials Division (7510P)

Enclosure Stamped Label

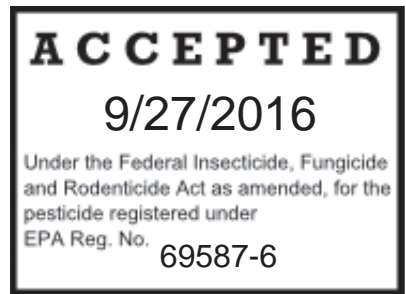

MASTER LABEL

FRONT PANEL

MOLD PREVENTING PRIMER [PAINT, SPRAY, AEROSOL]

[Front Panel to include any of the following optional statements]

- [Any Angle Spray with Comfort Tip]
- [Paint directly over existing mold, mildew, odor causing bacteria and other fungal organisms]
- [Zinsser®]
- [Rust-Oleum Stops Rust]
- [Rust-Oleum High Performance]
- [Rust-Oleum Professional]
- [Rust-Oleum Professional High Performance]
- [Rust-Oleum Professional Enamels]
- [Rust-Oleum Professional Primer]
- [Rust-Oleum Professional High Performance Protective Enamels]
- [LeakSeal]
- [Professional]
- [paint, spray, aerosol]
- [Sheen: Flat]
- [Color: White]
- [Interior/Exterior]
- [Solvent based]

FRONT PANEL CONTINUED

- [Topcoat in 30 minutes]
- [Dries in 30 minutes]
- [Before]
- [After]
- [Excellent Hide]
- [High Hide]
- [Blocks Stains]
- [Blocks Odors]
- [Great for small projects and touch-ups]
- [Great for: Priming inside, using as a complement to Mold Killing Primer brush product, use under wallcovering, priming outdoors, galvanized metal]
- [Binds chalky siding, masonry, and metal]
- [Blocks crayon, lipstick, grease, handprints, and cedar tannins]
- [Net Contents: Fluid Ounce/Fluid Millimeter/Grams: [6 oz, 178 ml, 170 g, 8 oz, 237 ml, 227 g, 10 oz, 297 ml, 283 g, 11 oz, 326 ml, 312 g, 12 oz, 355 ml, 340 g, 13 oz, 385 ml, 368 g, 14 oz, 415 ml, 397 g, 15 oz, 445 ml, 425 g, 16 oz, 473 ml, 453 g, 18 oz, 534 ml, 510 g, 20 oz, 592 ml, 567 g]

FRONT PANEL CONTINUED



**KEEP OUT OF REACH OF CHILDREN
CAUTION**

See First Aid statement on back panel.

ACTIVE INGREDIENTS:

3-Iodo-2-Propynyl Butyl Carbamate:	0.15%
Inert Ingredients*:	99.85%
TOTAL:	100.00%

**Contains petroleum distillates, xylene or xylene range aromatic solvents*

EPA Reg. No. 69587-6

EPA Est. No. xxxxx-xx-xxx

Manufactured by Rust-Oleum Corporation, 11 Hawthorn Parkway, Vernon Hills, IL 60061

MASTER LABEL

BACK PANEL

[Back Label to include any of the following optional statements]

- [Paint directly over mold, mildew, odor causing bacteria and other fungal organisms]
- [Zinsser®]
- [Rust-Oleum Stops Rust]
- [Rust-Oleum High Performance]
- [Rust-Oleum Professional]
- [Rust-Oleum Professional High Performance]
- [Rust-Oleum Professional Enamels]
- [Rust-Oleum Professional Primer]
- [Rust-Oleum Professional High Performance Protective Enamels]
- [LeakSeal]
- [Professional]
- [Sheen: Flat]
- [Color: White]
- [Interior/Exterior]
- [Solvent based]
- [Topcoat in 30 minutes]
- [Dries in 30 minutes]
- [Excellent Hide]
- [High Hide]
- [Blocks Odors]

BACK PANEL CONTINUED

- [Great for small projects and touch-ups]
- [Great for: Priming inside, using as a complement to Mold Killing Primer brush product, use under wallcovering, priming outdoors, galvanized metal]
- [Binds chalky siding, masonry, and metal]

- [Blocks stains]
- [Blocks crayon, lipstick, grease, handprints, and cedar tannins]

[Mold Preventing Primer [paint, spray, aerosol] is an EPA registered protective coating that can be used to paint over*] all existing mold, mildew, fungi, and odor causing bacteria and any other fungal organisms.]

[Mold Preventing Primer contains an EPA registered antimicrobial to prevent the growth of mold and mildew on the paint film for up to 7 days.]

[Mold Preventing Primer also aides in covering residual microbiological stains.]

[Trusted quality since 1921.]

[Any angle spray with comfort tip.]

[Features an any angle spray feature that allows you to spray in any direction, even upside down.]

[30 Minute Fast Dry]

[Dries Fast]

[Tough enough for industrial application.]

[Mold Preventing Primer is formulated for use on non-porous interior and exterior applications and may be applied in factories, warehouses, storage facilities, refrigerated storage facilities, office buildings, residential living, schools, hospitals, veterinary care facilities, elderly care facilities, prisons and correction facilities, wash houses, restaurants, fitness centers and locker rooms, attics, basements, window frames, bathrooms, wall cavities, baseboards, sub-floors and table tops.]

[Mold Preventing Primer can be used with any topcoat including] [Zinsser PERMA WHITE®, Rust-Oleum Professional, Rust-Oleum Professional High Performance Protective Enamels, Rust-Oleum Stops Rust.]

[Do not use on new or unpainted aluminum, metal or vinyl siding.]

DIRECTIONS FOR USE

It is a violation of Federal law to use this product in a manner inconsistent with its labeling.

Check with all local, state and federal regulations prior to using or working with this product. Fix the source of any moisture problems prior to remediation. Do not attempt to salvage damaged or structurally unsound building materials. Consult a qualified professional to perform a thorough inspection and supply work specifications appropriate to the project.

BACK PANEL CONTINUED

Surface Preparation: *For applications that have existing wet, slimy, heavy soiled, gross filth, overgrowth or loose material on the substrate a pre-cleaning step is required. Physically or mechanically remove gross filth, heavy soil, overgrowth or loose material including dirt, grease and oily films before application and ensure the substrate is free of slime or excessive moisture to ensure long-term adhesion and product performance particularly on exterior surfaces. If mold or mildew needs to be removed prior to application, remove with a mildew remover that is EPA registered and let dry. Wear eye, skin, and NIOSH approved respiratory protection. Patch surface irregularities with appropriate patching compounds.

Application: Mold Preventing Primer is a ready to use product. Use at room temperature (70°F) in a well ventilated area –do not use in high humidity conditions. Shake can vigorously until ball inside can rattles. Turn upside down and continue shaking for one minute – shake occasionally during use. If ball does not rattle, do not strike the can. [Contact Rust-Oleum.] Spray 10-12” from object with short dusting strokes. If valve clogs, twist and pull off spray tip and rinse it in a solvent such as mineral spirits. Do not stick pin or other object into the stem.

Mold, Mildew, Fungi, and Odor Causing Bacteria Control: Mold Preventing Primer will reduce the growth of all mold, mildew and fungal organisms for up to 7 days. Apply Mold Preventing Primer generously and uniformly, ensuring that the surface is completely coated. Allow to dry.

Coverage: Approximately [8, 12, 14, 15, 16, 18, 20] sq. ft. per can.

Drytime: Dries in minutes; topcoat in 30 minutes with latex or oil-base paints. [For optimal protection, apply a topcoat that prevents mold & mildew on the paint film within 72 hours of application.] Full adhesion and hardness develops in 7 days. [For best results allow primer to cure overnight when applying strong solvent-base topcoats.]

Clean Up: Wipe off tip before storing. Clean up wet paint with xylol or mineral spirits.

ATTENTION! If you scrape, sand, or remove old paint, you may release lead dust. LEAD IS TOXIC. EXPOSURE TO LEAD DUST CAN CAUSE SERIOUS ILLNESS, SUCH AS BRAIN DAMAGE, ESPECIALLY IN CHILDREN. PREGNANT WOMEN SHOULD ALSO AVOID EXPOSURE. Wear a NIOSH-approved respirator to control lead exposure. Clean up carefully with HEPA vacuum and a wet mop. Before you start, find out how to protect yourself and others by contacting the National Lead Information Hotline at 1-800-424-LEAD, or log on to www.epa.gov/lead.

STORAGE AND DISPOSAL

Do not contaminate water, food or feed by storage and disposal.

Storage: Store between 32-86F (0-30C) in a secure area inaccessible to children and away from food or feed.

Pesticide Disposal and Container Handling: Do Not Puncture or Incinerate! **If empty:** Place in trash or offer for recycling, if available. **If partly filled:** Call your local solid waste agency for disposal instructions.

PRECAUTIONARY STATEMENTS
HAZARDS TO HUMANS AND DOMESTIC ANIMALS

CAUTION: Prolonged or frequently repeated skin contact may cause allergic reactions in some individuals. Avoid contact with skin or clothing. Wash thoroughly with soap and water after handling and before eating, drinking, chewing gum, using tobacco or using the toilet. Wear gloves.

BACK PANEL CONTINUED

Note to Physician: Contains petroleum distillate. Vomiting may cause aspiration pneumonia.

FIRST AID

IF ON SKIN:	<ul style="list-style-type: none">• Take off contaminated clothing• Rinse skin immediately with plenty of water for 15-20 minutes• Call a poison control center or doctor for treatment advice
IF SWALLOWED:	<ul style="list-style-type: none">• Immediately call a poison control center or doctor• Do not induce vomiting unless told to do so by a poison control center or doctor• Do not give any liquid to the person• Do not give anything by mouth to an unconscious person
For 24 hour emergency information on this product, call the National Pesticides Information Center: 1-800-858-7378 [(6:30 AM to 4:30 PM Pacific Time (PT))], seven days a week. During other times call the Poison Control Center: 1-800-222-1222. In case of emergency call 847-367-7700. Have the product container/label with you when calling Poison Control Center, doctor or going for treatment.	

[Proposition 65 Statement: This product contains a chemical(s) known to the State of California to cause cancer [and birth defects or other reproductive harm.]

ENVIRONMENTAL HAZARDS

This product is toxic to fish. To protect the environment, do not allow pesticide to enter or run off into storm drains, drainage ditches, gutters or surface waters. Applying this product in calm weather when rain is not predicted for the next 24 hours will help to ensure that wind or rain does not blow or wash pesticide off the treatment area.

PHYSICAL OR CHEMICAL HAZARDS

Extremely flammable. Contents under pressure. Keep away from fire, sparks, and heated surfaces. Do not puncture or incinerate container. Exposure to temperatures above 130°F may cause bursting.

SATISFACTION GUARANTEED: If you are dissatisfied with this product, contact Rust-Oleum product support at 1-888-855-1774 for product replacement or a full refund of the purchase price. Refer to product number and batch code on bottom of can.

[Rust-Oleum Corporation, 11 Hawthorn Parkway, Vernon Hills, IL 60061 www.rustoleum.com]

BACK PANEL CONTINUED

Primer – MIR less than 0.70g O₃/g of product; VOC less than 60% by weight.

(RUST-OLEUM LOGO)

RUST-OLEUM address

RUST-OLEUM PHONE NUMBER

(Made in U.S.A)

(company website address)

(BATCH CODE XXXXXXXX ON CONTAINER)