



U.S. ENVIRONMENTAL PROTECTION AGENCY

Office of Pesticide Programs
Antimicrobials Division (7510P)
1200 Pennsylvania Ave., N.W.
Washington, D.C. 20460

EPA Reg. Number:

69587-7

Date of Issuance:

8/16/17

NOTICE OF PESTICIDE:

Registration
 Reregistration
(under FIFRA, as amended)

Term of Issuance:

Conditional

Name of Pesticide Product:

Wolman F & P

Name and Address of Registrant (include ZIP Code):

Mary Ann Sanders, Agent for
Rust-Oleum Corporation
11 Hawthorn Parkway
Vernon Hills, IL. 60061

Note: Changes in labeling differing in substance from that accepted in connection with this registration must be submitted to and accepted by the Antimicrobials Division prior to use of the label in commerce. In any correspondence on this product always refer to the above EPA registration number.

On the basis of information furnished by the registrant, the above named pesticide is hereby registered under the Federal Insecticide, Fungicide and Rodenticide Act.

Registration is in no way to be construed as an endorsement or recommendation of this product by the Agency. In order to protect health and the environment, the Administrator, on his motion, may at any time suspend or cancel the registration of a pesticide in accordance with the Act. The acceptance of any name in connection with the registration of a product under this Act is not to be construed as giving the registrant a right to exclusive use of the name or to its use if it has been covered by others.

This product is conditionally registered in accordance with FIFRA section 3(c)(7)(A). You must comply with the following conditions:

1. Submit and/or cite all data required for registration/reregistration/registration review of your product under FIFRA when the Agency requires all registrants of similar products to submit such data.

Signature of Approving Official:

Jacqueline Hardy, Product Manager 34
Regulatory Management Branch II
Antimicrobials Division (7510P)

Date:

8/16/17

2. You are required to comply with the data requirements described in the DCI identified below:
 - a. 3-Iodo-2-Propynyl Butyl Carbamate (IPBC): EPA-HQ-OPP-2011-0420

You must comply with all of the data requirements within the established deadlines. If you have questions about the Generic DCI listed above, you may contact the Reevaluation Team Leader (Team 36): <http://www2.epa.gov/pesticide-contacts/contacts-office-pesticide-programs-antimicrobial-division>


3. Make the following label changes before you release the product for shipment:
 - Revise the EPA Registration Number to read, “EPA Reg. No. 69587-7.”
4. Submit one copy of the final printed label for the record before you release the product for shipment.

Should you wish to add/retain a reference to the company’s website on your label, then please be aware that the website becomes labeling under the Federal Insecticide Fungicide and Rodenticide Act and is subject to review by the Agency. If the website is false or misleading, the product would be misbranded and unlawful to sell or distribute under FIFRA section 12(a)(1)(E). 40 CFR 156.10(a)(5) list examples of statements EPA may consider false or misleading. In addition, regardless of whether a website is referenced on your product’s label, claims made on the website may not substantially differ from those claims approved through the registration process. Therefore, should the Agency find or if it is brought to our attention that a website contains false or misleading statements or claims substantially differing from the EPA approved registration, the website will be referred to the EPA’s Office of Enforcement and Compliance.

If you fail to satisfy these data requirements, EPA will consider appropriate regulatory action including, among other things, cancellation under FIFRA section 6(e). Your release for shipment of the product constitutes acceptance of these conditions. A stamped copy of the label is enclosed for your records. Please also note that the record for this product currently contains the Basic CSF dated 4/5/2017.

If you have any questions, please contact Tom Luminello by phone at 703-308-8075, or via email at luminello.tom@epa.gov.

Sincerely,



Jacqueline Hardy, Product Manager (34)
Regulatory Management Branch II
Antimicrobials Division (7510P)


MASTER LABEL

FRONT PANEL

[Wolman F&P®]
[Wolman F&P Wood Finish & Preservative]
[F&P]
[RockSolid F&P]
[Varathane F&P]
[Wolman All Finish F&P]

[Front Panel to include any of the following optional statements]

- [Rust-Oleum]
- [Wood Finish & Preservative]
- [Natural]
- [Cedar]
- [Golden Pine]
- [Redwood]
- [Transparent, Rich Oil Finish]
- [Decks, Fences, and Siding]
- [Protects Wood Against: Rot & Decay, Mold & Mildew, Water Damage, UV Graying]
- [Protects Against Rot]
- [Protects Against Wood Rot]
- [Inhibits Mold & Mildew Attack]
- [Inhibits Mold & Mildew Growth]
- [Prevents Water Damage]
- [Water Repellent]
- [Blocks UV Graying]
- UV Resistant]
- [Fade Resistant]
- [Fade Resistant]
- [One Coat Coverage]
- [Long Lasting Protection]
- [3 Yr. Performance]
- [3 Yr. Performance Guarantee]
- [3 Yr. Warranted Performance]

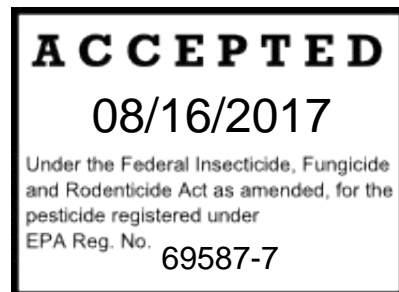

FRONT PANEL CONTINUED

KEEP OUT OF REACH OF CHILDREN

CAUTION

See First Aid statement on back panel.

ACTIVE INGREDIENT:

3-Iodo-2-Propynyl Butyl Carbamate 0.500%

OTHER INGREDIENTS*: 99.500%

TOTAL: 100.00%

**Contains petroleum distillates, xylene or xylene range aromatic solvents*

EPA Reg. No. 69587-T

EPA Est. No. 69587-XX-XXX

Manufactured by Rust-Oleum Corporation, 11 Hawthorn Parkway, Vernon Hills, IL 60061

1 U.S. Gal. (3.8 L)

1 U.S. Quart (.95 L)

5 U.S. Gals. (19 L)

MASTER LABEL

BACK/SIDE PANEL

- [Don't Just Stain Your Wood]
- [Preserve It!]
- [Contains a Wood Preservative to Protect Wood Against Rot and Decay]
- [Preservative Inhibits Mold, Mildew & Fungus Growth on Wood that can lead to rot and decay]
- [Long Term Water Repellent]
- Minimizes water damage such as splitting and warping
- ["Dual Action" UV Protection]
- [Uses blockers and absorbers to resist fading and wood graying]
- [Durable, Penetrating Formula]
- [Will not peel or splinter]
- [Deep, Rich Oil Finish]
- [Beautifies new wood and renews weathered wood]
- [Transparent, Natural Wood Colors]
- [Enhances original wood color, grain and texture]
- [One Coat Coverage on Decks]
- [Gets the job done fast]
- [Easy to Apply and Clean Up]
- [Brush, pad or spray on, soap and water cleanup]
- 3 Year Warranted Performance!
- For a minimum of 3 years this product will:
 - Prevent Water Damage
 - Protect Against Rot & Decay
 - Resist Peeling and Blistering
- [Complete Protection]
- [Multi-Project Finish!]
- [**This premium "finish and preservative"**] formula not only resists UV graying, it protects against water damage and wood rot and decay. Its penetrating oil-base nature makes the coating resistant to peeling and blistering. Unlike other wood protectors that only resist mildew growth on the coating film, the preservative ingredient in this product protects the wood itself from mold, mildew and other

BACK/SIDE PANEL CONTINUED

staining fungi. That makes it a complete protective finish for ALL your outdoor wood projects:

Decks
Siding
Clapboard
Fencing
Shake, Shingle, Lap and Log Siding
Shake & Shingle Roofing
Exterior Doors, Window Frames, Trim
Boat Docks & Boardwalks
Outdoor Furniture & Décor
Spa Cabinets
Gazebos & Arbors
Trellises
Storage Sheds
Play Equipment/Gym Sets
Spas
Play Sets

V.O.C. Max. 2.5 Lbs./Gal. (300 g/l)

[Product Name][FINISH AND PRESERVATIVE]

DIRECTIONS FOR USE

It is a violation of Federal law to use this product in a manner inconsistent with its labeling.

GENERAL PRECAUTIONS AND RESTRICTIONS

Apply this product only as specified on the label.

DO NOT USE ON WOOD WHICH WILL COME IN CONTACT WITH FOOD.

Residential Users: Do not apply this product in a way that will contact any person or pet.

Commercial Users: Do not apply this product in a way that will contact workers or other persons.

PPE for commercial users:

Applicators and other chemical handlers must wear:

- Long sleeved shirt and long pants
- Chemical resistant gloves (such as barrier laminate, nitrile rubber, neoprene rubber and viton)
- Shoes plus socks

Follow manufacturers' instructions for cleaning/maintaining PPE. If no such instruction exists for washables, use detergent and hot water. Keep and wash PPE separately from other laundry. Remove personnel protective equipment immediately after handling this

BACK/SIDE PANEL CONTINUED

product. Wash the outside of gloves before removing. As soon as possible wash thoroughly.

WHERE TO USE: FOR EXTERIOR, ABOVE GROUND USE ONLY.

WOOD TYPES: Use on all species of pressure-treated lumber, Cedar, Redwood, Poplar, Hickory and other North American hardwoods.

PROJECTS: Use to beautify and protect newly installed or existing decks, fences, siding or roofing shakes & shingles, clapboard, lap or log siding, exterior doors, window frames & trim, boat docks, boardwalks, outdoor furniture & décor, spa cabinets, gazebos, arbors & trellises, storage sheds, and play equipment/gym sets.

APPLICATION INSTRUCTIONS

SURFACE PREPARATION: Follow the preparation process outlined below prior to application of [Product Name] to ensure adequate penetration, coloration and optimum performance of this product.

Step 1 – Perform a Splash Test: Regardless of whether wood is newly installed or pre-existing, it is important to determine if there is a surface barrier present which would prevent the proper penetration or adhesion of a new coating.

To conduct a Splash Test, sprinkle several handfuls of water on a few distinct areas of the surface. If the water absorbs rapidly, the surface is ready to be coated. If the water beads, puddles or is not absorbed, an internal or external barrier exists, and must be eliminated before coating can begin.

Step 2 – Prepare the surface with Wolman® DeckBrite™, Deck & Fence Brightener or DeckStrip®. Repeat Splash Test to confirm water absorption before applying this product.

Uncoated, New Wood: If pressure-treated lumber, beading or puddling water may indicate either a surface barrier such as excess surface wax or excessive internal moisture content. If new Cedar or Redwood, “mill glaze” on the surface is likely. Use Wolman DeckBrite powder concentrate or Deck & Fence Brightener liquid concentrate according to label directions, then conduct Splash Test again. If absorption is not improved, allow wood to dry a minimum of 30 days in temperate weather (avg. 70°F, 50% humidity), longer in cooler or more humid conditions. Test for absorption again before applying this product.

Uncoated, Weathered Wood: Before coating, weathered wood must be thoroughly cleaned to remove ground-in dirt, mildew, mold and algae stains, gray, UV-damaged

BACK/SIDE PANEL CONTINUED

wood fibers and any other surface contaminants. Use Wolman DeckBrite powder concentrate or Deck & Fence Brightener liquid concentrate according to label directions.

Previously-Coated, Weathered Wood: Remove previous coatings before application of this product. If pigmented oil or latex coating exists, use Wolman DeckStrip® Stain & Finish Remover according to label directions to prepare the surface. Acrylic coatings may require a paint stripper. If coated with a clear sealer or lightly pigmented finish and little to no pigment remains, use Wolman DeckBrite powder concentrate or Deck & Fence Brightener liquid concentrate, followed by pressure-washing to restore the surface and remove residual coating/water repellency.,

BEFORE YOU START COATING AFTER SURFACE PREPARATION:

Before applying this oil-base product, wait at least 24 hours after cleaning, stripping or power-washing to allow the water soaked wood to dry out thoroughly. Oil-base finished will not properly penetrate wood that is water saturated.

Prior to project start date, perform a trial brush-out in several inconspicuous areas to ensure the desired color is achieved. (Color appearance will vary depending on wood species, age, and surface porosity). Replace rotted, extremely weathered, or warped boards. This product will not repair existing wood damage such as cracking, checking, splintering or splitting. Make sure entire wood surface is completely dry and free of dust, dirt, and debris. Cover all surrounding areas not intended to be coated. Thoroughly rinse these areas before and after application. Intermix multiple gallons of the same product in

(Back/Side Panel Continued)

a separate container to ensure a uniform color. Mix thoroughly before use and stir occasionally during application. Do not tint, dilute or mix this product with any other product. (Retail and commercial)

APPLICATION: For best results, apply when outside temperatures are between 50°F and 90°F and when 24 hours of precipitation free weather is expected. Do not apply to wood that is hot to the touch or in direct sunlight to prevent premature evaporation. Apply with a natural or synthetic bristle staining brush, stain/paint pad, pump sprayer, HVLP or airless sprayer, or dip (3 minutes). When spraying, work on a 30-40 square foot area at a time, making sure to back-brush along the grain any drips, runs, uneven coverage or surface puddles. Do not over-saturate surface with product or allow to puddle to prevent shiners, tackiness, excessive drying time or uneven appearance when dry. This product must penetrate the surface to work properly – do not apply over a sealed surface.

Do not use as a primer coat. Clean up over-spray, drips or splashes with soap and water immediately.

BACK/SIDE PANEL CONTINUED

Horizontal Surfaces: APPLY ONE (1) LIBERAL, UNIFORM COAT ON DECKS AND OTHER HORIZONTAL SURFACES. Thoroughly coat all exposed surfaces until (Back/Side Panel Continued)

wood will not absorb any additional product, and avoid puddling. Only if wood is highly porous is a second coat recommended. To test for this condition, check the penetration rate of the first 30 sq. ft. area coated. If the coating is dry to the touch in 15 minutes or less, then another light coat may be applied no later than one hour after first coat. Only half the amount is necessary for the second coat.

Vertical Surfaces: APPLY TWO (2) WET-ON-WET COATS ON SHAKE, SHINGLE OR LAP SIDING, ROOFING, FENCES AND OTHER VERTICAL SURFACES. Do not allow product to dry fully between coats. Apply second coat within 6 hours of the first coat.

Dry Time: Because temperature and humidity fluctuate, allow a minimum 24-48 hours before using deck or sitting on outdoor furniture. Wait 72 hours to reposition furniture on deck.

Coverage: To determine correct number of gallons required to complete your project, divide total square footage to be coated by 150. One gallon will cover approximately 150-200 square feet, depending on wood species, age, surface porosity and method of application. Rough, weathered or highly porous surfaces will absorb more product and reduce coverage rate. If surface requires two coats, first coat will cover approximately 150-200 square feet, second coat will cover approximately 200-300 square feet.

Careful: As with application of any protective coating, **WOOD SURFACES CAN BE SLIPPERY WHEN WET.**

Clean up: Wipe up wet coating spatters and spills immediately with soap and warm water. Dried spills can be removed with lacquer thinner or paint stripper. Clean tools and equipment immediately after use with soap and warm water or mineral spirits, dried product will require mineral spirits.

Maintenance: To maintain adequate preservative protection and shield wood against water damage, this product must be re-applied every three (3) years. In areas exposed to severe sun, heavy precipitation, humidity or temperature extremes, accelerated weathering can take place, especially on older wood. In these cases, a re-coat every two (2) years may be desired to maintain protection and color integrity. Clean annually with mild soap and water to keep coating grime-free and looking its best

BACK/SIDE PANEL CONTINUED

STORAGE AND DISPOSAL

Do not contaminate water, food, or feed by storage or disposal.

PESTICIDE STORAGE:

Store this product in its originally labeled container and in a storage area located in a cool place. This product will not freeze but may become cloudy at colder temperatures. Keep container and freshly treated articles away from high temperatures, sparks, fire, or open flame. If static generating conditions exist, provide necessary grounding and bonding. Keep this product separate from other pesticides during storage to prevent cross contamination of other pesticides, fertilizers, food and feed. Remove sources of ignition if this product is released or spilled. Confine area of spill and avoid breathing vapors. Ventilate area. Cover with absorbent material and place in approved containers for disposal using non-sparking tools. Keep container tightly closed when not in use.

PESTICIDE DISPOSAL:

Commercial Users: Wastes resulting from the use of this product must be disposed of on site or at an approved waste disposal facility.

CONTAINER HANDLING:

Residential Users: Nonrefillable container. Do not reuse or refill this container. Securely wrap original container in several layers of newspaper and discard in trash or offer for recycling if available.

PRECAUTIONARY STATEMENTS HAZARDS TO HUMANS AND DOMESTIC ANIMALS

CAUTION: Prolonged or frequently repeated skin contact may cause allergic reactions in some individuals. Causes moderate eye irritation. Avoid contact with eyes, skin, or clothing. Wash thoroughly with soap and water after handling and before eating, drinking, chewing gum, using tobacco or using the toilet. Wear protective eyewear and gloves.

Note to Physician: Contains petroleum distillate. Vomiting may cause aspiration pneumonia.

BACK/SIDE PANEL CONTINUED

FIRST AID

IF IN EYES	<ul style="list-style-type: none">• Hold eye open and rinse slowly and gently with water for 15-20 minutes.• Remove contact lenses, if present, after the first 5 minutes, then continue rinsing.• Call a poison control center or doctor for treatment advice.
IF ON SKIN:	<ul style="list-style-type: none">• Take off contaminated clothing.• Rinse skin immediately with plenty of water for 15-20 minutes.• Call a poison control center or doctor for treatment advice.
IF SWALLOWED:	<ul style="list-style-type: none">• Immediately call a poison control center or doctor.• Do not induce vomiting unless told to do so by a poison control center or doctor.• Do not give any liquid to the person.• Do not give anything by mouth to an unconscious person.
For 24 hour emergency information on this product, call the National Pesticides Information Center: 1-800-858-7378 [(6:30 AM to 4:30 PM Pacific Time (PT))], seven days a week. During other times call the Poison Control Center: 1-800-222-1222. In case of emergency call 847-367-7700. Have the product container/label with you when calling Poison Control Center, doctor or going for treatment.	

[Proposition 65 Statement: This product contains a chemical(s) known to the State of California to cause cancer and birth defects or other reproductive harm.]

ENVIRONMENTAL HAZARDS

[For less than 5 gallon container, retail uses]

This product is toxic to fish. To protect the environment, do not allow pesticide to enter or run off into storm drains, drainage ditches, gutters or surface waters. Applying this product in calm weather when rain is not predicted for the next 24 hours will help to ensure that wind or rain does not blow or wash pesticide off the treatment area.

BACK/SIDE PANEL CONTINUED

[For containers 5 gallons and greater, commercial uses]

This product is toxic to fish. Do not discharge effluent containing this product into lakes, streams, ponds, estuaries, oceans or other water unless in accord with the requirements of a National Pollution Discharge Elimination System (NPDES) permit and the permitting authority has been notified in writing prior to discharge. Do not discharge this product to sewer systems without previously notifying the local sewage treatment plant authority. For guidance contact your State Water Board or Regional Office of the EPA.

PHYSICAL OR CHEMICAL HAZARDS

COMBUSTIBLE – Do not use or store near heat or open flame.

LIMITED WARRANTY

(Retail)

[The Company warrants, for three years after date of purchase, [Product Name] will protect wood substrate surfaces against rot and decay, prevent warping or splitting damage caused by water penetration, and resist peeling or blistering of the coating film. This warranty does not apply to wood that was rotting, decaying, splitting, or warping prior to application of the Product, or to pressure-treated wood that cracks, splits, or warps after Product application due to escape of internal moisture. This warranty applies to Product applied to newly installed or pre-existing wood surfaces only if the surface has been properly prepared and the Product has been properly applied in accordance with the directions on the Product Label. Label directions are as complete as possible but cannot encompass all conditions, applications, and/or surfaces, all of which are beyond manufacturer's and seller's control. This warranty does not apply to use of the Product in combination with other materials.]

[To the extent consistent with the applicable law, the exclusive remedy for losses or damages resulting from the Product (including claims based on contract, negligence, strict liability or other legal theories) shall be limited to, at seller's or manufacturer's option, one of the following:

1. Refund of purchase price paid by the buyer or user for Product purchase; or
2. Replacement of the amount of Product used.

To the fullest extent permitted by law, in no event shall seller or manufacturer be liable to user, buyer, or any third party for consequential or incidental damages or

losses resulting from the use of the Product. The terms of this Warranty Disclaimer and Limitation of Liability cannot be varied by any written or verbal

statements or agreements. No employee or sales agent is authorized to vary the terms of the Warranty Disclaimer and Limitation of Liability.

The warranty does not include labor or cost of labor for the removal or application of any Product or replacement of any wood structure.]

BACK/SIDE PANEL CONTINUED

(Commercial)

[To the extent consistent with applicable law, the Company, seller, and manufacturer make no other warranties, guarantees, or representations of any kind to buyer or user, or to any third party, either express or implied or by usage of trade, statutory or otherwise, with regard to the Product, including, but not limited to warranties of merchantability, fitness for a particular purpose, or use or eligibility of the goods for any particular trade usage. No warranties shall be created by course of performance, usage or trade, or course of dealing.]

[Rust-Oleum Corporation Logo]

[Wolman Logo]

[UPC Code]

[Rust-Oleum Corporation Address]

[Company website address]

[RPM Logo]

[Made in U.S.A.]

[BATCH CODE XXXXXXXX ON CONTAINER]