

PM 33

70214-1

12-16-97

12/11/97

9:28 AM

2/5

10/5

SeaLife 1000™

Antifouling Marine Paint

Active ingredient (cuprous oxide)	39.95%
Inert ingredients	60.05%
TOTAL	100.00%

KEEP OUT OF REACH OF CHILDREN

WARNING

STATEMENT OF PRACTICAL TREATMENT

- IF SWALLOWED Drink promptly a large quantity of water. Avoid alcohol. Get medical attention.
- IF INHALED Remove victim to fresh air. If not breathing give artificial respiration, preferably mouth-to-mouth. Get medical attention.
- IF ON SKIN Wash with soap and water. Get medical attention.
- IF IN EYES Flush eyes with plenty of water for at least 15 minutes. Get medical attention.

SEE BACK LABEL FOR ADDITIONAL PRECAUTIONARY STATEMENTS

MFG by
 SeaLife Marine Coatings
 51 Beaver Creek Place
 Suite 19122
 Avon, Colorado 81620
 (970) 926-0437

EPA Reg. No. 70214-1

ONE U.S. Gallon
 (3.79 Liters)

ACCEPTED

DEC 16 1997

Under the Federal Insecticide, Fungicide, and Rodenticide Act as amended, for the pesticide, registered under EPA Reg. No. 70214-1

29/5

SeaLife Marine Coatings

51 Beaver Creek Place Suite 19122 Avon, Colorado 86120 Tel (970) 926-0437 Fax (970) 926-0438

Fax Transmission

TO: Martha Terry Tel (703) 308-6217 Fax (703) 308-6467
Project Status Manager, Team 31

FROM: Gael Himmah Tel (970) 926-0437 Fax (970) 926-0438

RE: Registration No./File Symbol 70214-1

SEALIFE 1000 antifouling paint

December 11, 1997

Dear Martha,

Thank you for your phone message this morning. As per your instructions, following is a copy of the product label with the word "FLAMMABLE" deleted.


During my conversation with Marshall Swindell and you several weeks ago, we agreed that the statement, "Flammable" under PRECAUTIONARY STATEMENTS was not applicable and should be deleted from the label.

The statement in our label, "Keep away from heat and open flame. Store at temperatures not exceeding 110° F" was included in the text of our label only because storing the paint at higher than normal room temperatures tends to dry out the paint. It has nothing to do with flammability. As per the MSDS for our paint, its ignition point is nearly 1000° F.

Please fax me, and mail me a hard copy, of the revised product label.

Many thanks,

GAEL H

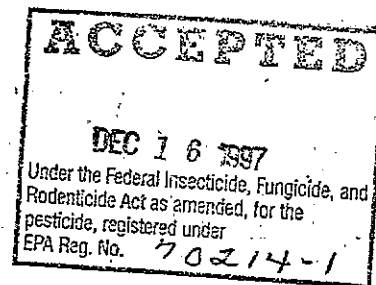

30/5

HANDLING

Stir thoroughly. Use with adequate ventilation.

APPLICATION

SEALIFE 1000 may be applied by brushing, rolling or spraying. **SEALIFE 1000** offers superior adhesion on wet or oily surfaces without the necessity of pre-coating. It can be applied to dry, wet or humid surfaces. It provides long life protection under water on steel, fiberglass, aluminum and wooden hulls. It adheres to tar, bitumen and other paints. It is highly elastic and ultra violet resistant

DRY TIME (HOURS)

TO RECOAT

TO LAUNCH

90°F	1	6
70°F	2	8
50°F	4	24

CLEANUP

Mineral spirits or paint thinner.


COVERAGE

One gallon will coat approximately 300-400 square feet. A thin double coating provides optimal results.

THICKNESS PER COAT

PAINT APPLIED BY:

roller	1.2-1.6 mils
brush	1.2-1.6 mils
airspray	1.2-2.8 mils
airless spray	2.0-7.8 mils

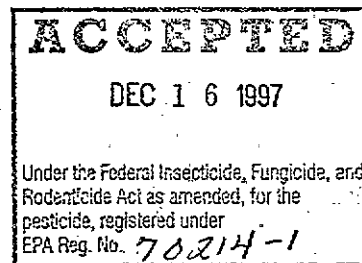

VOC 130 grams per liter

ACCEPTED

DEC 16 1997

Under the Federal Insecticide, Fungicide, and
Rodenticide Act as amended, for the
pesticide, registered under
EPA Reg. No. 70214-1**STORAGE AND DISPOSAL****STORAGE:**

Store at room temperature. Avoid temperatures above 110°F. Do not allow to freeze.

DISPOSAL:

Do not contaminate water, food or feed by storage or disposal. Open dumping is prohibited.

Pesticide Disposal: Pesticide, spray mixture, or rinsate that cannot be used or chemically reprocessed should be disposed of according to procedures approved by Federal, State or local disposal authorities.

Container Disposal: Triple rinse (or equivalent). Then offer for recycling or reconditioning, or puncture and dispose of in a sanitary landfill, or by other procedures approved by state and local authorities.

GENERAL DESCRIPTION

SEALIFE 1000 is an anti-fouling marine paint which provides protection to hulls in both salt and fresh water.

This paint has a unique, environmentally compatible formulation. It contains no silicones, arsenic, tributyl tin, lead, mercury, or toxic metals. It does not allow algae, fungi, marine plant life or shellfish (barnacles, mussels, etc.) to attach to it due to its formulation and silky-smooth surface.

DIRECTIONS FOR USE

It is a violation of Federal Law to use this product in a manner inconsistent with its labeling.

PREPARATION

A clean, dry surface is recommended. For maximum anti-fouling protection, surface should be clean, dry and solid. However, **SEALIFE 1000** can be applied on old paint provided the surface is sound. Undercoating is not needed.

Safs

PRECAUTIONARY STATEMENTS

HAZARDS TO HUMANS & DOMESTIC ANIMALS

WARNING: Causes eye irritation. Harmful if absorbed through skin. Avoid contact with skin, eyes or clothing. Wear protective clothing such as gloves, long-sleeved cotton shirt, long pants, and hat. May be fatal if swallowed or inhaled. Do not breathe dust, vapor or spray mist. While spraying paint or sanding or sand blasting boat surfaces, wear a mask or a respirator jointly approved by the Mining Enforcement and Safety Administration and the National Institute of Occupational Safety and Health. Remove contaminated clothing and wash before reuse. Wash thoroughly with soap and water after handling.

ENVIRONMENTAL HAZARDS

This pesticide is toxic to fish. Do not apply directly to water by cleaning of equipment or disposal of wastes. Do not allow chips and dust generated during paint removal to enter water. Dispose of paint debris in an approved landfill. Do not discharge effluent containing this product into lakes, streams, ponds, estuaries, oceans, and other waters unless in accordance with requirements of a National Pollution Discharge Elimination System (NPDES) permit and the permitting authority has been notified in writing prior to discharge. Do not discharge effluent to sewer system without previously notifying the local sewer treatment plant authority. For guidance, contact your State Water Board or Regional Office of the EPA.

PRECAUTIONS FOR SAFE HANDLING AND USE

Avoid contact with eyes. Use hand & eye protection (rubber gloves & goggles). May cause eye irritation. Do not ingest. Avoid contact with skin and open wounds. Wash hands at breaks and at end of work. Observe usual precautions when handling chemicals.

RESPIRATORY PROTECTION:	NO
VENTILATION:	YES
PROTECTIVE GLOVES:	YES
EYE PROTECTION:	YES, GOGGLES
OTHER PROTECTIVE EQUIPMENT:	NONE

PHYSICAL OR CHEMICAL HAZARDS: NONE

IF MATERIAL IS RELEASED OR SPILLED:

Let paint dry or take up with absorbent material (eg: sawdust, sand).

ACCEPTED

DEC 16 1997

Under the Federal Insecticide, Fungicide, and
Rodenticide Act as amended, for the
pesticide, registered under
EPA Reg. No. 70214-1