

**PRECAUTIONARY STATEMENTS  
HAZARDS TO HUMANS & DOMESTIC ANIMALS**

**DANGER:** Harmful or fatal if swallowed, inhaled or absorbed through skin. Do not breathe dust, vapor or spray mist. Do not get in eyes, on skin or on clothing. Causes eye and skin damage or skin irritation. While spraying paint, sanding or sand blasting boat surfaces, wear protective clothing such as rubber gloves, long-sleeved cotton shirt, long pants, hat, safety goggles and a mask or a respirator jointly approved by the Mining Enforcement and Safety Administration and the National Institute of Occupational Safety and Health.


**ENVIRONMENTAL HAZARDS**

Concentrate is toxic to fish. Do not apply directly to water by cleaning of equipment or disposal of wastes. Do not allow chips and dust generated during paint removal to enter water. Dispose of paint debris in an approved landfill. Do not discharge effluent containing this product into lakes, streams, ponds, estuaries, oceans, and other waters unless in accordance with requirements of a National Pollution Discharge Elimination System (NPDES) permit and the permitting authority has been notified in writing prior to discharge. Do not discharge effluent to sewer system without previously notifying the local sewer treatment plant authority. For guidance, contact your State Water Board or Regional Office of the EPA.

**PRECAUTIONS FOR SAFE HANDLING AND USE**

Avoid contact with eyes. Use hand & eye protection (rubber gloves & safety goggles). May cause eye irritation. Do not ingest. Avoid contact with skin and open wounds. Wash hands thoroughly with soap and water after handling and before eating, drinking or using tobacco. Remove contaminated clothing and wash before reuse. Observe usual precautions when handling chemicals.

RESPIRATORY PROTECTION: YES  
VENTILATION: YES  
PROTECTIVE GLOVES: YES  
EYE PROTECTION: YES, SAFETY GOGGLES  
OTHER PROTECTIVE EQUIPMENT: NONE  
PHYSICAL OR CHEMICAL HAZARDS: NONE  
IF MATERIAL IS RELEASED OR SPILLED: Let paint dry or take up with absorbent material (e.g. Sawdust, sand).

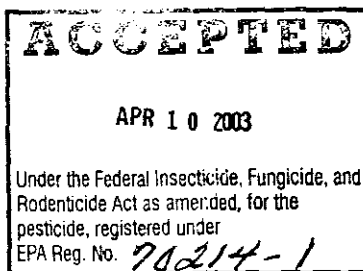

MFG by SeaLife Marine Products, Inc. 5601 Blauson Ave. Suite 282 Claver, CA 90230

EPA Reg.# 70214-1  
1 U.S. Gallon  
(3.79 Liters)  
RED



**SeaLife 1000<sup>TM</sup>  
Antifouling Marine Paint**

Active ingredient( cuprous oxide) 39.95%  
inert ingredient 60.05%  
100.00%

**DANGER** Keep out of reach of children

**Statement of practical treatment**

**If swallowed** Call a doctor or get medical attention. Do not induce vomiting. Do not give anything by mouth to an unconscious person. Avoid alcohol. Get medical attention.  
**If inhaled** Remove victim to fresh air. If not breathing give artificial respiration. Preferably mouth-to-mouth. Get medical attention.  
**If on Skin** Wash with soap and water. Get medical attention.  
**If in eyes** Flush eyes with plenty of water for at least 15 minutes - Get medical attention

**SEE BACK OF LABEL FOR ADDITIONAL PRECAUTIONARY STATEMENTS**

70214-1

4/10/2003

1/2

### GENERAL DESCRIPTION

SEALIFE 1000 is an anti-fouling marine paint which provides protection to hulls in both salt and fresh water. This paint has a unique, environmentally compatible formulation. It contains no silicones, arsenic, tributyl tin, lead, mercury, or toxic metals. It does not support algae, fungi, marine plant life or shellfish (barnacles, mussels, etc.) growth due to its formulation and silky-smooth surface.

### DIRECTIONS FOR USE

It is a violation of Federal Law to use this product in a manner inconsistent with its labeling.

### PREPARATION

A clean, dry surface is recommended. For maximum anti-fouling protection, surface should be clean, dry and solid. However, SEALIFE 1000 can be applied on old paint provided the surface is sound.

Undercoating is not needed except on bare steel or aluminum hulls.

**HANDLING** Stir thoroughly. Use with adequate ventilation.

### APPLICATION

SEALIFE 1000 may be applied by brushing, rolling or spraying. SEALIFE 1000 offers superior adhesion to wet or oily surfaces without the necessity of pre-coating. It can be applied to dry, wet or humid surfaces. It provides long life protection under water on steel, fiberglass, aluminum and wooden hulls. It adheres to tar, bitumen and other paints. It is highly elastic and ultra violet resistant.

DRY TIME (HOURS)		THICKNESS PER COAT	
TEMP	TO RECOAT	TO LAUNCH	PAINT APPLIED BY
90°F	1	6	Roller 2.0 mils
70°F	2	8	Brush 2.0 mils
50°F	4	24	Airspray 2.0 mils
			Airless spray 2.0- 7.8 mils

**CLEANUP:**  
Mineral spirits or paint thinner.

**COVERAGE:**  
One gallon will coat approximately 300-400 square feet. A thin double coating provides optimal results.

**Thinning:**  
Thin with Xylene if necessary

V.O.C. 260 grams / liter

### STORAGE AND DISPOSAL

**STORAGE:** Store at room temperature. Avoid temperatures above 110°F. Do not allow to freeze.

**DISPOSAL:** Do not contaminate water, food or feed by storage or disposal. Open dumping is prohibited.

**PESTICIDE DISPOSAL:** Pesticide, spray mixture, or rinsate that cannot be used or chemically reprocessed should be disposed of according to procedures approved by Federal, State or local disposal authorities.

**CONTAINER DISPOSAL:** Triple rinse (or equivalent). Then offer for recycling or reconditioning, or puncture and dispose of in a sanitary landfill, or by other procedures approved by state and local authorities.