

JUL 3 2003

Mr. Michael Kellogg
Agent
Diacom Technologies Ltd.
Diacon Technologies LTD
c/o Pyxis Regulatory Consulting, Inc.
11324 17th Ave., Ct. NW
Gig Harbor, WA 98332

Subject: Mycostat Z
EPA Registration No. 70227-3
Application Date: 4/4/03
Receipt Date: 4/7/03

Dear Mr. Kellogg:

The following amendment, submitted in connection with registration under the Federal Insecticide, Fungicide and Rodenticide Act (FIFRA), as amended, is acceptable:

Updating First Aid language

LABEL COMMENTS

Revise the Precautionary Statements to read "Danger, Keep out of Reach of Children. Corrosive. Causes irrsible eye damage and skin burns. Harmful if absorbed through skin. May be fatal if swallowed. Harmful if inhaled. Avoid breathing spray mist. Do not get into eyes, on skin or on clothing. Wear goggles or face shield and rubber gloves and protective clothing when handling. Wash thoroughly with soap and water after handling. Remove contaminated clothing and wash before reuse.

1. On page two (2), under Storage and Disposal, remove "Spill or Leak Procedures" and its statement and place under "Physical and Chemical Hazards".
2. Delete the "Container Disposal" statement and the word "Pesticide" above it and place the word "Container" in its place. Also, delete the statement "For swimming Pool Use 1 gallon or less" above the heading "Storage and Disposal" and add "containers 1 gallon or less".
3. Revise the "Storage and Disposal" section "For Industrial Water Treatment use, Industrial and/or Commercial Cooling Water Towers..." by repeating the Statement: Do not contaminate water, food, or feed by storage and disposal in the section.

SYMBOL	75100						
SURNAME	M. Kellogg						
DATE	7-1-03						


4. On page 3, place the statement "Containers one (1) gallon or more" above "Storage and Disposal".

GENERAL COMMENTS

A stamped copy of the accepted labeling is enclosed. Submit three (3) copies of your final printed labeling before distributing or selling the product bearing the revised labeling.

Should you have any questions or comments concerning this letter, please contact Zenobia Jones at (703) 208-6198.

Sincerely,

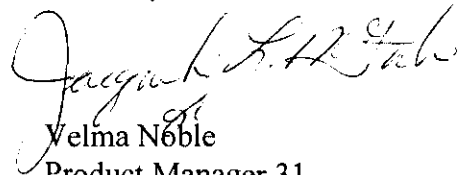

Velma Noble
Product Manager 31
Regulatory Management Branch 1
Antimicrobial Division (7510C)

MYCOSTAT™-Z

MYCOSTAT™-Z for control of Algae, Algal, Fungal and Bacterial Slimes in Recirculating Water Systems, Auxiliary Water and Waste Water Systems and Water Cooling Systems, Molluscs in Once Through Freshwater Cooling Systems, Mold, Mildew and Fungi in Sap Stains and Wood Preservatives.

ACTIVE INGREDIENT:

n-Alkyl (67% C₁₂, 25% C₁₄, 7% C₁₆, 1% C₁₈) dimethyl benzyl ammonium chloride..... 50.0%

OTHER INGREDIENTS: 50.0%

TOTAL: 100.0%

Weight Approx. 8 lbs./gal.

KEEP OUT OF REACH OF CHILDREN DANGER

STATEMENT OF PRACTICAL TREATMENT

In case of contact, immediately flush eyes or skin with plenty of water for at least 15 minutes. For eyes, call a physician. Remove and wash contaminated clothing before reuse.

If swallowed, drink promptly a large quantity of egg whites, gelatin solution or, if these are not available, drink large quantities of water. Avoid alcohol. Call a physician immediately.

NOTE TO PHYSICIAN

Probable mucosal damage may contraindicate the use of gastric lavage.

FIRST AID	
If on skin or clothing:	<ul style="list-style-type: none"> Take off contaminated clothing. Rinse skin immediately with plenty of water for 15-20 minutes. Call a poison control center or doctor for treatment advice.
If in eyes:	<ul style="list-style-type: none"> Hold eye open and rinse slowly and gently with water for 15-20 minutes. Remove contaminated lenses, if present, after the first 5 minutes, then continue rinsing eye. Call a poison control center or doctor for treatment advice.
If swallowed:	<ul style="list-style-type: none"> Call a poison control center or doctor immediately for treatment advice. Have person sip a glass of water if able to swallow. Do not induce vomiting unless told to do so by the poison control center or doctor. Do not give anything by mouth to an unconscious person.
HOT LINE NUMBER	
Have the product container or label with you when calling a poison control center or doctor, or going for treatment. For general product information, call Diacon Technologies Ltd at (604) 271-8855 between the hours of 9 a.m. - 4 p.m. Pacific Time.	
NOTE TO PHYSICIAN	
Probable mucosal damage may contraindicate the use of gastric lavage.	

SEE LEFT PANEL FOR ADDITIONAL PRECAUTIONARY STATEMENTS

ACCEPTED
with COMMENTS
in EPA Letter Dated:

JUL 3 2003

Under the Federal Insecticide,
Fungicide, and Rodenticide Act as
amended, for the pesticide,
registered under EPA Reg. No

70227-3

DIACON TECHNOLOGIES LTD.
#135-11960 Hammersmith Way
Richmond, BC V7A 5C9
Canada
(604) 271-8855

E.P.A. Reg. No. 70227-3

E.P.A. Est. No.

Net Contents:

Lot Number:

Made In USA

**PRECAUTIONARY STATEMENTS
HAZARDS TO HUMANS & DOMESTIC ANIMALS**

DANGER

KEEP OUT OF REACH OF CHILDREN

CORROSIVE

Causes irreversible eye damage and skin burns. Harmful if swallowed or absorbed through skin. severe eye and skin damage.—Do not get in eyes, on skin, or on clothing. Wear protective eyewear (goggles, safety glasses or face shield), protective clothing, and rubber gloves. Wear goggles or face shield and rubber gloves when handling.—Wash thoroughly with soap and water after handling. Remove contaminated clothing and wash clothing before reuse. Prolonged or frequent skin contact may cause allergic reactions in some individuals. Harmful or fatal if swallowed. Avoid contamination of food.

ENVIRONMENTAL HAZARDS

This pesticide is toxic to fish. Do not discharge effluent containing this product into lakes, streams, ponds, estuaries, oceans, or other waters unless in accordance with the requirements of a National Pollutant Discharge Elimination System (NPDES) permit and the permitting authority has been notified in writing prior to discharge. Do not discharge effluent containing this product into sewer systems without previously notifying the local sewage treatment plant authority. For guidance contact your State Water Board or Regional Office of the EPA.

(Use the statement below for swimming pools only and less than 5 gallon containers.)

ENVIRONMENTAL HAZARDS

This product is toxic to fish.

PHYSICAL OR CHEMICAL HAZARDS

Do not mix with soap, anionic detergents or oxidizers.

(For Swimming Pool Use 1 gallon or less)

STORAGE AND DISPOSAL

Do not contaminate water, food, or feed by storage and disposal.

PESTICIDE STORAGE: Store in original containers and place in locked storage area. Keep from freezing.

SPILL OR LEAK PROCEDURES: Small spills may be mopped up or flushed away with water or absorbed on some absorbent material and incinerated.

PESTICIDE DISPOSAL: Securely wrap original container in several layers of newspaper and discard in trash.

CONTAINER DISPOSAL: Do not reuse container (bottle, cans, jars). Triple rinse (or equivalent). Then dispose of in a sanitary landfill or by other procedures approved by state and local authorities.

(For Industrial Water Treatment Use, Industrial and/or Commercial Recirculating Cooling Water Towers and Recirculating Cooling Water Systems, Auxiliary water and waste water systems and water cooling systems, once through fresh water cooling systems, sap stains, wood preservatives.)

STORAGE AND DISPOSAL

Do not contaminate water, food, or feed by storage and disposal.

PESTICIDE STORAGE: Store in original containers and place in locked storage area. Keep from freezing.

SPILL OR LEAK PROCEDURES: Small spills may be mopped up or flushed away with water or absorbed on some absorbent material and incinerated. Large spills should be contained, the material then moved into containers and disposed of by approved methods for hazardous wastes.

PESTICIDE DISPOSAL: Pesticide wastes are acutely hazardous. Improper disposal of excess pesticide, spray mixture, or rinsate is a violation of Federal Law. If these wastes cannot be disposed of by use according to label instructions, contact your State Pesticide or Environmental Control agency or the Hazardous Waste representative at the nearest EPA Regional Office for guidance.

CONTAINER DISPOSAL: Do not reuse empty container (bottle, cans, jars). Triple rinse (or equivalent). Then offer for recycling or reconditioning or puncture and dispose of in a sanitary landfill, or incinerate or if allowed by state and local authorities, by burning. If burned, stay out of smoke.

DIRECTIONS FOR USE

It is a violation of Federal Law to use this product in a manner inconsistent with its labeling. Do not use water containing residues from use of this product to irrigate crops used for food or feed. Use of the product in either public/municipal or single or multiple family private/residential potable/drinking water intake is strictly prohibited. Use of the product in any cooling water system that discharges effluent within 1/4 mile of either a public/municipal or single or multiple family private/residential potable/drinking water intake is strictly prohibited.

SWIMMING POOLS
IMPORTANT NOTES

1. Do not allow swimming in pool for at least 15 minutes after this product has been applied.
2. Always apply this and other pool treatment chemicals separately, never combine them.
3. Sunlight, rainfall, temperature, number of swimmers and frequency of pool use, all affect the rate at which unsanitary pool water conditions develop. Adjust your pool cleaning and maintenance functions accordingly.

BEFORE YOU BEGIN

1. Make sure all pool equipment is working properly including pump, filter, skimmer and heater. Allow the filter to run for at least 6 hours after adding algaecide.
2. Backwash filter following normal procedure for your pools filter.
3. Check water pH (acidity/alkalinity balance) with a Test Kit, following label direction. Desired pH range is between 7.2-7.6. If necessary, adjust pH by adding pH decreaser to lower pH or pH increaser to raise pH.
4. Recheck pH and maintain it between 7.2-7.6 for at least 6 hours before adding this product.
5. Add this product directly into pool by pouring around entire outside perimeter of pool.

INITIAL APPLICATION FOR SWIMMING POOLS

(To a Clean Pool)

1. Vacuum algae debris to waste and thoroughly brush pool.
 2. Add 26 fluid oz. MYCOSTAT™-Z to each 50,000 gallons of water (5.2 ounces per 10, 000 gallons) or ratio thereof. Add this product directly into pool by pouring around entire outside perimeter of pool.
 3. Vacuum pool after 24 hours to remove dead algae.
 4. If algae growth is still visible repeat dose (steps 3 & 4) as necessary until pool is free of visible algae.
 5. Once algae is under control, clean filter and return to normal operation.
- ~~apply the initial dose. If algae is still visible repeat dose as necessary until pool is free of visible algae.~~

CONTINUED MAINTENANCE APPLICATION

Add 6.5 fluid oz. MYCOSTAT™-Z in 50,000 gallons of water every 3-5 days, or as needed to maintain 2 ppm active. Add this product directly into pool by pouring around entire outside perimeter of pool. Quaternary Test Kits are available for this use.

BOOSTER APPLICATION

6.5 fluid oz. MYCOSTAT™-Z in 50,000 gallons of water after a heavy or prolonged rainfall or when there is a heavy bathing load. Add this product directly into pool by pouring around entire outside perimeter of pool.

If algae growth is noticeable, apply initial dose.

THE ABOVE DIRECTIONS SHOULD BE FOLLOWED EVEN WHEN THE POOL IS NOT IN USE.

INDUSTRIAL AND/OR COMMERCIAL RECIRCULATING COOLING WATER TOWERS, RETORT WATER SYSTEMS ~~AND RECIRCULATING COOLING WATER SYSTEMS~~

This product aids in the control of bacterial, fungal and algae slimes in evaporative condensers, heat exchange water system, commercial and industrial cooling towers, influent systems such as flow through filters and lagoons, industrial water scrubbing systems and brewery pasteurizers.

DOSING LOCATION: This product is to be applied at a point in the system where it will be uniformly mixed, such as at the sump.

DOSING CONDITIONS: This product should be applied when the system is in jeopardy of being affected or after cleaning systems where efficiency is already impaired.

METHOD OF APPLICATION:

INTEMITTENT OR SLUG METHOD

Initial Dose: When the system is noticeably fouled, apply this treatment is required, add this product at the rate of 5.25 to 10.25 fluid ounces (20 to 40 ppm on an active quaternary basis) per 1000 gallons of water already in the system. Repeat until control is achieved, or being added to the system, for 4 to 8 hours, 1 to 4 times per week or as needed to achieve the desired level of control. When control is obtained, add this product at the rate of 1.33 to 3.85 ounces per 1000 gallons of water in the system.

Subsequent Dose: When microbial control is evident, add 1.33 to 3.85 fluid ounces (5 to 15 ppm on an active quaternary basis) per 1000 gallons of water in the system twice weekly or as needed to maintain control. Badly fouled systems must be cleaned before treatment is begun.

MODIFIED INTERMITTENT METHOD

Initial Dose: When the system is noticeably fouled, apply 5.25 to 10.25 fluid ounces (20 to 40 ppm on an active quaternary basis) per 1000 gallons of water in the system. Apply half of this initial dose when half of the water in the system has been lost by blowdown.

Subsequent Dose: When control of microbial growth is evident, apply 1.33 to 3.85 fluid ounces (5 to 15 ppm on an active quaternary basis) per 1000 gallons of water in the system. Apply half of this subsequent dose when half of the water in the system has been lost by blowdown. Badly fouled systems must be cleaned before treatment is begun.

CONTINUOUS FEED METHOD

Initial Dose: When the system is noticeably fouled, apply 5.25 fluid ounces (20 ppm on an active quaternary basis) per 1000 gallons of water in the system.

Subsequent Dose: Maintain this treatment by starting a continuous feed of 1.33 fluid ounces (5 ppm on an active quaternary basis) per 1000 gallons of water lost by blowdown. Badly fouled systems must be cleaned before treatment is begun.

INITIAL APPLICATION

(To a Clean System)

The dose should be poured into the sump of a system which is clean or in which growth is first noticed. 5.25 to 10.25 fluid ounces (20-40 ppm on an active quaternary basis) per 1000 gallons of contained water. When heavy algae growth is present system will have to be cleaned manually.

SUBSEQUENT APPLICATION

1.33 to 3.85 fluid ounces (5 to 15 ppm on an active quaternary basis) per 1000 gallons of contained water. The above directions are to be followed twice weekly or as needed. If algae growth is noticeable, apply the initial dose.

AUXILIARY SERVICE WATER AND WASTE WATER SYSTEM

This product is effective for the control of odor-forming and slime-forming bacteria, fungi and algae in auxiliary service water systems such as fire protection systems and pump or screen bays, water waste systems material disposal, holding or recovery systems such as storage tanks, storage piles, associated piping, settling ponds or lagoons, transport spillways or canals and disposal wells.

This product may be added to the system by slug or intermittent feed or by spraying onto a waste pile. The frequency of feed or spray and the duration of the treatment will depend upon the severity of the contamination. Additions to water systems should be made during the pumping operation and as close to the pump as possible to ensure adequate mixing.

INTERMITTENT OR SLUG METHOD

When this treatment is required, add this product at the rate of 5.25 to 10.25 ounces per 1000 gallons of water already in the system, or being added to the system, for 4 to 8 hours, 1 to 4 times per week or as needed to achieve the desired level of control. When control is obtained, add this product at the rate of 1.33 to 3.85 ounces per 1000 gallons of water in the system.

ONCE THOUGH FRESH-WATER COOLING SYSTEMS

DOSING LOCATION: This product is to be applied at a point in the system where it will be uniformly mixed, such as at the sump.

DOSING CONDITIONS: This product should be applied when the system is in jeopardy of being affected or after cleaning systems where efficiency is already impaired.

METHOD OF APPLICATION:

1. Wear safety glasses, rubber gloves and impervious apron.
2. Add product directly from drum or add the product at a point where it will be mixed uniformly.
3. To reduce foaming, mix 2 parts of water to 1 part of this product.
4. 0.15 to 1.5 fluid ounces (1-10 ppm on an active quaternary basis) per thousand gallons.
5. Do not discharge without performing proper deactivation. To perform deactivation use Bentonite Clay. The minimum ratio to be used is 56 ppm of clay to 1 ppm of product.
6. Do not use product more than 4 times per year.
7. Treatment time cannot exceed 120 hours/application.
8. Avoid oxidizers and reducing agents. Product is cationic and should not be mixed with soap or anionic surfactants.

SAP STAIN CONTROL

For control of mold and fungus on green or freshly cut lumber. May be used in a dip or spray application. Before use, dilute at a rate of 25-100 gallons of water per gallon of this product. Seasonal variation in storage and shipping conditions, species and condition of wood should be considered in selection of end use concentration. For effective inhibition of mold and fungus, lumber and logs must be dipped or sprayed in a manner that ensures that all surfaces are uniformly treated.

For best results, green wood should be treated immediately, at least within twenty-four hours after cutting or sawing. Mold and fungus growth begins immediately after cutting so delayed treatment is much less effective and requires increased chemical concentration. Green, untreated lumber should not be used for stickers.

Freshly treated lumber should not be allowed to remain unprotected in heavy rains. Dip tanks and drip aprons must be roofed, paved and drained to prevent dilution and loss of the anti-stain solution.

WOOD PRESERVATIVES

This product can be used in combination with other EPA registered organic and inorganic wood preservatives or it can be used alone. This product is for use in the formulation of wood preservative products. When used as directed, formulations produced from this product will protect treated wood articles from the destructive attack of fungi, mold and mildew. Treatment can be done by pressure or double vacuum. Wood articles that will be protected by these treatments would include millwork, construction timbers, decking, wood shingles, posts and other articles to be used in above ground applications.

Dilute this product in either water or mineral spirits solution to produce a 0.5% to a 3.0% active solution. This formulation is to be used for both pressure and double vacuum treatment.

MYCOSTAT™-Z

Dilute this product in either water or mineral spirits to produce a 0.5% to 3.0% active quaternary ammonium compound.

Percent Active Quat Solution	Ounces of product per gallon
<u>0.5</u>	<u>1.28</u>
<u>1.0</u>	<u>2.56</u>
<u>1.5</u>	<u>3.85</u>
<u>2.0</u>	<u>5.12</u>
<u>2.5</u>	<u>6.4</u>
<u>3.0</u>	<u>7.68</u>

To find the ounces of this product per gallon for other dilutions take the percent active desired and divide by 0.3906.

MYCOSTAT™-Z AND COPPER COMPOUNDS

Mix this product with water and either ACQ-C2 EPA Reg. No. 10465-36 or ACQ-C EPA Reg. No. 10465-33. Refer to the product labels for ACQ-C and ACQ-C2 for precise mixing instructions.

MYCOSTAT™-Z AND BORATES

Mix this product and Tim-Bor, EPA Reg. No. 1624-39 in water and stir to give a solution of the desired concentration of components.

MYCOSTAT™-Z AND PROPICONAZOLE

Mix this product with MYCOSTAT™-P (EPA Reg. No. 71406-1-70227) and dilute with either water, mineral spirits or other light organic solvent to produce a 0.5% to 3.0% quaternary ammonium compound solution. Follow the instructions on the MYCOSTAT™-P label for the appropriate concentration of propiconazole. PLEASE NOTE THAT THIS FORMULATION CAN ONLY BE USED FOR DIP TREATMENT.

PRESSURE TREATMENT

Place the wood article to be treated into the pressure cylinder and seal unit. Treat the wooden articles using the pressure treatment procedures consistent with the equipment being used and standard treatment practices. Treatment conditions should be such as to produce a 0.1 to 0.6 lb./cu. foot retention in the treated article. Such treated wood is to be used for above ground uses only.

DOUBLE VACUUM

Stack the wooden articles to be treated in the treatment vessel so that the preservative solution will have access to all sides of the articles. Seal the vessel. Reduce the pressure within the vessel to -10 inches for five minutes. Cover all the articles with preservative solution. Allow the pressure to return to

atmospheric conditions and discharge the preservative solution. Reduce the pressure to -20 inches and maintain for 20 minutes. Allow the pressure to return to atmospheric and remove treated wooden articles. Treatment conditions should be used as to produce a 0.1 to 0.6 lbs./cu. foot retention of product in the treated article. Wood treated to this retention is suitable for above ground use only.

DIP TREATMENT

Stack the wood to be treated on a suitable holder and convey the stack into the treating solution making sure the stack is completely immersed. Dip times should range from 30 seconds (individual pieces) up to 30 minutes (bundled wooden articles). Use a concentration of 0.5 to 3.0% active quaternary ammonium compound, the concentration should be customized to the degree of sap stain protection desired, which should be determined by an independent test on the intended species of wood.

PERSONAL PROTECTIVE EQUIPMENT FOR PRESSURE TREATMENT, DOUBLE VACUUM AND DIP TREATMENT

Applicators must wear gloves which are chemical-resistant (such as nitrile or butyl) in all situations where dermal contact is expected ~~impervious to the wood treatment formulation in all situations where dermal contact is expected~~ (i.e. handling freshly treated wood and manually opening cylinder doors).

Individuals who enter pressure treatment cylinders and other related equipment that are contaminated with the wood treatment solution (e.g. cylinders that are in operation or are not free of all treatment solution) must wear coveralls over a long sleeved shirt and long pants, socks, chemical-resistant footwear, and protective eyewear. ~~protective clothing including overalls, jacket, gloves and boots impervious to the wood treatment formulation.~~ Federal, State and local confined space entry procedures need to be taken.

Applicators must not eat, drink or use tobacco products during those parts of the applications process that may expose them to the wood treatment formulation (e.g. manually opening/closing cylinder doors, moving trams out of cylinders, mixing chemicals, handling freshly treated wood).

Wash thoroughly after skin contact and before eating, drinking, use of tobacco products, or using restroom.

Protective clothing must be changed when it shows signs of contamination. Applicators must leave protective clothing and work shoes or boots and equipment at the plant. Worn out protective clothing and work shoes or boots must be left at the plant and disposed of in a manner approved for pesticide disposal and in accordance with State and Federal regulations.

BRUSH OR SPRAY

A 0.5% to 3.0% active solution with water may be applied by brush or spray for use on wood shingles or shake roofs and siding on existing homes by commercial applicators. Low pressure equipment is recommended for spray applications. A moderately fine spray, not an aerosol or fog, generally provides the best coverage at practical product concentrations. Apply only to point of runoff. To make a 0.5% to 3.0% active solution, use the following table:

<u>Percent Active Quat Solution</u>	<u>Ounces of product per gallon</u>
<u>0.5</u>	<u>1.28</u>
<u>1.0</u>	<u>2.56</u>
<u>1.5</u>	<u>3.85</u>
<u>2.0</u>	<u>5.12</u>
<u>2.5</u>	<u>6.4</u>
<u>3.0</u>	<u>7.68</u>

To find the ounces of this product per gallon for other dilutions take the percent active desired and divide by 0.3906.

PERSONAL PROTECTIVE EQUIPMENT FOR BRUSH AND SPRAY APPLICATIONS

Applicators must wear gloves which are chemical-resistant (such as nitrile or butyl). Applicators must also wear coveralls over a long sleeved shirt and long pants, socks, chemical-resistant footwear, and

protective eyewear. Applicator must not eat, drink, or use tobacco during the application process. Use with adequate ventilation, mist or vapor generated by spraying this product may be harmful if inhaled. Wash thoroughly after skin contact and before eating, drinking, use of tobacco products or using restrooms. Protective clothing must be changed when it shows signs of contamination. Brush/Spray treatment may require frequent changing. Discard clothing and other absorbent materials that have been drenched or heavily contaminated. Do not reuse them. Follow manufacturers instructions for cleaning/maintaining protective equipment. If no such instructions exist for washables, use detergent and hot water. Keep and wash protective equipment separate from other laundry. Worn out protective clothing and work shoes or boots must be disposed of in a manner approved for pesticide disposal and in accordance with State and Federal regulations.

STORAGE AND DISPOSAL

1. PROHIBITIONS

~~DO NOT CONTAMINATE WATER, FOOD OR FEED BY STORAGE OR DISPOSAL. OPEN DUMPING IS PROHIBITED. DO NOT REUSE EMPTY CONTAINER.~~

2. STORAGE INSTRUCTIONS

~~STORE IN ORIGINAL CONTAINER AND PLACE IN LOCKED STORAGE AREA. KEEP FROM FREEZING. DO NOT STORE ON SIDE. AVOID CREASING OR IMPACTING OF SIDE WALLS.~~

3. SPILL OR LEAK PROCEDURES

~~SMALL SPILLS MAY BE MOPPED UP, FLUSHED AWAY WITH WATER OR ABSORBED ON SOME ABSORBENT MATERIAL AND INCINERATED.~~

4. PESTICIDE DISPOSAL

~~PESTICIDE WASTES ARE ACUTELY HAZARDOUS. IMPROPER DISPOSAL OF EXCESS PESTICIDE, SPRAY MIXTURE, OR RINSATE IS A VIOLATION OF FEDERAL LAW. IF THESE WASTES CANNOT BE DISPOSED OF BY THE USE ACCORDING TO LABEL INSTRUCTIONS. CONTACT YOUR STATE PESTICIDE OR ENVIRONMENTAL CONTROL AGENCY OR THE HAZARDOUS WASTE REPRESENTATIVE AT THE NEAREST EPA REGIONAL OFFICE FOR GUIDANCE.~~

5. CONTAINER DISPOSAL

~~TRIPLE RINSE (OR EQUIVALENT). THEN OFFER FOR RECYCLING OR RECONDITIONING, OR PUNCTURE AND DISPOSE OF IN A SANITARY LANDFILL, OR BY OTHER PROCEDURES APPROVED BY STATE AND LOCAL AUTHORITIES.~~

NOTICE OF WARRANTY:

Diacon Technologies Ltd. warrants that this product conforms to the chemical description on the label thereof and is reasonably fit for purposes stated on such label only when used in accordance with the directions under normal use conditions. It is impossible to eliminate all risk inherently associated with the use of this product. Ineffectiveness or other unintended consequences may result because of such factors as weather conditions, presence of other materials, or the manner of use or application, all of which are beyond the control of Diacon Technologies Ltd. In no case shall Diacon Technologies Ltd. be liable for consequential, special or indirect damages resulting from the use or handling of this product. All such risks shall be assumed by the Buyer. **DIACON TECHNOLOGIES LTD. MAKES NO WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE NOR ANY OTHER EXPRESSED OR IMPLIED WARRANTY EXCEPT AS STATED ABOVE.**