


10/03/01

Package Copy:
Front Panel

Prod. No. 00902
Prod. No. 00903
Prod. No. 78904

WOODLIFE®
CLASSIC
Clear Wood Preservative

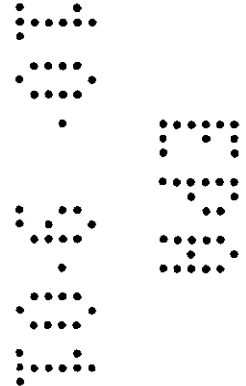

Banner: Above Ground Use Only

- Protects against rot and decay
- Resists mold, mildew and stain fungi
- Repels water: resists moisture damage
- Allows wood to gray naturally

Starburst 1: 100% Clear - Paintable and Stainable - Extends Top-Coat Life

Starburst 2: Water-Base – WATER REPELLENT – Soap and Water Clean-up

SubHead: Prolongs the life of *non*-pressure-treated wood

Main Photo: Clapboard Siding

3 Photo Illustration Inset Copy: Siding, Decks, Fencing, Outdoor Furniture and Décor *and more.*

Illustrations: Deck, Stockade Fence, Adirondack Chair

FOR EXTERIOR USE ONLY.

KEEP OUT OF REACH OF CHILDREN.

CAUTION

See Back Panel for Additional Precautionary Statements.

ACTIVE INGREDIENTS:

3-Iodo-2-Propynyl Butyl Carbamate	0.50%
Inert Ingredients:	99.50%
Total:	100.00%


EPA Reg. No. 71240-4

EPA Est. No. 60061-MO-1

EPA Est. No. 71240-NJ-001

- 1 U.S. Quart (.95 Liters)
- 1 U.S. Gallon (3.8 Liters)
- 5 U.S. Gallons (19 Liters)

- 1 Qt. : 0 37772 00902 3
- 1 Gal.: 0 37772 00903 0
- 5 Gal.: 0 37772 78904 8

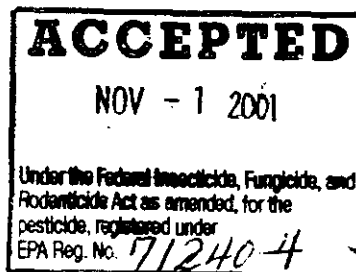

Back Panel (Left)

WOODLIFE® Classic Clear Wood Preservative

DIRECTIONS FOR USE

It is a violation of Federal Law to use this product in a manner inconsistent with its labeling.

WOODLIFE® CLASSIC Clear Wood Preservative is a totally clear, water-based, fungicidal exterior wood preservative with water repellent for use on above ground applications where either pressure-treated or *non*-pressure-treated wood has been used. When applied as directed, **WOODLIFE CLASSIC** provides protection against rot, decay and moisture damage. **WOODLIFE CLASSIC** resists wood decay by inhibiting the surface growth of mold, mildew and staining fungi. Its water repellency effectiveness (which exceeds the minimum requirement set by Federal specification TT-W-572B, parag. 3.7), coupled with its anti-wicking property, prevents surface and end cut moisture absorption, providing greater resistance to dimensional warping, splitting and end-checking. Plus, **WOODLIFE CLASSIC** can be top-coated with primer, paint or stain after 24 hours. **This preservative will dry 100% clear, allowing wood that is not painted or stained to gray naturally over time from UV exposure.**

- Provides effective control against decay fungi (brown or white rot), staining fungi (blue stain) and surface mold (black, brown or other colored mildew).
- Extends top-coat service life; prevents moisture absorption that can cause blistering and peeling.
- Can be applied *immediately* to new wood – no need to wait for wood to weather or “season”.
- Water-base formula requires only soap and water clean-up.

RECOMMENDED USES: Use to preserve brand new or existing wood decks, fencing, siding, outdoor furniture and décor, gazebos and arbors, storage sheds, play equipment / gym sets or other structural lumber, plywood or engineered wood items exposed to moisture contact. Especially suitable as a preservative primer for wood windows, doors, frames, trim, siding and other exterior wood intended to be over-coated with paint or stain.

SURFACE PREPARATION: All cutting, gluing and sanding should be done before applying **WOODLIFE CLASSIC Clear Wood Preservative**. DO NOT use steel wool. Follow preparation instructions below to ensure adequate adhesion, penetration, coloration and optimum performance of this product.

New Wood: If wood is “brand new” (intended for outdoor installation and exposed to weather conditions for 30 days or less), first perform a “splash test” (see Splash Test below) to determine if there is any surface barrier present which would repel a new coating, such as paraffin wax (found on some types of pressure-treated wood) or mill glaze (found on cedar and redwood). Use **Wolman Deck & Fence Brightener** to remove any surface barrier detected, then conduct splash test again before applying **WOODLIFE CLASSIC**.

Weathered Wood: For all outdoor wood structures except “brand new”, the surface must first be stripped of any existing old stains or built-up finishes, or thoroughly cleaned to remove ground-in dirt, mildew stains, grayed wood fibers and any other surface contaminants. Use of **Wolman DeckStrip®** or **Wolman Deck & Fence Brightener** is recommended to properly prepare the surface before applying this product. After surface preparation is completed, perform a “splash test” to determine if the wood surface is ready to accept a coating.

Splash Test: Sprinkle a few drops of water on a representative portion of the surface to be coated. If the water is absorbed rapidly, surface is ready to be finished with **WOODLIFE CLASSIC**. If the water beads or is not absorbed, a surface barrier exists which must be removed. Apply **Wolman Deck & Fence Brightener** and then test again.

BEFORE YOU START: Protect plants, shrubs and vegetation from over-spray. Wood surface must be free from dust, dirt and debris. This product will adhere to dry or damp (not soaking wet) surfaces. If surface is in direct sunlight and hot to the touch, dampen with fresh water to cool. Remove any standing water before beginning application. Do not tint, dilute or mix this product with any other product. **Note: This product has a milky white appearance in the can, and a whitish appearance when applied, but dries clear.** Perform a sample brush-out in an inconspicuous area to ensure the desired look is achieved.

APPLICATION PROCEDURES: For best results, apply when outside temperatures are between 50°F and 90°F, and when 24 hours of precipitation-free weather is expected. Pre-treatment by dip method before construction is recommended. Immerse wood in product for 3 minutes or longer. Any surface cut after first treatment should be re-treated. For existing wood installations, or when dipping is not possible, apply by synthetic bristle brush, short nap roller, pump-style sprayer or airless sprayer. **APPLY ONE (1) LIBERAL COAT to wood surfaces, and three (3) or more consecutive coats to end cuts to give full protection.** Allow at least one (1) hour between applications. When rolling or spraying, work on a 30-40 square foot area at a time, making sure to back-brush along grain any drips, runs, uneven coverage or surface puddles. Allow wood to dry 24 hours before installation or using treated surface. Allow a minimum 24 hours before over-coating with primer, paint or stain. On humid days, longer initial drying time may be required.

COVERAGE: One gallon covers approximately 150-250 sq. ft. (14-23 m²), depending upon the wood age and species, surface porosity and method of application. Rough, weathered or highly porous surfaces will absorb more. **CAUTION: As with application of any protective coating, WOOD SURFACES CAN BE SLIPPERY WHEN WET.**

CLEAN-UP: Clean tools and equipment after use with soap and water. Wipe up drips and spatters from surrounding surfaces before they dry. Dried spatters or spills should be removed with mineral spirits or lacquer thinner.

V.O.C. < 350 g/l (less water and exempt solvent)

V.O.S. < 2.92 lbs./gal.

NEED HELP?

Call Toll Free:

1-800-556-7737

E-Mail: info@wolman.com

Web Site: www.wolman.com

Z?00902-0110-GMC copyright 2001 (Quart Stock Printing No.)

Z?00903-0110-GMC copyright 2001 (Gallon Stock Printing No.)

Z078904-0110-GMC copyright 2001 (Pail Stock Printing No.)

Back Panel (Right)

STORAGE AND DISPOSAL

PROHIBITIONS: Do not contaminate water, food or feed by storage or disposal.

PESTICIDE STORAGE: Store in original, labeled container, and keep container closed when not in use. Store in a secure, well-ventilated area protected from extreme temperatures. Do not store near excessive heat. Keep contents away from food. **KEEP FROM FREEZING.**

PESTICIDE DISPOSAL: Wastes resulting from use of this product may be disposed of on site or at an approved waste disposal facility.

CONTAINER DISPOSAL: Triple rinse (or equivalent). Then offer for recycling or reconditioning, or puncture and dispose of in a sanitary landfill, or by other procedures approved by the state and local authorities.

In case of emergency involving this product, call Chemtrec at 1-800-424-9300.

**PRECAUTIONARY STATEMENTS
HAZARDS TO HUMANS (AND DOMESTIC ANIMALS)**

**CAUTION - HARMFUL IF SWALLOWED OR ABSORBED THROUGH SKIN.
AVOID CONTACT WITH EYES, SKIN OR CLOTHING.
WASH THOROUGHLY WITH SOAP AND WATER AFTER HANDLING.**

Keep contents and freshly treated articles away from food and living plants. Use only in a well ventilated area. Do not breathe vapor or spray mist. **DO NOT USE ON WOOD WHICH WILL COME IN CONTINUOUS CONTACT WITH SKIN UNLESS THE WOOD IS SEALED WITH PAINT, STAIN OR VARNISH AFTER TREATMENT.** Wear goggles, rubber gloves and protective clothing when applying or handling treated lumber.

FIRST AID:

Have the product container or label with you when calling a poison control center or doctor, or going for treatment.

IF SWALLOWED: Call poison control center or doctor immediately for treatment advice. Have person sip a glass of water if unable to swallow. Do not induce vomiting unless told to do so by the poison control center or doctor. Do not give anything by mouth to an unconscious person.

IF ON SKIN OR CLOTHING: Take off contaminated clothing. Rinse skin immediately with plenty of water for 15-20 minutes. Call a poison control center or doctor for treatment advice.

IF INHALED: Move person to fresh air. If person is not breathing, call 911 or an ambulance, then give artificial respiration, preferably by mouth-to-mouth, if possible. Call a poison control center or doctor for treatment advice.

IF IN EYES: Hold eye open and rinse slowly and gently with water for 15-20 minutes. Remove contact lenses, if present, after the first 5 minutes, then continue rinsing eye. Call a poison control center or doctor for treatment advice.

NOTE TO PHYSICIAN: This product is a cholinesterase inhibitor. If signs of cholinesterase inhibition appear, atropine only by injection is antidotal. Probable mucosal damage may contraindicate the use of gastric lavage.

ENVIRONMENTAL HAZARDS: This product is toxic to fish and wildlife. For terrestrial uses. Do not apply directly to water to areas where surface water is present or to intertidal areas below the mean high water mark. Do not contaminate water by disposal of equipment washwaters or rinsate. Do not discharge effluent containing this product into lakes, streams, ponds, estuaries, oceans or other waters unless in accordance with the requirements of a National Pollutant Discharge Elimination System (NPDES) permit and the permitting authority has been notified in writing prior to discharge. Do not discharge effluent containing this product to sewer systems without previously notifying the local sewerage treatment plant authority. For guidance, contact your State Water Board or Regional Office of the EPA.

LIMITED WARRANTY

Wm. Zinsser & Co., Inc. warrants its *WOODLIFE® CLASSIC Clear Wood Preservative* to perform as claimed if directions are followed. Directions are as complete as possible but cannot encompass all conditions, applications, techniques, and/or surfaces which are beyond our control. Call 1-800-556-7737 if there are any questions about the directions or use of the Product. This warranty does not apply to conditions caused by use of other materials or failure to follow directions provided with the Product. The remedy under this warranty is limited to the replacement or refund value of any Product actually used. To obtain a warranty remedy, write to Wm. Zinsser & Co., Inc., 173 Belmont Drive, Somerset, NJ, 08875. No other warranty is expressed or implied.

WOODLIFE® is a registered trademark of Wm. Zinsser & Co., Inc.

Zinsser Logo

Wm. Zinsser & Co., Inc.

UPC Symbol

RPM Logo

173 Belmont Drive

Somerset, NJ 08875

Made In U.S.A.