

74530 - 4

5/12/2009

1/3



UNITED STATES ENVIRONMENTAL PROTECTION AGENCY
WASHINGTON, D.C. 20460

OFFICE OF
PREVENTION, PESTICIDES AND
TOXIC SUBSTANCES

Marshal Wixson
Helm Agro US, Inc.
8295 Tournament Drive, Suite 310
Memphis, Tennessee 38125

S-12-09

Subject: EPA Reg. 74530-4 / Glyphosate 41% Supplemental Label

Dear Mr. Wixson:

The supplemental label for aerial application in Arkansas is acceptable. Note that supplemental labels must be incorporated into the master label from 18 months from the date of this letter or during the next round of printing whichever occurs first.

If you have any questions please call Erik Kraft at 703-308-9358 or email at Kraft.Erik@epa.gov.

Sincerely,

A handwritten signature in cursive script that reads "Erik Kraft".

Jim Tompkins
Product Manager 25
Herbicide Branch
Registration Division (7505P)

3/2

SUPPLEMENTAL LABELING


READ THE ENTIRE LABEL FOR GLYPHOSATE 41% HERBICIDE BEFORE PROCEEDING WITH THE USE DIRECTIONS CONTAINED IN THIS SUPPLEMENTAL LABELING.

When using Glyphosate 41% Herbicide as permitted according to this supplemental labeling, read and follow all applicable directions, restrictions, and precautions on the label booklet provided with the pesticide container and on this supplemental labeling. This supplemental labeling must be in the possession of the user at the time of pesticide application.

GLYPHOSATE 41% Herbicide

EPA REG. NO. 74530-4

FOR AERIAL APPLICATION IN ARKANSAS ONLY

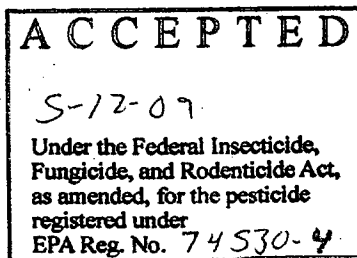

DIRECTIONS FOR USE

It is a violation of Federal law to use this product in any manner inconsistent with its labeling. This labeling must be in the possession of the user at the time of herbicide application.

AVOID CONTACT OF HERBICIDE WITH FOLIAGE, GREEN STEMS, EXPOSED NON-WOODY ROOTS OR FRUIT OF CROPS (EXCEPT AS SPECIFIED FOR INDIVIDUAL ROUNDUP READY CROPS), DESIRABLE PLANTS AND TREES, AS SEVERE INJURY OR DESTRUCTION MAY RESULT.

AVOID DRIFT. EXTREME CARE MUST BE USED WHEN APPLYING THIS PRODUCT TO PREVENT INJURY TO DESIRABLE PLANTS AND CROPS.

DO NOT APPLY WHEN WINDS ARE GUSTY OR UNDER ANY OTHER CONDITIONS WHICH WILL ALLOW DRIFT. DRIFT MAY CAUSE DAMAGE TO ANY VEGETATION CONTACTED TO WHICH TREATMENT IS NOT INTENDED. TO PREVENT INJURY TO ADJACENT DESIRABLE VEGETATION, APPROPRIATE BUFFER ZONES MUST BE MAINTAINED.

See "General Information" and "Mixing" sections of the container label for this product for essential product performance information.

AERIAL APPLICATIONS

Use the specified rate of this product in 3 to 15 gallons of water per acre.

Do not allow the herbicide solution to mist, drip, drift or splash onto desirable vegetation since minute quantities of this product can cause severe damage or destruction to the crop, plants or other areas on which treatment was not intended.

Apply only when the wind speed is less than or equal to 10 mph at the application site.

Do not apply by air if drift can occur to sensitive nontarget crops or plants that are within 100 feet of the application site.

If wind up to 5 miles per hour is blowing toward desirable vegetation or crops, do not apply within 500 feet upwind of the desirable vegetation or crops.

Winds blowing from 5 to 10 miles per hour toward desirable vegetation or crops will likely require buffer zones in excess of 500 feet.

Use sufficient carrier volume and appropriate equipment set-up to form droplets large enough to avoid drift potential. Coarse droplets in the 300 to 500 (VMD) micron ranges are specified.

Applications should typically be made with the nozzle release point at 8 to 15 feet above the top of the target plants unless a greater height is required for aircraft safety.

The boom length must not exceed 75% of the wingspan or rotor blade diameter. In many cases, reducing this distance to 65% of the length of the wingspan or rotor will improve drift control without affecting the swath width.

Do not make any type of application into temperature inversions. Do not apply into still air where there is a temperature inversion layer low enough for fine spray particles to become suspended and move outside the target area when the inversion layer moves. These conditions may occur when wind speeds are less than 2 mph.

Nozzles must always discharge backward parallel with the air stream and never discharge downwards more than 45 degrees on fixed wing aircraft or forward of the prevailing air flow on rotary winged aircraft. Avoid the use of nozzles with wide-angle discharge.

HELM AGRO US, INC.
MEMPHIS, TN. 38125