

74681-4

5/30/2012

1077



U S ENVIRONMENTAL PROTECTION AGENCY

Office of Pesticide Programs
Antimicrobials Division (7510P)
1200 Pennsylvania Avenue NW
Washington, D C 20460

EPA Reg Number
74681-4

Date of Issuance
MAY 30 2012

Term of Issuance
Expiration Date
6-30-14

Name of Pesticide Product
Copper Pro SCX

NOTICE OF PESTICIDE
[x] Registration
Reregistration

(under FIFRA as amended)

Name and Address of Registrant (include ZIP Code)

Don Schnurr
Blue Water Marine Paint
1999 Elizabeth Street
North Brunswick NJ 08902

Note: Changes in labeling differing in substance from that accepted in connection with this registration must be submitted to and accepted by the Registration Division prior to use of the label in commerce. In any correspondence on this product always refer to the above EPA registration number.

On the basis of information furnished by the registrant the above named pesticide is hereby registered/reregistered under the Federal Insecticide Fungicide and Rodenticide Act

Registration is in no way to be construed as an endorsement or recommendation of this product by the Agency. In order to protect health and the environment the Administrator on his motion may at any time suspend or cancel the registration of a pesticide in accordance with the Act. The acceptance of any name in connection with the registration of a product under this Act is not to be construed as giving the registrant a right to exclusive use of the name or to its use if it has been covered by others.

This product is conditionally registered in accordance with FIFRA sec 3(c)(7)(a) provided that you

- 1 Submit and/or cite all data required for registration of your product under FIFRA sec 3(c)(5) when the Agency requires all registrants of similar products to submit such data, and submit acceptable responses required for re-registration of your product under FIFRA section 4
2 This is a time-limited registration. The Agency is still process of completing the Environmental Risk Assessment needed to support the antifouling use pattern. The Agency is now extending your time-limit to June 30, 2014

Signature of Approving Official

Handwritten signature of Marshall Swindell

Marshall Swindell
Product Manager Team-33
Regulatory Management Branch I
Antimicrobials Division (7510P)

Date


MAY 30 2012

Page 2
EPA Reg No 74681-4

- 3 This conditional registration will expire automatically on June 30, 2014. If you fail to satisfy the conditions imposed in the registration, EPA may issue a Notice of Cancel under Section 6 (e) of FIFRA.

A stamped copy of the label is enclosed for your records. Submit one (3) copies of your final printed labeling prior to release of this product for shipment. If you have any questions concerning this letter, please contact Demson Fuller at (703) 308-8062.

Sincerely,

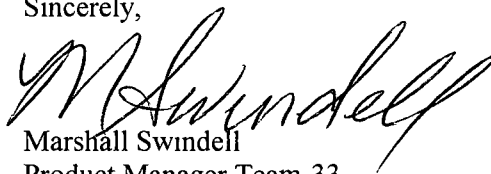

Marshall Swindell
Product Manager Team-33
Regulatory Management Branch I
Antimicrobials Division (7510P)

Enclosure (Stamped Label)

FRONT PANEL

COPPER PRO SCX™

SLIME CONTROL EXTRA HIGHEST LOADED COPPER BOOSTED ABLATIVE

- Self Polishing Boosted Ablative
Added SCX™ - Slime Control Xtra™
- Multi Season
- Relaunch Without Painting
- Eliminates Heavy Sanding
- Tremendous Protection for Extreme Fouling Conditions

WARNING: Keep Out of Reach of Children

SEE SIDE PANELS FOR ADDITIONAL PRECAUTIONARY STATEMENTS

One Gallon 3 785 Liters

ACCEPTED
with COMMENTS
in EPA Letter Dated

MAY 30 2012

Under the Federal Insecticide
Fungicide and Rodenticide Act as
amended for the pesticide
registered under EPA Reg No

74681-4

FRONT - LEFT PANEL

ACTIVE INGREDIENT

CUPROUS OXIDE 67 00% (CAS Number 1317-39-1)
N-Cyclopropyl-N-(1,1-dimethylethyl)- 6- (methylthio)-1,3,5
triazine-2,4 diamine 1 96% (CAS Number 28159-98-0)

INERT INGREDIENTS 31 04 %

TOTAL 100 00%

COPPER AS METALLIC = 57 62%

EPA REG 74681-4

EPA ESTABLISHMENT 74681-NJ-1

CONTAINS PETROLEUM DISTILLATE

STORAGE AND DISPOSAL

Store in a dry area away from heat and severe cold. Keep partially used container tightly sealed. Do not contaminate water, food or feed by storage or disposal. In case of spillage, absorb with inert material and dispose of in accordance with applicable regulations.

PESTICIDE DISPOSAL

Pesticide wastes are toxic. Improper disposal of excess pesticides or rinsate is a violation of federal law. If these wastes cannot be disposed of by use according to label instructions, contact your state pesticide or environmental control agency or hazardous waste representative at the nearest EPA regional office for guidance. Triple rinse container after emptying. Triple rinse as follows: Empty remaining contents into application equipment or a mix tank and drain for 10 seconds after the begins to drip. Fill the container 1/10th full with thinner and recap. Shake for 10 seconds. Pour rinsate into application equipment or a mix tank or store rinsate for later use or recycling. Drain for 10 seconds after flow begins to drip. Repeat this procedure two more times. Then offer the container for recycling or reconditioning or puncture and dispose of in a sanitary landfill or by other approval state and local procedures.

CONTAINER DISPOSAL

Triple rinse container then offer it for recycling or reconditioning, or puncture and dispose of in a sanitary landfill or by other procedures approved by state and local authorities. Nonrefillable Container. Do not reuse or refill this container. Offer for recycling if available.

MANUFACTURED BY BLUE WATER MARINE PAINT

1999 ELIZABETH STREET
NORTH BRUNSWICK NJ 08902
1 800 628 8422

ACCEPTED
with COMMENTS
in EPA Letter Dated

MAY 30 2012

Under the Fungicide and Rodenticide Act as amended in the pesticide registered under EPA Reg No

74681-4

ACCEPTED
with COMMENTS
in EPA Letter Dated
MAY 30 2012

BACK INSTRUCTIONS

DIRECTIONS FOR USE

It is a violation of federal law to use this product in a manner inconsistent with its labeling

Under FIFRA
Fungicide and Rodenticide Act
consistent with its
registered under EPA Reg No

74681-4

Product Description Copper Pro SCX™ provides full season antifouling protection against barnacles, algae and hydroids in salt and fresh water on boat bottoms only Its ablative copolymer base renders a smooth finish with durability and abrasion resistance Copper Pro SCX™ releases biocide by the constant exposure of new paint film to the water Copper Pro SCX™ contains both a high loading of cuprous oxide and an SCX™ boosting biocide for maximum protection and has universal application over all types of properly prepared bottom paints and surfaces (except aluminum) For use on fiberglass boats as well as wood and steel hulls

Surface Preparation Surface must always be clean dry and properly prepared prior to painting Failure to do so will lead to eventually blistering and/or peeling All sanded surfaces must be wiped clean with Dewaxer – 973 to remove sanding residue

General Application For use on boats below the true waterline Can be brushed or rolled on fiberglass wood, steel and previously painted surfaces per application systems below Do not use on aluminum Apply at least 2 coats for best performance, as the life of the paint is proportional to the number of coats applied

Do not apply this product in a way that will contact adults children or pets either directly or through drift

Spray Drift Management A variety of factors including weather conditions (e.g wind direction wind speed temperature relative humidity) and method of application can influence pesticide drift The applicator must evaluate all factors and make appropriate adjustments when applying this product

Mixing and Thinning Shake or mix thoroughly and stir continuously while using Thin when necessary with Reducer – 974

Theoretical Coverage Depending on surface conditions one gallon of bottom paint will usually cover over 400 square feet of surface when brushed or rolled

Clean Up Use Reducer – 974 for cleaning equipment and paint brushes

Estimated Dry Times Bottom paints are designed for overcoating after an overnight dry Prior to launching allow a minimum dry of overnight If drying conditions are poor, or if paint was applied too thickly longer periods of drying will be required Fresh coats of paint must be thoroughly dry before overcoating

Yearly Repainting Scrub bottom clean at haul-out Repaint only if old paint is sound and tight if not remove it by sanding or with paint remover If old paint is rough sand it with 100-150 grit sandpaper Prepare seams nicks and chips as below Spot coat any scuffs with Copper Pro 67 SCX antifouling Apply 2 full coats of Copper Pro SCX™ antifoulant

On Bare Wood If seams are not flush fill them with seam compound Dry several days until skin forms Do not sand Fill nicks with trowel cement, dry hard sand apply Copper Pro SCX™ antifouling paint (reduced 10% Blue Water Thinner 974) then follow with 2 additional unreduced coats of Copper Pro SCX™

On Bare Fiberglass Dewax by washing with Dewaxer – 973, remove dissolved wax at once with clean paper towels or rags repeat sand hard to a dull finish with 80-100 grit sandpaper Fill any chips with trowel cement, dry hard, sand Apply 3-5 coats of 8000A / 8000B Bottom Protect High Build Epoxy Primer, then apply 2 coats of Copper Pro SCX™ antifouling paint

On Bare Steel Sandblast surface to a near white metal remove blast residue with a broom and air hose Wipe off with Dewaxer – 973 Apply one or two coats of Blue Water Marine Strontium Chromate Epoxy Primer Do not sand Fill as required with Uraglow Lightweight Epoxy Faring Compound Sand smooth and wipe clean Apply 3-5 coats of 8000A / 8000B Blue Water Bottom Protect High Build Epoxy Primer or Uraglow Epoxy Primer then apply 2 coats of Copper Pro SCX™ antifouling paint

ACCEPTED
with COMMENTS
in EPA Letter Dated
MAY 30 2012

PRECAUTIONARY STATEMENTS

HAZARDS TO HUMANS AND DOMESTIC ANIMALS

'WARNING May be fatal if swallowed or inhaled Causes moderate eye irritation Harmful if absorbed through skin Prolonged or frequently repeated skin contact may cause allergic reactions in some individuals Do not breathe vapors, spray mist, dust or chips from sanding Avoid contact with skin, eyes or clothing While spraying paint, or sanding surface, wear a mask or pesticide respirator jointly approved by the Mine Safety and Health Administration and the National Institute for Occupational Safety and Health Wear protective clothing (long sleeved cotton shirt, long pants, hat, gloves (such as nitril or butyl) Shoes and socks Wash thoroughly with soap and water after handling and before eating, drinking, using tobacco or using the toilet Remove contaminated clothing and wash before reuse Use adequate ventilation

Under the Fungicide moderate eye irritation registered under EPA Reg No

74681-4

Follow manufacturers instructions for cleaning/maintaining Personal Protection Equipment (PPE) If no such instructions for washables exist, use detergent and hot water Keep and wash PPE separately from other laundry

FIRST AID

IF IN EYES Hold eye open and rinse slowly and gently with water for 15-20 minutes Remove contact lenses if present, after the first 5 minutes then continue rinsing Call a poison control center or doctor for treatment advices

IF SWALLOWED Call a poison control center or doctor immediately for treatment advice Have a person sip a glass of water if able to swallow Do not induce vomiting unless told to do so by a poison control center or doctor

IF ON SKIN OR CLOTHING Take off contaminated clothing Rinse skin immediately with plenty of water for 15-20 minutes Call a poison control center or doctor for treatment

IF INHALED Move person to fresh air If person is not breathing call 911 or an ambulance then give artificial respiration preferably mouth to mouth if possible Call a poison control center or doctor immediately for further treatment advice For additional information in case of emergency call toll free Chemtrec- 1-800-424-9300 Have the product container or label with you when calling a poison control center or doctor or going for treatment

ENVIRONMENTAL HAZARDS

This paint is toxic to birds, fish and aquatic invertebrates and may contaminate water through runoff Do not contaminate water when disposing of equipment washwaters or rinsate Do not discharge effluent containing this product into lakes streams, ponds estuaries oceans or public waters unless in accordance with the requirements of a National Pollutant Discharge Elimination System (NPDES) permit and the permitting

authority has been notified in writing prior to discharge Do not discharge effluent containing this product to sewer systems without previously notifying the local sewage treatment plant authority For guidance contact your State Water Board or Regional Office of the EPA

PHYSICAL AND CHEMICAL HAZARDS

Do not use or store near heat or open flame

DISCLAIMER The performance of any marine paint or coating depends on many factors outside the control of our company including surface preparation proper application and environmental condition Therefore we cannot guarantee this product's suitability for your particular purpose or application Implied warranties of fitness for a particular purpose and of merchantability are excluded We shall not, under any circumstances be liable for incidental or consequential damages By purchase or use of this product, buyer agrees that the sole exclusive remedy if any, is limited to the refund of the purchase price or replacement of the product, at the company's option

ACCEPTED
with COMMENTS
in EPA Letter Dated
MAY 30 2012
Under the Federal Insecticide
Fungicide and Rodenticide Act as
amended for the pesticide
registered under EPA Reg No
74681-4