
 <p>U.S. ENVIRONMENTAL PROTECTION AGENCY Office of Pesticide Program Registration Division (H7505C) 401 "M" St., S.W. Washington, D.C. 20460</p> <p>NOTICE OF PESTICIDE: <u> X </u> Registration <u> </u> Reregistration</p> <p>(under FIFRA, as amended)</p>	EPA Reg. Number: 74681-6	Date of Issuance: JUN 15 2005
	Term of Issuance: Expiration Date 06/15/06	
	Name of Pesticide Product: Copper Shield SCX 45	
Name and Address of Registrant (include ZIP Code): Blue Water Marine Paint 1999 Elizabeth Street North Brunswick, NJ 08902		
<p>Note: Changes in labeling differing in substance from that accepted in connection with this registration must be submitted to and accepted by the Registration Division prior to use of the label in commerce. In any correspondence on this product always refer to the above EPA registration number.</p> <p>On the basis of information furnished by the registrant, the above named pesticide is hereby registered/reregistered under the Federal Insecticide, Fungicide and Rodenticide Act.</p> <p>Registration is in no way to be construed as an endorsement or recommendation of this product by the Agency. In order to protect health and the environment, the Administrator, on his motion, may at any time suspend or cancel the registration of a pesticide in accordance with the Act. The acceptance of any name in connection with the registration of a product under this Act is not to be construed as giving the registrant a right to exclusive use of the name or to its use if it has been covered by others.</p> <p>This product is conditionally registered in accordance with FIFRA sec. 3(c)(7)(A) provided that you:</p> <p>1. Submit and/or cite all data required for registration of your product under FIFRA sec. 3(c)(5) when the Agency request all registrants of similar product to submit such data; and submit acceptable response required for reregistration of your product under FIFRA section 4.</p> <p>The Agency is currently reviewing additional information submitted by your supplier. In order to allow the Agency time to review this information we are extending this time limited registration to June 15, 2006.</p>		
Signature of Approving Official:  Marshall Swindell, Product Manager 33 Regulatory Management Branch I Antimicrobials Division (7510C)	Date: JUN 15 2005	

As requested in the original registration notice you must delete the picture of the otter on the front-panel of the label. The picture of the otter implies an environmental safety claim.

2. This conditional registration will expire automatically June 15, 2006. If you fail to satisfy the conditions imposed in the registration, EPA may issue a Notice To Cancel under Section 6(e) of FIFRA.

If these conditions are not complied with, the registration will be subject to cancellation in accordance with FIFRA section 6(e). Your release for shipment of the product constitutes acceptance of these conditions.

A stamped copy of the label is enclosed for your records.

Sincerely yours,



Marshall Swindell
Product Manager 33
Regulatory Management Branch I
Antimicrobials Division (7510C)

Enclosure

ALL INFORMATION CONTAINED
HEREIN IS UNCLASSIFIED
DATE 10/20/2005 BY SP4 LARRY L. BROWN

JUN 15 2005

Blue Water Marine Paint
74681-6

BLUE WATER® MARINE PAINT

DISCLAIMER: The performance of any marine paint or coating depends on many factors outside the control of our company including surface preparation, proper application, and environmental conditions. Therefore, we cannot guarantee the product's suitability for your particular purpose or application. Implied warranties of fitness for a particular purpose and of merchantability are excluded. We shall not, under any circumstances, be liable for incidental or consequential damages. By purchase or use of this product, buyer agrees that the sole exclusive remedy, if any, is limited to the refund of the purchase price or replacement of the product, at the company's option.

STORAGE AND DISPOSAL

Store in a dry area away from heat and severe cold. Keep partially used container tightly sealed. Do not contaminate water, food or feed by storage or disposal.


PESTICIDE DISPOSAL

Pesticide wastes are toxic. Improper disposal of excess pesticides or rinsate is a violation of federal law. If these wastes cannot be disposed of by use according to label instructions, contact your state pesticide or environmental control agency, or hazardous waste representative at the nearest EPA regional office for guidance.

CONTAINER DISPOSAL

Triple rinse container, then offer it for recycling or reconditioning, or puncture and dispose of in a sanitary landfill, or by other procedures approved by state and local authorities.

MANUFACTURED BY
BLUE WATER MARINE PAINT
1999 ELIZABETH STREET
NORTH BRUNSWICK, NJ 08902
1-800-432-4333
www.bluewatermarinepaint.com

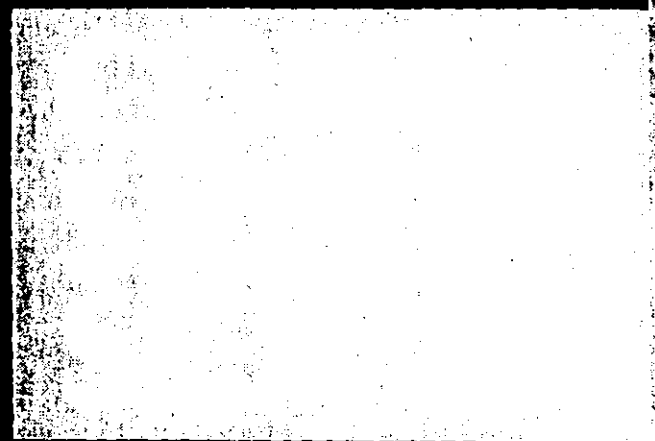

SLIME CONTROL XTRA™
PERFORMANCE
BRONZE PAINT SERIES

Polishing Boosted Ablative
added SCX™ - SLIME CONTROL XTRA™

- Multi Season
- Relaunch Without Painting
- Eliminates Heavy Sanding
- Good Protection for Moderate Fouling Conditions

BW-7690
MARINE BLUE

One Gallon 3.785 Liters

WARNING: Keep Out of Reach of Children
SEE SIDE PANELS FOR ADDITIONAL PRECAUTIONARY STATEMENTS

3/4

ACTIVE INGREDIENTS

CUPROUS OXIDE	45.00%
N-CYCLOPROPYL-N'-(1,1-DIMETHYL)-6-(METHYLTHIO)-1,3,5-TRIAZINE-2,4-DIAMINE	1.90%
INERT INGREDIENTS	53.04%
TOTAL	100.00%
COPPER AS METALLIC - 39.97%	
EPA REG. 74681	
EPA ESTABLISHMENT 74681-NJ	
CONTAINS PETROLEUM DISTILLATE	

PRECAUTIONARY STATEMENTS

HAZARDS TO HUMANS AND DOMESTIC ANIMALS

Causes eye irritation. Harmful if absorbed through skin. Avoid contact with skin, eyes, or clothing. Wear protective clothing such as gloves, long sleeved cotton shirt, long pants and hat. May be fatal if swallowed or inhaled. Do not breathe dust, vapor or spray mist. Wear a mask or respirator, jointly approved by the Mining Enforcement and Safety Administration and by the National Institute for Occupational Safety and Health while sanding boat surfaces. Remove contaminated clothing and wash before reuse. Wash thoroughly with soap and water after handling.

FIRST AID

IF IN EYES: Hold eye open and rinse slowly and gently with water for 15-20 minutes. Remove contact lenses, if present, after the first 5 minutes, then continue rinsing. Call a poison control center or doctor for treatment advice.

IF SWALLOWED: Call a poison control center or doctor immediately for treatment advice. Have a person sip a glass of water if able to swallow. Do not induce vomiting unless told to do so by a poison control center or doctor.

IF ON SKIN OR CLOTHING: Take off contaminated clothing. Rinse skin immediately with plenty of water for 15-20 minutes. Call a poison control center or doctor for treatment.

IF INHALED: Move person to fresh air. If person is not breathing, call 911 or an ambulance, then give artificial respiration, preferably mouth to mouth, if possible. Call a poison control center or doctor immediately for further treatment advice. For additional information in case of emergency call toll free Chemtrec 1-800-424-9300.

Have the product container or label with you when calling a poison control center or doctor or going for treatment.

ENVIRONMENTAL HAZARDS

This paint is toxic to birds, fish and aquatic invertebrates. Do not discharge effluent containing this product into lakes, streams, ponds, estuaries, oceans, or public waters unless product is specifically identified and addressed in a NPDES permit. Do not discharge effluent containing this product to sewage systems without previously notifying the sewage plant authority. For guidance contact your State Water Board or Regional Office of the U.S. Environmental Protection Agency.

PHYSICAL AND CHEMICAL HAZARDS

Do not use or store near heat or open flame.

DIRECTIONS FOR USE

It is a violation of federal law to use this product in a manner inconsistent with its labeling.

Product Description: Copper Shield™ SCX™ 45 provides extended antifouling protection against barnacles, algae and hydroids in salt and fresh water on boat bottoms only. SCX™ SLIME CONTROL XTR™ acts like a sunscreen to prevent slime and algae. Its abrasive copolymer base renders a smooth finish with durability and abrasion resistance. Copper Shield™ SCX™ 45 releases biocide by the constant exposure of new paint film to the water. Copper Shield™ SCX™ 45 has universal application over all types of properly prepared bottom paints (except aluminum). For use on fast fiberglass boats, as well as wood and steel hulls, extended protection is possible since performance is directly proportional to the amount of paint applied.

Surface Preparation: Surface must always be clean, dry and properly prepared prior to painting. Failure to do so will lead to eventual blistering and/or peeling. All sanded surfaces must be wiped clean with BW-216 Thinner to remove sanding residue.

General Application: For use on boats below the true waterline. Can be brushed or rolled on fiberglass, wood, steel and previously painted surfaces per application systems below. Do not use on aluminum. Apply at least 3 coats for best performance as the life of the paint is proportional to the number of coats applied.

Mixing and Thinning: Shake or mix thoroughly and stir continuously while using. Thin when necessary with BW-216 Thinner.

Theoretical Coverage: Depending on surface conditions, one gallon of bottom paint will usually cover over 400 square feet of surface when brushed or rolled.

Clean Up: Use BW-216 Thinner for cleaning equipment and paint brushes.

Estimated Dry Times: Bottom paints are designed for overcoating after an overnight dry. Prior to launching, allow a minimum dry of overnight and maximum of 60 days. If drying conditions are poor, or if paint was applied too thickly, longer periods of drying will be required. Fresh coats of paint must be thoroughly dry before overcoating.

Yearly Repainting: Scrub bottom, clean and haul out. Repaint only if old paint is sound and light; if not, remove it by sanding or with paint remover. If old paint is rough, sand it with 100-150 grit sandpaper. Prepare seams, nicks and chips as below. Spotcoat any scuffs with antifoulant. Apply 3 coats of antifoulant. **On Bare Wood:** If seams are not flush, fill them with seam compound. Dry several days until skin forms. Do not sand. Fill nicks with trowel cement, dry, hard sand, apply antifoulant (reduced 10%) then follow with 2 additional un-reduced coats of antifoulant.

On Bare Fiberglass: Dewax by washing with BW-216 Thinner, remove dissolved wax at once with clean paper towels or rags, repeat sand hard to dull finish with 80-100 grit sandpaper. Fill any chips with trowel cement, dry hard sand. Apply 5 coats of BW-2000 Prokote Epoxy, then apply 3 coats of antifoulant.

On Bare Steel: Sandblast surface to bare metal, remove blast residue with a broom and almost wipe off with BW-216 Thinner. Do not sand. Fill in any imperfections with fairing compound. Sand smooth and wipe clean. Apply 5 coats of BW-2000 Prokote Epoxy, then apply 3 coats of antifoulant.

ACCEPTED
with COMMENTS
SPE. Letter Deleted
JUN 15 2005
As to the Federal Government
Records and Records Act of
1967, for the position
I advised under 50 CFR 101.11
74681-6

7/4