

74681-28

06/02/2011

1/7



U.S. ENVIRONMENTAL PROTECTION AGENCY

Office of Pesticide Programs
Antimicrobials Division (7510P)
1200 Pennsylvania Avenue NW
Washington, D.C. 20460

EPA Reg. Number:
74681-28

Date of Issuance:
JUN - 2 2011

Term of Issuance:
Conditional

Name of Pesticide Product:
Shelter Island Plus -
Deep Blue

NOTICE OF PESTICIDE:

Registration
 Reregistration

(under FIFRA, as amended)

Name and Address of Registrant (include ZIP Code):
Blue Water Marine Paint
1999 Elizabeth Street
North Brunswick, NJ 08902

Note: Changes in labeling differing in substance from that accepted in connection with this registration must be submitted to and accepted by the Registration Division prior to use of the label in commerce. In any correspondence on this product always refer to the above EPA registration number.

On the basis of information furnished by the registrant, the above named pesticide is hereby registered/reregistered under the Federal Insecticide, Fungicide and Rodenticide Act.

Registration is in no way to be construed as an endorsement or recommendation of this product by the Agency. In order to protect health and the environment, the Administrator, on his motion, may at any time suspend or cancel the registration of a pesticide in accordance with the Act. The acceptance of any name in connection with the registration of a product under this Act is not to be construed as giving the registrant a right to exclusive use of the name or to its use if it has been covered by others.

This product is conditionally registered in accordance with FIFRA sec 3(c)(7)(a) provided that you:

1. Submit and/or cite all data required for registration of your product under FIFRA sec. 3(c)(5) when the Agency requires all registrants of similar products to submit such data; and submit acceptable responses required for re-registration of your product under FIFRA section 4.
2. Make the labeling changes listed below before you release the product for shipment:
 - a. Revise the "EPA Registration Number to read, "EPA Reg. No. 74681-28".

Signature of Approving Official:

Marshall Swindell
Product Manager Team-33
Regulatory Management Branch I
Antimicrobials Division (7510P)

Date:


JUN - 2 2011

- b. Should you wish to retain a reference to the company's website on your label, then please be aware that such a reference transforms the website into labeling under the Federal Insecticide Fungicide and Rodenticide Act sec 2 (p) (2) and then the website is subject to review by the Agency. If the website content is false or misleading, the product would be misbranded and its sale or distribution unlawful to sell or distribute under FIFRA section 12(a)(1)(E). In addition, regardless of whether a website is referenced on your product's label, claims made on the website may not substantially differ from those claims approved through the registration process. Although EPA has not yet determined the extent to which it will routinely review company websites, if the Agency finds or if it is brought to our attention that a website contains false or misleading statements or claims substantially differing from claims approved through the registration process, the website may be referred to the EPA's Office of Enforcement and Compliance Assurance.

If these conditions are not complied with, the registration will be subject to cancellation in accordance with FIFRA sec. 6(e). Your release for shipment of the product constitutes acceptance of these conditions.

A stamped copy of the label is enclosed for your records. Submit one (1) copy of your final printed labeling prior to release of this product for shipment. If you have any questions concerning this letter, please contact Abigail Downs at (703) 305-5259.

Sincerely,

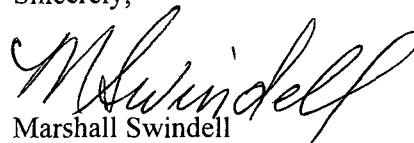

Marshall Swindell
Product Manager Team-33
Regulatory Management Branch I
Antimicrobials Division (7510P)

Enclosure: (Stamped Label)

SHELTER ISLAND PLUS - Deep Blue

Antifoulant Paint

ACTIVE INGREDIENT:

Tralopyril*	5.6%
Zinc Pyrithione**	4.0%

OTHER INGREDIENTS: 90.4%

TOTAL: 100.0%

*CAS # 122454-29-9 **CAS # 13463-41-7

Contains Petroleum Distillates and Xylene

KEEP OUT OF REACH OF CHILDREN

DANGER

See side panel for additional precautionary statements


FIRST AID	
If in eyes	Hold eye open and rinse slowly and gently with water for 15-20 minutes. Remove contact lenses, if present, after the first 5 minutes, then continue rinsing. Call a poison control center or doctor for treatment advice.
If swallowed	Immediately call a poison control center or doctor. Do not induce vomiting unless told to do so by a poison control center or doctor. Do not give liquid to the person. Do not give anything by mouth to an unconscious person.
If on skin or clothing	Take off contaminated clothing. Rinse skin immediately with plenty of water for 15-20 minutes. Call a poison control center or doctor for treatment.
If inhaled	Move person to fresh air. If person is not breathing, call 911 or an ambulance, then give artificial respiration, preferably mouth-to-mouth, if possible. Call a poison control center or doctor immediately for further treatment advice.
For additional information in case of emergency, call toll free ChemTrec at 1-800-424-9300.	
Have the product container or label with you when calling a poison control center or doctor, or going for treatment.	
NOTE TO PHYSICIAN	
Probable mucosal damage may contraindicate the use of gastric lavage. Contains petroleum distillate. Vomiting may cause aspiration pneumonia.	

Net Contents – One Gallon (3.785 Liters)

EPA Reg. No.: 74681-XX

EPA Est. No.: 74681-NJ-1

Manufactured by: **BLUE WATER MARINE PAINT**
 1999 Elizabeth Street
 North Brunswick, NJ 08902
 800-628-8422
 www.bluewatermarinepaint.com

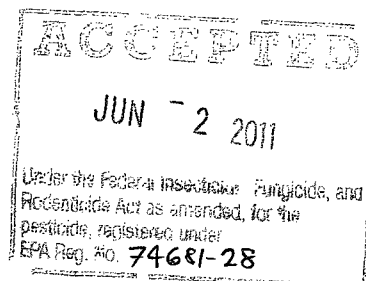

**PRECAUTIONARY STATEMENTS
HAZARDS TO HUMANS AND DOMESTIC ANIMALS**

DANGER

Corrosive. Causes irreversible eye damage and skin burns. Prolonged or repeated skin contact may cause allergic reactions in some individuals. Do not get in eyes or on clothing. Harmful if swallowed, inhaled or absorbed through skin. Avoid contact with skin, eyes, or clothing. Do not breathe vapor. Wear protective eyewear such as goggles, face shield, or safety glasses, gloves, long sleeved cotton shirt, long pants and hat. Wear a mask or respirator jointly approved by the Mining Enforcement and Safety Administration and by the National Institute for Occupational Safety and Health while sanding boat surfaces. Wash thoroughly with soap and water after handling and before eating, drinking, chewing gum, using tobacco or using the toilet. Remove and wash contaminated clothing before reuse.

ENVIRONMENTAL HAZARDS

This paint is toxic to birds, fish and aquatic invertebrates, oysters and shrimp. Do not discharge effluent containing this product into lakes, streams, ponds, estuaries, oceans, or other waters unless in accordance with the requirements of a National Pollutant Discharge Elimination System (NPDES) permit, and the permitting authority has been notified in writing prior to discharge. Do not discharge effluent containing this product to sewage systems without previously notifying the sewage plant authority. For guidance contact your State Water Board or Regional Office of the U.S. Environmental Protection Agency.

PHYSICAL AND CHEMICAL HAZARDS

Combustible. Do not use or store near heat or open flame.

STORAGE AND DISPOSAL

Do not contaminate water, food, or feed by storage and disposal.

PESTICIDE STORAGE

Always store in the original container, and keep partially used container tightly sealed. If a leaky container must be contained within another, mark the outer container to identify the contents. The storage area must be dry, well-lit and well ventilated. Keep storage areas clean. Clean up any spills promptly. Protect containers from extreme heat and cold.

PESTICIDE DISPOSAL

Pesticide wastes are toxic. Improper disposal of excess pesticides or rinsate is a violation of Federal law. If these wastes cannot be disposed of by use according to label instructions, contact your State Pesticide or Environmental Control Agency, or hazardous waste representative at the nearest EPA Regional Office for guidance.

CONTAINER HANDLING

Nonrefillable container. Do not reuse or refill this container. If empty, let paint dry on the walls of the container by keeping lid open and exposed to air in a well ventilated location. When dry, place in trash for disposal in a sanitary landfill or offer for recycling if available. If partially filled, call your local solid waste agency for disposal instructions. Never place unused product down any indoor or outdoor drain.

ACCEPTED
JUN - 2 2011
U.S. Environmental Protection Agency
74681-28

DIRECTIONS FOR USE

It is a violation of Federal law to use this product in a manner inconsistent with its labeling.

NOT FOR COMMERCIAL MARINE USE

Product Description:

SHELTER ISLAND PLUS is a high performance solvent-base antifouling paint that uses a high-end technology of tralopyril and zinc pyrithione. SHELTER ISLAND PLUS provides multi season antifouling protection against barnacles, algae, slime and hydroids in salt and fresh water on boat bottoms only. Its ablative copolymer base renders a smooth finish with durability and abrasion resistance. SHELTER ISLAND PLUS releases biocide by the constant exposure of new paint film to the water. SHELTER ISLAND PLUS has universal application over all types of properly prepared bottom paints. For use on fiberglass boats, as well as aluminum, wood and steel hulls.

Surface Preparation:

Surface must always be clean, dry and properly prepared prior to painting. Failure to do so will lead to eventual blistering and/or peeling. All sanded surfaces must be wiped clean with Dewaxer-973 to remove sanding residue.

General Application:

For use on boats below the true waterline. Can be brushed or rolled on fiberglass, wood, aluminum & steel previously painted surfaces per application systems below. Apply at least 2 coats for best performance, as the life of the paint is proportional to the number of coats applied. Certain areas of the hull, such as the leading edge of the keel and rudder, the waterline, and the bow stem polish faster than other areas. On these areas, an additional coat of paint is recommended to insure that the paint does not polish away before other areas of the bottom. Apply only in outdoor, non-enclosed spaces. **Do not apply by spray.**

Mixing and Thinning:

Shake or mix thoroughly and stir continuously while using. Thin when necessary with Reducer-974.

Theoretical Coverage:

Depending on surface conditions, one gallon of bottom paint will usually cover over 400 square feet of surface when brushed or rolled.

Clean-up:


Use Reducer-974 for cleaning equipment, rollers and paint brushes.

Estimated Dry Times:

Bottom paints are designed for over coating after an overnight dry. Prior to launching, allow a minimum dry of overnight. If drying conditions are poor, or if paint was applied too thickly, longer periods of drying will be required. Fresh coats of paint must be thoroughly dry before over coating.

Yearly Repainting:

Scrub bottom clean at haul-out. Repaint only if old paint is sound and tight: if not, remove it by sanding or with paint remover. If old paint is rough, sand it with 100-150 grit sandpaper. Prepare seams, nicks and chips as below. Spot coat any scuffs with antifoulant. Apply 2 full coats of antifoulant.

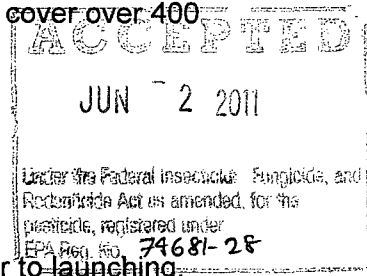

On Bare Wood:

Sand surface with 80 grit sandpaper. Wipe off sanding dust with rags saturated with Thinner 975. Allow to dry and apply one coat of Shelter Island Plus reduced with Thinner 974 to maximize penetration. Make sure Shelter Island Plus is applied in the seams as well as the entire bottom. Fill seams with seam compound. Allow several days to dry until skin forms. Do not sand seam compound. Fill any nicks with trowel cement, allow to dry hard and sand smooth. Apply two coats of Shelter Island Plus antifouling paint without any thinner addition.

On Bare Fiberglass:

Sand surface with 80 grit sandpaper. Wipe off sanding dust with rags saturated with Thinner 975. Allow to dry and apply one coat of Shelter Island Plus reduced with Thinner 974 to maximize penetration. Make sure Shelter Island Plus is applied in the seams as well as the entire bottom. Fill seams with seam compound. Allow several days to dry until skin forms. Do not sand seam compound. Fill any nicks with trowel cement, allow to dry hard and sand smooth. Apply two coats of Shelter Island Plus antifouling paint without any thinner addition.

Dewax by washing with Dewaxer-973, remove dissolved wax at once with clean paper towels or rags; repeat; sand hard to a dull finish with 80-100 grit sandpaper. Fill any chips with trowel cement, dry hard, sand. Apply 3-5 coats of 8000A/8000B Bottom Protect High Build Epoxy Primer, then apply 2 coats of antifoulant.

Fiberglass No Sand System:


Using a 1/8 inch foam or 1/4 inch mohair solvent resistant roller, apply one thin continuous coat of Fiberglass No Sand Primer. Apply in one direction only without recoating. Only one coat of Fiberglass No Sand Primer is required. Antifouling overcoat times will vary due to wide variations in temperature and humidity. The only safe method to determine when the Fiberglass No Sand Primer is "Ready-to-Overcoat" is to check the paint film using the "Thumb Print" test. If the primer feels tacky and you can leave a thumb print in the paint film without getting any paint on your thumb, the Fiberglass No Sand Primer is "Ready-to-Overcoat." Test the paint film in the area you started applying the primer no later than 30 minutes after starting the application. Continue testing every 15 minutes using the "Thumb Print" test until reaching the "Ready-to-Overcoat" stage. Immediately, begin to apply the antifouling paint once the primer has reached the "Ready-to-Overcoat" stage. Note: If you miss the overcoat time between the Fiberglass No Sand Primer and the antifouling paint you may apply another coat of primer for up to 72 hours of initial application.

On Bare Steel:

Sandblast surface to a near white metal (SSPC-SP-10); remove blast with a broom and air hose. Wipe off with Dewaxer-973. Do not sand. Apply one coat of 8004K Strontium Chromate Epoxy Primer. Allow to dry. Fill in any imperfections with epoxy fairing compound. Sand smooth and wipe clean. Apply 3-5 coats of 8000A/8000B Bottom Protect High Build Epoxy Primer or 8003K Coal Tar Epoxy, then apply 2 coats of antifoulant.

On Bare Aluminum:

Wipe off with Alumiprep, then sand to bright metal with coarse Emery cloth and wipe clean with 974 Thinner. Apply one coat of 8004K Strontium Chromate Epoxy Primer

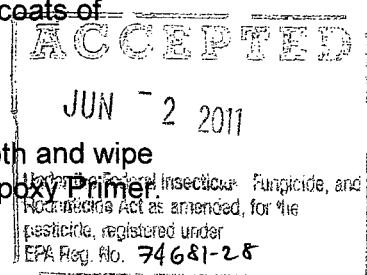

Allow to dry. Apply 3-5 coats of 8000A/8000B Bottom Protect H Build Epoxy Primer, then apply 2 coats of antifoulant.

DISCLAIMER: The performance of any marine paint or coating depends on many factors outside the control of our company, including surface preparation, application and environmental conditions. Therefore, we cannot guarantee this product's suitability for your particular purpose or application. Implied warranties for fitness of a particular purpose and merchantability are excluded. By purchase or use of this product, buyer agrees that the sole exclusive remedy, if any, is limited to the refund of the purchase price or replacement of the product, at the company's option.

Date: 16September2010

