


74681-28

5/28/2013

1/4

UNITED STATES ENVIRONMENTAL PROTECTION AGENCY  
WASHINGTON, D.C. 20460

MAY 28 2013



Office of Pesticide Programs

Bluewater Marine Paint  
1999 Elizabeth Street  
North Brunswick, N. J. 08902

Attention: Don Schnurr, President

Subject: Shelter Island Plus Marine Antifouling Paint  
EPA Reg. No. 74681-28  
Notification Dated May 1, 2013

This will acknowledge receipt of your notification, submitted under the provisions of FIFRA Section 3(c)(9).

**Proposed Notification**

- Change in Environmental Hazards statement on the label

**General Comment**

Based on a review of the submitted material, the following comments apply:

The Notification is in compliance with PR Notice 98-10 and is acceptable. This information has been made a part of your file.

If you have any questions concerning this letter, please contact Martha Terry at (703) 308-6217.

Sincerely,

Marshall Swindell  
Product Manager 33  
Regulatory Management Branch 1  
Antimicrobials Division (7510P)



United States Environmental Protection Agency Washington, DC 20460

Registration Amendment Other (checked)

OPP Identifier Number

Application for Pesticide - Section I

1. Company/Product Number: 74681-28
2. EPA Product Manager: Marshall Swindell
3. Proposed Classification: None (checked)
4. Company/Product (Name): Shelter Island Plus - Deep Blue
5. Name and Address of Applicant: Blue Water Marine Paint, 1999 Elizabeth Street, North Brunswick, New Jersey, 08902
6. Expedited Review: EPA Reg. No., Product Name

Section - II

Amendment - Explain below. Resubmission in response to Agency letter dated. Notification - Explain below. Final printed labels in response to Agency letter dated. "Me Too" Application. Other - Explain below.

Explanation: Use additional page(s) if necessary. (For section I and Section II.) Change in Environmental Hazards statements on product label as dictated by Federal EPA. See attached label.

Section - III

1. Material This Product Will Be Packaged In: Child-Resistant Packaging, Unit Packaging, Water Soluble Packaging, 2. Type of Container: Metal (checked), Plastic, Glass, Paper, Other. 3. Location of Net Contents Information: Label (checked). 4. Size(s) Retail Container: 5,1 and 1/4 gal. 5. Location of Label Directions: On Label (checked). 6. Manner in Which Label is Affixed to Product: Lithograph Paper glued (checked).


Section - IV

1. Contact Point (Complete items directly below for identification of individual to be contacted, if necessary, to process this application.) Name: Donald Schnurr, Title: President, Telephone No.: 732-821-3200

Certification: I certify that the statements I have made on this form and all attachments thereto are true, accurate and complete. 2. Signature: [Signature], 3. Title: President, 4. Typed Name: Donald Schnurr, 5. Date: 5/1/13, 6. Date Application Received (Stamped)

# BLUE WATER® MARINE PAINT

## SHELTER ISLAND PLUS™



**ACTIVE INGREDIENTS:**

Talopyril\* 5.6%  
Zinc Pyrithione\*\* 4.0%  
OTHER INGREDIENTS 90.4%  
TOTAL 100.0%

CAS # 122454-29-9  
EPA Reg. No. 74681-28  
EPA Est. No. 374681-NJ-1

Contains Petroleum Distillates and Xylene

Do not contaminate water, food, or feed by storage and disposal.



**STORAGE AND DISPOSAL:**  
Always store in the original container, and keep partially used container tightly sealed. If a leaky container must be contained within another, mark the outer container to identify the contents. The storage area must be dry, well-ventilated, and well-ventilated. Keep storage areas clean. Clean up any spills promptly. Protect containers from extreme heat and cold.

**PESTICIDE DISPOSAL:**  
Pesticide wastes are toxic. Improper disposal of excess pesticides or insecticide is a violation of Federal law. If these wastes cannot be disposed of by use according to label instructions, contact your State Pesticide or Environmental Control Agency, or hazardous waste representative at the nearest EPA Regional Office for guidance.

**CUSTOMER HANDLING:**  
Non-refillable container. Do not reuse or refill this container. If empty, let paint dry on the walls of the container by keeping lid open and exposed to air in a well-ventilated location. When dry, place in trash for disposal in a sanitary landfill or offer for recycling if available. If partially filled, call your local solid waste agency for disposal instructions. Never place unused product down any indoor or outdoor drain.


**MANUFACTURED BY**  
**BLUE WATER MARINE PAINT**  
1999 ELIZABETH STREET  
NORTH BRUNSWICK, NJ 08902

860-628-8422  
[www.bluewatermarinepaint.com](http://www.bluewatermarinepaint.com)

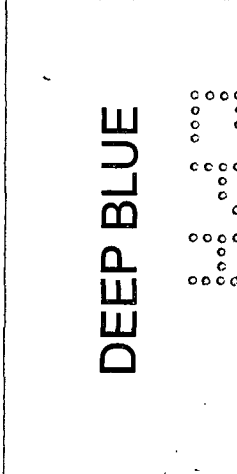

One Gallon, 3.785 Liters

**DANGER: Keep Out of Reach of Children**  
**SEE SIDE PANELS FOR ADDITIONAL PRECAUTIONARY STATEMENTS**

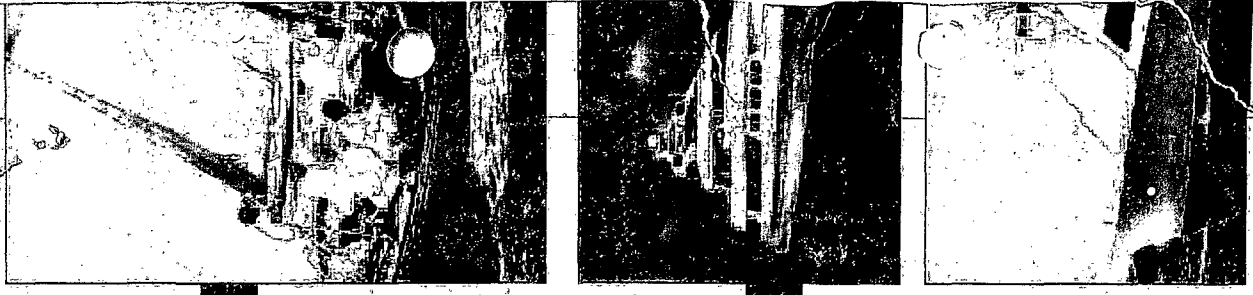

# SHELTER ISLAND PLUS™

## DIRECTIONS FOR USE

It is a violation of federal law to use this product in a manner inconsistent with its labeling.

**Product Description:** SHELTER ISLAND PLUS is a high performance solvent-base antifouling paint that uses a high-end technology of tributyltin and zinc pyrrhione. SHELTER ISLAND PLUS provides multi season antifouling protection against barnacles, algae, slime and hydroids in salt and fresh water on boat bottoms only. Its ablative copolymer base renders a smooth finish with durability and abrasion resistance. SHELTER ISLAND PLUS releases biocide by the constant exposure of new paint film to the water. SHELTER ISLAND PLUS has universal application over all types of properly prepared bottom paints. For use on fiberglass boats, as well as aluminum, wood and steel hulls.

**Surface Preparation:** Surface must always be clean, dry and properly prepared prior to painting. Failure to do so will lead to eventual blistering and/or peeling. All sanded surfaces must be wiped clean with Dewaxer-973 to remove sanding residue.

**General Application:** For use on boats below the true waterline. Can be brushed or rolled on fiberglass, wood, aluminum & steel previously painted surfaces per application systems below. Apply at least 2 coats for best performance, as the life of the paint is proportional to the number of coats applied. Certain areas of the hull, such as the leading edge of the keel and rudder, the waterline, and the bow stem polish faster than other areas. On these areas, an additional coat of paint is recommended to insure that the paint does not polish away before other areas of the bottom. Apply only in outdoor, non-enclosed spaces. **Do not apply by spray.**

**Mixing and Thinning:** Shake or mix thoroughly and stir continuously while using. Thin when necessary with Reducer-974.

**Theoretical Coverage:** Depending on surface conditions, one gallon of bottom paint will usually cover over 400 square feet of surface when brushed or rolled.

**Clean Up:** Use Reducer-974 for cleaning equipment, rollers and paint brushes.

**Estimated Dry Times:** Bottom paints are designed for over coating after an overnight dry. Prior to launching, allow a minimum dry of overnight. If drying conditions are poor, or if paint was applied too thickly, longer periods of drying will be required. Fresh coats of paint must be thoroughly dry before over coating.

**Yearly Repainting:** Scrub bottom clean at haul-out. Repaint only if old paint is sound and tight; if not, remove it by sanding or with paint remover. If old paint is rough, sand it with 100-150 grit sandpaper. Prepare seams, nicks and chips as below. Spot coat any scuffs with antifouling. Apply 2 full coats of antifouling.

**On Bare Wood:** Sand surface with 80 grit sandpaper. Wipe off sanding dust with rags saturated with Thinner 975. Allow to dry and apply one coat of Shelter Island Plus reduced with Thinner 974 to maximize penetration. Make sure Shelter Island Plus is applied in the seams as well as the entire bottom. Fill nicks with seam compound. Allow several days to dry until skin forms. Do not sand seam compound. Fill any chips with trowel cement, allow to dry hard and sand smooth. Apply two coats of Shelter Island Plus antifouling paint without any thinner addition.

**On Bare Fiberglass:** Dewax by washing with Dewaxer 973. Remove dissolved wax at once with clean paper towels or rags. Repeat once again. Sand hard to dull finish with 80 grit sandpaper. Fill in any chips with trowel cement, dry hard and sand. Apply 3-5 coats of 8000A/8000B Bottom Protect High Build Epoxy Primer, followed by 2 coats of antifouling.

**Fiberglass No Sand System:** Using a 1/8 inch foam or 1/4 inch mohair solvent resistant roller, apply one thin continuous coat of Fiberglass No Sand Primer. Apply in one direction only without recoating. Only one coat of Fiberglass No Sand Primer is required. Antifouling overcoat times will vary due to wide variations in temperature and humidity. The only safe method to determine when the Fiberglass No Sand Primer is "Ready-to-Overcoat" is to check the paint film using the "Thumb Print" test. If the primer feels tacky and you can leave a thumb print in the paint film without getting any paint on your thumb, the Fiberglass No Sand Primer is "Ready-to-Overcoat." Test the paint film in the area you started applying the primer no later than 30 minutes after starting the application. Continue testing every 15 minutes using the "Thumb Print" test until reaching the "Ready-to-Overcoat" stage. Immediately, begin to apply the antifouling paint once the primer has reached the "Ready-to-Overcoat" stage. Note: If you miss the overcoat time between the Fiberglass No Sand Primer and the antifouling paint you may apply another coat of primer for up to 72 hours of initial application.

**On Bare Steel:** Sandblast surface to a near white metal (SSPC-SP-10), remove blast dust with a broom and air hose. Wipe off with Dewaxer 973. Do not sand. Apply one coat of 8004K Strontium Chromate Epoxy Primer. Allow to dry. Fill in any imperfections with epoxy fairing compound. Sand smooth and wipe clean. Apply 3-5 coats of 8000A/8000B Bottom Protect High Build Epoxy Primer or 8003K Coal Tar Epoxy, then apply 2 coats of antifouling.

**On Bare Aluminum:** Wipe off with Alumiprep, then sand to bright metal with coarse Emery cloth and wipe clean with 974 Thinner. Apply one coat of 8004K Strontium Chromate Epoxy Primer. Allow to dry. Apply 3-5 coats of 8000A/8000B Bottom Protect High Build Epoxy Primer, then apply 2 coats of antifouling.

## PRECAUTIONARY STATEMENTS

### HAZARDS TO HUMANS AND DOMESTIC ANIMALS

**DANGER.** Corrosive. Causes irreversible eye damage. Prolonged or repeated skin contact may cause allergic reactions in some individuals. Do not get in eyes or on clothing. Harmful if swallowed, inhaled or absorbed through skin. Avoid contact with skin, eyes or clothing. Do not breathe vapor. Wear protective eyewear such as goggles, face shield or safety glasses, gloves, long sleeved cotton shirt, long pants and hat. Wear a mask or respirator jointly approved by the Mining Enforcement and Safety Administration and by the National Institute for Occupational Safety and Health while sanding boat surfaces. Wash thoroughly with soap and water after handling and before eating, drinking, chewing gum, using tobacco or using the toilet. Remove and wash contaminated clothing before reuse.

### FIRST AID

**IF IN EYES:** Hold eye open and rinse slowly and gently with water for 15-20 minutes. Remove contact lenses, if present, after the first 5 minutes, then continue rinsing. Call a poison control center or doctor for treatment advice. **IF SWALLOWED:** Immediately call a poison control center or doctor. Do not induce vomiting unless told to do so by a poison control center or doctor. Do not give anything by mouth to an unconscious person.

**DISCLAIMER:** The performance of any marine paint or coating depends on many factors outside the control of our company including surface preparation, proper application, and environmental condition. Therefore, we cannot guarantee this product's suitability for your particular purpose or application. Implied warranties of fitness for a particular purpose and of merchantability are excluded. We shall not, under any circumstances, be liable for accidental or consequential damages. By purchase or use of this product, buyer agrees that the sole exclusive remedy, if any, is limited to the refund of the purchase price or replacement of the product, at the company's option.

**IF ON SKIN OR CLOTHING:** Take off contaminated clothing. Rinse skin immediately with plenty of water for 15-20 minutes. Call a poison control center or doctor for treatment.

**IF INHALED:** Move person to fresh air. If person is not breathing, call 911 or an ambulance, then give artificial respiration, preferably mouth-to-mouth, if possible. Call a poison control center or doctor immediately for further treatment advice.


Have the product container or label with you when calling a poison control center or doctor, or going for treatment.

### ENVIRONMENTAL HAZARDS

This paint is toxic to birds, fish and aquatic invertebrates, oysters and shrimp. Do not apply directly to water by cleaning of equipment or disposal of wastes. Do not allow chips and dust generated during paint removal to enter water. Dispose of paint debris in an approved landfill. Do not discharge effluent containing this product to sewage systems without previously notifying the sewage plant authority. For guidance contact your State Water Board or Regional Office of the U.S. Environmental Protection Agency.

### PHYSICAL AND CHEMICAL HAZARDS

Do not use near heat or open flame.

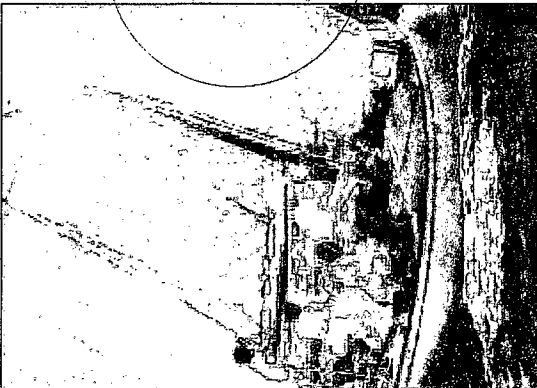

4/9