

86015-1

11/2/2010

1/5



U.S. ENVIRONMENTAL PROTECTION AGENCY

Office of Pesticide Programs
Antimicrobials Division (7510P)
1200 Pennsylvania Avenue NW
Washington, D.C. 20460

EPA Reg. Number:
86015-1

Date of Issuance:
NOV 02 2010

Term of Issuance:

Conditional

Name of Pesticide Product:

Velox Plus Antifouling White

NOTICE OF PESTICIDE:

Registration
 Reregistration

(under FIFRA, as amended)

Name and Address of Registrant (include ZIP Code):

Patricia A. Turley, Ph.D.
Marlin S.r.l.
Via Caduti sul Lavoro 4
34015 Muggia, TRIESTE, ITALY

Note: Changes in labeling differing in substance from that accepted in connection with this registration must be submitted to and accepted by the Registration Division prior to use of the label in commerce. In any correspondence on this product always refer to the above EPA registration number.

On the basis of information furnished by the registrant, the above named pesticide is hereby registered/reregistered under the Federal Insecticide, Fungicide and Rodenticide Act.

Registration is in no way to be construed as an endorsement or recommendation of this product by the Agency. In order to protect health and the environment, the Administrator, on his motion, may at any time suspend or cancel the registration of a pesticide in accordance with the Act. The acceptance of any name in connection with the registration of a product under this Act is not to be construed as giving the registrant a right to exclusive use of the name or to its use if it has been covered by others.

This product is conditionally registered in accordance with FIFRA sec 3(c)(7)(a) provided that you:

1. Submit and/or cite all data required for registration of your product under FIFRA sec. 3(c)(5) when the Agency requires all registrants of similar products to submit such data; and submit acceptable responses required for re-registration of your product under FIFRA section 4.
2. Make the labeling changes listed below before you release the product for shipment:
 - a. Revise the "EPA Registration Number to read, "EPA Reg. No. 86015-1".

Signature of Approving Official:

Marshall Swindell
Product Manager Team-33
Regulatory Management Branch I
Antimicrobials Division (7510P)

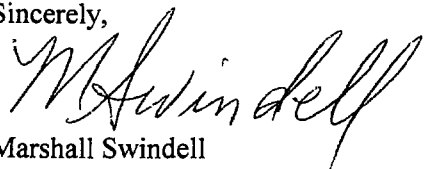
Date:

NOV 02 2010

- b. Remove the phrase "While removing existing paint by sand or blasting, or applying new paint by brush or roller, it is advised to wear a respirator with an organic vapor removing cartridge with a prefilter approved for pesticides (MSHA/NIOSH approval number prefix TC-23C) or a canister approved for pesticides (MSHA/NIOSH approval number TC-14G), or a NIOSH approved full face respirator with an organic vapor removing cartridge with a P-100 filter" from the Residential (non-commercial) users section. As most residential users do not have access to, or do not wear, such respirators, the Agency does not require such language given that it may not be followed.
- c. The superlative "excellent" cannot be used to modify a pesticidal claim as the use of such a term may be false and misleading because it may imply heightened efficacy which may not exist. "Excellent" can be used to modify "adhesion" in that sentence as "adhesion" is a non-pesticidal claim. You must rewrite the claim so that "excellent" does not modify "antifouling".

If these conditions are not complied with, the registration will be subject to cancellation in accordance with FIFRA sec. 6(e). Your release for shipment of the product constitutes acceptance of these conditions.

A stamped copy of the label is enclosed for your records. Submit one (1) copy of your final printed labeling prior to release of this product for shipment. If you have any questions concerning this letter, please contact Abigail Downs at (703) 305-5259.

Sincerely,

 Marshall Swindell
 Product Manager Team-33
 Regulatory Management Branch I
 Antimicrobials Division (7510P)

Enclosure: (Stamped Label)

8/5

Velox Plus Antifouling White

- *For propellers, stern drives and other underwater metallic parts*
- ~~Excellent~~ *adhesion and antifouling properties*

Active Ingredient:	
Zinc 2-Pyridinethiol 1-Oxide*.....	13.30%
Inert Ingredients:.....	86.70%
	100.00%
*zinc pyrithione	

KEEP OUT OF THE REACH OF CHILDREN

DANGER

NET CONTENTS: 8.45 fl. oz. (250 ml)

See side panel for First Aid and additional Precautionary Statements

EPA Registration No.: 86015-xxx
EPA Establishment No.: 86015-ITA-001

Batch No. XXXXXXXX

Manufactured by:
 MARLIN, s.r.l.
 Via Caduti sul Lavoro 4
 34015 Muggia
 TRIESTE, ITALY
 Tel. +39 040 232588
 Fax +39 040 232688
 Email: information@marlinpaint.com

ACCEPTED
 with CCTA
 in EPA Reg. No. 86015-1

NOV 02 2010
 Under the Federal Insecticide,
 Fungicide, and Rodenticide Act as
 amended, for the pesticide,
 registered under EPA Reg. No.
86015-1

4/5

PRECAUTIONARY STATEMENTS HAZARDS TO HUMANS & DOMESTIC ANIMALS

DANGER

Corrosive. Causes irreversible eye damage. Harmful if swallowed or absorbed through skin. Do not get in eyes or on clothing. Avoid contact with skin. Wear goggles, face shield, or safety glasses. Wash thoroughly with soap and water after handling and before eating, drinking, chewing gum, using tobacco or using the toilet. Remove contaminated clothing and wash before reuse.

Residential (non-commercial) users are advised to wear chemical resistant gloves, protective eyewear (goggles, safety glasses, or face shield), long-sleeved shirt and long pants, socks and shoes. ~~While removing existing paint by sanding or blasting, or applying new paint by brush or roller, it is advised to wear a respirator with an organic vapor removing cartridge with a prefilter approved for pesticides (MSHA/NIOSH approval number prefix TC-23C) or a canister approved for pesticides (MSHA/NIOSH approval number TC-14G), or a NIOSH approved full face respirator with an organic vapor removing cartridge with a P-100 filter.~~

Commercial users must wear a disposable coverall with hood, chemical resistant gloves, protective eyewear (goggles, safety glasses, or face shield), long-sleeved shirt and long pants, socks and chemical-resistant footwear. While removing existing paint by sanding or blasting, or applying new paint, user must wear a respirator with an organic vapor removing cartridge with a prefilter approved for pesticides (MSHA/NIOSH approval number prefix TC-23C) or a canister approved for pesticides (MSHA/NIOSH approval number TC-14G), or a NIOSH approved full face respirator with an organic vapor removing cartridge with a P-100 filter.

Environmental Hazards. This pesticide is toxic to fish and aquatic invertebrates. Do not discharge effluent containing this product into lakes, streams, ponds, estuaries, oceans or other water unless in accordance with the requirements of a national pollutant discharge elimination system (NPDES) permit and the permitting authority has been notified in writing prior to discharge. Do not discharge effluent containing this product to sewer systems without previously notifying the local sewage treatment plant authority. For guidance contact your state water board or regional offices of the EPA. Do not apply directly to water by cleaning of equipment or disposal of wastes. Do not allow chips and dust generated during paint removal to enter water. Dispose of paint debris in an approved landfill. Wear protective clothing and supplied air respirator in accordance with the precautionary statements above when handling, painting or removing this paint.

Physical or Chemical Hazards. Combustible. Do not use or store near heat or open flame.

FIRST AID

- IF IN EYES:
 - Hold eye open and rinse slowly and gently for 15-20 minutes. Remove contact lenses, if present, after the first 5 minutes, and then continue rinsing.
 - Call a poison control center or doctor for treatment advice.
- IF SWALLOWED:
 - Call a poison control center or doctor immediately for advice.
 - Have person sip a glass of water if able to swallow.
 - Do not induce vomiting unless told to do so by a poison control center or doctor.
 - Do not give anything by mouth to an unconscious person.
- IF ON SKIN OR CLOTHING:
 - Take off contaminated clothing.
 - Rinse skin immediately with plenty of water for 15-20 minutes.
 - Call a poison control center or doctor for treatment advice.
- IF INHALED:
 - Move person to fresh air.
 - If person is not breathing, call 911 or an ambulance, then give artificial respiration, preferably mouth-to-mouth if possible.
 - Call a poison control center or doctor for further treatment advice.

ACCEPTED
with COMMENTS
in EPA Letter Dated:
NOV 02 2010
Under the Federal Insecticide,
Fungicide, and Rodenticide Act as
amended, for the pesticide,
registered under EPA Reg. No
86018-1

Note to Physician: Probable mucosal damage may contraindicate the use of gastric lavage.

Have product container or label with you when calling a poison control center or doctor for treatment advice. For emergency information on this product, call the National Pesticides Information Center at 1-300-858-7378, 6:30 AM to 4:30 PM Pacific time (PT), seven days a week. During other times, call the Poison Control Center at 1-800-222-1222.

5/5

DIRECTIONS FOR USE

It is a violation of Federal law to use this product in a manner inconsistent with its labeling.

VELOX PLUS ANTIFOULING WHITE is an antifouling coating for the control of barnacles, mussels, slime, algae, grasses and other marine and fresh-water fouling organisms. It is for use on propellers, stern drives and other underwater metallic parts of recreational and commercial vessels. It is not intended for use on hulls. This product may be applied by brush or spray (commercial users).

SURFACE PREPARATION

STEEL OR BRONZE: Remove any existing antifouling coating. Remove grease or oil stains from the propeller or metallic part using a fast degreasing solvent. Sand the metallic surface with rather coarse and sharp sandpaper (n. 80 - 100) or sandblast it. Then remove dust with a dry rag or with a brush. Do not touch the sanded surface with bare hands, as this may leave traces of grease which will impair adhesion of the product.

ALUMINIUM OR LIGHT ALLOY: Remove any existing antifouling coating. For new aluminum or light alloy parts that are already varnished with the original factory finish, degrease and sand with fine sandpaper. Bare aluminum must be treated with an appropriate epoxy coating, then sanded with fine sandpaper.

MIXING: Thoroughly mix before use, by shaking the can well in an upside down position for 2 minutes before opening. After opening, stir with a paddle to ensure that the paint is homogeneous.

APPLICATION: VELOX PLUS and its primer METAL PRIMER can be applied by brush or sprayer (commercial users only). Apply one light coat of METAL PRIMER. After allowing to dry for a minimum of 3 hours (70° F), apply 2-3 coats of VELOX PLUS waiting at least 3 hours (70° F) between each coat. Wait at least 16 hours before launching.

Apply VELOX PLUS only on METAL PRIMER or itself. Never apply VELOX PLUS or METAL PRIMER on other antifouling paints.

Theoretical coverage per coat: 450 square feet per gallon (11 square meters per liter).

For application by residential (non-commercial) users: Do not apply by airless sprayer. Apply only in outdoor, non-enclosed spaces.

STORAGE AND DISPOSAL

Do not contaminate water, food or feed by storage or disposal. Keep container closed when not in use. In case of spillage, absorb with inert material and dispose of in accordance with applicable regulations.

Pesticide Disposal. Pesticide wastes are toxic. Improper disposal of excess pesticide, spray mixture or rinsate is a violation of Federal law. If these wastes cannot be disposed of by use according to label instructions, contact your state pesticide or environmental control agency, or the hazardous waste representative at the nearest EPA regional office for guidance.

Container Disposal. Nonrefillable container. Do not reuse or refill this container. Offer for recycling if available. **Commercial Users:** Triple rinse container promptly after emptying. Triple rinse as follows: Empty the remaining contents into application equipment or a mix tank and drain for 10 seconds after the flow begins to drip. Fill the container ¼ full with water and recap. Shake for 10 seconds. Pour rinsate into application equipment or a mix tank or store rinsate for later use or disposal. Drain for 10 seconds after the flow begins to drip. Repeat this procedure two more times. Then offer the container for recycling or reconditioning, or puncture and dispose of in a sanitary landfill, or by other approved state and local procedures.

For additional safety and handling information, refer to the MSDS and technical bulletin for this product.

ACCEPTED
with COMMENTS
in EPA Letter Dated:

NOV 02 2010

Under the Federal Insecticide,
Fungicide, and Rodenticide Act as
amended, for the pesticide,
registered under EPA Reg. No.

86015-1