

88951-2

12/12/2012

1/4



U.S. ENVIRONMENTAL PROTECTION AGENCY

Office of Pesticide Programs
Antimicrobials Division (7510C)
1200 Pennsylvania Avenue NW
Washington, D.C. 20460

NOTICE OF PESTICIDE:

[x] Registration
Reregistration

(under FIFRA, as amended)

EPA Reg.

Number:

88951-2

Date of

Issuance:

DEC 12 2012

Term of Issuance:

Conditional

Name of Pesticide Product:

Panax 500™ 50

Name and Address of Registrant (include ZIP Code):

Pan Asian Chemicals Inc.
3040 Post Oak Blvd., #1050
Houston, TX 77056

Note: Changes in labeling differing in substance from that accepted in connection with this registration must be submitted to and accepted by the Registration Division prior to use of the label in commerce. In any correspondence on this product always refer to the above EPA registration number.

On the basis of information furnished by the registrant, the above named pesticide is hereby registered/reregistered under the Federal Insecticide, Fungicide and Rodenticide Act.

Registration is in no way to be construed as an endorsement or recommendation of this product by the Agency. In order to protect health and the environment, the Administrator, on his motion, may at any time suspend or cancel the registration of a pesticide in accordance with the Act. The acceptance of any name in connection with the registration of a product under this Act is not to be construed as giving the registrant a right to exclusive use of the name or to its use if it has been covered by others.

This product is conditionally registered in accordance with FIFRA sec 3(c)(7)(A) provided that you:

1. Submit and/or cite all data required for registration of your product under FIFRA sec. 3(c)(5) when the Agency requires all registrants of similar products to submit such data; and submit acceptable responses required for re-registration of your product under FIFRA section 4.

2. Make the labeling changes listed below before you release the product for shipment:

a. Revise the "EPA Registration Number to read, "EPA Reg. No. 88951--2".

Signature of Approving Official:

Marshall Swindell
Product Manager Team-33
Regulatory Management Branch
Antimicrobials Division (7510P)

[Handwritten signature of Marshall Swindell]

Date:

DEC 12 2012

Page 2
EPA Registration No. 88951-2

b. Submit the product Storage Stability and Corrosion Characteristics study within one (1) year from the date of this Notice of Registration.

c. Submit two (2) copies of your final printed labeling before distributing or selling the product bearing the revised labeling.


3. The Confidential Statement of Formula dated October 23, 2012, for the basic formulation is acceptable. Refer to the enclosed copy of the Product Chemistry Review for further comments.

If these conditions are not complied with, the registration will be subject to cancellation in accordance with FIFRA sec. 6(e). Your release for shipment of the product constitutes acceptance of these conditions.

A stamped copy of the "accepted" label is enclosed for your records.

If you have any questions concerning this letter, please contact Martha Terry at (703) 308-6217.

Sincerely,

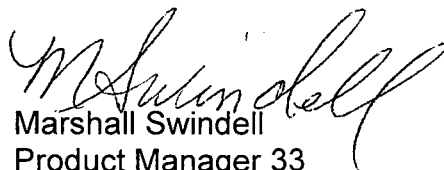

Marshall Swindell
Product Manager 33
Regulatory Management Branch I
Antimicrobials Division (7510P)

Enclosures

PRECAUTIONARY STATEMENTS
HAZARD TO HUMANS AND DOMESTIC ANIMALS
DANGER
KEEP OUT OF REACH OF CHILDREN

Corrosive. Causes irreversible eye damage and skin burns. May be fatal if swallowed. Harmful if inhaled. Harmful if absorbed through the skin. Do not get in eyes, on skin or on clothing. Wear goggles or face shield and rubber gloves when handling. Wash thoroughly with soap and water after handling and before eating, drinking, chewing gum, using tobacco, or using the toilet. Remove and wash contaminated clothing before reuse. Prolonged or frequently repeated skin contact may cause allergic reactions in some individuals.

ENVIRONMENTAL HAZARDS

This product is toxic to fish, aquatic invertebrates, oysters and shrimp. Do not discharge effluent containing this product into lakes, streams, ponds, estuaries, oceans or other waters unless in accordance with the requirements of a National Pollutant Discharge Elimination System (NPDES) permit and the permitting authority has been notified in writing prior to discharge. Do not discharge effluent containing this product to sewer systems without previously notifying the local sewage treatment plant authority. For guidance, contact your State Water Board or Regional Office of the EPA.

PHYSICAL OR CHEMICAL HAZARDS

FLAMMABLE. Keep away from heat and flame.

DIRECTIONS FOR USE

It is a violation of Federal law to use this product in a manner inconsistent with its labeling. PanaX 500™ 50 Industrial Bactericide is especially recommended for controlling sulfate reducing bacteria in water to be used for polymer treated water-flood programs. PanaX 500™ 50 Industrial Bactericide does not interfere with the viscosity characteristics of the polymer agent. PanaX 500™ 50 Industrial Bactericide may be applied in systems used to treat injection water immediately ahead of water de-oiling equipment such as an air flotation unit in the clear water holding tank or at the suction side of the injection pump. PanaX 500™ 50 Industrial Bactericide should be used full strength in concentrations of 30 ppm of PanaX 500™ 50 Industrial Bactericide on a continuous basis or in slug applications to 5,000 ppm of PanaX 500™ 50 Industrial Bactericide or higher concentrations as needed (1/4 pint per 1,000 gallons equals approximately 30 ppm). A typical slug application is one quart per 1,000 gallons.

STORAGE AND HANDLING

Container. Keep container closed when not in use. Store in a cool, dry, well-ventilated area away from incompatible substance. Refrigeration has been recommended.

LIMITED WARRANTY AND DISCLAIMER

Seller warrants that the product conforms to its chemical description as contained on this label and is reasonably fit for the purposes stated on this label when used in accordance with directions under normal conditions of use. THE WARRANTIES MADE IN THIS PARAGRAPH ARE SELLER'S SOLE WARRANTIES WITH RESPECT TO THE PRODUCT AND ARE MADE EXPRESSLY IN LIEU OF AND EXCLUDE ANY IMPLIED WARRANTIES OF MERCHANTABILITY OR OF FITNESS FOR A PARTICULAR PURPOSE AND ALL OTHER EXPRESS OR IMPLIED REPRESENTATIONS AND WARRANTIES.

STORAGE AND DISPOSAL

Do not contaminate water, food, or feed by storage or disposal. STORAGE: Do not pour, spill or store near heat or open flame. PESTICIDE DISPOSAL: Pesticide wastes are toxic. Improper disposal of excess pesticides, spray mixture or rinseate is a violation of Federal law. If these wastes cannot be disposed of by use according to label instructions, contact your State Pesticide or your Environmental Control Agency, or the Hazardous Waste representative at the nearest EPA Regional Office for guidance. CONTAINER DISPOSAL: Refillable container. Refill this container with pesticide only. Do not reuse this container for any other purpose. Cleaning the container before final disposal is the responsibility of the person disposing of the container. Cleaning of the refilling is the responsibility of the refiller. To clean the container before final disposal, empty the remaining contents from this container into application equipment or mix tank. Fill the container about 1/4 percent full of water. Agitate vigorously or recirculate water with the pump for 2 minutes. Pour or pump rinseate into application equipment or rinsate collection system. Repeat the rinsing procedure two more times.

PanaX 500™ 50
Industrial Bactericide

FOR USE IN INDUSTRIAL PROCESSES ONLY.
 NOT FOR DOMESTIC USE.

ACTIVE INGREDIENT: Glutaraldehyde..... 1.50%
 INERT INGREDIENTS:..... 98.50%
 TOTAL:..... 100.00%

NET CONTENTS: Bulk, Drum or As Marked on Container
KEEP OUT OF REACH OF CHILDREN

DANGER

FIRST AID

- Call a poison control center or a doctor immediately for treatment advice
- DO NOT INDUCE VOMITING.
- Do not give anything to drink.
- Wash immediately and continuously with flowing water for at least 30 minutes
- Remove contact lenses after the first 5 minutes and continue washing. Obtain prompt medical consultation, preferably from an ophthalmologist.
- Call a poison control center or a doctor immediately for treatment advice.

- Take off contaminated clothing.
- Rinse skin immediately with plenty of water for 15-20 minutes.
- Call a poison control center or a doctor for treatment advice.
- Move person to fresh air.
- If person is not breathing, call 911 or an ambulance, and then give artificial respiration, preferably mouth-to-mouth if possible.
- Call a poison control center or a doctor for further treatment advice.

- If ON SKIN OR CLOTHING:
- If INHALED:

NOTE TO PHYSICIAN: Aspiration may cause lung damage. Probable mucosal damage may contraindicate the use of gastric lavage.
 Have the MSDS and, if available, the product container or label with you when calling a poison control center or a doctor, or going for treatment.
IN CASE OF EMERGENCY: Endangering life or property involving this product, call collect: (989) 636-4400

EPA Registration Number..... 88951-#2
 EPA Establishment Number.....

PAN ASIAN CHEMICALS INC.
 3040 POST OAK BLVD. # 1050
 HOUSTON, TEXAS 77056

EMERGENCY CONTACT (24 HOURS PER DAY) 1-800-424-9300

ACCEPTED
 WITH COMMENTS
 DEC 12 2012

Federal Insecticide, Fungicide, and Rodenticide Act as Pesticide, registered under EPA Reg. No. 88951-2

8/4

ACCEPTED COMMENTS
in EPA Label dated:
DEC 12 2012

Under the Federal Insecticide, Fungicide, and Rodenticide Act as amended, this product is registered for use as a bactericide and antifoulant in a tank containing 0.4% to 4.0% PanaX 500™ 50. PanaX 500™ 50 can also be added to in-line service reverse osmosis elements in a tank of service reverse osmosis equipment (where approved for compatibility by membrane manufacturer). PanaX 500™ 50 is the tank in the circulating system. Maintain the concentration of PanaX 500™ 50 by periodically testing to counteract any system leakage.

DIRECTIONS FOR USE

It is a violation of Federal Law to use this product in a manner inconsistent with its labeling.

AIR WASHERS AND INDUSTRIAL SCRUBBING SYSTEMS/ RECIRCULATING COOLING AND PROCESS WATER SYSTEMS:

This product may be used only in industrial air washers and air washer systems which have mist-eliminating components. PanaX 500™ 50 should be added at the application rates described below to a water treatment system at a convenient point of uniform mixing such as the basin area. Addition may be made intermittently (SLUG DOSE) or continuously. Badly fouled systems can be shock treated with PanaX 500™ 50. Under these conditions, blowdown should be discontinued for up to 24 hours. PanaX 500™ 50 can be used in industrial process water systems that contain ultra-filtration units and non-medical reverse osmosis membranes (where approved for compatibility by the membrane manufacturer) and associated distribution systems.

INTERMITTENT (SLUG DOSE) METHOD

Initial Dose: When the system is noticeably fouled, apply 12 to 24 fluid ounces of PanaX 500™ 50 per 1000 gallons of water in the system. Repeat until control is achieved.

Subsequent Dose: When microbial control is evident, add 4.8 to 12 fluid ounces of PanaX 500™ 50 per 1000 gallons of water in the system weekly, or as needed to maintain control. Badly fouled system must be cleaned before treatment is begun.

CONTINUOUS FEED METHOD

Initial Dose: When the system is noticeably fouled, apply 12 to 24 fluid ounces of PanaX 500™ 50 per 1000 gallons of water in the system. Subsequent Dose: Maintain this treatment level by starting a continuous feed of 2.4 to 12 fluid ounces of PanaX 500™ 50 per 1000 gallons of water in the system per day. Badly fouled system must be cleaned before treatment is begun.

SERVICE WATER AND AUXILIARY SYSTEMS

PanaX 500™ 50 should be used at the same application rates, and in the same manner as described above. It should be added to the system at a point that will allow for uniform mixing throughout the system.

HEAT TRANSFER SYSTEMS

(Evaporative Condensers, Dairy Sweetwater Systems, Hydrostatic Sterilizers and Retorts, and Pasteurizers and Warmers) PanaX 500™ 50 should be used at the same application rates, and in the same manner as described above. It should be added to the system as a point of uniform mixing such as a basin area, sump area, or other reservoir or collection area from which the treated water will be circulated uniformly throughout the system.

INDUSTRIAL WASTEWATER SYSTEMS:

(Wastewater systems, wastewater sludge and wastewater holding tanks) Initial Dose: PanaX 500™ 50 should be added to a wastewater system or sludge at a convenient point of uniform mixing such as the digester. Add 10.8 to 54 fluid ounces (0.63 pints to 3.4 quarts) (900 to 4,500 ppm) of PanaX 500™ 50 per 100 gallons of wastewater or sludge.

PAPER MILLS AND PAPER MILL PROCESS WATER SYSTEMS

PanaX 500™ 50 should be added to the paper making system at a point of uniform mixing such as the beaters, broke chest pump, save-all tank, or white water tank. Initial Dose: When the system is noticeably contaminated, add 1.0 to 6.0 lbs. of PanaX 500™ 50 per ton of pulp or paper (dry basis) as a slug dose. Repeat until control is achieved. Heavily fouled systems should be boiled out prior to initial treatment. Subsequent Dose: When microbial control is evident, add 0.6 to 4.0 lbs. of PanaX 500™ 50 per ton of pulp or paper (dry basis) as a slug dose as necessary to maintain control.

PIGMENTS AND FILLER SLURRIES FOR PAPER AND PAPERBOARD

(For use in food and non-food contact pigments and filler slurries) Use from 0.2 to 1.2 lbs. of PanaX 500™ 50 per 1,000 lbs. dry powder to produce a concentration of 200 to 1,200ppm as product (based on slurry solids) in the mixed slurry.

WATER BASED COATINGS

NOTE: For use in non-food contact coatings only. Use from 0.2 to 1.2 lbs. of PanaX 500™ 50 per 1,000 lbs. dry powder to produce a concentration of 200 to 1,200ppm as product (based on slurry solids) in the mixed slurry.

AQUEOUS METAL WORKING FLUIDS

PanaX 500™ 50 should be added to a metal working fluid system at a point of uniform mixing such as the fluid collection tank. Additions may be made intermittently (SLUG DOSE) at intervals of one week or less. Initial Dose: When the system is noticeable fouled apply 2.4 to 7.2 fluid ounces (100 to 300ppm active) of PanaX 500™ 50 per 100 gallons of metal working fluid to the system. Repeat until control is achieved. Subsequent Dose: When microbial control is evident add 0.95 to 4.8 fluid ounces (40 to 200 ppm active) of PanaX 500™ 50 per 100 gallons of metalworking fluid to the system weekly, or as needed to maintain control. Badly fouled system should be cleaned before treatment is begun.

WATER BASED CONVEYOR LUBRICANTS

(Brewery, Juice, Dairy, Beverage, and Food Processing Systems) Avoid contamination of food in application of product. Thoroughly clean all tracks and conveyors to remove gross soil. Rinse well. Use an automatic feed system to provide 12 to 2.2 fluid ounces (50 to 300 ppm active) of PanaX 500™ 50 per 100 gallons of diluted lubricant.

GENERAL PRESERVATIVE USE

PanaX 500™ 50 is recommended for use in aqueous C₁₂ water containing products and systems, including industrial, institutional and consumer in can processes and products. Control the growth of bacteria and fungi. For effective preservation, add PanaX 500™ 50 to the product formulation at a rate of 0.04% to 0.6% based on the water content of the product (0.4 to 4.0 lbs. PanaX 500™ 50 per 1,000 lbs. water content. Mix uniformly.

PRESERVATIVE FOR CONCENTRATES

For use in concentrates where effective preservation is needed after dilution, add PanaX 500™ 50 to the product formulation at a rate such that the diluted end-use product will contain 0.04% to 0.4% PanaX 500™ 50. At no time during the preservation process should the level of PanaX 500™ 50 exceed 6.6%.

REVERSE OSMOSIS MEMBRANES

For effective preservation of reverse osmosis elements (where approved for compatibility by membrane manufacturer) add PanaX 500™ 50 to the tank containing 0.4% to 4.0% PanaX 500™ 50. PanaX 500™ 50 can also be added to in-line service reverse osmosis elements in a tank of service reverse osmosis equipment (where approved for compatibility by membrane manufacturer). PanaX 500™ 50 is the tank in the circulating system. Maintain the concentration of PanaX 500™ 50 by periodically testing to counteract any system leakage.

CONCRETE ADMIXTURES

For effective preservation of concrete admixtures, add PanaX 500™ 50 to the product formulation at a rate of 4,000 to 16,000 ppm based on the weight of the admixture (4.0 to 16.0 lbs. PanaX 500™ 50 per 1,000 concrete admixture.) Mix uniformly.

WATER FLOODS

PanaX 500™ 50 should be added to a water flood system at a point of uniform mixing. Initial Treatment: When the system is noticeably contaminated, add 200 to 10,000 ppm PanaX 500™ 50 to the system (0.2 to 9.4 gallons PanaX 500™ 50 per 1,000 flood water). Repeat until control is achieved. Subsequent Dose: When microbial control is evident, add 40 to 10,000 ppm PanaX 500™ 50 (0.04 to 9.4 gallons PanaX 500™ 50 per 1,000 gallons flood water) to the system weekly, or as needed to maintain control.

FRAC FLUIDS

Product not registered for this use in the State of California. PanaX 500™ 50 reduces bacterial contamination and degradation of fracturing fluids and gels used in oil and gas well stimulations. Add PanaX 500™ 50 to the frac. water storage tanks or directly into the well head injection pipeline as the water is being pumped down-hole. Dose Range: PanaX 500™ 50 should be added at a rate of 200 to 10,000 ppm (1.9-94 gallons per 10,000 gallons) depending on the degree of bacterial fouling in the source water.

DRILLING, COMPLETION, AND WORKOVER FLUIDS

PanaX 500™ 50 should be added to a drilling fluid system at a point of uniform mixing such as the circulating mud tank. Initial treatment: Add 100 to 2,000ppm PanaX 500™ 50 (0.4 to 7.9 gallons PanaX 500™ 50 per 100 barrels of fluid) to a freshly prepared fluid depending on the severity of contamination. Maintenance dosage: Maintain a concentration of 100 to 2,000 ppm PanaX 500™ 50 by adding 0.4 to 7.9 gallons of PanaX 500™ 50 per 100 barrels of additional fluid, or as needed, depending on the severity of contamination.

PACKER FLUIDS

PanaX 500™ 50 should be added to a packer fluid at a point of uniform mixing such as a circulating holding tank. Add 100 to 1,200 ppm PanaX 500™ 50 (0.4 to 4.7 gallons PanaX 500™ 50 per 100 barrels of fluid) to a freshly prepared fluid depending on the severity of contamination. Seal the treated packer fluid in the well between the casing and production tube.

OIL PRODUCTION AND TRANSMISSION PIPELINES AND SYSTEMS

Product not registered for this use in the State of California. PanaX 500™ 50 should be added to an oil production or transmission line via direct injection. The application should be conducted to ensure maximum distribution of PanaX 500™ 50 throughout the entire internal pipeline surface by adding a sufficient amount of biocide to detect/measure a residual concentration at the back end of the pipeline system. Criteria for success of the treatment will be a reduction in bacterial counts and/or reduced corrosion rates. To facilitate application, it may be desirable to dilute the PanaX 500™ 50 with an appropriate solvent immediately before use. The concentration in the solvent should not fall below an active concentration range of 500 to 5,000 ppm based on the volume of water in the pipeline. Injections to the system should be weekly or as needed to maintain control.

GAS PRODUCTION AND TRANSMISSION PIPELINES AND SYSTEMS

Product not registered for this use in the State of California. PanaX 500™ 50 should be added to a gas production or transmission line via direct injection. The application should be conducted to ensure maximum distribution of PanaX 500™ 50 throughout the entire internal pipeline surface by adding a sufficient amount of biocide to detect/measure a residual concentration at the back end of the pipeline system. Criteria for success of the treatment will be a reduction in bacterial counts and/or reduced corrosion rates. To facilitate application, it may be desirable to dilute the PanaX 500™ 50 with an appropriate solvent immediately before use. The concentration in the solvent should not fall below an active concentration range of 500 to 5,000 ppm based on the volume of water in the pipeline. Injections to the system should be weekly or as needed to maintain control.

GAS STORAGE WELLS AND SYSTEMS

Individual injection wells should be treated with sufficient quantity of PanaX 500™ 50 to produce a concentration of 1,000 to 10,000 ppm PanaX 500™ 50 when diluted by the water present in the formation. Injection should take place before gas is injected (during the summer). Injections should be repeated yearly, or as needed to maintain control. Individual drips should be treated with a sufficient quantity of PanaX 500™ 50 to produce a concentration of 400 to 4,000 ppm PanaX 500™ 50 when diluted by the water present in the drip. Injections should be repeated yearly, or as needed to maintain control.

HYDROTRESTING

Water used to hydro-test pipelines or vessels should contain 200 to 8,000 ppm PanaX 500™ 50 (0.2 to 7.5 gallons PanaX 500™ 50 per 1,000 gallons water), depending on water quality and length of time the equipment will remain idle. PIPELINE PIGGING AND SCRAPING OPERATIONS Add PanaX 500™ 50 to a slug of water immediately following the scraper (ideally this water volume can be kept to a minimum and contained between the scraper and a trailing pig). Sufficient PanaX 500™ 50 should be added to produce a concentration of 0.2 to 2.0% (0.2 to 1.9 gallons PanaX 500™ 50 per 100 gallons water), depending on the length of the pipeline and the severity of biofouling.

9/4