



UNITED STATES ENVIRONMENTAL PROTECTION AGENCY
WASHINGTON, DC 20460

OFFICE OF CHEMICAL SAFETY
AND POLLUTION PREVENTION

May 27, 2016

Abigail Wacek
Consultant for Shelburne Wood Protection
Technology Sciences Group Inc.
1150 18th Street NW, Suite 1000
Washington, D.C. 20036

Subject: Notification per PRN 98-10 – Updating Storage and Disposal language on label
Product Name: *P6980-C*
EPA Registration Number: 91149-1
Application Date: 04/26/2016
Decision Number: 516885

Dear Ms. Wacek:

The Agency is in receipt of your Application for Pesticide Notification under Pesticide Registration Notice (PRN) 98-10 for the above referenced product. The Antimicrobials Division (AD) has conducted a review of this request for its applicability under PRN 98-10 and finds that the action requested falls within the scope of PRN 98-10.

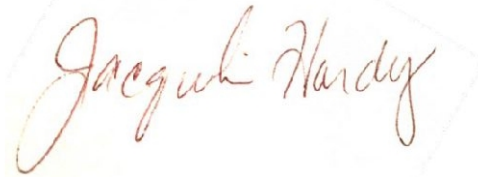
The label submitted with the application has been stamped “Notification” and will be placed in our records.

Should you wish to add/retain a reference to the company’s website on your label, then please be aware that the website becomes labeling under the Federal Insecticide Fungicide and Rodenticide Act and is subject to review by the Agency. If the website is false or misleading, the product would be misbranded and unlawful to sell or distribute under FIFRA section 12(a)(1)(E). 40 CFR 156.10(a)(5) list examples of statements EPA may consider false or misleading. In addition, regardless of whether a website is referenced on your product’s label, claims made on the website may not substantially differ from those claims approved through the registration process. Therefore, should the Agency find or if it is brought to our attention that a website contains false or misleading statements or claims substantially differing from the EPA approved registration, the website will be referred to the EPA’s Office of Enforcement and Compliance.

Page 2 of 2
EPA Reg. No. 91149-1
Decision No. 516885

If you have any questions, you may contact Farzana Olla at 703-347-0190 or via email at olla.farzana@epa.gov.

Sincerely,

A handwritten signature in red ink that reads "Jacqueline Hardy". The signature is written in a cursive style and is enclosed within a faint, light-colored rectangular border.

Jacqueline Hardy, Product Manager (34)
Regulatory Management Branch II
Antimicrobials Division (7510P)

NOTIFICATION

91149-1

The applicant has certified that no changes, other than those reported to the Agency have been made to the labeling. The Agency acknowledges this notification by letter dated:

05/25/2016

P-6980C

[Alternate Brand Name: TRUBLUE]

An industrial coating application for residential / commercial indoor wood framing components to protect against mold

Active Ingredient:

3-Iodo-2-Propynyl N-Butylcarbamate.....2.20%

Propiconazole 2.20%

Other Ingredients.....95.60%

Total.....100.00%

Contains: carbendazim and 3-iodo-2-propynyl n-butylcarbamate at 0.73% as an in-can preservative

Keep Out of Reach of Children

CAUTION

READ THE LABEL BEFORE USING

[See [side] [back] panel for additional precautionary statements]

FIRST AID	
If on Skin or Clothing	Take off contaminated clothing. Rinse skin immediately with plenty of water for 15 – 20 minutes. Call a poison control center or doctor for treatment advice.
<i>Call a poison control center or doctor immediately for treatment advice. Have the product container or label with you when calling a poison control center or doctor, or when going for treatment.</i>	

EPA REGISTRATION NO. 91149-1

EPA ESTABLISHMENT NO.

Net Contents: _____

Batch Code/Lot Number:

Shelburne Wood Protection

309 Main Street West

Shelburne, Ontario

Canada L9V 2X8

P-6980 (91149-1)

Shelburne Wood Protection

Notif. – April 26, 2016, Label Version (1)

Page 1 of 3

PRECAUTIONARY STATEMENTS

Hazards to Humans and Domestic Animals: CAUTION: Avoid contact with skin or clothing. Wash thoroughly with soap and water after handling and before eating, drinking, chewing gum, using tobacco, or using the toilet. Wear gloves when handling P-6980C. Wash outside of gloves before removing.

ENVIRONMENTAL HAZARDS

This chemical is toxic to terrestrial and aquatic plants, fish and aquatic invertebrates. Do not apply directly to water, or to areas where surface water is present or to intertidal areas below the mean high water mark. Do not contaminate water when cleaning equipment or disposing of equipment washwaters. Do not discharge effluent containing this product into lakes, streams, ponds, estuaries, oceans or other waters unless in accordance with the requirements of a National Pollutant Discharge Elimination System (NPDES) permit and the permitting authority has been notified in writing prior to discharge. Do not discharge effluent containing this product to sewer systems without previously notifying the local sewage treatment plant authority. For guidance contact your State Water Board or Regional office of the EPA.

DIRECTIONS FOR USE

It is a violation of federal law to use this product in a manner inconsistent with its labeling.

FOR USE ON WOOD FOR INTERIOR COVERED FRAMING COMPONENTS

Dilute P-6980C at a 6:1 ratio with water. For use as an anti-microbial coating in the treatment of residential / commercial wood framing components for above-ground, interior, covered structures. The anti-microbial coating is effective against mold. Any coated wood components stored outdoors need to be covered (tarp) and above ground (no ground contact).

Residential / commercial wood framing components is defined as dimensional lumber, plywood, oriented strand board (OSB) (if used as flooring or sheathing), wood I-beams, structural insulated panels (SIP), parallel strand lumber (PSL), laminated veneer lumber (LVL) and wood flooring I-Joists.

P6980C anti-microbial coating can be used in industrial flow-coat applicator systems that apply wet coating with active concentration ranging from **0.3 to 0.4%** by weight. For field application, apply two (2) liberal coatings via hand brushing, roller brushing, or air-less spray gun to achieve the desired coating thickness. Use the following table to determine appropriate coating amounts.

Product Type	Mil (wet)
Lumber	2-3
Plywood	6-8
OSB Panel	10-12

Coating procedures must rigidly adhere to the factory audit manual provided by Shelburne Wood Protection Ltd. For more details visit [our website/webpage] [www.intertek.com].

Coating systems used to apply P6980C shall leave no visual surface deposits / or residues. Wood components need to be dry (moisture content < 19%), clean, free of sawdust and other contaminants. Wood component grade markings need to be visible after coating. Only a small amount of pre-existing microbial stain (i.e. Bluestain) and non-microbial discoloration shall be allowed.

NOTICE TO USER/WARRANTY STATEMENT

This pest control product is to be used only in accordance with the directions on the label. It is an offence to use this product in a way that is inconsistent with the directions on the label. The user assumes the risk to persons or property that arises from any such misuse of this product.

STORAGE AND DISPOSAL

Do not contaminate food or feed by storage or disposal or cleaning of equipment.

Pesticide Storage: Store in a cool place. Protect from excessive heat. This product may congeal or stratify when exposed to temperatures below its pour point. Should this occur, allow the container to warm to room temperature and mix well before using.

Pesticide Disposal: Pesticide wastes are acutely hazardous. Improper disposal of excess pesticides, spray mixture, or rinsate is a violation of Federal Law. If these wastes cannot be disposed of by use according to label directions, contact your State pesticide or environmental control agency or the hazardous waste representative at the nearest EPA regional office. Open dumping is prohibited.

Container Handling: Nonrefillable container. Do not reuse or refill this container. Clean container promptly after emptying. [**For Less Than or Equal to 50 gal**] Triple Rinse as follows: Empty the remaining contents into application equipment or a mix tank and drain for 10 seconds after the flow begins to drip. Fill the container ¼ full with water and recap. Shake for 10 seconds. Pour rinsate into application equipment or a mix tank or store rinsate for later use or disposal. Drain for 10 seconds after the flow begins to drip. Repeat this procedure two more times. [**For Greater Than 50 gal**] Triple rinse as follows: Empty the remaining contents into application equipment or a mix tank. Fill the container ¼ full with water. Replace and tighten closures. Tip container on its side and roll back and forth, ensuring at least one complete revolution, for 30 seconds. Stand the container on its end and tip it back and forth several times. Turn the container over onto its other end and tip it back and forth several times. Empty the rinsate into application equipment or a mix tank or store rinsate for later use or disposal. Repeat this procedure two more times. Then offer for recycling or reconditioning if available, or puncture and dispose of in a sanitary landfill, or incineration, or, if allowed by state and local authorities, by burning. If burned, stay out of smoke.