



OFFICE OF CHEMICAL SAFETY AND POLLUTION PREVENTION

WASHINGTON, D.C. 20460

January 29, 2025

Brian Hogan
brianhogan330@gmail.com
BIOSAN LLC

Subject: Non-PRIA (Pesticide Registration Improvement Act) Labeling Amendment - To correct ppm typographical error on page 17 to match correct dilution rates
Product Name: OXYSAN 15 ACID SANITIZER
Admin Number: 91628-2
EPA Receipt Date: 07/09/2024
Action Case Number: 00620100

Dear Brian Hogan:

The amended labeling referred to above, submitted in connection with registration under the Federal Insecticide, Fungicide, and Rodenticide Act, as amended, is acceptable.

This approval does not affect any terms or conditions that were previously imposed on this registration. You continue to be subject to existing terms or conditions on your registration and any deadlines connected with them.

A stamped copy of your labeling is enclosed for your records. This labeling supersedes all previously accepted labeling. You must submit one (1) copy of the final printed labeling before you release this product for shipment with the new labeling. In accordance with 40 CFR § 152.130(c), you may distribute or sell this product under the previously approved labeling for 18 months from the date of this letter. After 18 months, you may only distribute or sell this product if it bears this new revised labeling or subsequently approved labeling. "To distribute or sell" is defined under FIFRA section 2(gg) and its implementing regulation at 40 CFR § 152.3.

Should you wish to add/retain a reference to your company's website on your label, then please be aware that the website becomes labeling under FIFRA and is subject to review by EPA. If the website is false or misleading, the product will be considered to be misbranded and sale or distribution of the product is unlawful under FIFRA section 12(a)(1)(E). 40 CFR § 156.10(a)(5) lists examples of statements the EPA may consider false or misleading. In addition, regardless of whether a website is referenced on your product's label, claims made on the website may not substantially differ from those claims approved through the registration process. Therefore, should the EPA find or if it is brought to our attention that a website contains statements or claims substantially differing from statements or claims made in connection with obtaining a FIFRA section 3 registration, the website will be referred to the EPA's Office of Enforcement and Compliance Assurance.

Your release for shipment of this product constitutes acceptance of these terms. If these terms are not complied with, this registration will be subject to cancellation in accordance with FIFRA section 6.

If you have questions, please contact Katelyn Chambers via email at chambers.katelyn@epa.gov.

Sincerely,

A handwritten signature in black ink, reading "Heather A. Garvie". The script is elegant and cursive, with the first letters of each word being capitalized and larger than the others.

Heather Garvie, Senior Regulatory Advisor
RMB 2, AD
Office of Pesticide Programs



OXYSAN 15 ACID SANITIZER
(Alternate Brand Name: OXYCARE)


ACTIVE INGREDIENTS:

Peroxyacetic Acid..... 16.00%

Hydrogen Peroxide..... 10.50%

INERT INGREDIENTS:73.50%

Total:100.00%

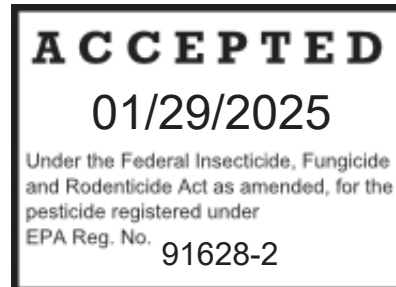

EPA Registration No. 91628-2

EPA Est. No. 91628-NY-1

KEEP OUT OF REACH OF CHILDREN

STRONG OXIDIZING AGENT
DANGER – PELIGRO

Si Usted no entiende la etiqueta, busque a alguien para que se la explique a Usted en detalle.
(If you do not understand the label, find someone to explain it to you in detail.)

Notes to the reviewer appear in parentheses ().

Optional text appears in brackets [] or braces {}.

(See Side Panel for Additional Precautionary Statements and Usage Directions)

(Note to Reviewer: The following optional referral statement may be organized in any order to be grammatically correct.)

[See][Consult] [Additional][attached][Product Information][Bulletin][Sheet][insert][booklet][label] for [other][additional][directions for use][information] [claims][organisms][applications] [and] [proper][use directions].

Net Contents: 1, 2.5, 5, 15, 265, 330, 6340 gallons

For Institutional / Industrial sanitizing of previously cleaned hard non-porous food contact surfaces in:

- Meat and Poultry Processing / Packaging Plants
- Milk and Dairy Products Processing / Packing Plants
- Seafood and Produce Processing / Packing Plants
- Food Processing / Packing Plants
- Egg Processing / Packing Equipment Surfaces
- Eating Establishments
- For institutional / Industrial sanitizing of previously cleaned hard, non-porous food contact surfaces such as:
 - Eating, Drinking, and Food Preparation Utensils
 - Countertops and Food Preparation Surfaces
 - Tableware
 - Plastic, Glass and Metal Bottles (rinse)



Master Label File | OXYSAN 15 ACID SANITIZER

For use in circulation cleaning and institutional/industrial sanitizing of previously cleaned hard, non-porous food-contact surfaces and equipment such as food preparation surfaces, pipelines, tanks, vats, fillers, evaporators, pasteurizers in:

- Dairies, Wineries, Breweries and Beverage Plants
- Meat and Poultry Processing / Packaging Plants
- Milk and Dairy Products Processing / Packing Plants
- Seafood and Produce Processing / Packing Plants
- Food Processing / Packing Plants
- Egg Processing / Packing Equipment Surfaces
- Eating Establishments
- Final Sanitizing Bottle Rinse
- Agriculture and Horticulture Industry
- Oil & Gas
- Water and Sewage Treatment Facilities

(Optional Marketing Statements)

(Note to Reviewer: The following marketing claims may be used with the prefix "This product or "This product is {a} {an}").)

For Organic Production, Oxysan 15 Acid Sanitizer may be used in rinse or wash water on products labeled as organic in food processing facilities on commodities that will be further processed.

For use as a sanitizer on food contact surfaces in contact with products labeled as organic.

OXYSAN 15 Acid Sanitizer is for use as a coarse spray for surfaces to be sanitized.

OXYSAN 15 Acid Sanitizer can be used with Biofoam foaming agents. For food-contact applications the foaming agent must be used in compliance with the applicable regulations under the Federal Food, Drug, and Cosmetic Act.

OXYSAN 15 Acid Sanitizer can be used with Bioclean non-foaming agent, as an antimicrobial container rinse and for hard, nonporous surface sanitization.

OXYSAN 15 Acid Sanitizer is for sanitizing surfaces such as packinghouse conveyers and harvesting equipment and containers.

OXYSAN 15 Acid Sanitizer is for sanitization of shell eggs.

OXYSAN 15 Acid Sanitizer is for porous and non-porous hard surface sterilization.

OXYSAN 15 Acid Sanitizer is for use as a sanitizer of hard non-porous surfaces in general commercial environments and as an antimicrobial rinse of Precleaned or New Returnable or Non-Returnable Containers.

OXYSAN 15 Acid Sanitizer is for sanitization of animal and poultry premises, trucks, coops, and crates.

OXYSAN 15 Acid Sanitizer can be used for reducing non-public health microorganisms in processing waters for fruits and vegetables.

OXYSAN 15 Acid Sanitizer is for use as a dip or spray wash, or fog to control the growth of non-public health microorganisms that may cause decay and/or spoilage on raw, post-harvest and fresh cut, fruits and vegetables.



Master Label File | OXYSAN 15 ACID SANITIZER

OXYSAN 15 Acid Sanitizer is for use in process water that contacts raw, post-harvest, fresh-cut and processed fruits and vegetables to control growth of non-public health microorganisms.

OXYSAN 15 Acid Sanitizer is for use as a microbial control in wastewater and sewage effluent in public and private treatment facilities.

OXYSAN 15 Acid Sanitizer is for use in agricultural water and irrigation systems

OXYSAN 15 Acid Sanitizer is for use in commercial and Institutional /Industrial laundry operations for disinfection and sanitization.

OXYSAN 15 Acid Sanitizer is for use in oilfield and gas-field well operations.

OXYSAN 15 Acid Sanitizer may be used for the non-pesticidal purpose of cleaning room surfaces by fogging.

OXYSAN 15 Acid Sanitizer For use as an antimicrobial rinse to control beverage spoilage microorganisms.

OXYCARE

OXYSAN 15

The regular use of this product at the recommended pH ranges will prevent the formation of Milkstone, Beerstone, or Mineralstone deposits

Performs acid wash and antimicrobial rinse in one step which can save water, time and energy

Saves Time

Liquid formula allows for automatic dispensing and control. This helps reduce over-usage and saves employee time

Removes mineral soils

Removes mineral based soils

Removes milk stone

Removes calcium phosphate

Removes mineral fouling soils

Improved flux due to removal of mineral soils

Proven to remove mineral soils

Proven to remove mineral soils at lower temperatures

Peracetic acid is very effective because of its dissolving action on beer stone, proteins, slime, yeast and other matter commonly found in brewery lines, tanks and hoses

This product is a sanitizer in beer fermentation and holding tanks, bottling or pre-mix dispensing equipment.



Master Label File | OXYSAN 15 ACID SANITIZER

Is for use as a sanitizer In bottling and beverage dispensing equipment, beer fermentation and holding tanks, sanitary filling of bottles, caps and cans {In the final rinse application}, and for external spraying of filling and closing machines and In wineries for use on holding tanks, floors and processing equipment.

Antibacterial.

Can be applied through foaming apparatus, low-pressure sprayers. Follow manufacturers' Instructions when using this equipment.

Clear formula. (Note to Reviewer To be used only when no dyes are present)

Contains no fragrances. (Note to Reviewer: to be used only with non-fragrance formulas)

Is fragrance-free. (Note to Reviewer: to be used only with non-fragrance formulas)

Formulated for effective poultry sanitation.

Formulated for effective swine premise sanitation.

Is easily and quickly dispersed In water to form a completely uniform solution.

Is for use on floors, walls, tile, cages, crates, mats, litter boxes, floor coverings, or any hard, non-porous surfaces soiled by a pet.

Will not leave grit or soap scum. CLEANING AND DEODORIZATION MARKETING CLAIMS (Note to Reviewer: The following marketing claims may be used with the prefix "This product".)

Peracetic Acid (PAA) is used in the brewing and dairy industry to aid in the removal and prevention of Beerstone Milkstone, and Limestone deposits

Cleans {and shines} {without bleaching} {by {removing} {dirt} {grime} {and food soils in food preparation and processing areas}} {everyday kitchen messes} {non-food contact kitchen surfaces and food preparation areas} {like dirt, grease and food stains}.

Cleans rodent soiled areas. Deodorizes by killing microorganisms that cause offensive odors.)

Is for use in work areas such as tool rooms and garages for odor control and light duty cleaning.

[[Maximizes] {Improves}] labor results by effectively controlling odors.

Provides long lasting freshness against tough {pet} odors such as odors from litter boxes and pet accidents.

Removes dirt.

Removes [{Milkstone}{Beerstone}]

Removes stains.

Use of this product will control unpleasant [{malodors} {odors}].

This product is an effective no-rinse final sanitizer on pre-cleaned food contact surfaces.



Master Label File | OXYSAN 15 ACID SANITIZER

This product is a no-rinse disinfectant cleaner that disinfects, cleans and deodorizes in just [1] [one] labor saving step.

This product is for use as a sanitizer on food processing equipment and utensils and as a disinfectant on hard, non-porous surfaces.

This product is for use as a sanitizer in bottling and beverage dispensing equipment.

This product is for use as a sanitizer in sanitary filling of bottles and cans.

This product is for use as a sanitizer in beer fermentation and holding tanks.

This product is for use as a sanitizer on holding tanks, floors and processing equipment

Effective sanitizer to clean equipment (either manually or CIP) in the food, dairy, beer, wine, and beverage industries

The reduction of biofouling bacteria improves flux

The reduction of biofouling bacteria can lead to improved flux

The reduction of biofoulants leads to improved flux

The reduction of biofoulants leads to improved flux resulting in increased production capacity

Performs acid rinse and antimicrobial rinse in one step

Convenient to use - provides acidified wash and antimicrobial rinse in one step

This product is a versatile cleaner, sanitizer, and broad-spectrum disinfectant for hard, non-porous surfaces.

This product contains no phosphorous.

This product cleans by removing dirt, grime, blood, urine, fecal matter and other common soils found in animal housing facilities, livestock, swine and poultry facilities, grooming facilities, farms, kennels, pet stores, veterinary clinics, laboratories, or other small animal facilities. It (also) eliminates odors leaving surfaces smelling clean and fresh.

This product will not leave a grit or soap scum.

When used as directed, this product will deodorize surfaces in restrooms and toilet areas, behind and under sinks and counters, garbage cans and garbage storage areas, and other places where bacterial growth can cause malodors.

This product is a versatile sanitizer for veterinarian, animal care, animal laboratory, and agricultural and farm premises applications

This product is approved as a sanitizer in public eating places, dairy processing equipment, packing houses, and on food processing equipment and utensils. A potable rinse is not necessary when used as a sanitizer on food contact surfaces.



Master Label File | OXYSAN 15 ACID SANITIZER

This product is for use as a sanitizer on food contact surfaces, food processing equipment and utensils, and as a disinfectant on hard, non-porous surfaces. A potable water rinse is not required when used as a sanitizer on food contact surfaces.

This product is for use as a sanitizer in bottling and beverage dispensing equipment.

This product is for use as a sanitizer in sanitary filling of bottles, caps and cans.

This product is for use as a sanitizer in dairy clean-in-place systems.

This product is for use as a sanitizer in brewing clean-in-place systems

This product is a concentrate formulation designed for use in commercial, institutional, and industrial operations.

This product controls the growth of odor-causing and slime forming bacteria.

This product may be applied through automatic washing systems, immersion tanks, foaming apparatus, low-pressure sprayers and fogging (wet misting) systems. (Fogging and foaming not approved for use in California)

This product is formulated to effectively eliminate offensive odors caused by mold and mildew.

Antibacterial

Institutional Use Disinfectant and Sanitizer

Fabric Disinfectant and sanitizer

Fabric Bleach

Gentle on fabric fibers

Laundry Brightener

Laundry Sanitizer

Laundry Disinfectant

Laundry Sanitizer & Disinfectant

Sanitizer

Deodorizer

Easy to use

For sanitizing of hard, non-porous surfaces, structures & equipment

Contains no phosphates

Sanitizes and deodorizes

Leaves no residue



Master Label File | OXYSAN 15 ACID SANITIZER

Versatile Sanitizer

A post-harvest treatment for the prevention and control of plant pathogenic diseases on all fruits and vegetables and other agricultural crops in dump tanks, hydro coolers and process waters.

A treatment for the prevention and control of plant pathogenic diseases on surfaces, equipment and structures used in processing post-harvest commodities.

Controls the growth of odor-causing and slime forming bacteria

Effective over a wide range of pH conditions

Controls odors

Keeps water clean

Use on water gardens, ornamental ponds, waterfalls, fountains, or stone water features

Enhance water's appearance

Biodegradable


Will not harm plants

Contains no metals

Broad Spectrum

Optional Graphics:

1.  Orthodox Union

2.  Hologram





FIRST AID	
If in eyes	<ul style="list-style-type: none"> • Hold eye open and rinse slowly and gently with water for 15-20 minutes. • Remove contact lenses, if present, after the first 5 minutes, then continue rinsing eyes. • Call a poison control center or doctor for treatment advice.
If on skin or clothing	<ul style="list-style-type: none"> • Take off contaminated clothing • Rinse skin immediately with plenty of water for 15-20 minutes. • Call a poison control center or doctor for treatment advice.
If inhaled	<ul style="list-style-type: none"> • Move person to fresh air. • If person is not breathing. Call 911 or an ambulance, then give artificial respiration, preferably by mouth-to-mouth, if possible.
If swallowed	<ul style="list-style-type: none"> • Call a poison control center or doctor for treatment advice. • Call poison control center or doctor immediately for treatment advice. • Have person sip a glass of water if able to swallow. • Do not induce vomiting unless told to do so by the poison control center or doctor. • Do not give anything by mouth to an unconscious person.
Note to Physician: Probable mucosal damage may contraindicate the use of gastric lavage.	

Precautionary Statement



Master Label File | OXYSAN 15 ACID SANITIZER

Hazards to Humans and Domestic Animals

DANGER: CORROSIVE Causes irreversible eye damage. Causes skin burns. Do not get in eyes, on skin or on clothing. Harmful if swallowed. Wear coveralls worn over long-sleeved shirt and long pants, socks, chemical resistant footwear, rubber gloves, and chemical goggles. Wash thoroughly with soap and water after handling and before eating, drinking, chewing gum, or using tobacco or using the toilet. Remove and wash contaminated clothing before reuse.

PHYSICAL OR CHEMICAL HAZARDS - Strong oxidizing agent. Mix only with water. BioSan Acid Sanitizer is not combustible, but at temperatures exceeding 156 F, decomposition occurs releasing oxygen. The oxygen released could initiate or promote combustion of other materials.

ENVIRONMENTAL HAZARDS - This pesticide is toxic to birds, mammals, fish and aquatic life. Do not discharge effluent containing this product into lakes, streams, ponds, estuaries, oceans, or other waters unless in accordance with requirements of a National Pollutant Discharge Elimination System (NPDES) permit and the permitting authority has been notified in writing prior to the discharge. Do not discharge effluent containing this product to sewer systems without previously notifying the local sewage treatment facility authority. For guidance contact your State Water Board or Regional Office of the EPA.

PERSONAL PROTECTIVE EQUIPMENT (PPE)

Handlers who may be exposed to the undiluted product through mixing, loading, application, or other tasks must wear: coveralls over long-sleeved shirt and long pants, rubber gloves, chemical resistant footwear plus socks, and protective eyewear (goggles or face shield). Handlers who may be exposed to the diluted product through application or other tasks must wear: long-sleeved shirt and long pants, and shoes plus socks. Follow manufacturer's instructions for cleaning / maintaining PPE. Discard clothing and other absorbent materials that have been drenched or heavily contaminated with this product. Do not reuse them. If no such instructions for washables, use detergent and hot water. Keep and wash PPE separately from other laundry.

USER SAFETY RECOMMENDATIONS

Users should remove clothing immediately if pesticide gets inside. Then wash thoroughly and put on clean clothing. Remove PPE immediately after handling this product. Wash the outside of gloves before removing. As soon as possible, wash thoroughly and change into clean clothing.

AGRICULTURAL USE REQUIREMENTS

Use this product only in accordance with its labeling and with the Worker Protection Standard, 40



Master Label File | OXYSAN 15 ACID SANITIZER

CFR Part 170. This standard contains requirements for the protection of agricultural workers on farms, forests, nurseries and greenhouses, and handlers of agricultural pesticides. It contains requirements for training, decontamination, notification and emergency assistance. It also contains specific instructions and exceptions pertaining to the statements on this label about Personal Protective Equipment (PPE), notification to workers, and Restricted-Entry Interval (REI). The requirements in this box only apply to the uses of this product that are covered by the Worker Protection Standard.

For enclosed environments

There is a restricted entry of one (1) hour for this product when applied via fogging or spraying to growing plants, surfaces, equipment, structures and non-porous surfaces in enclosed glasshouses and greenhouses. PPE requirement for early entry to treated areas that is permitted under the Worker Protection Standard and that involves contact with anything that has been treated, such as plants, soil or water, is coveralls worn over long-sleeved shirt and pants, waterproof gloves and shoes plus socks.

There is a restricted entry of zero (0) hours for pre-plant dip, seed treatment, soil drench, mop, sponge, dip, soak, rinse or other non-spraying application methods when used in enclosed environments such as glasshouses and greenhouses.

For field applications:

Keep unprotected persons out of treated areas until sprays have dried.

Non-Agricultural Use Requirements

The requirements in this box apply to uses of this product that are **not** within the scope of the Worker Protection Standard for agricultural pesticides (40 CFR Part 170). The WPS applies when this product is used to produce agricultural plants on farms, forests, nurseries or greenhouses. Keep unprotected persons out of treated areas until sprays have dried.



Storage and Disposal

Do Not Contaminate Water, Food or Feed by Storage and Disposal.

Pesticide Storage

NEVER RETURN OXYSAN ACID SANITIZER TO THE ORIGINAL CONTAINER AFTER IT HAS BEEN REMOVED. Avoid all contaminants, especially dirt, caustic, reducing agents, and metals. Contamination and impurities will reduce shelf life and can induce decomposition. In case of a decomposition, isolate container, douse container with cool water and dilute with large volumes of water.

Avoid damage to containers. Keep closed at all times when not in use. Keep container out of direct sunlight. To maintain product quality, store at temperatures below 86 F. Do not store on wooden pallets.

Procedure for Leak or Spill

Stop leaks if this can be done without risk. Shut off ignition sources; no flames, smoking flares, or spark producing tools. Keep combustible and organic materials away. Flush spilled material with large quantities of water. Undiluted material should not enter confined spaces.

Pesticide Disposal

If material has been spilled, an acceptable method of disposal is to dilute with at least 20 volumes of water followed by discharge into suitable treatment system in accordance with all local, state and Federal environmental laws, regulations, standards, and other requirements. Because acceptable methods of disposal may vary by location, regulatory agencies should be contacted prior to disposal.

Product to be discarded should be disposed of as hazardous waste after contacting the appropriate local, state, or Federal agency to determine proper procedures.

Container Handling

Non-refillable containers greater than or equal to five gallons.

Nonrefillable container. Do not reuse or refill this container. Offer for recycling. If available. Triple rinse container (or equivalent) promptly after emptying. Triple rinse as follows: Empty the remaining contents into application equipment or a mix tank. Fill the container 1/4 full with water. Replace and tighten closures. Tip container on its side and roll back and forth, ensuring at least one complete revolution, for 30 seconds. Stand the container on its end and tip it back and forth several times. Empty rinsate into application equipment or mix tank or store rinsate for later use or disposal. Repeat this procedure two more times. Empty drums are not returnable to unless special arrangements have been made. Dispose of drums in accordance with local state, and Federal regulations.



Directions for Use

It is a violation of Federal law to use this product in a manner inconsistent with its labeling.

Do not apply this product in a way that will contact workers or other persons, either directly or through drift. Only protected handlers may be in the area during application.

For any requirements specific to your State, consult the agency in your State responsible for pesticide regulation.

Sanitizing Non-Porous Food Contact Surfaces

An effective sanitizer against *Staphylococcus aureus*, *Escherichia coli*, and *Salmonella enterica*.

Clean equipment immediately after use:

1. Remove gross particulate matter with a warm water flush.
2. Wash equipment with detergent or cleaning solution.
3. Rinse equipment with potable water.
4. Prepare product solution by adding 0.45 to 1.85 fluid ounces to 5 gallons of potable water containing up to 200 ppm hardness as CaCO₃. This provides 123 ppm to 500 ppm peroxyacetic acid and 82 ppm to 333 ppm hydrogen peroxide.
5. Fill closed systems with diluted sanitizer solution and allow a contact time of (1) minute.
6. For open or not completely closed systems, use a coarse spray, mop/wipe or flood technique to apply the solution to the surface and allow a contact time of one (1) minute.
7. Allow surfaces to [drain thoroughly before resuming operation] [air dry for a minimum of 2 minutes].

Non-Pathogenic Spoilage Organisms

OXYSAN 15 Acid Sanitizer is effective against non-pathogenic spoilage organisms, and yeasts.

Clean equipment immediately after use:

1. Remove gross particulate matter with warm water flush.
2. Wash equipment with detergent or cleaning solution.
3. Rinse equipment with potable water.
4. Prepare OXYSAN 15 Acid Sanitizer solution by adding 0.45 to 1.85 fl. oz. to 5 gallons of potable water. This provides 124 to 500ppm peroxyacetic acid and 82 to 333 of hydrogen peroxide.
5. Fill closed systems with diluted sanitizer solution for a contact time of one (1) minute.
6. For open or not completely closed systems, use a coarse spray, mop/wipe or flood technique to apply the solution to the surface for a contact time of at least one (1) minute. Allow surfaces to drain thoroughly before resuming operation.

Sanitization of Conveyors, Peelers, Slicers and Saws for Meat, Poultry, Seafood, Fruits and Vegetables

An effective sanitizer against *Staphylococcus aureus*, *Escherichia coli*, and *Salmonella enterica*.

For use in the static or continuous washing, rinsing and sanitizing of conveyor equipment, peelers, collators, slicers, saws, etc.

1. Remove all products from equipment if during treatment the sanitizer will directly contact the items.
2. Prepare product solution by adding 0.45 to 1.85 fluid ounces to 5 gallons of potable water containing up to 200 ppm hardness as CaCO₃. This provides 123 ppm to 500 ppm peroxyacetic acid and 82 ppm to 333 ppm hydrogen peroxide.



Master Label File | OXYSAN 15 ACID SANITIZER

3. Apply sanitizer solution to the return portion of the conveyor or to the equipment by using a coarse spray or other means of wetting the surfaces. Allow contact for at least (1) minute or for a contact time as specified by the local governing sanitizing code. Control the volume of solutions so as to permit maximum drainage and to prevent puddles. The conveyor may still be damp when food contact occurs.
4. Allow equipment to [drain adequately before reusing] [air dry for a minimum of 2 minutes].

Eating Establishment Sanitizing

An effective sanitizer against *Staphylococcus aureus*, *Escherichia coli*, and *Salmonella enterica*.

1. Scrape/prewash plates, utensils, cups, glasses, etc.
2. Wash all items with a detergent.
3. Rinse thoroughly with potable water
4. Prepare product solution by adding 0.45 to 1.85 fluid ounces to 5 gallons of potable water containing up to 200 ppm hardness as CaCO₃. This provides 123 ppm to 500 ppm peroxyacetic acid and 82 ppm to 333 ppm hydrogen peroxide.
5. Immerse all items for at least (1) minute or for a contact time as specified by the local governing sanitizing code.
6. Place all sanitized items on rack or drain board to drain adequately. Air dry for a minimum of 2 minutes if items will not be reused immediately.

Sanitizing Tableware

For sanitizing tableware in low to ambient temperature washing machines, inject the prepared product solution (by adding 0.45 to 1.85 fluid ounces to 5 gallons of potable water containing up to 200 ppm hardness as CaCO₃) into the final rinse water. Prepare product solution by adding 0.45 to 1.85 fluid ounces to 5 gallons of potable water containing up to 200 ppm hardness as CaCO₃. This provides 123 ppm to 500 ppm peroxyacetic acid and 82 ppm to 333 ppm hydrogen peroxide. Immerse all items for at least (1) minute or for a contact time as specified by the local governing sanitizing code. Allow to air dry for a minimum of 2 minutes.

Final Sanitizing Bottle Rinse

May be used as a final sanitizing rinse for plastic, glass or metal returnable and non-returnable bottles / cans.

1. Wash bottles with detergent or cleaning solution and rinse with potable water.
2. Prepare product solution by adding 0.45 to 1.85 fluid ounces to 5 gallons of potable water containing up to 200 ppm hardness as CaCO₃. This provides 123 ppm to 500 ppm peroxyacetic acid and 82 ppm to 333 ppm hydrogen peroxide.
3. Allow to [drain adequately] [air dry for a minimum of 2 minutes].

Sanitizing Milking Equipment by Cluster Dipping

1. Clean the external surfaces of the milking systems after each use.
2. Manually, or automatically rinse and sanitize all system components using a OXYSAN 15 Acid Sanitizer prepared by mixing 0.41-0.94 fl. oz. to 5 gallons of potable water. Ensure solution fills clusters.
3. Allow surfaces to remain wet for at least one (1) minute. Shake off well after dipping and allow to air dry. Rinsing is not required.

Sanitization of Egg Shells Intended for Food

1. Prepare product solution by adding 0.45 to 1.85 fluid ounces to 5 gallons of potable water containing up to 200 ppm hardness as CaCO₃. This provides 123 ppm to 500 ppm peroxyacetic acid and 82 ppm to 333 ppm hydrogen peroxide.
2. Apply dilute solution as eggs are gathered or prior to setting, as a coarse spray so as to lightly wet all egg shell surfaces. Allow contact for at least (1) minute or for a contact time as specified by the local governing sanitizing code.



Master Label File | OXYSAN 15 ACID SANITIZER

3. Allow to [drain dry] [air dry for a minimum of 2 minutes].

Surfaces Treated to Control the Spread of Citrus Canker

Use OXYSAN 15 Acid Sanitizer to control the spread of citrus canker between inanimate surfaces and inanimate surfaces to plants. This product is for sanitizing surfaces such as packinghouse conveyers and harvesting equipment and containers. This product is not for treatment of infected plants.

NON PESTICIDAL CLEANING

All surfaces must be cleaned and sanitized prior to fogging.

Fogging in Filling, Packaging, Processing, Storage, Warehouse, and Worker Welfare Rooms or Areas:

Prior to fogging remove food products and packaging materials from the room or area or carefully protect them. Fog desired areas using 32 – 64 fl. oz of use dilution per 1000 cu. ft. using equipment with an automated timer. Conventional corrosion resistant fogging devices are recommended. Vacate the area of all personnel prior to, during and after fogging until the hydrogen peroxide concentration is below 0.5 ppm.

Biofouling Control in Pulp, Paper and Paperboard Mill and Water Systems

For use in the manufacture of paper and paperboard intended for food and non-food contact. OXYSAN 15 Acid Sanitizer can be used to control bacterial, fungal and yeast growth in pulp, paper and paperboard or non-woven process water and influent systems.

Influent Water Systems: This product should be fed continuously to incoming fresh water streams for non-potable use only, at dosages ranging from 0.11- 2.0 lbs (1.5-27 fl. oz) of this product per 1000 gallons of raw or process water (2.0-36 ppm peroxyacetic acid). Adjust dosage as necessary to maintain microbiological control.

1. **Severely fouled systems:** should be cleaned before initial treatment with OXYSAN 15 Acid Sanitizer. Refer to the plant operations manual for directions for cleaning severely fouled systems. The product should be added directly to the system and not mixed with any other chemicals or additives. Other chemicals can be added separately. Contamination with other chemicals could result in product decomposition.
2. **Add the OXYSAN 15 Acid Sanitizer:** at a point in the system where it can be mixed uniformly with the pulp, e.g., the beater, hydro-pulper, fan pump, broke pump etc.
3. **Intermittent feed method:** Apply 0.5 lb. to 1.2 lb. (7 to 16 fluid ounces) of OXYSAN 15 Acid Sanitizer per ton (dry basis) of pulp or paper produced for two to three hours every eight-hour shift. Maintain a concentration that provides adequate control. Daily rate could change depending on the severity of the biofouling.
4. **Continuous feed method:** Initially, use the intermittent feed method to achieve control. When control is accomplished, apply OXYSAN15 Acid Sanitizer continuously at the rate determined adequate for intermittent control. Then reduce the rate of addition to the lowest level sufficient to maintain control. Depending on the severity of the biofouling, control usually can be maintained using a continuous rate of 0.2 to 1.2 lb. (2.6 to 16 fluid ounces) of OXYSAN 15 Acid Sanitizer solution per ton (dry basis) of pulp or paper produced on a continuous basis. This will provide 15 to 90 ppm of peroxyacetic acid and 10 to 60 ppm of hydrogen peroxide.

Mill Process Waters:



Master Label File | OXYSAN 15 ACID SANITIZER

Intermittent Feed: Apply 0.5 lb. to 1.2 lb. (7 to 16 fluid ounces) of OXYSAN 15 Acid Sanitizer per ton (dry basis) of pulp or paper produced for two to three hours every eight-hour shift. Maintain a concentration that provides adequate control. Daily rate could change depending on the severity of the biofouling.

Continuous Feed: Initially, use the intermittent feed method to achieve control. When control is accomplished, apply OXYSAN15 Acid Sanitizer continuously at the rate determined adequate for intermittent control. Then reduce the rate of addition to the lowest level sufficient to maintain control. Depending on the severity of the biofouling, control usually can be maintained using a continuous rate of 0.2 to 1.2 lb. (2.6 to 16 fluid ounces) of OXYSAN 15 Acid Sanitizer solution per ton (dry basis) of pulp or paper produced on a continuous basis. This will provide 15 to 90 ppm of peroxyacetic acid and 10 to 60 ppm of hydrogen peroxide.

Shock (slug) Dose: This product may be used to shock dose systems requiring a high level of biofouling control. Use rates ranging from 1-8 lbs (13.5-108 fl. oz.) of this product per ton (dry basis) of pulp or paper produced may be necessary. This dosage is equivalent to 75-600 ppm peroxyacetic acid. Shock dose every 1-3 hrs as necessary until biofouling control is evident. Thereafter, revert to continuous or intermittent feed methods.

Control of Bacteria and Fungi in Dispersed Pigments

OXYSAN 15 Acid Sanitizer can be used to control bacteria and fungi in the manufacture and storage of dispersed pigments used in paint and paper production such as kaolin clay, titanium dioxide, calcium carbonate, calcium sulfate, barium sulfate and magnesium silicate.

Apply 0.2 to 1.2 lb. (2.6 to 16 fluid ounces) (90 to 545 grams) of OXYSAN 15 Acid Sanitizer solution to each 1,000 lb. (454 Kg) of fluid. This will provide 200 to 1200 ppm of product (30 to 180 ppm of peroxyacetic acid and 20 to 120 ppm of hydrogen peroxide).

Control of Slime Forming Bacteria and Biofouling in Recirculating Cooling Water Systems (Cooling Towers, Evaporative Condensers, Air Washers) Non-Food Contact Water Systems and Ornamental or Recreation Water Features.

OXYSAN 15 Acid Sanitizer is for use in treating raw (make-up) and process waters, closed and opened loop systems such as heat exchanges, wet scrubbers, cooling towers, evaporative condensers and recirculating industrial process waters, such as pulp and paper mill water systems.

Severely fouled systems: should be cleaned before adding the OXYSAN 15 Acid Sanitizer solution. (Refer to the system operation manual for directions to clean severely fouled systems). The product should be added directly to the system and not mixed with any other chemicals or additives. Other chemicals should be added separately.

Never add OXYSAN 15 Acid Sanitizer into any feeding device, such as shot feeders, filter housings, by-pass feeders, or miscellaneous piping of any kind, because dangerous acute decomposition can occur.

Discontinue the use of chlorine or bromine products prior to using OXYSAN 15 Acid Sanitizer. Contamination. Contamination with other chemicals could result in product decomposition.

Add the OXYSAN 15 Acid Sanitizer solution only to water at a point in the system where uniform mixing and even distribution will occur.



Master Label File | OXYSAN 15 ACID SANITIZER

Intermittent feed method: When the system is noticeably fouled, apply 0.8 to 1.2 lb. (10 to 16 fluid ounces) of OXYSAN 15 Acid Sanitizer solution per 1000 gallons of water in the system. Repeat until control is achieved. When microbial control is evident, add 0.5 lb. to 1.2 lb. (7-16 fluid ounces) of the solution per 1000 gallons of water in the system every day, or as needed, to maintain control. The daily dose rate could vary depending upon the severity of the biofouling.

Continuous feed method: When the system is just noticeably fouled, apply 0.2 to 1.2 lb. (2.6 to 16 fluid ounces) of OXYSAN 15 Acid Sanitizer solution per 1000 gallons of water in the system. When microbial control is achieved, start adding OXYSAN 15 Acid Sanitizer solution continuously at a rate of 1.0 lb. (14 fluid ounces) per 1000 gallons of water provides 17 ppm peroxyacetic acid and 12 ppm of hydrogen peroxide. Then reduce the rate of addition to a level, sufficient to maintain control. The dose rate may have to be adjusted to account for losses due to blowdown and evaporation. Add 1.4 fluid ounces of OXYSAN 15 Acid Sanitizer for every 100 gals of make-up water.

Shock (Slug) Dose: For moderately to severely fouled systems add 5-20 fl. oz. of this product per 1000 gallons of process water (7-27 ppm peroxyacetic acid). Repeat as necessary until microbiological control is evident.

Air Washers: OXYSAN 15 Acid Sanitizer may be used to control bacteria and biofouling in industrial air washing/scrubbing systems. The air washer must have operational and effective mist elimination systems. Prior to use of this product, heavily fouled systems must be pre-cleaned using an appropriate cleaner. Continuous dosing methods will require 2-7 ppm and intermittent dosing methods require 7-14 ppm (as peroxyacetic acid) depending on the type of system and the level of microbiological control desired.

Control of Bacteria and Fungi in Coating Preservation

Do not use for coatings preservation applications involving Direct or Indirect food contact. OXYSAN 15 Acid Sanitizer can be used as an in-container preservative for the control of bacteria and fungi in water-based coatings such as paper coatings.

Add 0.2 to 1.2 lb. (2.6 to 16 fluid ounces) (90 to 545 grams) of OXYSAN 15 Acid Sanitizer solution to each 1,000 lbs. (454 Kg) of water (provides 200 to 1200 ppm of product or 30 to 180 ppm peroxyacetic acid and 20 to 120 ppm of hydrogen peroxide).

Foam Sanitization

OXYSAN 15 Acid Sanitizer can be applied as a foam for sanitization of previously cleaned, hard, non-porous food-contact surfaces and general environmental (non-food contact) hard, non-porous surfaces such as floors, walls, ceilings, drains and boots. Foam applications can be used where penetration and retention of product for required times is difficult to achieve. Examples include operating conveyor belts, and vertical or uneven surfaces.

1. Prepare a dilute OXYSAN 15 Acid Sanitizer solution by adding 0.3 to 0.5 fluid ounces per 4.5 gallons' potable water.
2. After preparing the OXYSAN 15 Acid Sanitizer diluted solution, add 1.25 to 5.0 fluid ounces of BIOFOAM to the diluted solution. After the BIOFOAM is added, adjust the total solution volume to 5 gallons. BIOFOAM is the only approved foam-generating additives for use with OXYSAN 15 Acid Sanitizer.
3. Apply the sanitizing solution as a foam using commercially available foam generating equipment. Allow foam to contact surfaces at least one (1) minute. For foot bath application, allow foam to remain on the boot surface for one minute upon exiting the bath.
4. Drain items and/or surfaces thoroughly.

Alkaline Detergent Cleaning Adjunct (Booster)



Master Label File | OXYSAN 15 ACID SANITIZER

To Clean Food Processing Equipment: OXYSAN 15 Acid Sanitizer is an effective cleaning booster (hypochlorite alternative) for use with alkaline detergents. It may be used as a cleaning additive for Clean-In-Place (CIP) operations involving the circulation cleaning of pipelines, tanks, vessels, evaporators, HTSTs, and other food processing equipment. For cleaning applications as a detergent booster, use 0.5 to 3 fl. oz. per gallon of water, to assist in the removal of organic soils. All hard-nonporous food contact surfaces treated with this boosted detergent must be thoroughly rinsed with potable water followed by sanitizing with an approved food contact surface sanitizer (such as OXYSAN 15 Acid Sanitizer).

Antimicrobial Rinse of Pre-Cleaned or New Returnable or Non-Returnable Containers

To reduce the number of nonpathogenic beverage spoilage organisms such as *Byssoschlamys fulva*, *Pediococcus damnosus*, *Lactobacillus buchneri* and *Saccharomyces cerevisiae*.

1. Prepare solution by adding 10 fluid oz. to 5 gallons of potable water containing up to 200 ppm hardness as CaCO₃. This will provide 2700 ppm of peroxyacetic acid and 1800 ppm hydrogen peroxide.
2. Apply solution. Immerse for at least (1) minute or for a contact time as specified by local governing sanitation codes.
3. Allow containers to drain thoroughly and then rinse with sterile or potable water. Allow to air dry for a minimum of 2 minutes.

Treatment of Processing Waters and Surfaces to Control Growth of Non-Public Health Microorganisms that can Cause Spoilage of Fresh-Cut, Raw Post-Harvest or Processed Fruits, Nuts and Vegetables

1. Ensure that the water is recirculating or mixing in the processing tank or water line.
2. Prepare OXYSAN 15 Acid Sanitizer solution by diluting 0.13-1.06 fl. oz. per 25 gallons of water. Ensure that the solution is thoroughly mixed. This provides 7-60 ppm of peroxyacetic acid and 5-39 ppm of hydrogen peroxide. Allow the solution to circulate at least 45 seconds before adding or treating raw fruits and vegetables.
3. Dose as needed to maintain 7-60 ppm of peroxyacetic acid by adding OXYSAN 15 Acid Sanitizer to processing water.
4. Apply the prepared solution as a spray or dip. Allow a minimum contact time of 45 seconds. No rinse following application is required. This use complies with the requirements at 21 C.F.R. 173.315 (a) (5).
5. Prepare fresh process water daily to ensure effectiveness. Do not reuse water that is badly fouled.
6. Contact your Biosan technical representative for specific fruit and vegetable applications.

Treatment of Raw, Unprocessed Fruit and Vegetable Surfaces

Apply OXYSAN 15 Acid Sanitizer as a dip or spray to control the growth of non-public health microorganisms that may cause decay and/or spoilage on raw, post-harvest fruits and vegetables during the washing process. OXYSAN 15 Acid Sanitizer can be applied during physical cleaning processes, including at the roller spreader, washer manifold, and dip tank, on the brushes or elsewhere in the washing process prior to, simultaneously with or as a final rinse prior to packaging.

1. Prepare solution by diluting 1.5 -1.9 fl. oz. per 25 gallons of water. Ensure that the solution is thoroughly mixed. This provides 85-100 ppm of peroxyacetic acid and 57-67 ppm of hydrogen peroxide.
2. Apply the diluted sanitizing solution using a coarse spray or fog directed at the fruits or vegetables, or by submerging the fruits or vegetables in the prepared solution.
3. Allow a minimum contact time of 45 seconds.
4. Rinsing is not required



Master Label File | OXYSAN 15 ACID SANITIZER

5. Contact your Biosan technical representative for specific fruit and vegetable applications.

Fogging Instructions: Apply OXYSAN 15 Acid Sanitizer as a fog to control the growth of non-public health microorganisms that may cause decay and/or spoilage on raw, post-harvest fruits and vegetables during the post-harvest process.

Commercially-applied fogging methods may be used, provided, the dilution rate of the resultant solution does not exceed those prescribed in this section (85-100 ppm 100% Peracetic acid in the use solution). Conventional corrosion-resistant fogging devices are recommended. Applicable for use on all types of post-harvest commodities.

1. Vacate all personnel from the room during fogging.
2. Fog areas using one quart per 1,000 cu. ft. of room area with a 0.06% OXYSAN 15 Acid Sanitizer solution per 1,000 cu. ft. of room volume.
3. Exit the area or space immediately and remain outside the treated area or space until the area or space is thoroughly ventilated and until fog or mist has dispersed.
4. Do not enter room until hydrogen peroxide concentrations are tested and are below 1 ppm on a time weighted average. Reentry times may vary.
5. Contact your Biosan technical representative for specific fruit and vegetable application

Non-Pathogenic Spoilage Organisms

OXYSAN 15 Acid Sanitizer is effective against non-pathogenic spoilage organisms, and yeasts. Clean equipment immediately after use:

1. Remove gross particulate matter with warm water flush.
2. Wash equipment with detergent or cleaning solution.
3. Rinse equipment with potable water.
4. Prepare OXYSAN 15 Acid Sanitizer solution by adding 0.41-0.94 fl. oz. to 5 gallons of potable water. This provides 109-250 ppm peroxyacetic acid and 73-167 ppm of hydrogen peroxide.
5. Fill closed systems with diluted sanitizer solution for a contact time of one (1) minute.
6. For open or not completely closed systems, use a coarse spray, mop/wipe or flood technique to apply the solution to the surface for a contact time of at least one (1) minute. Allow surfaces to drain thoroughly before resuming operation.

For Non-Public Health Microbial Control in Sewage and Wastewater Effluent Treatment Plants.

Use OXYSAN 15 Acid Sanitizer to treat sewage and wastewater effluent related to public and private wastewater treatment plants. OXYSAN 15 Acid Sanitizer can be applied directly to the effluent or may be used with an appropriate activator such as hydrogen peroxide or other technology such as Ultra Violet (UV). OXYSAN 15 Acid Sanitizer may be applied to effluent water discharged from trickle bed or percolating fluidized bed filters.

The application rate for individual facilities will depend on the degree of bio loading of the effluent stream to be discharged and the local microbial discharge limit. Adjust application rate to meet the need of the individual facility.

1. Add OXYSAN 15 Acid Sanitizer to effluent water at a concentration of 0.5 ppm to 15 ppm. Allow contact time of approximately 15 to 60 minutes.



Master Label File | OXYSAN 15 ACID SANITIZER

2. The maximum amount of Peracetic acid that can be discharged from the treatment facility is 1 ppm. Use an appropriate Peracetic acid test kit analyzer to ensure that this level is not exceeded. Contact your Biosan representative for assistance establishing treatment regimes.

Water Damage Restoration

Use OXYSAN 15 Acid Sanitizer to control the growth of odor causing bacteria in water damage restoration situations. This product is suitable for use on hard, non-porous surfaces, along with the following porous and semi-porous materials: carpets, carpet cushion, sub floors, drywall, trim, frame lumber, tackless strip and paneling.

Sewer Backup and River Flooding

During mitigation procedures prepare a solution of OXYSAN 15 Acid Sanitizer by adding 0.35 fl. oz. of the product to 1 gallon of potable water, allowing for the diluting effect of absorbed water within the saturated materials. Remove heavy soil or gross filth from surfaces by cleaning with the OXYSAN 15 Acid Sanitizer solution by wiping, mopping, or as a coarse spray. Saturate all affected materials with the solution using a coarse spray before cleaning and extraction. Allow surfaces and materials to remain wet with solution for ten (10) minutes. Follow with a thorough extraction. Dry rapidly and thoroughly. Use proper ventilation.

Antimicrobial use with Aqueous Treatment Fluids in Subterranean Oilfield and Gas Field Well Operations such as Well Drilling, Formation Fracturing, Productivity Enhancement and Secondary Recovery

OXYSAN Acid Sanitizer can be for control of slime forming and spoilage bacteria, yeast and fungi and anaerobic sulfate reducing bacteria, *Desulfovibrio vulgaris*, that lead to reservoir souring and metal corrosion.

This product must be introduced through a closed mixed/loading and delivery transfer system equipped with a metering device that is appropriate for its intended use.

Drilling Muds, Fracturing Fluids, Well Squeezed Fluids

For the preservation of drilling muds, workover and completion fluids and other product susceptible to contamination, pre-mix with the fluid or add directly at the point of use at 3.75 fluid ounces per 1000 gallons of water (5 ppm of Peroxyacetic and 3.3 ppm. of Hydrogen Peroxide) to 75.5 fluid ounces per 1000 gallons of water (100 ppm of Peroxyacetic Acid and 66 ppm of Hydrogen Peroxide) as required. Depending on the severity of the contamination, initial application may be added up to 755 fluid ounces per 1000 gallons of water (1000 ppm of Peroxyacetic Acid and 670 ppm of Hydrogen Peroxide).

Flooding, injection and Produced Water

Water Flooding Operations: add initially at 3.75 fluid ounces per 1000 gallons of water (5 ppm of Peroxyacetic acid and 3.3 ppm of Hydrogen Peroxide) to 75.5 fluid ounces per 1000 gallons of water (100 ppm of Peroxyacetic Acid and 66 ppm of Hydrogen Peroxide) and repeat until control is achieved. Subsequent treatment may be continued on a weekly basis or as required.



Master Label File | OXYSAN 15 ACID SANITIZER

Injection Wells: The well that are associated with gas storage systems may be treated up to 100 ppm of Peroxyacetic Acid and 66 ppm of Hydrogen Peroxide when diluted in the formation water. Any additional top-up water should be treated as required.

Hydrostatic Systems: Apply 3.75 fluid ounces per 1000 gallons of water (5 ppm of Peroxyacetic acid and 3.3 ppm of Hydrogen Peroxide) to 75.5 fluid ounces per 1000 gallons of water (100 ppm of Peroxyacetic and 66 ppm of Hydrogen Peroxide) depending on the water quality and the duration of the shut-in.

Pipeline and Tank Maintenance

For microbial control in water-bottoms in crude and refined hydrocarbon storage tanks, piping, and transportation systems. Apply 3.75 fluid ounces per 1000 gallons of water (5 ppm of Peroxyacetic and 3.3 ppm of Hydrogen Peroxide) to 75.5 fluid ounces per 1000 gallons of water (100 ppm of Peroxyacetic and 66 ppm of Hydrogen Peroxide) in the aqueous phase, directly injected into the water-bottom, pipeline or may be added to the hydrocarbon phase. Treatment may be applied daily or monthly for both storage and transportation systems as needed.

Agricultural and Horticultural Uses

A Restricted-Entry-Interval of zero (0) hours is required for OXYSAN 15 Acid Sanitizer in agricultural or horticultural uses. This product should not be mixed or combined with any pesticides or fertilizers. Upon soil contact, the diluted product decomposes rapidly to oxygen, carbon dioxide and water. This product may be harmful to fish if exposed on a continuous basis at concentrations greater than 1 ppm of active Peracetic acid. Meter OXYSAN 15 Acid Sanitizer into pressurized pipes using a plastic or stainless-steel injection/backflow device installed upstream from the equipment to ensure thorough mixing prior to application. For open bodies of water, allow adequate mixing prior to product flow entering anybody of water. If open pouring of this product is required, pour product close to the surface of the water as possible to reduce odor and exposure.

Treatment of Agricultural and Irrigation Water Systems: Use OXYSAN 15 Acid Sanitizer to control sulfides, odor, slime, and algae in sand filters, humidification systems, storage tanks, ponds, reservoirs, canals. Apply OXYSAN 15 Acid Sanitizer at 15 to 75 fluid ounces per 10,000 gallons of water. This provides 2 ppm to 10 ppm peroxyacetic acid. Repeat dose as necessary to maintain control. For prevention of algae, some systems may require continuous low-level dosing during warm, sunny periods (2 ppm to 5 ppm peroxyacetic acid).

Drip Irrigation Systems: To clean slime and algae from drip system filters, tapes and emitters, add OXYSAN 15 Acid Sanitizer at 7.5 to 15 fluid ounces per 1000 gallons. This provides 10 ppm to 20 ppm peroxyacetic acid. Use this product at the recommended dose for a minimum of 30 minutes during normal irrigation cycles. Upon irrigation cycle completion, discontinue use and flush the lines.

Greenhouses: This product can be used to suppress/control algae and slime formations in and around greenhouses. For normal use in various process, irrigation or sprinkler water systems, this product may be used at 1: 40,000 to 1: 5000 dilutions (4-33 ppm as peroxyacetic acid). Heavily fouled systems, such as evaporative coolers or irrigation/drip lines may need shock doses of up to 100 ppm as peroxyacetic acid (1: 1,600 dilution).

Cleaning Poultry, Swine, Livestock Water Systems (When the System is Not in Use): To remove scale, calcium, iron, magnesium, heavy soils, polysaccharides and deposits from vitamins and medications from livestock watering systems use OXYSAN 15 Acid Sanitizer at 0.15-0.30 fl. oz. per gallon of water. When used as directed, OXYSAN 15 Acid Sanitizer will remove organic and inorganic deposits that reduce water flow and clog nipples. Allow system to run for 6 - 24 hours depending on the conditions. Following the cleaning process, rinse with potable water to



Master Label File | OXYSAN 15 ACID SANITIZER

remove the cleaning solution from the watering line, nipples and cups. Never mix OXYSAN 15 Acid Sanitizer with any other product.

Cleaning Poultry, Swine, Livestock Watering Operating Systems (When Animals Are Present): After water lines have been cleaned, use OXYSAN 15 Acid Sanitizer at 0.3-0.45 fl. oz. per 100 gallons of water to control mineral build up in watering lines. Never use OXYSAN 15 Acid Sanitizer more than 5 consecutive days to clean the operating system. Never mix OXYSAN 15 Acid Sanitizer with any other product. If cleaning the operating system, stop the use of OXYSAN 15 Acid Sanitizer twenty-four (24) hours prior to vaccination or medication via the water line.

Evaporated or Condensed Water: This product may be used to treat SWEET or COW water (e.g. condensate of whey) collected from evaporated or condensing water systems in food or dairy plants. Continuous dosing methods will require 2-7 ppm and intermittent dosing methods require 7-14 ppm (as peroxyacetic acid) as described in the previous paragraph, depending on the type of system and the level of microbiological control desired.

Sanitizing of Animal and Poultry Premises, Trucks, Coops, and Crates

This product can be used in animal hospitals, animal laboratories, kennels, pet shops, zoos, pet animal quarters, poultry premises, poultry hatcheries, and livestock quarters. When used as directed, this product is specifically designed to sanitize, deodorize and clean inanimate, hard, surfaces such as walls, floors, sink tops, furniture, operating tables, kennel runs, cages and feeding equipment. In addition, this product will deodorize those areas which are generally hard to keep smelling fresh, such as garbage storage areas, empty garbage bins and cans, and any other areas which are prone to odors caused by microorganisms.

Sanitizing of Poultry Premises: For heavily soiled areas, a pre-cleaning step is required. Prepare a fresh solution for each use. Remove all poultry and feeds from premises, trucks, coops and crates. Remove all litter and droppings from floors, walls and surfaces of facilities occupied or traversed by poultry. Empty all troughs, racks and other feeding and watering appliances. Thoroughly clean all surfaces with a detergent and rinse with water. Saturate surfaces with (1 – 3 fl. oz. per 5gal) solution of this product for a period of 10 minutes. Thoroughly scrub treated feed racks, troughs, automatic feeders, fountains and waters with a detergent and rinse with potable water before reuse. Ventilate buildings, coops and other closed spaces. Do not house poultry or employ equipment until treatment has been absorbed, set or dried. All treated equipment that will contact food, feed, or drinking water must be rinsed with potable water before reuse. See your technical representative for specific recommendations for all cleaning and rinsing requirements.

Sanitize and Deodorizing of Animal Housing Facilities (Barns, Kennels, Hutches, Etc.): Remove animals and feed from premises, vehicles, and enclosures. Remove litter, waste matter from floors, walls and surfaces of barns, pens, stalls, chutes, and other facilities and fixtures occupied or traversed by animals. Empty all troughs, racks and other feeding and watering equipment. Thoroughly clean all surfaces with soap or detergent and rinse with water. Saturate surfaces by applying a 1 fl. oz. per 5-gal solution of this product with a mop, brush or coarse spray. Wet all surfaces and allow to remain wet for 10 minutes. Immerse all halters, ropes, and other types of equipment used in handling and restraining animals, as well as forks, shovels and scrapers used for removing litter and manure. Ventilate buildings and other closed spaces. Do not house livestock or employ equipment until treatment has been absorbed, set, or dried. Thoroughly scrub all treated feed racks, mangers, troughs, automatic feeders, fountains and waterers with soap or detergent, and rinse with potable water before reuse.



Master Label File | OXYSAN 15 ACID SANITIZER

NOTE: This product at its use dilution is compatible with stainless steel and aluminum surfaces. If product is intended to be used on any other surface, it is recommended that you apply product to a smaller test area to determine compatibility before proceeding with its use.

Reverse Osmosis (RO), Ultra Filtration (UF) and Other Membrane Cleaning

This product may be used in the sanitization of ultra-filtration (UF) and reverse osmosis (RO) membranes and their associated piping systems. This product is not for use in kidney dialysis equipment. Do not use the intermittent dosing methods for nano or ultra-filtration food or drinking water applications. This product may not totally eliminate all vegetative microorganisms in RO or NF or UF membranes and their associated piping systems due to their construction or assembly, but can be relied upon to reduce the number of microorganisms to acceptable levels when used as directed. Prior to using this product check with membrane manufacturer to confirm compatibility of membranes with various types or concentration of peroxyacetic acid solutions.

Batch Sanitation of NF, UF and RO Systems: Isolate incompatible equipment, such as carbon filters and ion exchangers. Clean system with an appropriate cleaner and follow with RO permeate water or potable water. Remove mineral deposits if necessary with an acidic cleaner, and rinse as before. Fill entire system with water and add up to 0.5% of this product by volume. This will equal 750 ppm peroxyacetic acid and 500 ppm hydrogen peroxide. Recirculate the sanitizing solution through the piping and membrane system at 20° C for 10 minutes minimum, or up to 4 hours, depending on the severity of cleaning to be done. Open and close process valves and solenoids to be sure all parts are in contact with the solution. Rinse the system with RO permeate or potable water until residual peroxide concentration is below 1 ppm.

Continuous or Intermittent Addition: For continuous addition (dosing) for RO systems, use 2-5 ppm of active peroxyacetic acid, which equals 1.5-3.7 fl. oz. of this product per 1000 gallons of process water. For occasional intermittent feed, do not exceed 93 ppm active peroxyacetic acid, which equals 0.7 fl. oz. of this product per 10 gallons of feed water. Intermittent dosing of this product is not allowed for use in NF or UF systems for on-line food or drinking water applications.

For Sanitization and Disinfection of Laundry in Commercial, Institutional and Industrial Operations.

OXYSAN 15 Acid Sanitizer is a Sanitizer and Antimicrobial Agent for use in Commercial, Institutional and Industrial including Hospitality Laundry Operations to control microorganisms including *Staphylococcus aureus*, *Klebsiella pneumoniae* and *Pseudomonas aeruginosa*.

Sanitization:

1. Add 3.5 fluid ounces of OXYSAN 15 Acid Sanitizer per 100 pounds of dry laundry assumes 5 parts water to 1 part laundry based on 100 pounds of dry laundry.
2. Inject OXYSAN 15 Acid Sanitizer into the sanitizing rinse step at 3.5 fluid ounces per 60 gallons of water. OXYSAN 15 Acid Sanitizer is effective in water up to 400 ppm of water hardness. Treat laundry for a minimum of 6 minutes at a minimum of 20° C. Following sanitization, laundry may be rinsed with water



Master Label File | OXYSAN 15 ACID SANITIZER

that may include starch, softener, odor neutralizer, fragrance, soil release agent, sour and/or fluid repellent.

Disinfection:

1. Add 14.5 fluid ounces of OXYSAN 15 Acid Sanitizer per 100 pounds of dry laundry assumes 5-parts water to 1-part laundry based on 100 pounds of dry laundry.
2. Inject OXYSAN 15 Acid Sanitizer into the disinfecting rinse step at 14.5 fluid ounces per 60 gallons of water. OXYSAN 15 Acid Sanitizer is effective in water up to 400 ppm of water hardness. Treat laundry for a minimum of 15 minutes at a minimum of 20° C. Following Disinfection, laundry may be rinsed with water that may include starch, softener, odor neutralizer, fragrance, soil release agent, sour and/or fluid repellent.

Note: May cause bleaching of treated surfaces

Note: Before using OXYSAN 15 Acid Sanitizer to sanitize metal surfaces, it is recommended that the diluted solution be tested on a small area to determine compatibility.

In all applications always prepare new solution daily to ensure effectiveness. Do not re-use solutions. Dispose of un-used solutions responsibly.

UN 3109, Organic Peroxide Type F, Liquid (Peroxyacetic Acid) 5.2 (8)

Manufactured by: BIOSAN LLC ,26 Freedom Way, Saratoga Springs, NY 12866, (518) 886-9827

CHEMTREC EMERGENCY 800-424-9300 (CCN205494)