

#41

**B&W** thebabcock&wilcoxcompany

## Environmental Equipment: Wet Flue Gas Desulfurization (Wet FGD) Scrubber

### Design features:

Spray tower scrubber design used for SO<sub>2</sub> control, with patented tray design for more uniform flue gas distribution and improved absorption.

### Applicable boiler sizes:

50 MW to 1300 MW.

### Removal efficiencies:

To 99%.


### Reagents:

Primarily limestone; also lime, magnesium-enhanced lime, sodium carbonate and ammonia.

### Fuels:

All solid fuels - primarily coal.

For more information, please [contact us](#).

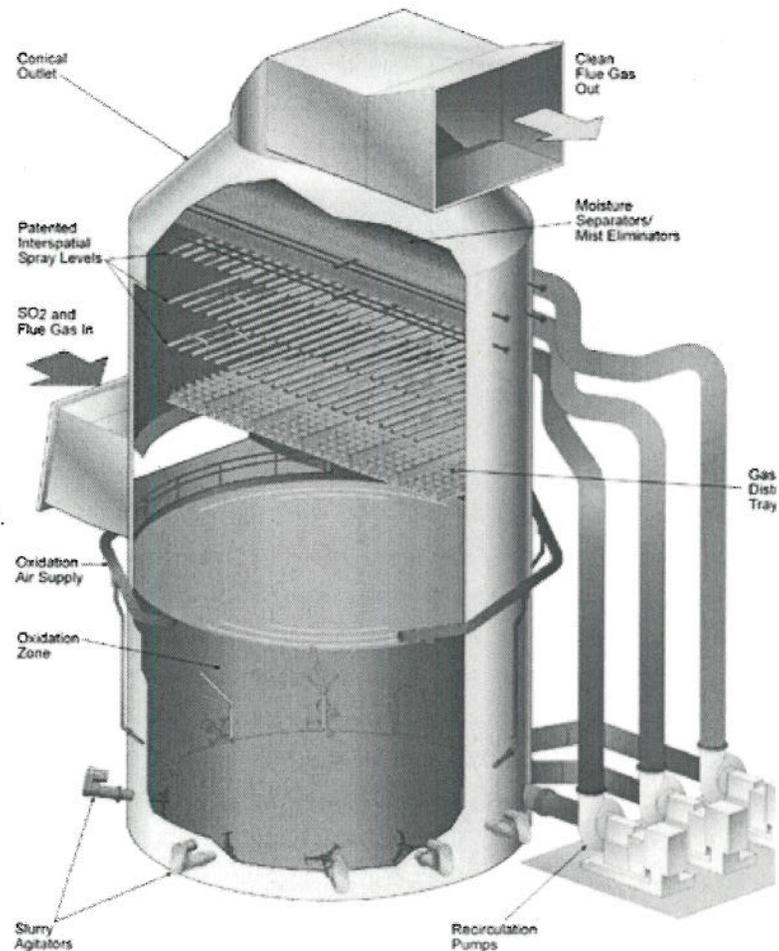

© 2010, The Babcock & Wilcox Company. All rights reserved.