

**United States Environmental Protection Agency (EPA)
National Pollutant Discharge Elimination System (NPDES)**

**GENERAL PERMITS FOR STORMWATER DISCHARGES FROM
SMALL MUNICIPAL SEPARATE STORM SEWER SYSTEMS
IN MASSACHUSETTS
(as modified)**

**AUTHORIZATION TO DISCHARGE UNDER THE
NATIONAL POLLUTANT DISCHARGE ELIMINATION SYSTEM**

In compliance with the provisions of the Clean Water Act (CWA), as amended (33 U.S.C. §1251 *et seq.*), and the Massachusetts Clean Waters Act, as amended (M.G.L. Chap.21 §§ 26-53), any operator of a small municipal separate storm sewer system whose system:

- Is located in the areas described in part 1.1;
- Is eligible for coverage under part 1.2 and part 1.9; and
- Submits a complete and accurate Notice of Intent in accordance with part 1.7 of this permit and EPA issues a written authorization

is authorized to discharge in accordance with the conditions and the requirements set forth herein.

The following appendices are also included as part of these permits:

- Appendix A – Definitions, Abbreviations, and Acronyms;
- Appendix B – Standard permit conditions applicable to all authorized discharges;
- Appendix C – Endangered Species Act Eligibility Guidance;
- Appendix D – National Historic Preservation Act Eligibility Guidance;
- Appendix E – Information required for the Notice of Intent (NOI);
- Appendix F – Requirements for MA Small MS4s Subject to Approved TMDLs;
- Appendix G – Impaired Waters Monitoring Parameter Requirements;
- Appendix H – Requirements related to discharges to certain water quality limited waterbodies;

[This modifies parts: 2.0; 2.1; 2.1.1; 2.1.2.a; 2.2.; 2.2.2 \(paragraphs 2 and 3\); 2.3.3; 2.3.5; 2.3.6; 2.3.7.b; 4.1; 4.4; 5.1.5; 6.5; Appendix F part A.I; Appendix F part A.II; and Appendix H of the permits that became effective on July 1, 2018](#)

These permit [modifications](#) become effective on **July 1, 2017**[\[insert date\]](#).

These permits and the authorization to discharge expire at midnight, **June 30, 2022**.

Signed this day of

Signed this day of

Ken Moraff, Director

~~Douglas E. Fine~~ Lealdon Langley

Office of Ecosystem Protection Water Division

~~Assistant Commissioner for Water~~ Director, Division of Watershed -United States
Environmental Protection Agency Resources Management
5 Post Office Square – Suite 100 Department of Environmental Protection
Boston, Massachusetts 02109-3912 One Winter Street
Boston, Massachusetts 02108

TABLE OF CONTENTS [TO BE UPDATED]

1.0. INTRODUCTION 4

1.1. AREAS OF COVERAGE4

1.2. ELIGIBILITY4

1.2.1. Small MS4s Covered4

1.3. LIMITATIONS ON COVERAGE4

1.4. NON-STORMWATER DISCHARGES.....4

1.5. PERMIT COMPLIANCE4

1.6. CONTINUATION OF THIS PERMIT4

1.7. OBTAINING AUTHORIZATION TO DISCHARGE4

1.7.1. How to Obtain Authorization to Discharge.....4

1.7.2. Notice of Intent4

1.7.3. Submission of Notice of Intent4

1.7.4. Public Notice of NOI and Effective Date of Coverage4

1.8. INDIVIDUAL PERMITS AND ALTERNATIVE GENERAL PERMITS.....4

1.9. SPECIAL ELIGIBILITY DETERMINATIONS.....4

1.9.1. Documentation Regarding Endangered Species4

1.9.2. Documentation Regarding Historic Properties.....4

1.10. STORMWATER MANAGEMENT PROGRAM (SWMP)4

1.10.1. Stormwater Management Program Availability.....4

1.10.2. Contents and Timelines of the Stormwater Management Program for 2003 permittees.....4

1.10.3. Contents and Timelines of the Stormwater Management Program for New Permittees.....4

2.0. NON-NUMERIC EFFLUENT LIMITATIONS 4

2.1. WATER QUALITY BASED EFFLUENT LIMITATIONS4

2.1.1. Requirement to Meet Water Quality Standards4

2.1.2. Increased Discharges.....5

2.2. DISCHARGES TO CERTAIN IMPAIRED WATERS.....5

2.2.1. Discharges Subject to Requirements Related to an Approved TMDL.....56

2.2.2. Discharges to Certain Water Quality Limited Waters Subject to Additional Requirements.....6

2.3. REQUIREMENTS TO REDUCE POLLUTANTS TO THE MAXIMUM EXTENT PRACTICABLE (MEP).....6

2.3.1. Control Measures6

2.3.2. Public Education and Outreach6

2.3.3. Public Involvement and Participation6

2.3.4. Illicit Discharge Detection and Elimination (IDDE) Program7

2.3.5. Construction Site Stormwater Runoff Control.....7

2.3.6. Stormwater Management in New Development and Redevelopment (Post Construction Stormwater Management).....9

2.3.7. Good House Keeping and Pollution Prevention for Permittee Owned Operations.....13

3.0. ADDITIONAL REQUIREMENTS FOR DISCHARGES TO SURFACE DRINKING WATER SUPPLIES AND THEIR TRIBUTARIES 14

4.0.	PROGRAM EVALUATION, RECORD KEEPING, AND REPORTING ...	14
4.1.	PROGRAM EVALUATION	14
4.2.	RECORD KEEPING	15
4.3.	OUTFALL MONITORING REPORTING	15
4.4.	ANNUAL REPORTS	15
5.0.	NON-TRADITIONAL MS4S.....	15
5.1.	REQUIREMENTS FOR NON-TRADITIONAL MS4S.....	16
5.1.1.	Public education.....	16
5.1.2.	Ordinances and regulatory mechanisms.....	16
5.1.3.	Assessment of Regulations	16
5.1.4.	New Dischargers.....	16
6.0	REQUIREMENTS FOR MS4S OWNED OR OPERATED BY	
TRANSPORTATION AGENCIES	16	
6.1	PUBLIC EDUCATION	16
6.2	ORDINANCES AND REGULATORY MECHANISMS	16
6.3	ASSESSMENT OF REGULATIONS.....	16
6.4	NEW DISCHARGERS	16

1.0. Introduction

2.0. Non-Numeric Effluent Limitations

~~The permittee shall develop, implement, and enforce a program. This section includes terms and conditions necessary~~ to reduce the discharge of pollutants from the MS4 to the maximum extent practicable; to protect water quality and to satisfy the appropriate water quality requirements of the Clean Water Act and the Massachusetts Water Quality Standards.

2.1. Water Quality Based Effluent Limitations

Pursuant to Clean Water Act 402(p)(3)(B)(iii), this permit includes provisions to ensure that discharges from the permittee's small MS4 ~~do not cause or contribute to an exceedance of~~ meet applicable water quality standards ~~as set forth in part 2.1.1. below, in addition to requirements to reduce the discharge of pollutants to the maximum extent practicable. The requirements found in this part and part 2.2 constitute appropriate water quality based effluent limits of this permit. Requirements to reduce the discharge of pollutants to the maximum extent practicable are set forth in part 2.3.~~

2.1.1. Requirement to Meet Water Quality Standards

- a. The ~~permittee's discharges shall meet applicable water quality standards by complying with parts 2.1.1.b and/or 2.1.1.c in accordance with the schedules set forth therein.² Any other discharge of a pollutant that: (i) is not addressed by part 2.1.1.b, part 2.1.1.c, part 2.2.1, and/or part 2.2.2, (ii) is not the result of an illicit discharge subject to part 2.3.4, and (iii) does not meet applicable water quality standards, either independently or in conjunction with other discharges, shall comply with part 2.1.1.d.~~ permittee shall reduce the discharge of pollutants such that the discharges from the MS4 do not cause or contribute to an exceedance of water quality standards.
- b. If there is a discharge from the MS4 to a waterbody (or its tributaries in some cases) that is subject to an EPA approved or established TMDL identified in part 2.2.1, the permittee is subject to the requirements of part 2.2.1 and Appendix F of this permit and the permittee shall comply with all applicable schedules, alternative schedules and requirements in Appendix F. A permittee's compliance with all applicable requirements and BMP implementation schedules in Appendix F or any alternative schedules applicable to it will constitute compliance with part 2.1.1.a. of the Permit for discharges of pollutants addressed in Appendix F.
- c. If (i) there is a discharge from the MS4 to a waterbody (or its tributaries in some cases) that is water quality limited (see definition in Appendix A) due to nutrients (Total Nitrogen or Total Phosphorus), metals (Cadmium, Copper, Iron, Lead or Zinc), solids (TSS or Turbidity), bacteria/pathogens (E. Coli, Enterococcus or Fecal Coliform), chloride (Chloride) or oil and grease (Petroleum Hydrocarbons or Oil and Grease) and is not subject to an approved TMDL, or (ii) the MS4 is located within a municipality listed in part 2.2.2.a.-b., then the permittee is subject to the requirements of part 2.2.2 and Appendix H of this permit and the permittee shall comply with all applicable schedules and requirements in Appendix H. A permittee's compliance with all applicable requirements and BMP implementation schedules in Appendix H applicable to it will constitute compliance with part 2.1.1.a. of the Permit for discharges of pollutants addressed in Appendix H.

² Applicable water quality standards are the state standards that have been federally approved or promulgated as of the issuance date of this permit and are compiled by EPA at <http://www.epa.gov/waterscience/standards/wqslibrary/>.

- d. ~~Pursuant to Part 2.1.1.a, upon notice from EPA or MassDEP to the permittee that a discharge of a pollutant from the MS4 that is exceeding applicable water quality standards, the permittee must, within 60 days, remedy the exceedance or eliminate the discharge. However, where such remedy or elimination within 60 days is impracticable, the permittee shall submit to EPA, by the same deadline, a schedule of actions to achieve a remedy or elimination in the shortest time not impracticable. The permittee shall implement such actions on the schedule submitted to EPA and report on progress in its annual reports unless or until EPA takes any other action that effectively replaces the schedule. Except where a pollutant of concern in a discharge is subject to the requirements of part 2.2.1 and/or part 2.2.2 of this permit or is the result of an illicit discharge and subject to part 2.3.4 of this Permit, if a pollutant in a discharge from the MS4 is causing or contributing to a violation of applicable water quality criteria³ for the receiving water, the permittee shall, as expeditiously as possible, but no later than 60 days of becoming aware of the situation, reduce or eliminate the pollutant in its discharge such that the discharge meets applicable water quality criteria.~~

2.1.2. Increased Discharges

- a. Any increased discharge, including increased pollutant loading(s) through the MS4 to waters of the United States is subject to Massachusetts antidegradation regulations at 314 CMR 4.04. The permittee shall comply with the provisions of 314 CMR 4.04 including information submittal requirements and obtaining authorization for increased discharges where appropriate⁴. Any authorization of an increased discharge by MassDEP shall be incorporated into the permittee's SWMP. If an applicable MassDEP approval specifies ~~additional~~ conditions or requirements ~~related to the increased discharge, then those requirements are incorporated into this permit by reference. The permittee must comply with all~~ such requirements may be independently enforceable under State law and may be adopted into a future permit.

2.2. Discharges to Certain Impaired Waters

The permittee shall identify in the SWMP and Annual Reports all MS4 discharges, including both outfalls and interconnections to other MS4s or other separate storm sewer systems, that:

- Are subject to Total Maximum Daily Load (TMDL) related requirements as identified in part 2.2.1.
- Are subject to additional requirements to protect water quality as identified in part 2.2.2.

The discharge location from an interconnection shall be determined based on the receiving water of the outfall from the interconnected system.

Permittees are subject to the applicable requirements in part 2.2.1, Appendix F, or an approved alternative structural control implementation schedule, and/or the applicable requirements in part 2.2.2, and Appendix H.

2.2.1. Discharges Subject to Requirements Related to an Approved TMDL

³ ~~Applicable water quality criteria are part of the state standards that have been federally approved as of the effective date of this permit and are compiled by EPA at <http://www.epa.gov/waterscience/standards/wqslibrary/>~~

⁴ Contact MassDEP for guidance on compliance with 314 CMR 4.04

2.2.2. Discharges to Certain Water Quality Limited Waters Subject to Additional Requirements

For purposes of this permit, a ‘water quality limited water body’ is any water body that does not meet applicable water quality standards, including but not limited to waters listed in categories 5 or 4b on the Massachusetts Integrated Report of waters listed pursuant to Clean Water Act section 303(d) and 305(b).

If there is a discharge from the MS4 to a water quality limited waterbody where pollutants typically found in stormwater (specifically nutrients (Total Nitrogen or Total Phosphorus), solids (TSS or Turbidity), bacteria/pathogens (E. Coli, Enterococcus or Fecal Coliform), chloride (Chloride), metals (Cadmium, Copper, Iron, Lead or Zinc) and oil and grease (Petroleum Hydrocarbons or Oil and Grease)) are the cause of the impairment and ~~there is not~~ subject to part 2.1.1.b for those pollutants an approved TMDL, or the MS4 is located in a town listed in part 2.2.2.a.-b, the permittee shall comply with the provisions in Appendix H applicable to it. Permittees notified by EPA or MassDEP during the permit term that they are discharging to a water quality limited water shall update their SWMP to include measures they must take in accordance with Appendix H.

In the absence of a defined pollutant reduction target and where no approved TMDL has been established as of the issuance date of this permit, this permit part and Appendix H define an iterative approach addressing pollutant reductions to waterbodies where the permittee’s discharge is ~~causing or contributing to an excursion above not meeting applicable~~ water quality standards due to nutrients (Total Nitrogen Total Phosphorus), solids (TSS or Turbidity), bacteria/pathogens (E. Coli, Enterococcus or Fecal Coliform), chloride (Chloride), metals (Cadmium, Copper, Iron, Lead or Zinc) or oil and grease (Petroleum Hydrocarbons or Oil and Grease).

2.3. Requirements to Reduce Pollutants to the Maximum Extent Practicable (MEP)

The permittee shall reduce the discharge of pollutants from the MS4 to the maximum extent practicable (MEP) as detailed in parts 2.3.2 through 2.3.7.

2.3.1. Control Measures

2.3.2. Public Education and Outreach

2.3.3. Public Involvement and Participation

Objective: The permittee shall provide opportunities to engage the public to participate in the review and implementation of the permittee’s SWMP.

- a. All public involvement activities shall comply with state public notice requirements (MGL Chapter 30A, Sections 18 – 25 – effective 7/10/2010). The SWMP, all documents submitted to EPA in accordance with Appendix F, and all annual reports shall be available to the public utilizing the permittee’s website, other website, or other means.
- b. The permittee shall annually provide the public an opportunity to participate in the review and implementation of the SWMP.
- c. The permittee shall report on the activities undertaken to provide public participation opportunities including compliance with part 2.3.3.a. Public participation opportunities pursuant

to part 2.3.3.b may include, but are not limited to, websites; hotlines; clean-up teams; monitoring teams; or an advisory committee.

2.3.4 Illicit Discharge Detection and Elimination (IDDE) Program

2.3.5. Construction Site Stormwater Runoff Control

Objective: The objective of an effective construction stormwater runoff control program is to minimize or eliminate erosion and maintain sediment on site so that it is not transported in stormwater and allowed to discharge to a water of the U.S through the permittee's MS4. The construction site stormwater runoff control program required by this permit is a separate and distinct program from EPA's Construction General Permit in that the former is implemented by the MS4 operator to ensure that runoff from construction sites discharging to the MS4 are controlled consistent with the MS4's applicable requirements, whereas the latter is implemented by construction site operators to comply with the terms and conditions of EPA's permit (<https://www.epa.gov/npdes/2017-construction-general-permit-cgp>). ~~stormwater construction permit program. (<http://efpub1.epa.gov/npdes/stormwater/cgp.cfm>)~~

- a. Permittees shall implement and enforce a program to reduce pollutants in any stormwater runoff discharged to the MS4 from all construction activities that result in a land disturbance of greater than or equal to one acre within the regulated area. The permittee's program shall include disturbances less than one acre if that disturbance is part of a larger common plan of development or sale that would disturb one or more acres. Permittees authorized under the MS4-2003 permit shall continue to implement and enforce their existing program and modify as necessary to meet the requirements of this part.
- b. The permittee does not need to apply its construction program requirements to projects that receive a waiver from EPA under the provisions of 40 CFR § 122.26(b) (15) (i).
- c. The permittee shall develop and implement a construction site runoff control program that includes the elements in Paragraphs i. through ~~viii~~. of this part:
 - i. An ordinance or regulatory mechanism that requires the use of sediment and erosion control practices at construction sites. In addition to addressing sediment and erosion control, the ordinance must include controls for other wastes on construction sites such as demolition debris, litter and sanitary wastes. The ordinance or regulatory mechanisms shall provide that the permittee may, to the extent authorized by law, impose sanctions to ensure compliance with the local program. Development of an ordinance or other regulatory mechanism was a requirement of the MS4-2003 permit (See part II.B.4 and part IV.B.4).The ordinance or other regulatory mechanism required by the MS4-2003 permit shall have been effective by May 1, 2008.
 - ii. Written (hardcopy or electronic) procedures for site plan review, site inspections and enforcement of sediment and erosion control measures by the permittee. If not already existing, these procedures shall be completed within one (1) year from the effective date of the permit. ~~The procedures shall clearly define who is responsible for site inspections as well as who has authority to implement enforcement procedures. The program shall provide that the permittee may, to the extent authorized by law, impose sanctions to ensure compliance with the local program. These procedures and regulatory authorities shall be documented in the SWMP.~~

1. The site plan review procedure shall include:

- a pre-construction review by the permittee of the site design, the planned operations at the construction site, planned BMPs during the construction phase, and the planned BMPs to be used to manage runoff created after development;
- consideration of potential water quality impacts;
- procedures for the receipt and consideration of information submitted by the public; and
- evaluating the incorporation of Low Impact Development (LID) site planning and design strategies, unless such practices are infeasible.

2. The site inspection and enforcement procedures shall include:

- who is responsible for site inspections and the necessary qualifications for performing inspections, as well as who has authority to implement enforcement procedures;
- the requirement that inspections of BMPs occur during construction of BMPs as well as after construction of BMPs to ensure they are working as described in the approved plans
- the use of mandated inspection forms, if appropriate; and
- procedure for tracking the number of site reviews, inspections, and enforcement actions. This tracking information shall be included as part of each annual report required by part 4.4.

- iii. Requirements for construction site operators performing land disturbance activities within the MS4 jurisdiction that result in stormwater discharges to the MS4 to implement a sediment and erosion control program that includes BMPs appropriate for the conditions at the construction site. The program may include references to the requirements of EPA's Construction General Permit (including the development of a SWPPP) to the extent they are consistent with the program requirements of this part. The program may include references to BMP design standards in state manuals, such as the 2008 Massachusetts Stormwater Handbook¹⁰, or design standards developed by the MS4. EPA supports and encourages the use of design standards in local programs. Examples of appropriate sediment and erosion control measures for construction sites include local requirements to:

1. Minimize the amount of disturbed area and protect natural resources;
2. Stabilize sites when projects are complete or operations have temporarily ceased;
3. Protect slopes on the construction site;
4. Protect all storm drain inlets and armor all newly constructed outlets;
5. Use perimeter controls at the site;
6. Stabilize construction site entrances and exits to prevent off-site tracking;
7. Control wastes that may be discharged, including but not limited to, discarded building materials, concrete truck wash out, chemicals, litter, and sanitary wastes (these wastes may not be discharged to the MS4); and
87. Inspect stormwater controls at consistent intervals.

¹⁰ The handbook is available at: <https://www.mass.gov/guides/massachusetts-stormwater-handbook-and-stormwater-standards><http://www.mass.gov/dep/water/laws/policies.htm#storm>

- ~~iv. Requirements for construction site operators within the MS4 jurisdiction to control wastes, including but not limited to, discarded building materials, concrete truck wash out, chemicals, litter, and sanitary wastes. These wastes may not be discharged to the MS4.~~
- ~~v. Written procedures for site plan review and inspection and enforcement. If not already existing, the procedures for site plan review and inspection and enforcement shall be completed within one (1) year from the effective date of the permit. The site plan review procedure shall include a pre-construction review by the permittee of the site design, the planned operations at the construction site, planned BMPs during the construction phase, and the planned BMPs to be used to manage runoff created after development. The review procedure shall incorporate procedures for the consideration of potential water quality impacts, and procedures for the receipt and consideration of information submitted by the public. The site plan review procedure shall also include evaluation of opportunities for use of low impact design and green infrastructure. When the opportunity exists, the permittee shall encourage project proponents to incorporate these practices into the site design. The procedures for site inspections conducted by the permittee shall include the requirement that inspections occur during construction of BMPs as well as after construction of BMPs to ensure they are working as described in the approved plans, clearly defined procedures for inspections including qualifications necessary to perform the inspections, the use of mandated inspection forms if appropriate, and procedure for tracking the number of site reviews, inspections, and enforcement actions. This tracking information shall be included as part of each annual report required by part 4.4.~~

2.3.6. Stormwater Management in New Development and Redevelopment (Post Construction Stormwater Management)

Objective: The objective of this control measure is to reduce the discharge of pollutants found in stormwater through the retention or treatment of stormwater after construction on new or redeveloped sites. For the purposes of this part (2.3.6.), the following definitions apply:

site is defined as the area extent of construction activities, including but not limited to the creation of new impervious cover and improvement of existing impervious cover (e.g. repaving not covered by 2.3.6.a.ii.4.~~db.~~)

new development is defined as any construction activities or land alteration resulting in total earth disturbances equal to or greater than 1 acre (or activities that are part of a larger common plan of development disturbing greater than 1 acre) on an area that has not previously been developed to include impervious cover.

redevelopment is defined as any construction, land alteration, or improvement of impervious surfaces resulting in total earth disturbances equal to or greater than 1 acre (or activities that are part of a larger common plan of development disturbing greater than 1 acre) that does not meet the definition of new development (see above).

- a. Permittees shall develop, implement, and enforce a program to address post-construction stormwater runoff from all new development and redevelopment sites that disturb one or more acres and discharge into the permittees MS4 at a minimum. Permittees authorized under the

MS4-2003 permit shall continue to implement and enforce their program and modify as necessary to meet the requirements of this part.

- i. The permittee's new development/ redevelopment program shall include sites less than one acre if the site is part of a larger common plan of development or redevelopment which disturbs one or more acre.
- ii. The permittee shall develop or modify, as appropriate, an ordinance or other regulatory mechanism within ~~two (2)~~three (3) years of the effective date of the permit to contain provisions that are at least as stringent as the following:
 1. Low Impact Development (LID) site planning and design strategies must be implemented unless infeasible in order to reduce the discharge of stormwater from development sites, used to the maximum extent feasible.
 - ~~2. The design of treatment and infiltration practices should follow the guidance in Volume 2 of the Massachusetts Stormwater Handbook, as amended, or other federally or State approved¹¹ BMP design guidance.~~
 23. Stormwater management systems design shall be consistent with, or more stringent than, the requirements of the on new development sites shall be designed to 2008 Massachusetts Stormwater Handbook:
 - ~~a) Not allow new stormwater conveyances to discharge untreated stormwater in accordance with Massachusetts Stormwater Handbook Standard 1;~~
 - ~~b) Control peak runoff rates in accordance with Massachusetts Stormwater Handbook Standard 2¹²;~~
 - ~~c) Recharge groundwater in accordance with Massachusetts Stormwater Handbook Standard 3¹³;~~
 - ~~d) Eliminate or reduce the discharge of pollutants from land uses with higher pollutant loads as defined in the Massachusetts Stormwater Handbook in accordance with Massachusetts Stormwater Handbook Standard 5;~~
 - ~~e) Protect Zone II or Interim Wellhead Protection Areas of public water supplies in accordance with Massachusetts Stormwater Handbook Standard 6¹⁴;~~
 - ~~f) Implement long term maintenance practices in accordance with Massachusetts Stormwater Handbook Standard 9; and~~
 - ~~g) Require that all stormwater management systems be designed to:
 - ~~1) Retain the volume of runoff equivalent to, or greater than, one (1.0) inch multiplied by the total post-construction impervious surface area on the site AND/OR~~
 - ~~2) Remove 90% of the average annual load of Total Suspended Solids (TSS) generated from the total post-construction impervious area on the site¹⁵ AND 60% of the average annual load of Total Phosphorus~~~~

¹¹ State approved includes any state in the United States, including, but not limited to, approved guidance by the Commonwealth of Massachusetts

¹² Requirement necessary for Section 401 water quality certification by Massachusetts

¹³ Requirement necessary for Section 401 water quality certification by Massachusetts

¹⁴ Requirement necessary for Section 401 water quality certification by Massachusetts

¹⁵ The required removal percentage is not required for each storm, it is the average removal over a year that is required

~~(TP) generated from the total post-construction impervious surface area on the site¹⁴. Pollutant removal shall be calculated consistent with EPA Region 1's BMP Performance Extrapolation Tool or other BMP performance evaluation tool provided by EPA Region 1, where available. If EPA Region 1 tools do not address the planned or installed BMP performance any federally or State-approved¹⁶ BMP design guidance or performance standards (e.g. State stormwater handbooks and design guidance manuals) may be used to calculate BMP performance.~~

3. Stormwater management systems on new development shall be designed to meet an average annual pollutant removal equivalent to 90% of the average annual load of Total Suspended Solids (TSS) related to the total post-construction impervious area on the site AND 60% of the average annual load of Total Phosphorus (TP) related to the total post-construction impervious surface area on the site¹⁷.
 - a) Average annual pollutant removal requirements in 2.3.6.a.ii.3 are achieved through one of the following methods:
 1. installing BMPs that meet the pollutant removal percentages based on calculations developed consistent with EPA Region 1's BMP Accounting and Tracking Tool (2016) or other BMP performance evaluation tool provided by EPA Region 1, where available. If EPA Region 1 tools do not address the planned or installed BMP performance, then any federally or State-approved BMP design guidance or performance standards (e.g., State stormwater handbooks and design guidance manuals) may be used to calculate BMP performance; or
 2. retaining the volume of runoff equivalent to, or greater than, one (1.0) inch multiplied by the total post-construction impervious surface area on the new development site; or
 3. meeting a combination of retention and treatment that achieves the above standards; or
 4. utilizing offsite mitigation that meets the above standards within the same USGS HUC12 as the new development site.
4. Stormwater management systems on redevelopment sites shall be designed to meet an average annual pollutant removal equivalent to 80% of the average annual post-construction load of Total Suspended Solids (TSS) related to the total post-construction impervious area on the site AND 50% of the average annual load of Total Phosphorus (TP) related to the total post-construction impervious surface area on the site¹⁸.
 - a) Average annual pollutant removal requirements in 2.3.6.a.ii.4 above are achieved through one of the following methods:
 1. installing BMPs that meet the pollutant removal percentages based on calculations developed consistent with EPA Region 1's BMP Accounting and Tracking Tool (2016) or other BMP

¹⁶ See footnote 14

¹⁷ Pollutant removal is calculated based on average annual loading and not on the basis of any individual storm event

¹⁸ Pollutant removal is calculated based on average annual loading and not on the basis of any individual storm event

- performance evaluation tool provided by EPA Region 1, where available. If EPA Region 1 tools do not address the planned or installed BMP performance, then any federally or State-approved BMP design guidance or performance standards (e.g., State stormwater handbooks and design guidance manuals) may be used to calculate BMP performance; or
2. retaining the volume of runoff equivalent to, or greater than, 0.8 inch multiplied by the total post-construction impervious surface area on the redeveloped site; or
3. meeting a combination of retention and treatment that achieves the above standards; or
4. utilizing offsite mitigation that meets the above standards within the same USGS HUC12 as the redevelopment site.

4. Redevelopment Requirements

- ~~a) Stormwater management systems on Redevelopment sites shall meet the following sections of part 2.3.6.a.ii.3 to the maximum extent feasible:
 - 1) Part 2.3.6.a.ii.3(a) (Massachusetts Stormwater Standard 1);
 - 2) Part 2.3.6.a.ii.3(b) (Massachusetts Stormwater Standard 2);
 - 3) Part 2.3.6.a.ii.3(c) (Massachusetts Stormwater Standard 3); and
 - 4) The pretreatment and structural best management practices requirements of 2.3.6.a.ii.3(d) and 2.3.6.a.ii.3(e) (Massachusetts Stormwater Standards 5 and 6).~~
- ~~b) Stormwater management systems on Redevelopment sites shall also improve existing conditions by requiring that stormwater management systems be designed to:
 - 1) Retain the volume of runoff equivalent to, or greater than, 0.80 inch multiplied by the total post-construction impervious surface area on the site AND/OR
 - 2) Remove 80% of the average annual post-construction load of Total Suspended Solids (TSS) generated from the total post-construction impervious area on the site AND 50% of the average annual load of Total Phosphorus (TP) generated from the total post-construction impervious surface area on the site. Pollutant removal shall be calculated consistent with EPA Region 1's BMP Performance Extrapolation Tool or other BMP performance evaluation tool provided by EPA Region 1 where available. If EPA Region 1 tools do not address the planned or installed BMP performance any federally or State approved BMP design guidance or performance standards (e.g. State stormwater handbooks and design guidance manuals) may be used to calculate BMP performance.~~
- ~~c) Stormwater management systems on redevelopment sites may utilize offsite mitigation within the same USGS HUC10 as the redevelopment site to meet the equivalent retention or pollutant removal requirements in part 2.3.6.a.ii.4(b).~~
- b~~d~~) Redevelopment activities that are exclusively limited to maintenance and improvement of existing roadways, (including widening less than a single lane, adding shoulders, correcting substandard intersections, improving existing drainage systems, and

repaving projects) shall improve existing conditions ~~where feasible unless infeasible~~ and are exempt from part 2.3.6.a.ii.4.(a), ~~part 2.3.6.a.ii.4(b) and part 2.3.6.a.ii.4(c)~~. Roadway widening or improvements that increase the amount of impervious area on the redevelopment site by greater than or equal to a single lane width shall meet the requirements of part 2.3.6.a.ii.4.(a) ~~—(c)~~ fully.

2.3.7. Good House Keeping and Pollution Prevention for Permittee Owned Operations

Objective: The permittee shall implement an operations and maintenance program for permittee-owned operations that has a goal of preventing or reducing pollutant runoff and protecting water quality from all permittee-owned operations.

a. Operations and Maintenance Programs

b. Stormwater Pollution Prevention Plan (SWPPP)

The permittee shall develop and fully implement a SWPPP for each of the following permittee-owned or operated facilities: maintenance garages, public works yards, transfer stations, and other waste handling facilities where pollutants are exposed to stormwater as determined by the permittee. If facilities are located at the same property, the permittee may develop one SWPPP for the entire property. The SWPPP is a separate and different document from the SWMP required in part 1.10. A SWPPP does not need to be developed for a facility if the permittee has either developed a SWPPP or received a no exposure certification for the discharge under the Multi-Sector General Permit or the discharge is authorized under another NPDES permit.

- i. No later than two (2) years from the effective date of the permit, the permittee shall develop and implement a written (hardcopy or electronic) SWPPP for the facilities described above. The SWPPP shall be signed in accordance with the signatory requirements of Appendix B – Subparagraph 11.
- ii. The SWPPP shall contain the following elements:
 1. Pollution Prevention Team
Identify the staff on the team, by name and title. If the position is unstaffed, the title of the position should be included and the SWPPP updated when the position is filled. The role of the team is to develop, implement, maintain, and revise, as necessary, the SWPPP for the facility.
 2. Description of the facility and identification of potential pollutant sources
The SWPPP shall include a map of the facility and a description of the activities that occur at the facility. The map shall show the location of the stormwater outfalls, receiving waters, and any structural controls. Identify all activities that occur at the facility and the potential pollutants associated with each activity including the location of any floor drains. These may be included as part of the inventory required by part 2.3.7.a.
 3. Identification of stormwater controls

The permittee shall select, design, install, and implement the control measures detailed in paragraph 4 below to prevent or reduce the discharge of pollutants from the permittee owned facility.

The selection, design, installation, and implementation of the control measures shall be in accordance with good engineering practices and manufacturer's specifications. The permittee shall also take all reasonable steps to control or address the quality of discharges from the site that may not originate at the facility.

If the discharge from the facility is to a water quality limited water and the facility has the potential to discharge the pollutant identified as causing the water quality limitation, the permittee shall identify the control measures that will be used to address this pollutant at the facility so that the discharge meets applicable water quality standards. ~~does not cause or contribute to a violation of a water quality standard.~~

3.0. Additional Requirements for Discharges to Surface Drinking Water Supplies and Their Tributaries

4.0. Program Evaluation, Record Keeping, and Reporting

4.1. Program Evaluation

- a. The permittee shall annually self-evaluate its compliance with the terms and conditions of this permit and submit each self-evaluation in the Annual Report. The permittee shall also maintain the annual evaluation documentation as part of the SWMP.
- b. The permittee shall evaluate the appropriateness of the selected BMPs in achieving the objectives of each control measure and the defined measurable goals. Where a BMP is found to be ineffective the permittee shall change BMPs in accordance with the provisions below. In addition, permittees may augment or change BMPs at any time following the provisions below:
 - Changes adding (but not subtracting or replacing) components or controls may be made at any time.
 - Changes replacing an ineffective or infeasible BMP specifically identified in the SWMP with an alternative BMP may be made as long as the basis for the changes is documented in the SWMP by, at a minimum:
 - An analysis of why the BMP is ineffective or infeasible;
 - Expectations on the effectiveness of the replacement BMP; and
 - An analysis of why the replacement BMP is expected to achieve the defined goals of the BMP to be replaced.

The permittee shall indicate BMP modifications along with a brief explanation of the modification in each Annual Report.

- c. EPA or MassDEP may ~~require request~~ the permittee to add, modify, repair, replace or change BMPs or other measures described in the annual reports as needed to satisfy the conditions of this permit.

- ~~• To address impacts to receiving water quality caused or contributed to by discharges from the MS4; or~~
- ~~• To satisfy conditions of this permit~~

Any changes requested by EPA or MassDEP will be in writing and ~~will~~may set forth the schedule for the permittee to develop the changes and ~~will~~may offer the permittee the opportunity to propose alternative program changes to ~~satisfy the permit conditions. meet the objective of the requested modification.~~

4.2. Record Keeping

4.3. Outfall Monitoring Reporting

4.4. Annual Reports

- The permittee shall submit annual reports each year of the permit term. The reporting period will be a one year period commencing on the permit effective date, and subsequent anniversaries thereof, except that the first annual report under this permit shall also cover the period from May 1, [year of final permit effective date] to the permit effective date. The annual report is due ninety days from the close of each reporting period.
- The annual reports shall contain the following information:
 - A self-assessment review of compliance with the permit terms and conditions.
 - An assessment of the appropriateness of the selected BMPs.
 - The status of any plans or activities required by part 2.1 and/ or part 2.2, including:
 - Identification of all discharges that do not meet applicable water quality standards~~determined to be causing or contributing to an exceedance of water quality standards and description of response including all items required by part 2.1.1;~~
 - For discharges subject to TMDL related requirements, identification of specific BMPs used to address the pollutant identified as the cause of impairment and assessment of the BMPs effectiveness at controlling the pollutant (part 2.2.1. and Appendix F) and any deliverables required by Appendix F;
 - For discharges to water quality limited waters a description of each BMP required by Appendix H and any deliverables required by Appendix H.

5.0. Non-Traditional MS4s

Non-traditional MS4s are MS4s owned and operated by the Commonwealth of Massachusetts, counties or other public agencies within the Commonwealth of Massachusetts, and properties owned and operated by the United States (Federal Facilities) within the Commonwealth of Massachusetts. This part addresses all non-traditional MS4s except MS4s that are owned or operated by transportation agencies, which are addressed in part 6.0 below.

5.1. Requirements for Non-Traditional MS4s

All requirements and conditions of parts 1 – 4 above apply to all Non-traditional MS4s, except as specifically provided below:

5.1.1. Public education

5.1.2. Ordinances and regulatory mechanisms

5.1.3. Assessment of Regulations

5.1.4. New Dischargers

5.1.5 Dischargers Subject to Appendix F Part A.I

Those dischargers discharging to waterbodies in the Charles River Watershed or to an MS4 that discharges to a waterbody in the Charles River Watershed shall coordinate with the municipality in which they are located to facilitate compliance with the phosphorus reduction applicable to the municipality. In each annual report the permittee shall indicate planned phosphorus reduction activities on site and coordination progress with the municipality. In addition, the year 4 annual report shall contain the following information:

- a. Estimated current impervious area of permittee owned property,
- b. Land Use information for permittee owned property,
- c. Phosphorus removal in pounds per year for any structural BMP owned by the permittee, calculated in accordance with Appendix F Attachment 3
- d. Date of last maintenance activity for all structural BMPs for which phosphorus removal is calculated

6.0 Requirements for MS4s Owned or Operated by Transportation Agencies

This part applies to all MS4s owned or operated by any state or federal transportation agency (except Massachusetts Department of Transportation –MassDOT- Highway Division, which is subject to a separate individual permit). All requirements and conditions of this permit apply with the following exceptions:

6.1 Public education

6.2 Ordinances and regulatory mechanisms

6.3 Assessment of regulations

6.4 New Dischargers

6.5 Dischargers Subject to Appendix F Part A.I

Those dischargers discharging to waterbodies in the Charles River Watershed or to an MS4 that discharges to a waterbody in the Charles River Watershed shall coordinate with the municipality in which they are located to facilitate compliance with the phosphorus reduction applicable to the municipality. In each annual report the

- permittee shall indicate planned phosphorus reduction activities on site and coordination progress with the municipality. In addition, the year 4 annual report shall contain the following information:
- a. Estimated current impervious area of permittee owned property,
 - b. Land Use information for permittee owned property,
 - c. Phosphorus removal in pounds per year for any structural BMP owned by the permittee, calculated in accordance with Appendix F Attachment 3,
 - d. Date of last maintenance activity for all structural BMPs for which phosphorus removal is calculated

Appendix A

Definitions, Abbreviations and Acronyms

Definitions

Best Management Practices (BMPs) - schedules of activities, practices (and prohibitions of practices), structures, vegetation, maintenance procedures, and other management practices to prevent or reduce the discharge of pollutants to waters of the United States. BMPs also include treatment requirements, operating procedures, and practices to control plant site runoff, spillage or leaks, sludge or waste disposal, or drainage from raw material storage.

Common Plan of Development - A "larger common plan of development or sale" is a contiguous area where multiple separate and distinct construction activities may be taking place at different times on different schedules under one plan. For example, if a developer buys a 20-acre lot and builds roads, installs pipes, and runs electricity with the intention of constructing homes or other structures sometime in the future, this would be considered a larger common plan of development or sale. If the land is parceled off or sold, and construction occurs on plots that are less than one acre by separate, independent builders, this activity still would be subject to stormwater permitting requirements if the smaller plots were included on the original site plan.

Control Measure - refers to any BMP or other method (including effluent limitations) used to prevent or reduce the discharge of pollutants to waters of the United States.

Director - a Regional Administrator of the Environmental Protection Agency or an authorized representative.

Discharge - when used without qualification, means the "discharge of a pollutant."

Discharge of a pollutant - any addition of any "pollutant" or combination of pollutants to "waters of the United States" from any "point source," or any addition of any pollutant or combination of pollutants to the waters of the "contiguous zone" or the ocean from any point source other than a vessel or other floating craft which is being used as a means of transportation. This includes additions of pollutants into waters of the United States from surface runoff which is collected or channeled by man; or discharges through pipes, sewers, or other conveyances, leading into privately owned treatment works.

Discharge-related activities - activities which cause, contribute to, or result in stormwater and allowable non-stormwater point source discharges, and measures such as the siting, construction and operation of BMPs to control, reduce, or prevent pollution in the discharges.

Disturbance - action to alter the existing vegetation and/or underlying soil of a site, such as clearing, grading, site preparation (e.g., excavating, cutting, and filling), soil compaction, and movement and stockpiling of top soils.

Existing Discharger – an operator applying for coverage under this permit for discharges covered previously under an NPDES general or individual permit.

Facility or Activity - any NPDES “point source” or any other facility or activity (including land or appurtenances thereto) that is subject to regulation under the NPDES program.

Federal Facility – Any buildings, installations, structures, land, public works, equipment, aircraft, vessels, and other vehicles and property, owned by, or constructed or manufactured for the purpose of leasing to, the federal government.

Illicit Discharge - any discharge to a municipal separate storm sewer that is not composed entirely of stormwater except discharges pursuant to a NPDES permit (other than the NPDES permit for discharges from the municipal separate storm sewer) and discharges resulting from fire fighting activities.

Impaired Water – A water is impaired if it does not meet one or more of its designated use(s). For purposes of this permit, “impaired” refers to categories 4 and 5 of the five-part categorization approach used for classifying the water quality standards attainment status for water segments under the TMDL program. Impaired waters compilations are also sometimes referred to as “303(d) lists.” Category 5 waters are impaired because at least one designated use is not being supported or is threatened and a TMDL is needed. Category 4 waters indicate that at least one designated use is not being supported but a TMDL is not needed (4a indicates that a TMDL has been approved or established by EPA; 4b indicates other required control measures are expected in result in the attainment of water quality standards in a reasonable period of time; and 4c indicates that the non-attainment of the water quality standard is the result of pollution (e.g. habitat) and is not caused by a pollutant). See *USEPA’s 2006 Integrated Report Guidance, July 29, 2005* for more detail on the five part categorization of waters [under EPA National TMDL Guidance <http://www.epa.gov/owow/tmdl/policy.html>]).

Impervious Surface- Any surface that prevents or significantly impedes the infiltration of water into the underlying soil. This can include but is not limited to: roads, driveways, parking areas and other areas created using non porous material; buildings, rooftops, structures, artificial turf and compacted gravel or soil.

Industrial Activity - the ten categories of industrial activities included in the definition of “stormwater discharges associated with industrial activity,” as defined in 40 CFR 122.26(b)(14)(i)-(ix) and (xi).

Industrial Stormwater - stormwater runoff associated with the definition of “stormwater discharges associated with industrial activity.”

Infeasible - means not technologically possible, or not economically practicable and achievable in light of best industry practices.

Interconnection – the point (excluding sheet flow over impervious surfaces) where the permittee’s MS4 discharges to another MS4 or other storm sewer system, through which the discharge is eventually conveyed to a water of the United States. Interconnections shall be treated similarly to outfalls throughout the permit.

Junction Manhole - For the purposes of this permit, a junction manhole is a manhole or structure with two or more inlets accepting flow from two or more MS4 alignments. Manholes with inlets solely from private storm drains, individual catch basins, or both are not considered junction manholes for these purposes.

Key Junction Manhole - For the purposes of this permit, key junction manholes are those junction manholes that can represent one or more junction manholes without compromising adequate implementation of the illicit discharge program. Adequate implementation of the illicit discharge program would not be compromised if the exclusion of a particular junction manhole as a key junction manhole would not affect the permittee’s ability to determine the possible presence of an upstream illicit discharge. A permittee may exclude a junction manhole located upstream from another located in the immediate vicinity or that is serving a drainage alignment with no potential for illicit connections.

Municipal Separate Storm Sewer - a conveyance or system of conveyances (including roads with drainage systems, municipal streets, catch basins, curbs, gutters, ditches, man-made channels, or storm drains):

- (i) Owned or operated by a State, city, town, borough, county, parish, district, association, or other public body (created by or pursuant to State law) having jurisdiction over disposal of sewage, industrial wastes, stormwater, or other wastes, including special districts under State law such as a sewer district, flood control district or drainage district, or similar entity, or an Indian tribe or an authorized Indian tribal organization, or a designated and approved management agency under section 208 of the CWA that discharges to waters of the United States;
- (ii) Designed or used for collecting or conveying stormwater;
- (iii) Which is not a combined sewer; and
- (iv) Which is not part of a Publicly Owned Treatment Works (POTW) as defined at 40 CFR 122.2.

Municipal Separate Storm Sewer System (MS4) - means all separate storm sewers that are defined as “large” or “medium” or “small” municipal storm sewer systems pursuant to paragraphs 40 CFR 122.26 (b)(4) and (b)(7), or designated under paragraph 40 126.26(a) (1)(v). For the purposes of this permit “MS4” may also refer to the permittee with jurisdiction over the sewer system.

New Development – any construction activities or land alteration resulting in total earth disturbances greater than 1 acre (or activities that are part of a larger common plan of development disturbing greater than 1 acre) on an area that has not previously been developed to include impervious cover. (see part 2.3.6. of the permit)

New Discharger – For the purposes of this permit, a new discharger is an entity that discharges stormwater from a new facility with an entirely new separate storm sewer system that is not physically located on the same or adjacent land as an existing facility and associated system operated by the same MS4.

New Source - any building, structure, facility, or installation from which there is or may be a “discharge of pollutants,” the construction of which commenced:

- S after promulgation of standards of performance under section 306 of the CWA which are applicable to such source, or
- S after proposal of standards of performance in accordance with section 306 of the CWA which are applicable to such source, but only if the standards are promulgated in accordance with section 306 within 120 days of their proposal.

New Source Performance Standards (NSPS) – Technology-based standards for facilities that qualify as new sources under 40 CFR 122.2 and 40 CFR 122.29.

No exposure - all industrial materials or activities are protected by a storm-resistant shelter to prevent exposure to rain, snow, snowmelt, and/or runoff.

One Lane Width – The width of the travel lane for a roadway. Lane width does not include shoulders, curbs, and on-street parking areas.

Outfall Catchment – The land area draining to a single outfall or interconnection. The extent of an outfall’s catchment is determined not only by localized topography and impervious cover but also by the location of drainage structures and the connectivity of MS4 pipes.

Owner or operator - the owner or operator of any “facility or activity” subject to regulation under the NPDES program.

Person - an individual, association, partnership, corporation, municipality, State or Federal agency, or an agent or employee thereof.

Point source - any discernible, confined, and discrete conveyance, including but not limited to any pipe, ditch, channel, tunnel, conduit, well, discrete fissure, container, rolling stock, concentrated animal feeding operation, landfill leachate collection system, vessel, or other floating craft from which pollutants are or may be discharged. This term does not include return flows from irrigated agriculture or agricultural stormwater runoff.

Pollutant - dredged spoil, solid waste, incinerator residue, filter backwash, sewage, garbage, sewage sludge, munitions, chemical wastes, biological materials, heat, wrecked or discarded equipment, rock, sand, cellar dirt, and industrial, municipal and agricultural waste discharged into water.

Pollutant of concern – A pollutant which causes or contributes to a violation of a water quality standard, including a pollutant which is identified as causing an impairment in a State's 303(d) list.

Redevelopment – for the purposes of part 2.3.6., any construction, land alteration, or improvement of impervious surfaces resulting in total earth disturbances greater than 1 acre (or activities that are part of a larger common plan of development disturbing greater than 1 acre) that does not meet the definition of new development (see above).

Reportable Quantity Release – a release of a hazardous substance at or above the established legal threshold that requires emergency notification. Refer to 40 CFR Parts 110, 177, and 302 for complete definitions and reportable quantities for which notification is required.

Runoff coefficient - the fraction of total rainfall that will appear at the conveyance as runoff.

Significant materials - includes, but is not limited to: raw materials; fuels; materials such as solvents, detergents, and plastic pellets; finished materials such as metallic products; raw materials used in food processing or production; hazardous substances designated under section 101(14) of CERCLA; any chemical the facility is required to report pursuant to section 313 of Title III of SARA; fertilizers; pesticides; and waste products such as ashes, slag and sludge that have the potential to be released with stormwater discharges.

Site – for the purposes of part 2.3.6., the area extent of construction activities, including but not limited to the creation of new impervious cover and improvement of existing impervious cover (e.g. repaving not covered by 2.3.6.a.ii.4.d.)

Small Municipal Separate Storm Sewer System – all separate storm sewer systems that are (i) owned or operated by the United States, a State, city, town, borough, county, parish, district, association, or other public body (created by or pursuant to State law) having jurisdiction over disposal of sewage, industrial wastes, storm water, or other wastes, including special districts under State law such as a sewer district, flood control district, or drainage district, or similar entity or an Indian tribe or an authorized Indian tribal organization or a designated and approved management agency under section 208 of the CWA that discharges to waters of the United States, and (ii) not defined as “large” or “medium” municipal separate storm sewer system pursuant to paragraphs 40 CFR 122.26 (b)(4) and (b)(7), or designated under paragraph 40 126.26(a) (1)(v). This term includes systems similar to separate storm sewer systems in municipalities, such as systems at military bases, large hospital or prison complexes, and highways and other thoroughfares. This term does not include separate storm sewers in very discrete areas, such as individual buildings.

Small MS4 – means a small municipal separate storm sewer system.

Stormwater - stormwater runoff, snow melt runoff, and surface runoff and drainage.

Stormwater Discharges Associated with Construction Activity - a discharge of pollutants in stormwater runoff from areas where soil disturbing activities (e.g., clearing, grading, or excavating), construction materials, or equipment storage or maintenance (e.g., fill piles, borrow areas, concrete truck washout, fueling), or other industrial stormwater directly related to the construction process (e.g., concrete or asphalt batch plants) are located. (See 40 CFR 122.26(b)(14)(x) and 40 CFR 122.26(b)(15).

Stormwater Discharges Associated with Industrial Activity - the discharge from any conveyance that is used for collecting and conveying stormwater and that is directly related to manufacturing, processing or raw materials storage areas at an industrial plant. The term does not include discharges from facilities or activities excluded from the NPDES program under Part 122. For the categories of industries identified in this section, the term includes, but is not limited to, stormwater discharges from industrial plant yards; immediate access roads and rail lines used or traveled by carriers of raw materials, manufactured products, waste material, or by-products used or created by the facility; material handling sites; refuse sites; sites used for the application or disposal of process waste waters (as defined at part 401 of this chapter); sites used for the storage and maintenance of material handling equipment; sites used for residual treatment, storage, or disposal; shipping and receiving areas; manufacturing buildings; storage areas (including tank farms) for raw materials, and intermediate and final products; and areas where industrial activity has taken place in the past and significant materials remain and are exposed to stormwater. For the purposes of this paragraph, material handling activities include storage, loading and unloading, transportation, or conveyance of any raw material, intermediate product, final product, by-product or waste product. The term excludes areas located on plant lands separate from the plant's industrial activities, such as office buildings and accompanying parking lots as long as the drainage from the excluded areas is not mixed with stormwater drained from the above described areas. Industrial facilities include those that are federally, State, or municipally owned or operated that meet the description of the facilities listed in Appendix D of this permit. The term also includes those facilities designated under the provisions of 40 CFR 122.26(a)(1)(v).

Total Maximum Daily Loads (TMDLs) - A TMDL is a calculation of the maximum amount of a pollutant that a waterbody can receive and still meet water quality standards, and an allocation of that amount to the pollutant's sources. A TMDL includes wasteload allocations (WLAs) for point source discharges, load allocations (LAs) for nonpoint sources and/or natural background, and must include a margin of safety (MOS) and account for seasonal variations. (See section 303(d) of the Clean Water Act and 40 CFR 130.2 and 130.7).

Urbanized Area – US Census designated area comprised of a densely settled core of census tracts and/or census blocks that meet minimum population density requirements, along with adjacent territory containing non-residential urban land uses as well as territory with low population density included to link outlying densely settled territory

with the densely settled core. For the purposes of this permit, Urbanized Areas as defined by any Census since 2000 remain subject to stormwater regulation even if there is a change in the reach of the Urbanized Area because of a change in more recent Census data.

Water Quality Limited Water – for the purposes of this permit, a water quality limited water is any waterbody that does not meet applicable water quality standards, including but not limited to waters listed in categories 5 or 4b on the Massachusetts Integrated Report of waters listed pursuant to Clean Water Act section 303(d) and 305(b).

Water Quality Standards - A water quality standard defines the water quality goals of a water body, or portion thereof, by designating the use or uses to be made of the water and by setting criteria necessary to protect the uses. States and EPA adopt WQS to protect public health or welfare, enhance the quality of water and serve the purposes of the Clean Water Act (See CWA sections 101(a)2 and 303(c)).

ABBREVIATIONS AND ACRONYMS

BMP – Best Management Practice

BPJ – Best Professional Judgment

CGP – Construction General Permit

CWA – Clean Water Act (or the Federal Water Pollution Control Act, 33 U.S.C. §1251 *et seq*)

DCIA – Directly Connected Impervious Area

EPA – U. S. Environmental Protection Agency

ESA – Endangered Species Act

USFWS – U. S. Fish and Wildlife Service

IA – Impervious Area

IDDE – Illicit Discharge Detection and Elimination

LA – Load Allocations

MOS – Margin of Safety

MS4 – Municipal Separate Storm Sewer System

MSGP – Multi-Sector General Permit

NHPA – National Historic Preservation Act

NMFS – U. S. National Marine Fisheries Service

NOI – Notice of Intent

NPDES – National Pollutant Discharge Elimination System

NRHP – National Register of Historic Places

NSPS – New Source Performance Standard

NTU – Nephelometric Turbidity Unit

PCP – Phosphorus Control Plan (pertaining to Charles River Watershed phosphorus TMDL requirements only – Appendix F Part A.I)

LPCP – Lake Phosphorus Control Plan (pertaining to Lake or pond phosphorus TMDL requirements only – Appendix F Part A.II)

POTW – Publicly Owned Treatment Works

RCRA – Resource Conservation and Recovery Act

SHPO – State Historic Preservation Officer

SIC – Standard Industrial Classification
SPCC – Spill Prevention, Control, and Countermeasure
SWMP – Stormwater Management Program
SWPPP – Stormwater Pollution Prevention Plan
TMDL – Total Maximum Daily Load
TSS – Total Suspended Solids
USGS – United States Geological Survey
WLA – Wasteload Allocation
WQS – Water Quality Standard

APPENDIX F

Requirements for Discharges to Impaired Waters with an Approved TMDL

Table of Contents

A. Requirements for Discharges to Impaired Waters with an Approved MassDEP In State TMDL2

 I. Charles River Watershed Phosphorus TMDL Requirements.....2

 II. Lake and Pond Phosphorus TMDL Requirements.....24

 III. Bacteria and Pathogen TMDL Requirements36

 IV. Cape Cod Nitrogen TMDL Requirements.....50

 V. Assabet River Phosphorus TMDL Requirements.....54

B. Requirements for Discharges to Impaired Waters with an Approved Out of State TMDL57

 I. Nitrogen TMDL Requirements57

 II. Phosphorus TMDL Requirements.....61

 III. Bacteria and Pathogen TMDL Requirements65

 IV. Metals TMDL Requirements.....68

C. Requirements for Discharges to Impaired Waters with a Regional TMDL.....71

 I. The “Northeast Regional Mercury TMDL (2007)”.....71

Attachment 1 – Method To Calculate Baseline Watershed Phosphorus Load For Lake And Pond Phosphorus TMDLs (Applicable To part II Of Appendix F Only) And Method To Calculate Increases in Phosphorus Load due to Development

Attachment 2 – Phosphorus Reduction Credits For Selected Enhanced Non-Structural BMPs

Attachment 3 - Phosphorus Reduction Credits For Selected Structural BMPs

A. Requirements for Discharges to Impaired Waters with an Approved MassDEP In State TMDL

I. Charles River Watershed Phosphorus TMDL Requirements

On October 17, 2007, EPA approved the *Final TMDL for Nutrients in the Lower Charles River Basin* (Lower Charles TMDL)¹ and on June 10, 2011 EPA approved the *Total Maximum Daily Load for Nutrients in the Upper/Middle Charles River* (Upper/Middle Charles TMDL)². The following phosphorus reduction requirements address phosphorus in MS4 discharges.

1. To address the discharge of phosphorus from its MS4, the permittee shall develop a Phosphorus Control Plan (PCP) designed to reduce the amount of phosphorus in stormwater (SW) discharges from its MS4 to the Charles River and its tributaries. The PCP shall be completed in phases and the permittee shall add it as an attachment to its written SWMP upon completion and report in annual reports pursuant to part 4.4 of the Permit on its progress toward achieving its Phosphorus Reduction Requirement. The PCP shall be developed and fully implemented as soon as possible but no later than 20 years after the permit effective date in accordance with the phases and schedule outlined below. Each Phase shall contain the elements required of each phase as described in parts a. through c. below. The timing of each phase over 20 years from the permit effective date is:

1-5 years after permit effective date	5-10 years after permit effective date	10-15 years after permit effective date	15-20 years after permit effective date
Create Phase 1 Plan	Implement Phase 1 Plan		
	Create Phase 2 Plan	Implement Phase 2 Plan	
		Create Phase 3 Plan	Implement Phase 3 Plan

a. Phase 1

- 1) The permittee shall complete a written Phase 1 plan of the PCP five years after the permit effective date and fully implement the Phase 1 plan of the PCP as soon as possible but no longer than 10 years after the permit effective date.
- 2) The Phase 1 plan of the PCP shall contain the following elements and has the following required milestones:

¹ Massachusetts Department of Environmental Protection. 2007. *Final TMDL for Nutrients in the Lower Charles River Basin*. CN 301.1

² Massachusetts Department of Environmental Protection. 2011. *Total Maximum Daily Load for Nutrients in the Upper/Middle Charles River Basin, Massachusetts*. CN 272.0

Item Number	Phase 1 of the PCP Component and Milestones	Completion Date
1-1	Legal analysis	2 years after permit effective date
1-2	Funding source assessment.	3 years after permit effective date
1-3	Define scope of PCP (PCP Area) Baseline Phosphorus Load and Phosphorus Reduction Requirement and Allowable Phosphorus Load	4 years after permit effective date
1-4	Description of Phase 1 planned nonstructural controls	5 years after permit effective date
1-5	Description of Phase 1 planned structural controls	5 years after permit effective date
1-6	Description of Operation and Maintenance program for structural controls	5 years after permit effective date
1-7	Phase 1 implementation schedule	5 years after permit effective date
1-8	Estimated cost for implementing Phase 1 of the PCP	5 years after permit effective date
1-9	Complete Written Phase 1 PCP	5 years after permit effective date
1-10	Full implementation of nonstructural controls	5 6 years after permit effective date
1-11	Performance Evaluation	6, and 7 years after permit effective date
1-12	1. Performance Evaluation. 2. Full implementation of all structural controls used to demonstrate that the total phosphorus export rate (P_{exp}) from the PCP Area in mass/yr is equal to or less than the applicable Allowable Phosphorus Load(P_{allow}) plus the applicable Phosphorus Reduction Requirement (P_{RR}) multiplied by 0.80 $P_{exp} \leq P_{allow} + (P_{RR} \times 0.80)$	8 years after permit effective date
1-13	Performance Evaluation	9 years after permit effective date

1-14	1. Performance Evaluation. 2. Full implementation of all structural controls used to demonstrate that the total phosphorus export rate (P_{exp}) from the PCP Area in mass/yr is equal to or less than the applicable Allowable Phosphorus Load(P_{allow}) plus the applicable Phosphorus Reduction Requirement (P_{RR}) multiplied by 0.75 $P_{exp} \leq P_{allow} + (P_{RR} \times 0.75)$	10 years after permit effective date
------	---	--------------------------------------

Table F-1:Phase 1 of the PCP components and Milestones

3) Description of Phase 1 PCP Components

Legal Analysis- The permittee shall develop and implement an analysis that identifies existing regulatory mechanisms available to the MS4 such as by-laws and ordinances, and describes any changes to regulatory mechanisms that may be necessary to effectively implement the entire PCP. This may include the creation or amendment of financial and regulatory authorities. The permittee shall adopt necessary regulatory changes by the end of the permit term.

Funding source assessment – The permittee shall describe known and anticipated funding mechanisms (e.g. general funding, enterprise funding, stormwater utilities) that will be used to fund PCP implementation. The permittee shall describe the steps it will take to implement its funding plan. This may include but is not limited to conceptual development, outreach to affected parties, and development of legal authorities.

Scope of the PCP, Baseline Phosphorus Load (P_{base}), Phosphorus Reduction Requirement (P_{RR}) and Allowable Phosphorus Load (P_{allow}) - The permittee shall indicate the area in which it plans to implement the PCP. The permittee must choose one of the following: (1) to implement its PCP in the entire area within its jurisdiction (for municipalities this would be the municipal boundary) within the Charles River Watershed; or (2) to implement its PCP only in the urbanized area portion of the permittee’s jurisdiction within the Charles River Watershed. The implementation area selected by the permittee is known as the “PCP Area” for that permittee. Table F-2³ and Table F-3⁴ list the permittees subject to phosphorus reduction requirements along with the estimated Baseline Phosphorus Loads in mass/yr, the calculated Allowable Stormwater Phosphorus Load in mass/yr, the Stormwater Phosphorus Reduction Requirement in mass/yr and

³ The estimated Baseline Phosphorus Load, Allowable Phosphorus Load, Phosphorus Reduction Requirement and percent reductions presented in Table F-2 apply to the entire watershed land area that drains to the Charles River and its tributaries within the permittee’s jurisdiction.

⁴ The estimated Baseline Phosphorus Load, Allowable Phosphorus Load, Phosphorus Reduction Requirement and percent reductions presented in Table F-3 apply only to the urbanized area portion of the permittee’s jurisdiction that drains to the Charles River or its tributaries.

the respective percent reductions necessary. The two tables contain different reduction requirements for each permittee based on the PCP Area they choose (see above). If the permittee chooses to implement the PCP in its entire jurisdiction, the permittee may demonstrate compliance with the Phosphorus Reduction Requirement and Allowable Phosphorus Load requirements applicable to it through structural and non-structural controls on discharges that occur outside the regulated area. If the permittee chooses to implement the PCP in its regulated area only, the permittee must demonstrate compliance with the Phosphorus Reduction Requirement and Allowable Phosphorus Load requirements applicable to it through structural and non-structural controls on discharges that occur within the regulated area only.

The permittee shall select the Baseline Phosphorus Load, Stormwater Phosphorus Reduction Requirement and Allowable Phosphorus Load that corresponds to the PCP Area selected. The selected Stormwater Phosphorus Reduction Requirement and Allowable Phosphorus Load will be used to determine compliance with PCP milestones of this Phase and Phase 2 and Phase 3. If the permittee chooses to implement its PCP in all areas within its jurisdiction within the Charles River Watershed, then the permittee shall use Table F-2 to determine the Baseline Phosphorus Load, Stormwater Phosphorus Reduction Requirement and Allowable Phosphorus Load for its PCP Area. If the permittee chooses to implement its PCP only within the regulated area within the Charles River Watershed, then the permittee shall use Table F-3 to determine the Baseline Phosphorus Load, Stormwater Phosphorus Reduction Requirement and Allowable Phosphorus Load for its PCP Area.

The Permittee may submit more accurate land use data from 2005, which is the year chosen as the baseline land use for the purposes of permit compliance, for EPA to recalculate baseline phosphorus stormwater loads for use in future permit reissuances. Updated land use maps, land areas, characteristics, and MS4 area and catchment delineations shall be submitted to EPA along with the year 4 annual report in electronic GIS data layer form for consideration for future permit requirements⁵. Until such a time as future permit requirements reflect information submitted in the year 4 annual report, the permittee shall use the Baseline Phosphorus Load, Stormwater Phosphorus Reduction Requirement and Allowable Phosphorus Load Table F-2 (if its PCP Area is the permittee's entire jurisdiction) or Table F-3 (if its PCP Area is the regulated area only) to calculate compliance with milestones for Phase 1, 2, and 3 of the PCP.

⁵ This submission is optional and needs only be done if the permittee has more accurate land use information from 2005 than information provided by MassGIS (<http://www.mass.gov/anf/research-and-tech/it-serv-and-support/application-serv/office-of-geographic-information-massgis/datalayers/lus2005.html>, retrieved 10/1/2013) or the permittee has updated MS4 drainage area characteristics and the permittee would like to update the Baseline Phosphorus Load.

Description of Phase 1 planned non-structural controls – The permittee shall describe the non-structural stormwater control measures necessary to support achievement of the phosphorus export milestones in Table F-1. The description of non-structural controls shall include the planned measures, the areas where the measures will be implemented, and the annual phosphorus reductions that are expected to result from their implementation in units of mass/yr. Annual phosphorus reduction from non-structural BMPs shall be calculated consistent with Attachment 2 to Appendix F.

Description of Phase 1 planned structural controls – The permittee shall develop a priority ranking of areas and infrastructure within the municipality for potential implementation of structural phosphorus controls during Phase 1. The ranking shall be developed through the use of available screening and monitoring results collected during the permit term either by the permittee or another entity and the mapping required pursuant to part 2.3.4.6 of the Permit. The permittee shall also include in this priority ranking a detailed assessment of site suitability for potential phosphorus control measures based on soil types and other factors. The permittee shall coordinate this activity with the requirements of part 2.3.6.8.b of the Permit. A description and the results of this priority ranking shall be included in Phase 1 of the PCP. The permittee shall describe the structural stormwater control measures necessary to support achievement of the phosphorus export milestones in Table F-1. The description of structural controls shall include the planned and existing measures, the areas where the measures will be implemented or are currently implemented, and the annual phosphorus reductions in units of mass/yr that are expected to result from their implementation. Structural measures to be implemented by a third party may be included in a municipal PCP. Annual phosphorus reductions from structural BMPs shall be calculated consistent with Attachment 3 to Appendix F.

Description of Operation and Maintenance (O&M) Program for all planned and existing structural BMPs – The permittee shall establish an Operation and Maintenance Program for all structural BMPs being claimed for phosphorus reduction credit as part of Phase 1 of the PCP. This includes BMPs implemented to date as well as BMPs to be implemented during Phase 1 of the PCP. The Operation and Maintenance Program shall become part of the PCP and include: (1) inspection and maintenance schedule for each BMP according to BMP design or manufacturer specification and (2) program or department responsible for BMP maintenance.

Phase 1 Implementation Schedule – A schedule for implementation of all planned Phase 1 BMPs, including, as appropriate: obtaining funding, training, purchasing, construction, inspections, monitoring, operation and maintenance activities, and other assessment and evaluation components of implementation. Implementation of planned BMPs must begin upon completion of the Phase 1 Plan, and all non-structural BMPs shall be fully implemented within six years of the permit effective date. Structural BMPs

shall be designed and constructed to ensure the permittee will comply with the 8 and 10 year phosphorus load milestones established in Table F-1. The Phase 1 plan shall be fully implemented as soon as possible, but no later than 10 years after the effective date of permit.

Estimated cost for implementing Phase 1 of the PCP – The permittee shall estimate the cost of implementing the Phase 1 non-structural and structural controls and associated Operation and Maintenance Program. This cost estimate can be used to assess the validity of the funding source assessment completed by year 3 after the permit effective date and to update funding sources as necessary to complete Phase 1.

Complete written Phase 1 Plan – The permittee must complete the written Phase 1 Plan of the PCP no later than 5 years after the permit effective date. The complete Phase 1 Plan shall include Phase 1 PCP item numbers 1-1 through 1-7 in Table F-1. The permittee shall make the Phase 1 Plan available to the public for public comment during Phase 1 Plan development. EPA encourages the permittee to post the Phase I Plan online to facilitate public involvement.

Performance Evaluation – The permittee shall evaluate the effectiveness of the PCP by tracking the phosphorus reductions achieved through implementation of structural and non-structural BMPs⁶ and tracking increases resulting from development. Phosphorus reductions shall be calculated consistent with Attachment 2 to Appendix F (non-structural BMP performance) and Attachment 3 to Appendix F (structural BMP performance) for all BMPs implemented to date. Phosphorus export increases since 2005 due to development shall be calculated consistent with Attachment 1 to Appendix F. Phosphorus loading increases and reductions in unit of mass/yr shall be added or subtracted from the applicable Baseline Phosphorus Load given in Table F-2 or Table F-3 depending on the Scope of PCP chosen to estimate the yearly phosphorous export rate from the PCP Area. The permittee shall also include all information required in part I.2 of this Appendix in each performance evaluation. Performance evaluations will be included as part of each permittee's annual report as required by part 4.4 of the Permit.

Alternative Schedule Request – If the permittee determines that the schedule to meet required Phase 1 phosphorus reductions contained in Table F-1 is impracticable, the permittee may submit to EPA and MassDEP an Alternative Schedule Request to meet the phosphorus reduction

⁶ In meeting its phosphorus reduction requirements a permittee may quantify phosphorus reductions by actions undertaken by another entity, except where those actions are credited to MassDOT or another permittee identified in Appendix F Table F-2 or F-3.

requirements in Table F-1 on the shortest schedule that is achievable considering the factors below.⁷

- a. A Phase 1 Alternative Schedule Request shall include an analysis demonstrating that the schedule to meet phosphorus reduction requirements in Table F-1 is unaffordable within the timeframe of Phase 1. EPA expects that such extraordinary circumstances would occur rarely, where meeting the phosphorus reductions in Table F-1 is unaffordable.⁸ A Phase 1 Alternative Schedule Request is limited to alternative schedules to meet the requirements of items numbered 1-11 through 1-14 in Table F-1. Requests must include the following:
 - i. A narrative of the reasons for the permittee's request for an alternative schedule, including information demonstrating the applicant's efforts and extent of progress made toward meeting the required phosphorus reductions in Table F-1,
 - ii. Analysis of the nonstructural controls implemented to date,
 - iii. A description of the planned Phase 1 structural controls for which schedule adjustment is requested,
 - iv. Estimated cost of the planned Phase 1 structural controls for which schedule adjustment is requested,
 - v. Affordability for taxpayers or ratepayers (as applicable), including a projection of sources and uses of funds, taking into consideration existing or potential financial capability and funding mechanisms (e.g., property taxes, stormwater rate changes, or stormwater utility fees), and
 - vi. A requested schedule to meet all phosphorus reduction requirements in Table F-1.

⁷ See part A.I.4 for information regarding the Alternative Schedule Request submittal and review process.

⁸ EPA notes that such expectation regarding infrequency does not constitute or establish an additional criterion for the applicant to satisfy.

Community Annual Stormwater Phosphorus Load Reduction by Permittee, Charles River Watershed				
Community	Baseline Phosphorus Load, kg/yr	Stormwater Phosphorus Load Reduction Requirement kg/yr	Allowable Phosphorus Load, kg/yr	Stormwater Percent Reduction in Phosphorus Load (%)
Arlington	106	6857	3849	64% 53%
Ashland	67	2823	3944	42% 34%
Bellingham	947	398331	549616	42% 35%
Belmont	202	10586	97116	52% 42%
<u>Boston⁹</u>	<u>6886</u>	<u>4145</u>	<u>2741</u>	<u>60%</u>
Brookline	1,635	968789	667846	59% 48%
Cambridge	512	317263	195249	62% 51%
Dedham	805	404325	401480	50% 40%
Dover	831	180137	652694	22% 17%
Foxborough	2	0	2	0%
Franklin	2,344	1012818	13321,526	43% 35%
Holliston	1,543	496395	10461,148	32% 26%
Hopedale	107	4737	6070	44% 35%
Hopkinton	292	8966	203226	31% 22%
Lexington	530	242194	287336	46% 37%
Lincoln	593	127101	466492	21% 17%
Medfield	955	345277	611678	36% 29%
Medway	1,063	400314	662749	38% 30%
Mendon	29	119	1720	40% 31%
Milford	1,611	809663	802948	50% 41%
Millis	969	301248	668721	31% 26%
Natick	1,108	486385	622723	44% 35%
Needham	1,772	974796	797976	55% 45%
Newton	3,884	23651,941	15191,943	61% 50%
Norfolk	1,004	286232	718772	28% 23%

⁹ Boston is included for reference and for non-traditional MS4s located within the city of Boston. Boston is covered by an individual Phase I MS4 permit. Boston's individual Phase I MS4 permit will also reflect this phosphorus load reduction

Community Annual Stormwater Phosphorus Load Reduction by Permittee, Charles River Watershed				
Community	Baseline Phosphorus Load, kg/yr	Stormwater Phosphorus Load Reduction Requirement kg/yr	Allowable Phosphorus Load, kg/yr	Stormwater Percent Reduction in Phosphorus Load (%)
Somerville	646	400 331	245 315	62% 51%
Sherborn	846	156 131	690 715	18% 16%
Walpole	159	37 28	121 131	24% 18%
Waltham	2,901	1755 1,461	1146 1,400	60% 50%
Watertown	1,127	703 582	424 545	62% 52%
Wayland	46	19 15	27 31	42% 33%
Wellesley	1,431	821 661	609 770	57% 46%
Weston	1,174	375 281	799 893	32% 24%
Westwood	376	150 114	226 262	40% 30%
Wrentham	618	210 171	407 447	34% 28%
Mass-DCR	421	91	330	22%

Table F-2: Baseline Phosphorus Load, Phosphorus Reduction Requirement, Allowable Phosphorus Load and Percent Reduction in Phosphorus Load from Charles River Watershed. For use when PCP Area is chosen to be the entire community within the Charles River Watershed.

Urbanized Area Annual Stormwater Phosphorus Load Reduction by Permittee, Charles River Watershed				
Community	Baseline Watershed Phosphorus Load, kg/yr	Stormwater Phosphorus Load Reduction Requirement, kg/yr	Allowable Phosphorus Load, kg/yr	Stormwater Percent Reduction in Phosphorus Load (%)
Arlington	106	68 57	38 49	64% 53%
Ashland	67	28 23	39 44	42% 34%
Bellingham	801	352 291	449 510	44% 36%
Belmont	202	105 86	97 116	52% 42%

Urbanized Area Annual Stormwater Phosphorus Load Reduction by Permittee, Charles River Watershed				
Community	Baseline Watershed Phosphorus Load, kg/yr	Stormwater Phosphorus Load Reduction Requirement, kg/yr	Allowable Phosphorus Load, kg/yr	Stormwater Percent Reduction in Phosphorus Load (%)
<u>Boston</u>	<u>6886</u>	<u>4145</u>	<u>2741</u>	<u>60%</u>
Brookline	1,635	<u>968789</u>	<u>667846</u>	<u>59%48%</u>
Cambridge	512	<u>317263</u>	<u>195249</u>	<u>62%51%</u>
Dedham	805	<u>404325</u>	<u>401480</u>	<u>50%40%</u>
Dover	282	<u>8254</u>	<u>199228</u>	<u>29%19%</u>
Foxborough	2	0	2	0%
Franklin	2,312	<u>1007813</u>	<u>13051,499</u>	<u>44%35%</u>
Holliston	1,359	<u>466369</u>	<u>892990</u>	<u>34%27%</u>
Hopedale	107	<u>4737</u>	<u>6070</u>	<u>44%35%</u>
Hopkinton	280	<u>8865</u>	<u>191215</u>	<u>32%23%</u>
Lexington	525	<u>241193</u>	<u>284332</u>	<u>46%37%</u>
Lincoln	366	<u>8463</u>	<u>282303</u>	<u>23%17%</u>
Medfield	827	<u>335267</u>	<u>492560</u>	<u>41%33%</u>
Medway	1,037	<u>390305</u>	<u>647732</u>	<u>38%29%</u>
Mendon	10	<u>65</u>	<u>55</u>	<u>57%50%</u>
Milford	1,486	<u>798653</u>	<u>688833</u>	<u>54%44%</u>
Millis	501	<u>200159</u>	<u>300342</u>	<u>40%32%</u>
Natick	994	<u>456359</u>	<u>538635</u>	<u>46%36%</u>
Needham	1,771	<u>974795</u>	<u>797976</u>	<u>55%45%</u>
Newton	3,884	<u>23651,941</u>	<u>15191,943</u>	<u>61%50%</u>
Norfolk	1,001	<u>285231</u>	<u>716770</u>	<u>29%23%</u>
Somerville	646	<u>400331</u>	<u>245315</u>	<u>62%51%</u>
Sherborn	203	<u>5238</u>	<u>151165</u>	<u>26%19%</u>
Walpole	159	<u>3728</u>	<u>121131</u>	<u>24%18%</u>
Waltham	2,901	<u>17551,461</u>	<u>11461,440</u>	<u>60%50%</u>
Watertown	1,127	<u>703582</u>	<u>424545</u>	<u>62%52%</u>
Wayland	46	<u>1915</u>	<u>2731</u>	<u>42%33%</u>
Wellesley	1,431	<u>821661</u>	<u>609770</u>	<u>57%46%</u>
Weston	1,174	<u>375281</u>	<u>799893</u>	<u>32%24%</u>

Urbanized Area Annual Stormwater Phosphorus Load Reduction by Permittee, Charles River Watershed				
Community	Baseline Watershed Phosphorus Load, kg/yr	Stormwater Phosphorus Load Reduction Requirement, kg/yr	Allowable Phosphorus Load, kg/yr	Stormwater Percent Reduction in Phosphorus Load (%)
Westwood	346	143 108	203 238	41% 31%
Wrentham	556	196 159	361 397	35% 29%
Mass DCR	396	89	307	22%

Table F-3: Baseline Phosphorus Load, Phosphorus Reduction Requirement, Allowable Phosphorus Load and Percent Reduction in Phosphorus Load from Charles River Watershed. For use when PCP Area is chosen to be only the urbanized area portion of a permittee’s jurisdiction within the Charles River Watershed.

b. Phase 2

- 1) The permittee shall complete the Phase 2 Plan of the PCP 10 years after the permit effective date and fully implement the Phase 2 plan of the PCP as soon as possible but no longer than 15 years after the permit effective date.
- 2) The Phase 2 plan of the PCP shall be added to the Phase 1 Plan and contain the following elements and has the following required milestones:

Item Number	Phase 2 of the PCP Component and Milestones	Completion Date
2-1	Update Legal analysis	As necessary
2-2	Description of Phase 2 planned nonstructural controls	10 years after permit effective date
2-3	Description of Phase 2 planned structural controls	10 years after permit effective date
2-4	Updated description of Operation and Maintenance Program	10 years after permit effective date
2-5	Phase 2 implementation schedule	10 years after permit effective date

2-6	Estimated cost for implementing Phase 2 of the PCP	10 years after permit effective date
2-7	Complete written Phase 2 Plan	10 years after permit effective date
2-8	Performance Evaluation.	11, and 12 years after permit effective date
2-9	<ol style="list-style-type: none"> 1. Performance Evaluation. 2. Full implementation of all structural controls used to demonstrate that the total phosphorus export rate (P_{exp}) from the PCP Area in mass/yr is equal to or less than the applicable Allowable Phosphorus Load(P_{allow}) plus the applicable Phosphorus Reduction Requirement (P_{RR}) multiplied by 0.65 $P_{exp} \leq P_{allow} + (P_{RR} \times 0.65)$ 	13 years after permit effective date
2-10	Performance Evaluation	14 years after permit effective date
2-11	<ol style="list-style-type: none"> 1. Performance Evaluation. 2. Full implementation of all structural controls used to demonstrate that the total phosphorus export rate (P_{exp}) from the PCP Area in mass/yr is equal to or less than the applicable Allowable Phosphorus Load(P_{allow}) plus the applicable Phosphorus Reduction Requirement (P_{RR}) multiplied by 0.50 $P_{exp} \leq P_{allow} + (P_{RR} \times 0.50)$ 	15 years after permit effective date

Table F-4: Phase 2 of the PCP components and Milestones

3) Description of Phase 2 PCP Components

Updated Legal Analysis- The permittee shall update the legal analysis completed during Phase 1 of the PCP as necessary to include any new or augmented bylaws, ordinances or funding mechanisms the permittee has deemed necessary to implement the PCP. The permittee shall use experience gained during Phase 1 to inform the updated legal analysis. The permittee shall adopt necessary regulatory changes as soon as possible to implement the Phase 2 Plan.

Description of Phase 2 planned non-structural controls – The permittee shall describe the non-structural stormwater control measures necessary to support achievement of the phosphorus export milestones in Table F-4. The description of non-structural controls shall include the planned measures,

the areas where the measures will be implemented, and the annual phosphorus reductions that are expected to result from their implementation in units of mass/yr. Annual phosphorus reduction from non-structural BMPs shall be calculated consistent with Attachment 2 to Appendix F.

Description of planned Phase 2 structural controls – The permittee shall develop a priority ranking of areas and infrastructure within the municipality for potential implementation of phosphorus control practices during Phase 2. The ranking shall build upon the ranking developed for Phase 1. The permittee shall describe the structural stormwater control measures necessary to support achievement of the phosphorus export milestones in Table F-4. The description of structural controls shall include the planned measures, the areas where the measures will be implemented, and the annual phosphorus reductions in units of mass/yr that are expected to result from their implementation. Structural measures to be implemented by a third party¹⁰ may be included in a municipal PCP. Annual phosphorus reductions from structural BMPs shall be calculated consistent with Attachment 3 to Appendix F.

Updated description of Operation and Maintenance (O&M) Program for all planned and existing structural BMPs – The permittee shall establish an Operation and Maintenance Program for all structural BMPs being claimed for phosphorus reduction credit as part of Phase 1 and 2 of the PCP. This includes BMPs implemented to date as well as BMPs to be implemented during Phase 2 of the PCP. The Operation and Maintenance Program shall become part of the PCP and include: (1) inspection and maintenance schedule for each BMP according to BMP design or manufacturer specification and (2) program or department responsible for BMP maintenance.

Phase 2 Implementation Schedule – A schedule for implementation of all planned Phase 2 BMPs, including, as appropriate: funding, training, purchasing, construction, inspections, monitoring, O&M activities and other assessment and evaluation components of implementation. Implementation of planned BMPs must begin upon completion of the Phase 2 Plan. Structural BMPs shall be designed and constructed to ensure the permittee will comply with the 13 and 15 year milestones established in Table F-4. The Phase 2 plan shall be fully implemented as soon as possible, but no later than 15 years after the effective date of permit.

Estimated cost for implementing Phase 2 of the PCP – The permittee shall estimate the cost of implementing the Phase 2 non-structural and structural controls and associated Operation and Maintenance Program. This cost estimate can be used to plan for the full implementation of Phase 2.

¹⁰ See footnote 6

Complete written Phase 2 Plan – The permittee must complete a written Phase 2 Plan of the PCP no later than 10 years after the permit effective date. The complete Phase 2 Plan shall include Phase 2 PCP item numbers 2-1 through 2-6 in Table F-4. The permittee shall make the Phase 2 Plan available to the public for public comment during Phase 2 plan development. EPA encourages the permittee to post the Phase 2 Plan online to facilitate public involvement.

Performance Evaluation – The permittee shall evaluate the effectiveness of the PCP by tracking the phosphorus reductions achieved through implementation of structural and non-structural BMPs¹¹ and tracking increases resulting from development. Phosphorus reductions shall be calculated consistent with Attachment 2 to Appendix F (non-structural BMP performance) and Attachment 3 to Appendix F (structural BMP performance) for all BMPs implemented to date. Phosphorus export increases due to development shall be calculated consistent with Attachment 1 to Appendix F. Phosphorus loading increases and reductions in unit of mass/yr shall be added or subtracted from the applicable Baseline Phosphorus Load given in Table F-2 or Table F-3 depending on the Scope of PCP chosen to estimate the yearly phosphorous export rate from the PCP Area. The permittee shall also include all information required in part I.2 of this Appendix in each performance evaluation. Performance evaluations will be included as part of each permittee’s annual report as required by part 4.4 of the Permit.

Alternative Schedule Request– If the permittee determines that the schedule to meet required Phase 2 phosphorus reductions contained in Table F-4 is impracticable, the permittee may submit to EPA and MassDEP an Alternative Schedule Request to meet the phosphorus reduction requirements of items numbered 2-9 and 2-11 in Table F-4 on the shortest schedule that is achievable considering the factors below.¹²

- a. A Phase 2 Alternative Schedule Request shall include an analysis demonstrating that the schedule to meet the phosphorus reduction requirements in items numbered 2-9 and 2-11 in Table F-4 is impracticable. Requests must include, where relevant, the following:
 - i. A narrative of the reasons for -the permittee’s request for an alternative schedule, including information demonstrating the applicant’s efforts and -extent of progress made toward meeting the required phosphorus reductions in Table F-4,
 - ii. A description of the planned structural controls to meet applicable phosphorus reduction milestones,
 - iii. Suitability and availability of areas for siting and constructing structural controls, including, if appropriate, a

¹¹ See footnote 9

¹² See part A.I.4 for information regarding the Alternative Schedule Request submittal and review process.

- review of third-party partnerships considered for within-watershed structural control sites,
- iv. Access and acquisition of real property rights for constructing and maintaining structural controls,
- v. Timelines for the permittee’s planning, design, financing, easement or property interest acquisition, and procurement for and construction of structural controls,
- vi. Timelines for and constraints due to the federal, state and/or local approval(s) and permitting processes for structural controls,
- vii. Anticipated phosphorus reductions due to the rate of redevelopment within the community and the degree to which future redevelopment may be reasonably anticipated to achieve the desired reductions in lieu of reliance upon structural controls by the permittee,
- viii. Estimated cost of the planned structural controls to meet applicable phosphorus reduction milestones,
- ix. Scale of structural BMP controls required and phasing considerations with other capital improvement projects that are being implemented by the permittee or other parties that impact the permittee, municipality or relevant taxpayers or ratepayers,
- x. Affordability for taxpayers or ratepayers (as applicable), including a projection of sources and uses of funds, taking into consideration existing or potential financial capability and funding mechanisms (e.g., property taxes, stormwater rate changes, or stormwater utility fees),
- xi. Other relevant information, and
- xii. A requested schedule to meet all phosphorus reduction requirements in Table F-4.

c. Phase 3

- 1) The permittee shall complete the Phase 3 Plan of the PCP 15 years after the permit effective date and fully implement the Phase 3 plan of the PCP as soon as possible but no longer than 20 years after the permit effective date.
- 2) The Phase 3 plan of the PCP shall be added to the Phase 1 Plan and the Phase 2 Plan to create the comprehensive PCP and contain the following elements and has the following required milestones:

Item Number	Phase 3 of the PCP Component and Milestones	Completion Date
3-1	Update Legal analysis	As necessary
3-2	Description of Phase 3 planned nonstructural controls	15 years after permit effective date

3-3	Description of Phase 3 planned structural controls	15 years after permit effective date
3-4	Updated description of Operation and Maintenance (O&M) Program	15 years after permit effective date
3-5	Phase 3 implementation schedule	15 years after permit effective date
3-6	Estimated cost for implementing Phase 3 of the PCP	15 years after permit effective date
3-7	Complete written Phase 3 Plan	15 years after permit effective date
3-8	Performance Evaluation.	16, and 17 years after permit effective date
3-9	<ol style="list-style-type: none"> Performance Evaluation. Full implementation of all structural controls used to demonstrate that the total phosphorus export rate (P_{exp}) from the PCP Area in mass/yr is equal to or less than the applicable Allowable Phosphorus Load (P_{allow}) plus the applicable Phosphorus Reduction Requirement (P_{RR}) multiplied by 0.30 $P_{exp} \leq P_{allow} + (P_{RR} \times 0.30)$ 	18 years after permit effective date
3-10	Performance Evaluation	19 years after permit effective date
3-11	<ol style="list-style-type: none"> Performance Evaluation. Full implementation of all structural controls used to demonstrate that the total phosphorus export rate (P_{exp}) from the PCP Area in mass/yr is equal to or less than the applicable Allowable Phosphorus Load (P_{allow}) $P_{exp} \leq P_{allow}$ 	20 years after permit effective date

Table F-5: Phase 3 of the PCP components and Milestones

3) Description of Phase 3 PCP Components

Updated Legal Analysis- The permittee shall update the legal analysis completed during Phase 1 and Phase 2 of the PCP as necessary to include any new or augmented bylaws, ordinances or funding mechanisms the permittee has deemed necessary to implement the PCP. The permittee

shall use experience gained during Phase 1 and Phase 2 to inform the updated legal analysis. The permittee shall adopt necessary regulatory changes as soon as possible to implement the Phase 3 Plan.

Description of Phase 3 planned non-structural controls – The permittee shall describe the non-structural stormwater control measures necessary to support achievement of the phosphorus export milestones in Table F-5. The description of non-structural controls shall include the planned measures, the areas where the measures will be implemented, and the annual phosphorus reductions that are expected to result from their implementation in units of mass/yr. Annual phosphorus reduction from non-structural BMPs shall be calculated consistent with Attachment 2 to Appendix F.

Description of planned Phase 3 structural controls – The permittee shall develop a priority ranking of areas and infrastructure within the municipality for potential implementation of phosphorus control practices during Phase 3. The ranking shall build upon the ranking developed for Phase 1 and 2. The permittee shall describe the structural stormwater control measures necessary to support achievement of the phosphorus export milestones. in Table F-5. The description of structural controls shall include the planned measures, the areas where the measures will be implemented, and the annual phosphorus reductions in units of mass/yr that are expected to result from their implementation. Structural measures to be implemented by a third party¹³ may be included in a municipal PCP. Annual phosphorus reduction from structural BMPs shall be calculated consistent with Attachment 3 to Appendix F.

Updated description of Operation and Maintenance (O&M) Program for all planned and existing structural BMPs – The permittee shall establish an Operation and Maintenance Program for all structural BMPs being claimed for phosphorus reduction credit as part of Phase 1, 2 and 3 of the PCP. This includes BMPs implemented to date as well as BMPs to be implemented during Phase 3 of the PCP. The Operation and Maintenance Program shall become part of the PCP and include: (1) inspection and maintenance schedule for each BMP according to BMP design or manufacturer specification and (2) program or department responsible for BMP maintenance.

Phase 3 Implementation Schedule – A schedule for implementation of all planned Phase 3 BMPs, including, as appropriate: funding, training, purchasing, construction, inspections, monitoring, O&M activities and other assessment and evaluation components of implementation. Implementation of planned BMPs must begin upon completion of the Phase 3 Plan. Structural BMPs shall be designed and constructed to ensure the permittee will comply with the 18 and 20 year milestones established in Table F-5.

¹³ See footnote 6.

The Phase 3 plan shall be fully implemented as soon as possible., but no later than 20 years after the effective date of permit.

Estimated cost for implementing Phase 3 of the PCP – The permittee shall estimate the cost of implementing the Phase 3 non-structural and structural controls and associated Operation and Maintenance Program. This cost estimate can be used to plan for the full implementation of Phase 3.

Complete written Phase 3 Plan – The permittee must complete the written Phase 3 Plan of the PCP no later than 15 years after the permit effective date. The complete Phase 3 Plan shall include Phase 3 PCP item numbers 3-1 through 3-6 in Table F-5. The permittee shall make the Phase 3 Plan available to the public for public comment during Phase 3 Plan development. EPA encourages the permittee to post the Phase 3 Plan online to facilitate public involvement.

Performance Evaluation – The permittee shall evaluate the effectiveness of the PCP by tracking the phosphorus reductions achieved through implementation of structural and non-structural BMPs¹⁴ and tracking increases resulting from development. Phosphorus reductions shall be calculated consistent with Attachment 2 to Appendix F (non-structural BMP performance) and Attachment 3 to Appendix F (structural BMP performance) for all BMPs implemented to date. Phosphorus export increases due to development shall be calculated consistent with Attachment 1 to Appendix F. Phosphorus loading increases and reductions in unit of mass/yr shall be added or subtracted from the applicable Baseline Phosphorus Load given in Table F-2 or Table F-3 depending on the Scope of PCP chosen to estimate the yearly phosphorous export rate from the PCP Area. The permittee shall also include all information required in part I.2 of this Appendix in each performance evaluation. Performance evaluations will be included as part of each permittee’s annual report as required by part 4.4 of the Permit.

Alternative Schedule Request– If the permittee determines that the schedule to meet required Phase 3 phosphorus reductions contained in Table F-5 is impracticable, the permittee may submit to EPA and MassDEP an Alternative Schedule Request to meet the phosphorus reduction requirements in items numbered 3-9 and 3-11 in Table F-5 on the shortest schedule that is achievable considering the factors below.¹⁵

- a. A Phase 3 Alternative Schedule Request, shall include an analysis demonstrating that the schedule to meet the phosphorus reduction requirements in items numbered 3-9 and 3-11 in Table F-5 is impracticable. Requests must include, where relevant, the following:

¹⁴ See footnote 9

¹⁵ See part A.I.4 for information regarding the Alternative Schedule Request submittal and review process.

- i. A narrative of the reasons for the permittee's request for an alternative schedule, including information demonstrating the applicant's efforts and extent of progress made toward meeting the required phosphorus reductions in Table F-5.
- ii. A description of the planned structural to meet applicable phosphorus reduction milestones.
- iii. Suitability and availability of areas for siting and constructing structural controls, including, if appropriate, a review of third-party partnerships considered for within-watershed structural control sites.
- iv. Access and acquisition of real property rights for constructing and maintaining structural controls.
- v. Timelines for the permittee's planning, design, financing, easement or property interest acquisition, and procurement for and construction of structural controls.
- vi. Timelines for and constraints due to the federal, state and/or local approval(s) and permitting processes for structural controls.
- vii. Anticipated phosphorus reductions due to the rate of redevelopment within the community and the degree to which future redevelopment may be reasonably anticipated to achieve the desired reductions in lieu of reliance upon structural controls by the permittee.
- viii. Estimated cost of the planned structural controls -to meet applicable phosphorus reduction milestones.
- ix. Scale of structural BMP controls required and phasing considerations with other capital improvement projects that are being implemented by the permittee or other parties that impact the permittee, municipality or relevant taxpayers or ratepayers.
- x. Affordability for taxpayers or ratepayers (as applicable), including a projection of sources and uses of funds, taking into consideration existing or potential financial capability and funding mechanisms (e.g., property taxes, stormwater rate changes, or stormwater utility fees).
- xi. Other relevant information, and
- xii. A requested schedule to meet all phosphorus reduction requirements in Table F-5.

2. Reporting

Beginning 1 year after the permit effective date, the permittee shall include a progress report in each annual report on the planning and implementation of the PCP.

Beginning five (5) years after the permit effective date, the permittee shall include the following in each annual report submitted pursuant to part 4.4 of the Permit:

- a. All non-structural control measures implemented during the reporting year along with the phosphorus reduction in mass/yr (P_{NSred}) calculated consistent with Attachment 2 to Appendix F
- b. Structural controls implemented during the reporting year and all previous years including:
 - a. Location information of structural BMPs (GPS coordinates or street address)
 - b. Phosphorus reduction from all structural BMPs implemented to date in mass/yr (P_{Sred}) calculated consistent with Attachment 3 to Appendix F
 - c. Date of last completed maintenance and inspection for each Structural control
- c. Phosphorus load increases due to development over the previous reporting period and incurred since 2005 (P_{DEVinc}) calculated consistent with Attachment 1 to Appendix F.
- d. Estimated yearly phosphorus export rate (P_{exp}) from the PCP Area calculated using Equation 2. ~~Equation 2 calculates the yearly phosphorus export rate by subtracting yearly phosphorus reductions through implemented nonstructural controls and structural controls to date from the Baseline Phosphorus Load and adding loading increases incurred through development to date.~~ This equation shall be used to demonstrate compliance with the applicable phosphorus reduction milestones ~~required as part of each phase of the PCP.~~

$$P_{exp} \left(\frac{\text{mass}}{\text{yr}} \right) = P_{base} \left(\frac{\text{mass}}{\text{yr}} \right) - \left(P_{Sred} \left(\frac{\text{mass}}{\text{yr}} \right) + P_{NSred} \left(\frac{\text{mass}}{\text{yr}} \right) \right) + P_{DEVinc} \left(\frac{\text{mass}}{\text{yr}} \right)$$

Equation 1. Equation used to calculate yearly phosphorus export rate from the chosen PCP Area. P_{exp} =Current phosphorus export rate from the PCP Area in mass/year. P_{base} =baseline phosphorus export rate from ~~L~~PCP Area in mass/year. P_{Sred} = yearly phosphorus reduction from implemented structural controls in the PCP Area in mass/year. P_{NSred} = yearly phosphorus reduction from implemented non-structural controls in the PCP Area in mass/year. P_{DEVinc} = yearly phosphorus increase resulting from development since 2005 in the PCP Area in mass/year.

- e. Certification that all structural BMPs are being inspected and maintained according to the O&M program specified as part of the PCP. The certification statement shall be:

I certify under penalty of law that all source control and treatment Best Management Practices being claimed for phosphorus reduction credit have been inspected, maintained and repaired in accordance with manufacturer or design specification. ~~I certify that, to the best of my knowledge, all Best Management Practices being claimed for a phosphorus reduction credit are performing as originally designed.~~

- f. Certification that all municipally owned and maintained turf grass areas are being managed in accordance with Massachusetts Regulation 331 CMR 31 pertaining to proper use of fertilizers on turf grasses (see <http://www.mass.gov/courts/docs/lawlib/300-399cmr/330cmr31.pdf>).

3. At any time during the permit term the permittee may be relieved of additional requirements in Appendix F part A.I.1. as follows.
 - a. The permittee is relieved of its additional requirements as of the date when the following conditions are met:
 - i. The applicable TMDL has been modified, revised or withdrawn and EPA has approved a new TMDL applicable for the receiving water that indicates that no additional stormwater controls for the control of phosphorus are necessary for the permittee's discharge based on wasteload allocations in the newly approved TMDL.
 - b. When the criteria in Appendix F part A.I.3.a. are met, the permittee shall document the date of the approved TMDL in its SWMP and is relieved of any remaining requirements of Appendix F part A.I.1 as of that date and the permittee shall comply with the following:
 - i. The permittee shall identify in its SWMP all activities implemented in accordance with the requirements of Appendix F part A.I.1 to date to reduce phosphorus in their discharges including implementation schedules for non-structural BMPs and any maintenance requirements for structural BMPs
 - ii. The permittee shall continue to implement all requirements of Appendix F part A.I.1 required to be implemented prior to the date of the newly approved TMDL, including ongoing implementation of identified non-structural BMPs and routine maintenance and replacement of all structural BMPs in accordance with manufacturer or design specifications, and the reporting requirements of Appendix F part I.2. remain in place.

4. The permittee may be relieved of the schedules and milestones contained in Table F-1, Table F-4 and/or Table F-5 as follows:

- a. The permittee is relieved of the applicable schedules and milestones when all the following conditions are met:
 - i. The permittee has submitted an Alternative Schedule Request package to EPA and MassDEP.^{16,17}
 - ii. EPA has determined the Alternative Schedule Request submittal is complete. The Alternative Schedule Request will be deemed complete 30 days from submittal, unless EPA requests additional information from the permittee.

¹⁶ Alternative Schedule Request package must be made available to the public consistent with 2.3.3. of the permit.

¹⁷ Submittal of an alternative schedule request does not relieve the permittee of noncompliance and potential enforcement for failure to comply with any permit requirements prior to the date of approval of an Alternative Schedule.

- iii. Following a 30-day public comment period on the complete Alternative Schedule Request, EPA approves the request in writing.¹⁸ If EPA has not acted to approve, modify with permittee consent, or deny an Alternative Schedule Request within 90 days of the close of the public comment period, the Alternative Schedule Request shall be deemed approved.
 - b. Any action by EPA approving or denying an Alternative Schedule Request is a final agency action that shall be subject to judicial review in federal district court.
 - c. When the permittee meets the conditions in Appendix F part A.I.4.a, the permittee shall incorporate the approved Alternative Schedule Request and the -approval date in its PCP. An approved Alternative Schedule Request will supersede any remaining schedules and milestones for the phase for which schedule adjustment is requested and approved. The permittee shall:
 - i. Identify in its PCP all activities implemented to date in accordance with the requirements of Appendix F part A.I and conducted to reduce phosphorus in its discharges pursuant to the submitted Alternative Schedule Request-, including non-structural BMP planning and implementation schedules and any structural BMP maintenance requirements; and
 - ii. Continue to implement all requirements of Appendix F part A.I required to be implemented prior to the date of Alternative Schedule Request approval, including ongoing implementation of identified non-structural BMPs and routine maintenance and replacement of all structural BMPs in accordance with manufacturer or design specifications
 - iii. Continue to implement their PCP, and the reporting requirements of Appendix F Part A.I.2 remain in place.

¹⁸ EPA may deny an alternative schedule request in the case of permittee noncompliance with permit requirements applicable to phosphorus reductions. EPA expects that an Alternative Schedule Request by a permittee that at the time of such request is in non-compliance with the applicable Table F-1, F-4 and F-5 phosphorus reduction percentage would be denied unless the permittee provides information regarding its phosphorus reduction efforts that EPA finds acceptable for this purpose.

II. Lake and Pond Phosphorus TMDL Requirements

Between 1999 and 2010 EPA has approved 13 Lake TMDLs¹⁹ completed by MassDEP covering 78 lakes and ponds within the Commonwealth of Massachusetts. Any permittee (traditional or non-traditional) that discharges to a waterbody segment in Table F-6 is subject to the requirements of this part.

1. Permittees that operate regulated MS4s (traditional and non-traditional) that discharge to the identified impaired waters or their tributaries must reduce phosphorus discharges to support achievement of phosphorus load reductions identified in the TMDLs. To address phosphorus, all permittees with a phosphorus reduction requirement greater than 0% shall develop a Lake Phosphorus Control Plan (LPCP) designed to reduce the amount of phosphorus in stormwater discharges from its MS4 to the impaired waterbody or its tributaries in accordance with the phosphorus load reduction requirements set forth in Table F-6 below. Permittees discharging to waterbodies in Table F-6 with an associated 0% Phosphorus Required Percent Reduction are subject to Appendix F part II.2.f and are relieved of the requirements of Appendix F part II.1.i through Appendix F part II.2.e Table F-6 identifies the primary municipalities²⁰ located within the watershed of the respective lake or pond and the percent phosphorus reductions necessary from urban stormwater sources. Any permittee (traditional or non-traditional) that discharges to a lake or pond listed in Table F-6 or its tributaries is subject to the same phosphorus percent reduction requirements associated with that lake or pond.

Primary Municipality	Waterbody Name	Required Percent Reduction
Auburn	Leesville Pond	31%
	Auburn Pond	24%
	Eddy Pond	0%
	Pondville Pond	8%
	Stoneville Pond	3%
Charlton	Buffumville Lake	28%
	Dresser Hill Pond	17%
	Gore Pond	14%
	Granite Reservoir	11%
	Jones Pond	13%
	Pierpoint Meadow Pond	27%

¹⁹ Final TMDLs for lakes and ponds in the Northern Blackstone River Watershed, Chicopee Basin, Connecticut Basin, French Basin, Millers Basin and Bare Hill Pond, Flint Pond, Indian Lake, Lake Boon, Leesville Pond, Salisbury Pond, White Island Pond, Quaboag Pond and Quacumquasit Pond can be found here: <http://www.mass.gov/eea/agencies/massdep/water/watersheds/total-maximum-daily-loads-tmdls.html>

²⁰ Primary municipalities indicate the municipality in which the majority of the lake or pond is located but does not necessarily indicate each municipality that has urbanized area that discharges to the lake or pond or its tributaries.

Primary Municipality	Waterbody Name	Required Percent Reduction
	Pikes Pond	38%
Dudley	Gore Pond	14%
	Larner Pond	55%
	New Pond	56%
	Pierpoint Meadow Pond	27%
	Shepherd Pond	25%
	Tobins Pond	62%
	Wallis Pond	54%
Gardner	Hilchey Pond	27%
	Parker Pond	47%
	Bents Pond	52%
	Ramsdall Pond	49%
Grafton	Flint Pond/Lake Quinsigamond	59%
Granby	Aldrich Lake East	0%
Hadley	Lake Warner	24%
Harvard	Bare Hill Pond	2%
Hudson	Lake Boon	28%
Leicester	Smiths Pond	30%
	Southwick Pond	64%
	Cedar Meadow Pond	17%
	Dutton Pond	23%
	Greenville Pond	14%
	Rochdale Pond	8%
Ludlow	Minechoag Pond	48%
Millbury	Brierly Pond	14%
	Dorothy Pond	1%
	Howe Reservoir	48%
Oxford	Buffumville Lake	28%
	Hudson Pond	37%
	Lowes Pond	51%
	McKinstry Pond	79%
	Robinson Pond	8%
	Texas Pond	21%
Shrewsbury	Flint Pond/Lake Quinsigamond	49%
	Jordan Pond	60%

Primary Municipality	Waterbody Name	Required Percent Reduction
	Mill Pond	43%
	Newton Pond	19%
	Shirley Street Pond	30%
Spencer	Quaboag Pond	29%
	Quacumquasit Pond	2%
	Jones Pond	13%
	Sugden Reservoir	31%
Springfield	Loon Pond	10%
	Long Pond	56%
	Mona Lake	57%
Stow	Lake Boon	28%
Templeton	Brazell Pond	62%
	Depot Pond	50%
	Bourn-Hadley Pond	49%
	Greenwood Pond 2	56%
Wilbraham	Spectacle Pond	45%
Winchendon	Lake Denison	22%
	Stoddard Pond	24%
	Whitney Pond	16%
	Whites Mill Pond	21%

Table F-6: Phosphorus impaired Lakes or Ponds subject to a TMDL along with primary municipality and required percent reduction of phosphorus from urban stormwater sources

- i. The LPCP shall be implemented in accordance with the following schedule and contain the following elements:
 - a. LPCP Implementation Schedule – The permittee shall complete its LPCP and fully implement all of the control measures in its LPCP as soon as possible but no later than 15 years after the effective date of the permit.
 - b. The LPCP shall be implemented in accordance with the following schedule and contain the following elements:

Number	LPCP Component and Milestones	Completion Date
1	Legal Analysis	2 years after permit effective date

2	Funding source assessment	3 years after permit effective date
3	Define LPCP scope (LPCP Area)	4 years after permit effective date
4	Calculate Baseline Phosphorus, Allowable Phosphorus Load and Phosphorus Reduction Requirement	4 years after permit effective date
5	Description of planned nonstructural and structural controls	5 years after permit effective date
6	Description of Operation and Maintenance (O&M) Program	5 years after permit effective date
7	Implementation schedule	5 years after permit effective date
8	Cost and Funding Source Assessment	5 years after permit effective date
9	Complete written LPCP	5 years after permit effective date
10	Full implementation of nonstructural controls.	6 years after permit effective date
11	Performance Evaluation.	6 and 7 years after permit effective date
12	<ol style="list-style-type: none"> 1. Performance Evaluation. 2. Full implementation of all structural controls used to demonstrate that the total phosphorus export rate (P_{exp}) from the LPCP Area in mass/yr is equal to or less than the applicable Allowable Phosphorus Load(P_{allow}) plus the applicable Phosphorus Reduction Requirement (P_{RR}) multiplied by 0.80 $P_{exp} \leq P_{allow} + (P_{RR} \times 0.80)$ 	8 years after permit effective date
13	Performance Evaluation	9 years after permit effective date
14	<ol style="list-style-type: none"> 1. Performance Evaluation. 2. Update LPCP 3. Full implementation of all structural controls used to demonstrate that the total phosphorus export rate (P_{exp}) from the LPCP Area in mass/yr is equal to or less than the applicable Allowable Phosphorus Load(P_{allow}) plus the applicable Phosphorus Reduction Requirement (P_{RR}) multiplied by 0.60 $P_{exp} \leq P_{allow} + (P_{RR} \times 0.60)$ OR that the permittee has reduced their phosphorus export rate by 30kg/year (whichever is greater, unless full 	10years after permit effective date

	Phosphorus Reduction Requirement has been met)	
15	Performance Evaluation	11 and 12 years after permit effective date
16	<ol style="list-style-type: none"> 1. Performance Evaluation. 2. Full implementation of all structural controls used to demonstrate that the total phosphorus export rate (P_{exp}) from the LPCP Area in mass/yr is equal to or less than the applicable Allowable Phosphorus Load(P_{allow}) plus the applicable Phosphorus Reduction Requirement (P_{RR}) multiplied by 0.30 $P_{exp} \leq P_{allow} + (P_{RR} \times 0.30)$ 	13years after permit effective date
17	Performance Evaluation	14 years after permit effective date
18	<ol style="list-style-type: none"> 1. Performance Evaluation. 2. Full implementation of all structural controls used to demonstrate that the total phosphorus export rate (P_{exp}) from the LPCP Area in mass/yr is equal to or less than the applicable Allowable Phosphorus Load(P_{allow}) $P_{exp} \leq P_{allow}$ 	15years after permit effective date

Table F-7: LPCP components and milestones

c. Description of LPCP Components:

Legal Analysis- The permittee shall develop and implement an analysis that identifies existing regulatory mechanisms available to the MS4 such as by-laws and ordinances and describes any changes to these regulatory mechanisms that may be necessary to effectively implement the LPCP. This may include the creation or amendment of financial and regulatory authorities. The permittee shall adopt necessary regulatory changes by the end of the permit term.

Scope of the LPCP (LPCP Area) - The permittee shall indicate the area in which the permittee plans to implement the LPCP, this area is known as the “LPCP Area”. The permittee must choose one of the following: 1) to implement its LPCP in the entire area within its jurisdiction discharging to the impaired waterbody (for a municipality this would be the municipal boundary) or 2) to implement its LPCP in only the urbanized area portion of its jurisdiction discharging to the impaired waterbody. If the permittee chooses to implement the LPCP in its entire jurisdiction discharging to the impaired waterbody, the permittee may demonstrate compliance with the Phosphorus Reduction Requirement and Allowable Phosphorus Load requirements applicable to it through structural and non-structural controls on discharges that occur both inside and outside the urbanized area. If the permittee chooses to implement the LPCP in its urbanized area only

discharging to the impaired waterbody, the permittee must demonstrate compliance with the Phosphorus Reduction Requirement and Allowable Phosphorus Load requirements applicable to it through structural and non-structural controls on discharges that occur within the urbanized area only.

Calculate Baseline Phosphorus Load (P_{base}), Phosphorus Reduction Requirement (P_{RR}) and Allowable Phosphorus Load (P_{allow}) – Permittees shall calculate their numerical Allowable Phosphorus Load and Phosphorus Reduction Requirement in mass/yr by first estimating their Baseline Phosphorus Load in mass/yr from its LPCP Area consistent with the methodology in Attachment 1 to Appendix F, the baseline shall only be estimated using land use phosphorus export coefficients in Attachment 1 to Appendix F and not account for phosphorus reductions resulting from implemented structural BMPs completed to date. Table F-6 contains the percent phosphorus reduction required from urban stormwater consistent with the TMDL of each impaired waterbody. The permittee shall apply the applicable required percent reduction in Table F-6 to the calculated Baseline Phosphorus Load to obtain the permittee specific Allowable Phosphorus Load. The Allowable Phosphorus Load shall then be subtracted from the Baseline Phosphorus Load to obtain the permittee specific Phosphorus Reduction Requirement in mass/yr.

Description of planned non-structural controls – The permittee shall describe the non-structural stormwater control measures to be implemented to support the achievement of the milestones in Table F-7. The description of non-structural controls shall include the planned measures, the areas where the measures will be implemented, and the annual phosphorus reductions that are expected to result from their implementation. Annual phosphorus reduction from non-structural BMPs shall be calculated consistent with Attachment 2 to Appendix F. The permittee shall update the description of planned non-structural controls as needed to support the achievement of the milestones in Table F-7, including an update in the updated written LPCP 10 years after the permit effective date.

Description of planned structural controls – The permittee shall develop a priority ranking of areas and infrastructure within the municipality for potential implementation of phosphorus control practices. The ranking shall be developed through the use of available screening and monitoring results collected during the permit term either by the permittee or another entity and the mapping required pursuant to part 2.3.4.6 of the Permit. The permittee shall also include in this prioritization a detailed assessment of site suitability for potential phosphorus control measures based on soil types and other factors. The permittee shall coordinate this activity with the requirements of part 2.3.6.8.b of the Permit. A description and the result of this priority ranking shall be included in the LPCP. The permittee shall describe the structural stormwater control measures necessary to support achievement of the milestones in Table F-7. The description of structural controls shall include the planned measures, the areas where the measures will be implemented, and the annual phosphorus reductions in units of mass/yr that are expected to result from their implementation. Structural measures to be implemented by a third party may be included in the LPCP. Annual phosphorus reduction from structural BMPs shall be calculated consistent with

Attachment 3 to Appendix F. The permittee shall update the description of planned structural controls as needed to support the achievement of the milestones in Table F-7, including an update in the updated written LPCP 10 years after the permit effective date.

Description of Operation and Maintenance (O&M) Program for all planned and existing structural BMPs – The permittee shall establish an Operation and Maintenance Program for all structural BMPs being claimed for phosphorus reduction credit. ~~This includes BMPs implemented to date as well as BMPs to be implemented, as part of Phase 1 and 2 of the PCP. This includes BMPs implemented to date as well as BMPs to be implemented during Phase 2 of the LPCP.~~ The Operation and Maintenance Program shall become part of the LPCP and include: (1) inspection and maintenance schedule for each BMP according to BMP design or manufacturer specification and (2) program or department responsible for BMP maintenance.

Implementation Schedule – An initial schedule for implementing the BMPs, including, as appropriate: funding, training, purchasing, construction, inspections, monitoring, O&M and other assessment and evaluation components of implementation. Implementation of planned BMPs must begin upon completion of the LPCP, and all non-structural BMPs shall be fully implemented within six years of the permit effective date. Where planned structural BMP retrofits or major drainage infrastructure projects are expected to take additional time to construct, the permittee shall within four years of the effective date of the permit have a schedule for completion of construction consistent with the reduction requirements in Table F-7. The permittee shall complete the implementation of its LPCP as soon as possible or at a minimum in accordance with the milestones set forth in Table F-7. The implementation schedule shall be updated as needed to support the achievement of the milestones in Table F-7, including an update in the updated written LPCP 10 years after the permit effective date.

Cost and funding source assessment – The permittee shall estimate the cost for implementing its LPCP and describe known and anticipated funding mechanisms. The permittee shall describe the steps it will take to implement its funding plan. This may include but is not limited to conceptual development, outreach to affected parties, and development of legal authorities

Complete written LPCP – The permittee must complete the written LPCP 4 years after permit effective date. The complete LPCP shall include item numbers 1-8 in Table F-7. The permittee shall make the LPCP available to the public for public comment during the LPCP development. EPA encourages the permittee to post the LPCP online to facilitate public involvement. The LPCP shall be updated as needed with an update 10 years after the permit effective date at a minimum to reflect changes in BMP implementation to support achievement of the phosphorus export milestones in Table F-7. The updated LPCP shall build upon the original LPCP and include additional or new BMPs the permittee will use to support the achievement of the milestones in Table F-7.

Performance Evaluation – The permittee shall evaluate the effectiveness of the LPCP by tracking the phosphorus reductions achieved through implementation of structural and non-structural BMPs²¹ and tracking increases in phosphorus loading from the LPCP Area beginning six years after the effective date of the permit. Phosphorus reductions shall be calculated consistent with Attachment 2 (non-structural BMP performance), Attachment 3 (structural BMP performance) and Attachment 1 (reductions through land use change), to Appendix F for all BMPs implemented to date.²² Phosphorus load increases resulting from development shall be calculated consistent with Attachment 1 to Appendix F. Phosphorus loading increases and reductions in units of mass/yr shall be added or subtracted from the calculated Baseline Phosphorus Load to estimate the yearly phosphorous export rate from the LPCP Area in mass/yr. The permittee shall also include all information required in part II.2 of this Appendix in each performance evaluation.

Alternative Schedule Request– If the permittee determines that the schedule to meet required phosphorus reductions contained in items 12, 14, 16 or 18 in Table F-7 is impracticable, the permittee may submit to EPA and MassDEP an Alternative Schedule Request to meet the phosphorus reduction requirements in items 12, 14, 16 or 18 in Table F-7 on the shortest schedule that is achievable considering the factors below.²³

- a. The Alternative Schedule Request shall include an analysis demonstrating that the schedule to meet phosphorus reduction requirements in items 12, 14, 16 or 18 in Table F-7 is impracticable, EPA expects that an Alternative Schedule Request to meet the phosphorus reduction requirement in item number 12 in Table F-7 would only be submitted in extraordinary circumstances and would occur rarely, where meeting the phosphorus reductions in number 12 in Table F-7 is unaffordable²⁴. All Alternative Schedule Requests must include, where relevant, the following:
 - i. A narrative of the reasons for the permittee’s request for an alternative schedule, including information demonstrating the applicant’s efforts and extent of progress made toward meeting required phosphorus reductions in Table F-7,

²¹ In meeting its phosphorus reduction requirements a permittee may quantify phosphorus reductions by actions undertaken by another entity, except where those actions are credited to MassDOT or another permittee identified in Appendix F Table F-7

²² Annual phosphorus reductions from structural BMPs installed in the LPCP Area prior to the effective date of this permit shall be calculated consistent with Attachment 3 to Appendix F. Phosphorus Reduction Credit for previously installed BMPs will only be given if the Permittee demonstrates that the BMP is performing up to design specifications and certifies that the BMP is properly maintained and inspected according to manufacturer design or specifications. This certification shall be part of the annual performance evaluation during the year credit is claimed for the previously installed BMP.

²³ See part A.II.4 for information regarding the Alternative Schedule Request submittal and review process.

²⁴ EPA notes that such expectation regarding infrequency does not constitute or establish an additional criterion for the applicant to satisfy

- ii. A description of the planned structural controls to meet applicable phosphorus reduction milestones.
- iii. Suitability and availability of areas for siting and constructing structural controls, including, if appropriate, a review of third-party partnerships considered for within-watershed structural control sites.
- iv. Access and acquisition of real property rights for constructing and maintaining structural controls.
- v. Timelines for the permittee's planning, design, financing, easement or property interest acquisition, and procurement for and construction of structural controls.
- vi. Timelines for and constraints due to the federal, state and/or local approval(s) and permitting processes for structural controls.
- vii. Anticipated phosphorus reductions due to the rate of redevelopment within the community and the degree to which future redevelopment may be reasonably anticipated to achieve the desired reductions in lieu of reliance upon structural controls by the permittee.
- viii. Estimated cost of the planned structural controls to meet applicable phosphorus reduction milestones.
- ix. Scale of structural BMP controls required and phasing considerations with other capital improvement projects that are being implemented by the permittee or other parties that impact the permittee, municipality or relevant taxpayers or ratepayers.
- x. Affordability for taxpayers or ratepayers (as applicable), including a projection of sources and uses of funds, taking into consideration existing or potential financial capability and funding mechanisms (e.g., property taxes, stormwater rate changes, or stormwater utility fees).
- xi. Other relevant information, and
- xii. A requested schedule to meet all phosphorus reduction requirements from which relief is sought.

2. Reporting

Beginning 1 year after the permit effective date, the permittee shall include a progress report in each annual report on the planning and implementation of the LPCP.

Beginning five (5) years after the permit effective date, the permittee shall include the following in each annual report submitted pursuant to part 4.4 of the Permit:

- a. All non-structural control measures implemented during the reporting year along with the phosphorus reduction in mass/yr (P_{NSred}) calculated consistent with Attachment 2 to Appendix F
- b. Structural controls implemented during the reporting year and all previous years including:
 - a. Location information of structural BMPs (GPS coordinates or street address)
 - b. Phosphorus reduction from all structural BMPs implemented to date in mass/yr (P_{Sred}) calculated consistent with Attachment 3 to Appendix F

- c. Date of last completed maintenance for each Structural control
- c. Phosphorus load increases due to development over the previous reporting period and incurred to date (P_{DEVinc}) calculated consistent with Attachment 1 to Appendix F.
- d. Estimated yearly phosphorus export rate (P_{exp}) from the LPCP Area calculated using Equation 2. Equation 2 calculates the yearly phosphorus export rate by subtracting yearly phosphorus reductions through implemented nonstructural controls and structural controls to date from the Baseline Phosphorus Load and adding loading increases incurred through development to date. This equation shall be used to demonstrate compliance with ~~the applicable~~ phosphorus reduction milestones ~~required as part of each phase of the LPCP.~~

$$P_{exp} \left(\frac{\text{mass}}{\text{yr}} \right) = P_{base} \left(\frac{\text{mass}}{\text{yr}} \right) - \left(P_{Sred} \left(\frac{\text{mass}}{\text{yr}} \right) + P_{NSred} \left(\frac{\text{mass}}{\text{yr}} \right) \right) + P_{DEVinc} \left(\frac{\text{mass}}{\text{yr}} \right)$$

Equation 2. Equation used to calculate yearly phosphorus export rate from the chosen LPCP Area. P_{exp} =Current phosphorus export rate from the LPCP Area in mass/year. P_{base} =baseline phosphorus export rate from LPCP Area in mass/year. P_{Sred} = yearly phosphorus reduction from implemented structural controls in the LPCP Area in mass/year. P_{NSred} = yearly phosphorus reduction from implemented non-structural controls in the LPCP Area in mass/year. Area in mass/year. P_{DEVinc} = yearly phosphorus increase resulting from development since the year baseline loading was calculated in the LPCP Area in mass/year.

- e. Certification that all structural BMPs are being inspected and maintained according to the O&M program specified as part of the PCP. The certification statement shall be:

I certify under penalty of law that all source control and treatment Best Management Practices being claimed for phosphorus reduction credit have been inspected, maintained and repaired in accordance with manufacturer or design specification. ~~I certify that, to the best of my knowledge, all Best Management Practices being claimed for a phosphorus reduction credit are performing as originally designed.~~

- f. Certification that all municipally owned and maintained turf grass areas are being managed in accordance with Massachusetts Regulation 331 CMR 31 pertaining to proper use of fertilizers on turf grasses (see <http://www.mass.gov/courts/docs/lawlib/300-399cmr/330cmr31.pdf>).

- 3. At any time during the permit term the permittee may be relieved of additional requirements in Appendix F part A.II.1. as follows:
 - a. The permittee is relieved of its additional requirements as of the date when the following conditions are met:
 - i. The applicable TMDL has been modified, revised or withdrawn and EPA has approved a new TMDL applicable for the receiving water that indicates that no additional stormwater controls for the control of phosphorus are necessary for the permittee's discharge based on wasteload allocations in the newly approved TMDL

- b. In such a case, the permittee shall document the date of the approved TMDL in its SWMP and is relieved of any additional remaining requirements of Appendix F part A.II.1 as of that date and the permittee shall comply with the following:
 - i. The permittee shall identify in its SWMP all activities implemented in accordance with the requirements of Appendix F part A.II.1 to date to reduce phosphorus in their discharges including implementation schedules for non-structural BMPs and any maintenance requirements for structural BMPs
 - ii. The permittee shall continue to implement all requirements of Appendix F part A.I.1 required to be implemented prior to the date of the newly approved TMDL, including ongoing implementation of identified non-structural BMPs and routine maintenance and replacement of all structural BMPs in accordance with manufacturer or design specifications, and the reporting requirements of Appendix F part A.II.2. remain in place.

4. The permittee may be relieved of the schedules and milestones contained in Table F-7 as follows:

- a. The permittee is relieved of the applicable schedules and milestones when all the following conditions are met:
 - i. The permittee has submitted an Alternative Schedule Request package to EPA and MassDEP.^{25,26}
 - ii. EPA has determined the Alternative Schedule Request submittal is complete. The Alternative Schedule Request will be deemed complete 30 days from submittal, unless EPA requests additional information from the permittee.
 - iii. Following a 30-day public comment period on the complete Alternative Schedule Request, EPA approves the request in writing.²⁷ If EPA has not acted to approve, modify with permittee consent, or deny an Alternative Schedule Request within 90 days of the close of the public comment period, the Alternative Schedule Request shall be deemed approved.
- b. Any action by EPA approving or denying an Alternative Schedule Request is a final agency action that shall be subject to judicial review in federal district court.

²⁵ Alternative Schedule Request package must be made available to the public consistent with 2.3.3. of the permit.

²⁶ Submittal of an alternative schedule request does not relieve the permittee of noncompliance and potential enforcement for failure to comply with any permit requirements prior to the date of approval of an Alternative Schedule.

²⁷ EPA expects that an Alternative Schedule Request by a permittee that at the time of such request is in non-compliance with applicable Table F-7 phosphorus reduction percentages would be denied unless the permittee provides information regarding its phosphorus reduction efforts that EPA finds acceptable for this purpose.

- c. When the permittee meets the conditions in Appendix F part A.II.4.a, the permittee shall incorporate the approved Alternative Schedule Request and the approval date in its LPCP. An approved Alternative Schedule Request will supersede any remaining schedules and milestones in Table F-7. The permittee shall:
- i. Identify in its LPCP all activities implemented to date in accordance with the requirements of Appendix F part A.II and conducted to reduce phosphorus in its discharges pursuant to the submitted Alternative Schedule Request, including non-structural BMP planning and implementation schedules and any structural BMP maintenance requirements;
 - ii. Continue to implement all requirements of Appendix F part A.II required to be implemented prior to the date of Alternative Schedule Request approval, including ongoing implementation of identified non-structural BMPs and routine maintenance and replacement of all structural BMPs in accordance with manufacturer or design specifications and
 - iii. Continue to implement their LPCP, and the reporting requirements of Appendix F Part A.II.2 remain in place.

ATTACHMENT 2 TO APPENDIX F

Phosphorus and Nitrogen Reduction Credits for Selected Enhanced Non-Structural BMPs

The permittee shall use the following methods to calculate phosphorus and nitrogen (nutrients) load reduction credits for the following enhanced non-structural control practices implemented in the Watershed:

- 1) Enhanced Sweeping Program;
- 2) Catch Basin Cleaning;
and
- 3) Organic Waste and Leaf Litter Collection program

The methods include the use of default phosphorus-nutrient reduction factors that EPA has determined are acceptable for calculating phosphorus-nutrient load reduction credits for these practices.

The methods and annual nutrient phosphorus-load export rates presented in this attachment are for the purpose of counting load reductions for various BMPs treating storm water runoff from varying site conditions (i.e., impervious or pervious surfaces) and different land uses (e.g. industrial and commercial) within the impaired watershed. Tables 2-1 and 2-2 below provides annual phosphorus and nitrogen load export rates by land use category for impervious and pervious areas. The estimates of annual phosphorus load and load reductions resulting from BMP implementation are intended for use by the permittee to measure compliance with its Phosphorus Reduction Requirement under the permit. The estimates of annual nitrogen load and load reduction resulting from BMP implementation are intended for use by the permittee to track and account for nitrogen load reductions in accordance with Appendices F and H in the permit.

Examples are provided to illustrate use of the methods. In calculating phosphorus and nitrogen export rates, the permittee shall select the land use category that most closely represents the actual use for the area in question. For watersheds with institutional type uses, such as government properties, hospitals, and schools, the permittee shall use the commercial land use category for the purpose of calculating phosphorus and nitrogen loads. Table 2-~~32~~ provides a crosswalk table of land use codes between land use groups in Tables 2-1 and 2-2, and the codes used by Mass GIS. For pervious areas, permittees should use the appropriate value for the hydrologic soil group (HSG) if known, otherwise, assume HSG C conditions.

Alternative Methods and/or PhosphorusNutrient Reduction Factors: A permittee may propose alternative methods and/or nutrientphosphorus reduction factors for calculating phosphorus-nutrient load reduction credits for these non-structural practices. EPA will consider alternative methods and/or phosphorus-nutrient reduction factors, provided that the permittee submits adequate supporting documentation to EPA. -At a minimum, supporting documentation shall consist of a description of the proposed method, the technical basis of the method, identification of alternative phosphorus nutrient reduction factors, supporting calculations, and identification of -references and

sources of information that support the use of the alternative method and/or factors in the Watershed. – If EPA determines that the alternative methods and/or factors are not adequately supported, EPA will notify the permittee and the permittee may receive no phosphorus-nutrient reduction credit other than a reduction credit calculated by the permittee following the methods in this attachment for the identified practices.

Table 2-1: Proposed average annual distinct P Load export rates for use in estimating P Load reduction credits in the MA MS4 Permit

Phosphorus Source Category by Land Use	Land Surface Cover	P Load Export Rate, lbs/acre/year	P Load Export Rate, kg/ha/yr
Commercial (Com) and Industrial (Ind)	Directly connected impervious	1.78	2.0
	Pervious	See* DevPERV	See* DevPERV
Multi-Family (MFR) and High-Density Residential (HDR)	Directly connected impervious	2.32	2.6
	Pervious	See* DevPERV	See* DevPERV
Medium -Density Residential (MDR)	Directly connected impervious	1.96	2.2
	Pervious	See* DevPERV	See* DevPERV
Low Density Residential (LDR) - "Rural"	Directly connected impervious	1.52	1.7
	Pervious	See* DevPERV	See* DevPERV
Highway (HWY)	Directly connected impervious	1.34	1.5
	Pervious	See* DevPERV	See* DevPERV
Forest (For)	Directly connected impervious	1.52	1.7
	Pervious	0.13	0.13
Open Land (Open)	Directly connected impervious	1.52	1.7
	Pervious	See* DevPERV	See* DevPERV
Agriculture (Ag)	Directly connected impervious	1.52	1.7
	Pervious	0.45	0.5
*Developed Land Pervious (DevPERV) – HSG A	Pervious	0.03	0.03
*Developed Land Pervious (DevPERV) – HSG B	Pervious	0.12	0.13
*Developed Land Pervious (DevPERV) – HSG C	Pervious	0.21	0.24
*Developed Land Pervious (DevPERV) – HSG C/D	Pervious	0.29	0.33
*Developed Land Pervious (DevPERV) – HSG D	Pervious	0.37	0.41

Notes:

- For pervious areas, if the hydrologic soil group (HSG) is known, use the appropriate value from this table. If the HSG is not known, assume HSG C conditions for the phosphorus load export rate.
- Agriculture includes row crops. Actively managed hay fields and pasture lands. Institutional land uses such as government properties, hospitals and schools are to be included in the commercial and industrial land use grouping for the purpose of calculating phosphorus loading.

- Impervious surfaces within the forest land use category are typically roadways adjacent to forested pervious areas.

Table 2-2: Average annual distinct nitrogen (N) load export rates for use in estimating N load reduction credits in the MA MS4 Permit

<u>Nitrogen Source Category by Land Use</u>	<u>Land Surface Cover</u>	<u>N Load Export Rate, lbs./acre/year</u>	<u>N Load Export Rate, kg/ha/yr.</u>
<u>Commercial (COM) and Industrial (IND)</u>	<u>Directly connected impervious</u>	<u>15.0</u>	<u>16.9</u>
	<u>Pervious</u>	<u>See* DevPERV</u>	<u>See* DevPERV</u>
<u>All Residential</u>	<u>Directly connected impervious</u>	<u>14.1</u>	<u>15.8</u>
	<u>Pervious</u>	<u>See* DevPERV</u>	<u>See* DevPERV</u>
<u>Highway (HWY)</u>	<u>Directly connected impervious</u>	<u>10.5</u>	<u>11.8</u>
	<u>Pervious</u>	<u>See* DevPERV</u>	<u>See* DevPERV</u>
<u>Forest (FOR)</u>	<u>Directly connected impervious</u>	<u>11.3</u>	<u>12.7</u>
	<u>Pervious</u>	<u>0.5</u>	<u>0.6</u>
<u>Open Land (OPEN)</u>	<u>Directly connected impervious</u>	<u>11.3</u>	<u>12.7</u>
	<u>Pervious</u>	<u>See* DevPERV</u>	<u>See* DevPERV</u>
<u>Agriculture (AG)</u>	<u>Directly connected impervious</u>	<u>11.3</u>	<u>12.7</u>
	<u>Pervious</u>	<u>2.6</u>	<u>2.9</u>
<u>*Developed Land Pervious (DevPERV) – HSG A</u>	<u>Pervious</u>	<u>0.3</u>	<u>0.3</u>
<u>*Developed Land Pervious (DevPERV) – HSG B</u>	<u>Pervious</u>	<u>1.2</u>	<u>1.3</u>
<u>*Developed Land Pervious (DevPERV) – HSG C</u>	<u>Pervious</u>	<u>2.4</u>	<u>2.7</u>
<u>*Developed Land Pervious (DevPERV) – HSG C/D</u>	<u>Pervious</u>	<u>3.1</u>	<u>3.5</u>
<u>*Developed Land Pervious (DevPERV) – HSG D</u>	<u>Pervious</u>	<u>3.6</u>	<u>4.1</u>

Notes:

- For pervious areas, if the hydrologic soil group (HSG) is known, use the appropriate value from this table. If the HSG is not known, assume HSG C conditions for the nitrogen load export rate.
- Agriculture includes row crops. Actively managed hay fields and pasture lands. Institutional land uses such as government properties, hospitals and schools are to be included in the commercial and industrial land use grouping for the purpose of calculating nitrogen loading.
- Impervious surfaces within the forest land use category are typically roadways adjacent to forested pervious areas.

Table 2-23: Crosswalk of Mass GIS land use categories to land use groups for P load calculations

Mass GIS Land Use LU_CODE	Description	Land Use group for calculating P Load - 2013/14 MA MS4
1	Crop Land	Agriculture
2	Pasture (active)	Agriculture
3	Forest	Forest
4	Wetland	Forest
5	Mining	Industrial
6	Open Land includes inactive pasture	open land
7	Participation Recreation	open land
8	spectator recreation	open land
9	Water Based Recreation	open land
10	Multi-Family Residential	High Density Residential
11	High Density Residential	High Density Residential
12	Medium Density Residential	Medium Density Residential
13	Low Density Residential	Low Density Residential
14	Saltwater Wetland	Water
15	Commercial	Commercial
16	Industrial	Industrial
17	Urban Open	open land
18	Transportation	Highway
19	Waste Disposal	Industrial
20	Water	Water
23	cranberry bog	Agriculture
24	Powerline	open land
25	Saltwater Sandy Beach	open land
26	Golf Course	Agriculture
29	Marina	Commercial
31	Urban Public	Commercial
34	Cemetery	open land
35	Orchard	Forest
36	Nursery	Agriculture
37	Forested Wetland	Forest
38	Very Low Density residential	Low Density Residential
39	Junkyards	Industrial
40	Brush land/Successional	Forest

(1) Enhanced Sweeping Program: The permittee may earn a phosphorus and/or nitrogen reduction credit(s) for conducting an enhanced sweeping program of impervious surfaces. Table 2-42 below outlines the default phosphorus-nutrient removal factors for enhanced sweeping programs. The credit shall be calculated by using the following equations:

$$\text{Phosphorus Credit}_{p_{\text{sweeping}}} = IA_{\text{swept}} \times \text{PLER}_{\text{IC-land use}} \times \text{PRF}_{\text{sweeping}} \times \text{AF}$$

(Equation 2-1)

$$\text{Nitrogen Credit}_{N_{\text{sweeping}}} = IA_{\text{swept}} \times \text{NLER}_{\text{IC-land use}} \times \text{NRF}_{\text{sweeping}} \times \text{AF}$$

(Equation 2-2)

Where:

- Credit_{sweeping} = Amount of phosphorus-nutrient load removed by enhanced sweeping program (lb/year)
- IA_{swept} = Area of impervious surface that is swept under the enhanced sweeping program (acres)
- PLER_{IC-land use} = Phosphorus Load Export Rate for impervious cover and specified land use (lb/acre/yr) (see Table 2-1)
- NLER_{IC-land use} = Nitrogen Load Export Rate for impervious cover and specified land use (lb./acre/yr.) (see Table 2-2)
- PRF_{sweeping} = Phosphorus Reduction Factor for sweeping based on sweeper type and frequency (see Table 2-43).
- NRF_{sweeping} = Nitrogen Reduction Factor for sweeping based on sweeper type and frequency (see Table 2-4).
- AF = Annual Frequency of sweeping. For example, if sweeping does not occur in Dec/Jan/Feb, the AF would be 9 mo./12 mo. = 0.75. For year-round sweeping, AF=1.0¹

As an alternative, the permittee may apply a credible sweeping model of the Watershed and perform continuous simulations reflecting build-up and wash-off of phosphorus or nitrogen using long-term local rainfall data.

**Table 2-43: Phosphorus-Nutrient reduction efficiency factors
(PRF_{sweeping}) for sweeping impervious areas**

Frequency¹	Sweeper Technology	PRF_{sweeping}	<u>NFR_{sweeping}</u>
2/year (spring and fall) ²	Mechanical Broom	0.01	<u>0.01</u>
2/year (spring and fall) ²	Vacuum Assisted	0.02	<u>0.02</u>
2/year (spring and fall) ²	High-Efficiency Regenerative Air-Vacuum	0.02	<u>0.02</u>
Monthly	Mechanical Broom	0.03	<u>0.03</u>
Monthly	Vacuum Assisted	0.04	<u>0.04</u>
Monthly	High Efficiency Regenerative Air-Vacuum	0.08	<u>0.08</u>
Weekly	Mechanical Broom	0.05	<u>0.06</u>
Weekly	Vacuum Assisted	0.08	<u>0.07</u>
Weekly	High Efficiency Regenerative Air-Vacuum	0.10	<u>0.10</u>

¹For full credit for monthly and weekly frequency, sweeping must be conducted year round. Otherwise, the credit should be adjusted proportionally based on the duration of the sweeping season (using AF factor).

² In order to earn credit for semi-annual sweeping the sweeping must occur in the spring following snow-melt and road sand applications to impervious surfaces and in the fall after leaf-fall and prior to the onset to the snow season.

Example 2-1: Calculation of enhanced sweeping program credit (Credit_{P_{ss}sweeping}): A permittee proposes to implement an enhanced sweeping program and perform weekly sweeping from March 1 – December 1 (9 months) in their Watershed, using a vacuum assisted sweeper on 20.3 acres of parking lots and roadways in a high-density residential area of the Watershed. For this site the needed information to calculate the phosphorus load reduction credit is:

$$\begin{aligned}
 IA_{\text{swept}} &= 20.3 \text{ acres} \\
 PLE_{\text{IC-HDR}} &= 2.32 \text{ lb/acre/yr (from Table 2-1)} \\
 PRF_{\text{sweeping}} &= 0.08 \text{ (from Table 2-4)} \\
 AF &= (9 \text{ months} / 12 \text{ months}) = 0.75
 \end{aligned}$$

Substitution into equation 2-1 yields a Credit_{sweeping} of 3.2 pounds of phosphorus removed per year.

$$\begin{aligned}
 \text{Credit}_{\text{sweeping}} &= IA_{\text{swept}} \times PLE_{\text{land use}} \times PRF_{\text{sweeping}} \times AF \\
 &= 20.3 \text{ acres} \times 2.32 \text{ lbs/acre/yr} \times 0.08 \times 0.75 \\
 &= \mathbf{2.8 \text{ lbs/yr}}
 \end{aligned}$$

The corresponding nitrogen load reduction credit (Credit_{N_{sweeping}}) for the same sweeping program in the specified LPCP area is calculated as follows:

$$\begin{aligned}
 IA_{\text{swept}} &= 20.3 \text{ acres} \\
 NLER_{\text{IC-HDR}} &= 14.1 \text{ lb./acre/yr. (from Table 2-2)} \\
 NRF_{\text{sweeping}} &= 0.08 \text{ (from Table 2-4)} \\
 AF &= (9 \text{ months} / 12 \text{ months}) = 0.75
 \end{aligned}$$

Substitution into equation 2-2 yields a Credit_{sweeping} of 17.2 pounds of nitrogen removed per year.

$$\begin{aligned}
 \text{Credit}_{N_{\text{sweeping}}} &= IA_{\text{swept}} \times NLER_{\text{land use}} \times NRF_{\text{sweeping}} \times AF \\
 &= 20.3 \text{ acres} \times 14.1 \text{ lbs./acre/yr.} \times 0.08 \times 0.75 \\
 &= \mathbf{17.2 \text{ lbs./yr.}}
 \end{aligned}$$

(2) Catch Basin Cleaning: The permittee may earn a phosphorus and/or nitrogen reduction credit(s), ~~Credit_{CB}~~, by removing accumulated materials from catch basins (i.e., catch basin cleaning) in the Watershed such that a minimum sump storage capacity of 50% is maintained throughout the year. The credits shall be calculated by using the following equations:

$$\text{Credit}_{CB} = IA_{CB} \times PLE_{IC\text{-land use}} \times PRF_{CB} \quad \text{(Equation 2-2)}$$

$$\text{Credit}_{P\text{ CB}} = IA_{CB} \times PLER_{IC\text{-land use}} \times PRF_{CB} \quad \text{(Equation 2-3)}$$

$$\text{Credit}_{N\text{ CB}} = IA_{CB} \times NLER_{IC\text{-land use}} \times NRF_{CB} \quad \text{(Equation 2-4)}$$

Where:

Credit_{CB} = Amount of phosphorus-nutrient load removed by catch basin cleaning (lb/year)

IA_{CB} = Impervious drainage area to catch basins (acres)

PLER_{IC-and use} = Phosphorus Load Export Rate for impervious cover and specified land use (lb/acre/yr) (see Table 2-1)

NLER_{IC-land use} = Nitrogen Load Export Rate for impervious cover and specified land use (lb./acre/yr.) (see Table 2-2)

PRF_{CB} = Phosphorus Reduction Factor for catch basin cleaning (see Table 2-54)

NRF_{CB} = Nitrogen Reduction Factor for catch basin cleaning (See Table 2-5)

Table 2-54: Phosphorus-Nutrient reduction efficiency factors (~~PRF_{CB}~~) for semi-annual catch basin cleaning

Frequency	Practice	PRF _{CB}	<u>NRF_{CB}</u>
Semi-annual	Catch Basin Cleaning	0.02	<u>0.06</u>

Example 2-2: Calculation for catch basin cleaning credit (Credit_{CB}):

A permittee proposes to clean catch basins in their Watershed (i.e., remove accumulated sediments and contaminants captured in the catch basins) that drain runoff from 15.3 acres of medium-density residential impervious area. For this site the needed information to calculate the phosphorus load reduction credit is:

$$\begin{aligned} I_{CB} &= 15.3 \text{ acre} \\ PLE_{IC-MDR} &= 1.96 \text{ lbs/acre/yr (from Table 2-1)} \\ PRF_{CB} &= 0.02 \text{ (from Table 2-54)} \end{aligned}$$

Substitution into equation 2-32 yields a Credit_{P_{CB}} of 0.6 pounds of phosphorus removed per year:

$$\begin{aligned} \text{Credit}_{P_{CB}} &= I_{CB} \times PLE_{IC-MDR} \times PRF_{CB} \\ &= 15.3 \text{ acre} \times 1.96 \text{ lbs/acre/yr} \times 0.02 \\ &= \mathbf{0.6 \text{ lbs/yr}} \end{aligned}$$

Note: the same methodology is applicable for calculating the nitrogen load reduction credit (Credit_{N_{CB}}).

(3) Enhanced Organic Waste and Leaf Litter Collection program: The permittee may earn a phosphorus and/or nitrogen reduction credit(s) by performing regular gathering, removal and disposal of landscaping wastes, organic debris, and leaf litter from impervious surfaces from which runoff discharges to the TMDL waterbody or its tributaries. In order to earn this credit (Credit_{leaf litter}), the permittee must gather and remove all landscaping wastes, organic debris, and leaf litter from impervious roadways and parking lots at least once per week during the period of September 1 to December 1 of each year. Credit can only be earned for those impervious surfaces that are cleared of organic materials in accordance with the description above. The gathering and removal shall occur immediately following any landscaping activities in the Watershed and at additional times when necessary to achieve a weekly cleaning frequency. The permittee must ensure that the disposal of these materials will not contribute pollutants to any surface water discharges. The permittee may use an enhanced sweeping program (e.g., weekly frequency) as part of earning this credit provided that the sweeping is effective at removing leaf litter and organic materials. The Credit_{leaf litter} shall be determined by the following equation:

~~Credit_{leaf litter} = (Watershed Area) x (PLE_{IC-land use}) x (0.05) (Equation 2-3)~~

~~Credit_{P_{leaf litter}} = (IA_{leaf litter}) x (PLER_{IC-land use}) x (0.05) (Equation 2-5)~~

~~Credit_{N_{leaf litter}} = (IA_{leaf litter}) x (NLER_{IC-land use}) x (0.05) (Equation 2-6)~~

Where:

Credit_{leaf litter} = Amount of phosphorus-nutrient load reduction credit for organic-waste and leaf litter collection program (lb/year)

<u>IA_{leaf litter}</u>	= Impervious area (acre) in applicable watersheds that are subject to enhanced organic waste and leaf litter collection program
<u>PLER_{IC-land use}</u>	= Phosphorus Load Export Rate for impervious cover and specified land use (lbs./acre/yr.) (see Table 2-1)
<u>NLER_{IC-land use}</u>	= Nitrogen Load Export Rate for impervious cover and specified land use (lbs./acre/yr.) (see Table 2-2)
<u>Watershed Area</u>	= All impervious area (acre) from which runoff discharges to the TMDL waterbody or its tributaries in the Watershed
<u>PLE_{IC-land use}</u>	= Phosphorus Load Export Rate for impervious cover and specified land use (lbs./acre/yr.) (see Table 2-1)
0.05	= 5% nutrient phosphorus-reduction factor for organic waste and leaf litter collection program in the Watershed

Example 2-3: Calculation for organic waste and leaf litter collection program credit

(Credit_{leaf litter}): A permittee proposes to implement an organic waste and leaf litter collection program by sweeping the parking lots and access drives at a minimum of once per week using a mechanical broom sweeper for the period of September 1 to December 1 over 12.5 acres of impervious roadways and parking lots in an industrial/commercial area of the Watershed. Also, the permittee will ensure that organic materials are removed from impervious areas immediately following all landscaping activities at the site. For this site the needed information to calculate the Credit_{leaf litter} for phosphorus is:

Watershed Area	= 12.5 acres; and
PLER _{IC-commercial}	= 1.78 lbs/acre/yr (from Table 2-1)

Substitution into equation 2-54 yields a Credit_{leaf litter} of 1.1 pounds of phosphorus removed per year:

$$\begin{aligned} \text{Credit}_{\text{leaf litter}} &= (12.5 \text{ acre}) \times (1.78 \text{ lbs/acre/yr}) \times (0.05) \\ &= 1.1 \text{ lbs/yr} \end{aligned}$$

Note: The same methodology is applicable for calculating the nitrogen load reduction credit (Credit_{N leaf litter}) for the specified organic waste leaf litter collection program.

Associated Street/Pavement Cleaning Credit:

The permittee also may earn a ~~nutrient~~phosphorus-reduction credit for enhanced sweeping of roads and parking lot areas (i.e., Credit_{sweeping}) for the three months of use. Using equation 2-1, Credit_{sweeping} is:

Credit _{sweeping}	= IA _{swept} X PLE _{IC-land use} X PRF _{sweeping} X AF (Equation 2-1)
IA _{swept}	= 12.5 acre
PLE _{IC-commercial}	= 1.78 lbs/acre/yr (from Table 2-1)
PRF _{sweeping}	= 0.05 (from Table 2-3)
AF	= 3 mo./12 mo. = 0.25

Substitution into equation 2-1 yields a Credit_{p_sweeping} of 0.28 pounds of phosphorus removed per year.

$$\begin{aligned} \text{Credit } P_{\text{sweeping}} &= IA_{\text{swept}} \times PLE_{\text{IC-commercial}} \times PRF_{\text{sweeping}} \times AF \\ &= 12.5 \text{ acre} \times 1.78 \text{ lbs/acre/yr} \times 0.05 \times 0.25 \\ &= \mathbf{0.3 \text{ lbs/yr}} \end{aligned}$$

ATTACHMENT 3 TO APPENDIX F

Methods to Calculate Phosphorus and Nitrogen Load Reductions for Structural Stormwater Best Management Practices

List of Tables

Table 3-1: Average annual distinct phosphorus (P) load export rates for use in estimating P load reduction credits in the MA MS4 Permit..... 12

Table 3-2: Average annual distinct nitrogen (N) load export rates for use in estimating N load reduction credits in the MA MS4 Permit..... 13

Table 3- 4: Developed Land Pervious Area Runoff Depths based on Precipitation depth and Hydrological Soil Groups (HSGs) 26

Table 3-5 Method for determining stormwater control design volume (DSV) (i.e., capacity) using long-term cumulative performance curves 40

Table 3- 6: Infiltration Trench (IR = 0.17 in/hr) BMP Performance Table 41

Table 3- 7: Infiltration Trench (IR = 0.27 in/hr) BMP Performance Table 42

Table 3- 8: Infiltration Trench (IR = 0.52 in/hr) BMP Performance Table 43

Table 3- 9: Infiltration Trench (IR = 1.02 in/hr) BMP Performance Table 44

Table 3- 10: Infiltration Trench (IR = 2.41 in/hr) BMP Performance Table 45

Table 3- 11: Infiltration Trench (8.27 in/hr) BMP Performance Table 46

Table 3- 12: Surface Infiltration (0.17 in/hr) BMP Performance Table 47

Table 3- 13: Infiltration Basin (0.27 in/hr) BMP Performance Table 48

Table 3- 14: Infiltration Basin (0.52 in/hr) BMP Performance Table 49

Table 3-15: Infiltration Basin (1.02 in/hr) BMP Performance Table 50

Table 3- 16: Surface Infiltration (2.41 in/hr) BMP Performance Table 51

Table 3- 17: Surface Infiltration (8.27 in/hr) BMP Performance Table 52

Table 3-18: Bio-filtration BMP Performance Table 53

Table 3- 19: Gravel Wetland BMP Performance Table..... 54

Table 3- 20: Enhanced Bio-filtration* with Internal Storage Reservoir (ISR) BMP Performance Table 54

Table 3-21: Sand Filter BMP Performance Table 55

Table 3- 22 Porous Pavement BMP Performance Table 56

Table 3- 23: Wet Pond BMP Performance Table 57

Table 3-24: Dry Pond BMP Performance Table..... 58

Table 3- 25: Water Quality Grass Swale with Detention BMP Performance Table 59

Table 3- 26: Impervious Area Disconnection through Storage: Impervious Area to Pervious Area Ratio = 8:1 60

Figure 3- 22: Impervious Area Disconnection through Storage: Impervious Area to Pervious Area Ratio = 8:1 for HSG B Soils 62

Table 3- 27: Impervious Area Disconnection through Storage: Impervious Area to Pervious Area Ratio = 6:1 63

Table 3- 28: Impervious Area Disconnection through Storage: Impervious Area to Pervious Area Ratio = 4:1 66

Table 3- 29: Impervious Area Disconnection through Storage: Impervious Area to Pervious Area Ratio = 2:1 68

Table 3- 30: Impervious Area Disconnection through Storage: Impervious Area to Pervious Area Ratio = 1:1 71

Table 3- 31: Impervious Area Disconnection Performance Table 73

Table 3- 32: Performance Table for Conversion of Impervious Areas to Pervious Area based on Hydrological Soil Groups 74

Table 3- 33: Performance Table for Conversion of Low Permeable Pervious Area to High Permeable Pervious Area based on Hydrological Soil Group 75

List of Figures

Table 3-1: Average annual distinct phosphorus (P) load export rates for use in estimating P load reduction credits in the MA MS4 Permit..... 12

Table 3-2: Average annual distinct nitrogen (N) load export rates for use in estimating N load reduction credits in the MA MS4 Permit..... 13

Table 3- 4: Developed Land Pervious Area Runoff Depths based on Precipitation depth and Hydrological Soil Groups (HSGs) 26

Table 3-5 Method for determining stormwater control design volume (DSV) (i.e., capacity) using long-term cumulative performance curves 40

Table 3- 6: Infiltration Trench (IR = 0.17 in/hr) BMP Performance Table 41

Figure 3- 1: BMP Performance Curve: Infiltration Trench (infiltration rate = 0.17 in/hr)41

Table 3- 7: Infiltration Trench (IR = 0.27 in/hr) BMP Performance Table 42

Figure 3- 2: BMP Performance Curve: Infiltration Trench (infiltration rate = 0.27 in/hr)42

Table 3- 8: Infiltration Trench (IR = 0.52 in/hr) BMP Performance Table 43

Figure 3- 3: BMP Performance Curve: Infiltration Trench (infiltration rate = 0.52 in/hr)43

Table 3- 9: Infiltration Trench (IR = 1.02 in/hr) BMP Performance Table 44

Figure 3- 4: BMP Performance Curve: Infiltration Trench (infiltration rate = 1.02 in/hr)44

Table 3- 10: Infiltration Trench (IR = 2.41 in/hr) BMP Performance Table 45

Figure 3- 5: BMP Performance Curve: Infiltration Trench (infiltration rate = 2.41 in/hr)45

Table 3- 11: Infiltration Trench (8.27 in/hr) BMP Performance Table 46

Figure 3- 6: BMP Performance Curve: Infiltration Trench (infiltration rate = 8.27 in/hr)46
 Table 3- 12: Surface Infiltration (0.17 in/hr) BMP Performance Table 47
 Figure 3- 7: BMP Performance Curve: Infiltration Basin (infiltration rate = 0.17 in/hr). 47
 Table 3- 13: Infiltration Basin (0.27 in/hr) BMP Performance Table 48
 Figure 3- 8: BMP Performance Curve: Surface Infiltration (infiltration rate = 0.27 in/hr)
 48
 Table 3- 14: Infiltration Basin (0.52 in/hr) BMP Performance Table 49
 Figure 3- 9: BMP Performance Curve: Surface Infiltration (infiltration rate = 0.52 in/hr)
 49
 Table 3-15: Infiltration Basin (1.02 in/hr) BMP Performance Table 50
 Figure 3- 10: BMP Performance Curve: Surface Infiltration (Soil infiltration rate = 1.02
 in/hr)..... 50
 Table 3- 16: Surface Infiltration (2.41 in/hr) BMP Performance Table 51
 Figure 3- 11: BMP Performance Curve: Infiltration Basin (infiltration rate = 2.41 in/hr)51
 Table 3- 17: Surface Infiltration (8.27 in/hr) BMP Performance Table 52
 Figure 3- 12: BMP Performance Curve: Surface Infiltration (infiltration rate = 8.27 in/hr)
 52
 Table 3-18: Bio-filtration BMP Performance Table 53
 Figure 3- 13: BMP Performance Curve: Bio-filtration..... 53
 Table 3- 19: Gravel Wetland BMP Performance Table..... 54
 Figure 3- 14: BMP Performance Curve: Gravel Wetland 54
 Table 3- 20: Enhanced Bio-filtration* with Internal Storage Reservoir (ISR) BMP
 Performance Table 54
 Figure 3-15: BMP Performance Curve: Enhanced Bio-filtration with Internal Storage
 Reservoir (ISR) BMP Performance Table 55
 Table 3-21: Sand Filter BMP Performance Table 55
 Figure 3-16: BMP Performance Curve: Sand Filter 56
 Table 3- 22 Porous Pavement BMP Performance Table 56
 Figure 3- 17: BMP Performance Curve: Porous Pavement 57
 Table 3- 23: Wet Pond BMP Performance Table 57
 Figure 3-18: BMP Performance Curve: Wet Pond 58
 Table 3-24: Dry Pond BMP Performance Table..... 58
 Figure 3- 19: BMP Performance Curve: Dry Pond 59
 Table 3- 25: Water Quality Grass Swale with Detention BMP Performance Table 59
 Figure 3-20: BMP Performance Curve: Water Quality Grass Swale with Detention 60

Table 3- 26: Impervious Area Disconnection through Storage: Impervious Area to Pervious Area Ratio = 8:1 60

Figure 3- 21: Impervious Area Disconnection through Storage: Impervious Area to Pervious Area Ratio = 8:1 for HSG A Soils 61

Figure 3- 22: Impervious Area Disconnection through Storage: Impervious Area to Pervious Area Ratio = 8:1 for HSG B Soils 62

Figure 3- 23: Impervious Area Disconnection through Storage: Impervious Area to Pervious Area Ratio = 8:1 for HSG C Soils 62

Figure 3- 24: Impervious Area Disconnection through Storage: Impervious Area to Pervious Area Ratio = 8:1 for HSG D Soils 63

Table 3- 27: Impervious Area Disconnection through Storage: Impervious Area to Pervious Area Ratio = 6:1 63

Figure 3- 25: Impervious Area Disconnection through Storage: Impervious Area to Pervious Area Ratio = 6:1 for HSG A Soils 64

Figure 3- 26: Impervious Area Disconnection through Storage: Impervious Area to Pervious Area Ratio = 6:1 for HSG B Soils 64

Figure 3- 27: Impervious Area Disconnection through Storage: Impervious Area to Pervious Area Ratio = 6:1 for HSG C Soils 65

Figure 3- 28: Impervious Area Disconnection through Storage: Impervious Area to Pervious Area Ratio = 6:1 for HSG D Soils 65

Table 3- 28: Impervious Area Disconnection through Storage: Impervious Area to Pervious Area Ratio = 4:1 66

Figure 3- 29: Impervious Area Disconnection through Storage: Impervious Area to Pervious Area Ratio = 4:1 for HSG A Soils 66

Figure 3- 30: Impervious Area Disconnection through Storage: Impervious Area to Pervious Area Ratio = 4:1 for HSG B Soils 67

Figure 3- 31: Impervious Area Disconnection through Storage: Impervious Area to Pervious Area Ratio = 4:1 for HSG C Soils 67

Figure 3- 32: Impervious Area Disconnection through Storage: Impervious Area to Pervious Area Ratio = 4:1 for HSG D Soils 68

Table 3- 29: Impervious Area Disconnection through Storage: Impervious Area to Pervious Area Ratio = 2:1 68

Figure 3- 33: Impervious Area Disconnection through Storage: Impervious Area to Pervious Area Ratio= 2:1 for HSG A Soils 69

Figure 3- 34: Impervious Area Disconnection through Storage: Impervious Area to Pervious Area Ratio= 2:1 for HSG B Soils 69

Figure 3- 35: Impervious Area Disconnection through Storage: Impervious Area to Pervious Area Ratio= 2:1 for HSG C Soils 70

Figure 3- 36: Impervious Area Disconnection through Storage: Impervious Area to Pervious Area Ratio= 2:1 for HSG D Soils 70

Table 3- 30: Impervious Area Disconnection through Storage: Impervious Area to Pervious Area Ratio = 1:1	71
Figure 3- 37: Impervious Area Disconnection through Storage: Impervious Area to Pervious Area Ratio = 1:1 for HSG A Soils	71
Figure 3- 38: Impervious Area Disconnection through Storage: Impervious Area to Pervious Area Ratio = 1:1 for HSG B Soils	72
Figure 3- 39: Impervious Area Disconnection through Storage: Impervious Area to Pervious Area Ratio = 1:1 for HSG C Soils	72
Figure 3- 40: Impervious Area Disconnection through Storage: Impervious Area to Pervious Area Ratio = 1:1 for HSG D Soils	73
Table 3- 31: Impervious Area Disconnection Performance Table	73
Figure 3- 41: Impervious Area Disconnection Performance Curves.....	74
Table 3- 32: Performance Table for Conversion of Impervious Areas to Pervious Area based on Hydrological Soil Groups	74
Table 3- 33: Performance Table for Conversion of Low Permeable Pervious Area to High Permeable Pervious Area based on Hydrological Soil Group.....	75

Methods to Calculate Phosphorus and Nitrogen Load Reductions for Structural Stormwater Best Management Practices in the Watershed

This attachment provides methods to determine design storage volume capacities and to calculate phosphorus and nitrogen (nutrient) load reductions for the following structural Best Management Practices (structural BMPs) for a LPCP area or watershed tributary to Great Bay:

- 1) Infiltration Trench;
- 2) Surface Infiltration Practices (i.e., basins, rain gardens and bio-retention);
- 3) Bio-filtration Practice;
- 4) Gravel Wetland System;
- 5) Enhanced Bio-filtration with Internal Storage Reservoir (ISR);
- 6) Sand Filter;
- 7) Porous Pavement;
- 8) Wet Pond or wet detention basin;
- 9) Dry Pond or extended dry detention basin; and
- 10) Dry Water Quality Grass Swale with Detention.

Additionally, this attachment provides methods to design and quantify associated nutrient load reduction credits for the following four types of semi-structural BMPs

- 11) Impervious Area Disconnection through Storage (e.g., rain barrels, cisterns, etc.);
- 12) Impervious Area Disconnection;
- 13) Conversions of Impervious Area to Permeable Pervious Area; and
- 14) Soil Amendments to Enhance Permeability of Pervious Areas.

Methods and examples are provided in this Attachment to calculate phosphorus and nitrogen (nutrient) load reductions for structural BMPs for the four following purposes:

- 1) To determine the design volume of a structural BMP to achieve a known nutrient load reduction target when the contributing drainage area is 100% impervious;
- 2) To determine the nutrient load reduction for a structural BMP with a known design volume capacity when the contributing drainage area is 100% impervious;
- 3) To determine the design volume of a structural BMP to achieve a known nutrient load reduction target when the contributing drainage area has impervious and pervious surfaces; and
- 4) To determine the nutrient load reduction for a structural BMP with a known design volume capacity when the contributing drainage area has impervious and pervious surfaces.

Examples are also provided for estimating nutrient load reductions associated with the four semi-structural/non-structural BMPs.

Also, this attachment provides the methodology for calculating the annual stormwater phosphorus and/or nitrogen load that will be delivered to BMPs for treatment (BMP Load) and to be used for quantifying phosphorus and/or nitrogen load reduction credits. The methods and annual nutrient export load rates presented in this Attachment are for calculating load reductions

for various BMPs treating storm water runoff from varying site conditions (i.e., impervious or pervious surfaces) and different land uses (e.g. commercial and institutional). The estimates of annual phosphorus load and load reductions resulting from BMP implementation are intended for use by the permittee to demonstrate compliance with its Phosphorus Reduction Requirement in accordance with Appendix F to the permit. The estimates of annual nitrogen load and load reductions resulting from BMP implementation are intended for use by the permittee to track and account for nitrogen load reductions in accordance with Appendix H to the permit.

Structural BMP performance credits: For each structural BMP type identified above (BMPs 1-10), long-term cumulative performance information is provided to calculate phosphorus and nitrogen load reductions or to determine needed design storage volume capacities to achieve a specified reduction target (e.g., 65% phosphorus load reduction). The performance information is expressed as cumulative phosphorus and/or nitrogen load removed (% removed) depending on the physical storage capacity of the structural BMP (expressed as inches of runoff from impervious area) and is provided at the end of this Attachment (see Tables 3-5 through 3-25 and performance curves Figures 3-1 through 3-20). Multiple tables and performance curves are provided for the infiltration practices to represent cumulative phosphorus load reduction performance for six infiltration rates (IR), 0.17, 0.27, 0.53, 1.02, 2.41, and 8.27 inches/hour. These infiltration rates represent the saturated hydraulic conductivity of the soils. The permittee may use the performance curves provided in this attachment to interpolate phosphorus and nitrogen load removal reductions for field measured infiltration rates that are different than the infiltration rates used to develop the performance curves. Otherwise, the permittee shall use the performance curve for the IR that is nearest, but less than, the field measured rate.

The Design Storage Volume or physical storage capacity (as referred to on the x-axis of performance curves) equals the total physical storage volume of the control structure to contain water at any instant in time. Typically, this storage capacity is comprised of the surface ponding storage volume prior to overflow and subsurface storage volumes in storage units and pore spaces of coarse filter media. Table 3-5 provides the formulae to calculate physical storage capacities for the structural control types for using the performance curves.

Semi-Structural/Non-structural BMP performance credits: For each semi-structural/non-structural BMP type identified above (BMPs 11-14), long-term cumulative performance information is provided to calculate phosphorus and/or nitrogen load reductions or to determine needed design specifications to achieve a desired reduction target (e.g., 50% phosphorus load reduction). The performance information is expressed as cumulative runoff volume reduction (% removed) depending on the design specifics and actual field conditions. Cumulative percent runoff volume reduction is being used as a surrogate to estimate both the cumulative phosphorus load and nitrogen load reduction credits for these BMPs.

To represent a wide range of potential conditions for implementing these types of BMPs, numerous performance tables and curves have been developed to reflect a wide range of potential conditions and designs such as varying storage volumes (expressed in terms of varying ratios of storage volume to impervious area (0.1 to 2.0 inches)); varying ratios of impervious source area to receiving pervious area based on hydrologic soil groups (HSGs) A, B, C and D (8:1, 6:1, 4:1, 2: 1 and 1:1); and varying discharge time periods for temporary storage (1, 2 or 3

days). The credits are provided at the end of this Attachment (see Tables 3-26 through 3-33 and performance curves Figures 3-21 through 3-41).

EPA will consider phosphorus and/or nitrogen load reductions calculated using the methods provided below to be valid for demonstrating compliance with the terms of this permit for BMPs that have not been explicitly modeled, if the desired BMP has functionality that is similar to one of the simulated BMP types. Regarding functionality, only the surface infiltration, the infiltration trench and the four semi-structural/non-structural BMP types were simulated to direct storm water runoff into the ground (i.e., infiltration). All other simulated BMPs represent practices that are not hydraulically connected to the sub-surface soils (i.e., no infiltration) and have either under-drains or impermeable liners. Following are some simple guidelines for selecting the BMP type and/or determining whether the results of any of the BMP types provided are appropriate for another BMP of interest.

Infiltration Trench is a practice that provides temporary storage of runoff using the void spaces within the soil/sand/gravel mixture that is used to backfill the trench for subsequent infiltration into the surrounding sub-soils. Performance results for the infiltration trench can be used for all subsurface infiltration practices including systems that include pipes and/or chambers that provide temporary storage. Also, the results for this BMP type can be used for bio-retention systems that rely on infiltration when the majority of the temporary storage capacity is provided in the void spaces of the soil filter media and porous pavements that allow infiltration to occur. General design specifications for infiltration trench systems are provided in the most recent version of *the Massachusetts Stormwater Handbook, Volume 2/Chapter2* (<http://www.mass.gov/eea/docs/dep/water/laws/i-thru-z/v2c2.pdf>).

Surface Infiltration represents a practice that provides temporary surface storage of runoff (e.g., ponding) for subsequent infiltration into the ground. Appropriate practices for use of the surface infiltration performance estimates include infiltration basins, infiltration swales (not conveyance swales), rain gardens and bio-retention systems that rely on infiltration and provide the majority of storage capacity through surface-ponding. If an infiltration system includes both surface storage through ponding and a lesser storage volume within the void spaces of a coarse filter media, then the physical storage volume capacity used to determine the long-term cumulative phosphorus removal efficiency from the infiltration basin performance curves would be equal to the sum of the surface storage volume and the void space storage volume. General design specifications for various surface infiltration systems are provided in the most recent version of *the Massachusetts Stormwater Handbook, Volume 2/Chapter2* (<http://www.mass.gov/eea/docs/dep/water/laws/i-thru-z/v2c2.pdf>).

Bio-filtration is a practice that provides temporary storage of runoff for filtering through an engineered soil media. The storage capacity is typically made of void spaces in the filter media and temporary ponding at the surface of the practice. Once the runoff has passed through the filter media it is collected by an under-drain pipe for discharge. The performance curve for this control practice assumes zero infiltration. If a filtration system has subsurface soils that are suitable for infiltration, then user should use the either performance curves for the infiltration trench or the infiltration basin depending on the predominance of storage volume made up by free standing storage or void space storage. Depending on the design of the filter media

manufactured or packaged bio-filter systems such as tree box filters may be suitable for using the bio-filtration performance results. Design specifications for bio-filtration systems are provided in the most recent version of *the Massachusetts Stormwater Handbook, Volume 2/Chapter2* (<http://www.mass.gov/eea/docs/dep/water/laws/i-thru-z/v2c2.pdf>).

Gravel Wetland performance results should be used for practices that have been designed in accordance or share similar features with the design specifications for subsurface gravel wetland systems provided in *the Massachusetts Stormwater Handbook, Volume 2/Chapter2* (<http://www.mass.gov/eea/docs/dep/water/laws/i-thru-z/v2c2.pdf>). Also, see report prepared by the University of New Hampshire Stormwater Center entitled *Design and Maintenance of Subsurface Gravel Wetland Systems* and dated February 4, 2015 (https://www.unh.edu/unhsc/sites/unh.edu.unhsc/files/NHDOT_SGW_02-06-15_Final_Report.pdf)

Enhanced Bio-filtration with Internal Storage Reservoir (ISR) is a practice that provides temporary storage of runoff for filtering through an engineered soil media, augmented for enhanced phosphorus removal, followed by detention and denitrification in a subsurface internal storage reservoir (ISR) comprised of gravel. Runoff flows are routed through filter media and directed to the underlying ISR via an impermeable membrane for temporary storage. An elevated outlet control at the top of the ISR is designed to provide a retention time of at least 24 hours in the system to allow for sufficient time for denitrification and nitrogen reduction to occur prior to discharge. The design storage capacity for using the cumulative performance curves is comprised of void spaces in the filter media, temporary ponding at the surface of the practice and the void spaces in the gravel ISR. The cumulative phosphorus load reduction curve for this control is intended to be used for systems in which the filter media has been augmented with materials designed and/or known to be effective at capturing phosphorus. If the filter media is not augmented to enhance phosphorus capture, then the phosphorus performance curve for the Bio-Filter should be used for estimating phosphorus load reductions. The University of New Hampshire Stormwater Center (UNHSC) developed the design of this control practice and a design template can be found at UNHSC's website (<https://www.unh.edu/unhsc/news/unhsc-innovative-bioretenion-template-pollutant-reductions-great-bay-estuary-watershed>).

Sand Filter performance results should be used for practices that have been designed in accordance or share similar features with the design specifications for sand filter systems provided in the most recent version of *the Massachusetts Stormwater Handbook, Volume 2/Chapter2* (<http://www.mass.gov/eea/docs/dep/water/laws/i-thru-z/v2c2.pdf>).

Porous Pavement performance results represent systems with an impermeable under-liner and an under-drain. *If porous pavement systems do not have an impermeable under-liner so that filtered runoff can infiltrate into sub-soils, then the performance results for an infiltration trench may be used for these systems.* Design specifications for porous pavement systems are provided in the most recent version of *the Massachusetts Stormwater Handbook, Volume 2/Chapter2* (<http://www.mass.gov/eea/docs/dep/water/laws/i-thru-z/v2c2.pdf>).

Extended Dry Detention Pond performance results should only be used for practices that have been designed in accordance with the design specifications for extended dry detention ponds

provided in the most recent version of *the Massachusetts Stormwater Handbook, Volume 2/Chapter2* (<http://www.mass.gov/eea/docs/dep/water/laws/i-thru-z/v2c2.pdf>).

Water Quality Grass Swale with Detention performance results should only be used for practices that have been designed in accordance with the design specifications for a dry water quality swale with check dams to temporarily store the target storage volume capture provided in the most recent version of *the Massachusetts Stormwater Handbook, Volume 2/Chapter2* (<http://www.mass.gov/eea/docs/dep/water/laws/i-thru-z/v2c2.pdf>)

Impervious Area Hydrologic Disconnection using Storage (e.g., rain barrels, cistern, etc.) performance results are for collecting runoff volumes from impervious areas such as roof tops, providing temporary storage of runoff volume using rain barrels, cisterns or other storage containers, and discharging stored volume to adjacent vegetated permeable pervious surfaces over an extended period of time. All impervious area disconnection projects must be designed to ensure that the permeable area to receive runoff from adjacent impervious areas are of sufficient size with adequate soils to receive the runoff without causing negative impacts to adjacent down-gradient properties. Careful consideration must be given to the ratio of impervious area to the pervious area that will receive the discharge. Also, devices such as level spreaders to disperse the discharge and provide sheet flow should be employed whenever needed to increase recharge and avoid flow concentration and short circuiting through the pervious area. Soil testing is needed to classify the permeability of the receiving pervious area in terms of HSG.

Impervious Area Hydrologic Disconnection performance results are for diverting runoff volumes from impervious areas such as roadways, parking lots and roof tops, and discharging it to adjacent vegetated permeable surfaces that are of sufficient size with adequate soils to receive the runoff without causing negative impacts to adjacent down-gradient properties. Careful consideration must be given to the ratio of impervious area to the pervious area that will receive the discharge. Also, devices such as level spreaders to disperse the discharge and provide sheet flow should be employed whenever needed to increase recharge and avoid flow concentration and short circuiting through the pervious area. Soil testing is needed to classify the permeability of the receiving pervious area in terms of HSG. Some useful design guidelines and considerations may be found at <https://www.mass.gov/files/documents/2016/08/to/practice-of-lid.pdf>.

Conversion of Impervious Area to Permeable Pervious Area nutrient load reduction credits are for replacing existing impervious surfaces (such as traditional pavements and buildings with roof tops) with permeable surfaces. To be eligible for credit, it is essential that the area previously covered with impervious surface be restored to provide natural or enhanced hydrologic functioning so that the surface is permeable. Sub-soils beneath pavements are typically highly compacted and will require reworking to loosen the soil and the possible addition of soil amendments to restore permeability. Soil testing is needed to classify the permeability (in terms of HSG) of the restored pervious area.

Soil Amendments to Increase Permeability of Pervious Areas performance results are for the practice of improving the permeability of pervious areas through incorporation of soil amendments, tilling and establishing dense vegetation. This practice may be used to compliment

other practices such as impervious area disconnection to improve overall performance and increase reduction credits earned. Soil testing is needed to classify the permeability (in terms of HSG) of the restored pervious area.

Alternative Methods:

A permittee may propose alternative long-term cumulative performance information or alternative methods to calculate phosphorus and/or nitrogen load reductions for the structural BMPs identified above or for other structural BMPs not identified in this Attachment.

EPA will consider alternative long-term cumulative performance information and alternative methods to calculate phosphorus and/or nitrogen load reductions for structural BMPs provided that the permittee provides EPA with adequate supporting documentation. At a minimum, the supporting documentation shall include:

1. Results of continuous BMP model simulations representing the structural BMP, using a verified BMP model and representative long-term (i.e., 10 years) climatic data including hourly rainfall data;
2. Supporting calculations and model documentation that justify use of the model, model input parameters, and the resulting cumulative phosphorus and/or nitrogen load reduction estimates;
3. If pollutant removal performance data are available for the specific BMP, model calibration results should be provided; and

Identification of references and sources of information that support the use of the alternative information and method.

If EPA determines that the long-term cumulative phosphorus and/or nitrogen load reductions developed based on alternative information are not adequately supported, EPA will notify the permittee in writing, and the permittee may receive no phosphorus reduction credit other than a reduction credit calculated by the permittee using the default phosphorus and/or nitrogen reduction factors provided in this Attachment for the identified practices. The permittee is required to submit to EPA valid phosphorus load reductions for structural BMPs in the LPCP area in accordance with the submission schedule requirements specified in the permit and Appendix F.

Method to Calculate Annual Phosphorus and/or Nitrogen Load Delivered to BMPs (BMP Load)

The **BMP Load** is the annual phosphorus and/or nitrogen load from the drainage area to each proposed or existing BMP used by permittee to claim credit against its stormwater phosphorus load reduction requirement (i.e., Phosphorus Reduction Requirement) or for tracking and accounting for nitrogen load reductions in nitrogen sensitive watersheds. The BMP Load is the starting point from which the permittee calculates the reduction in phosphorus load achieved by each existing and proposed BMP.

Examples are provided to illustrate use of the methods. Tables 3-1 and 3-2 below provide annual nutrient load export rates by land use category for impervious and pervious areas for phosphorus (PLERs) and nitrogen (NLER), respectively. The examples are applicable for both phosphorus

and nitrogen. The permittee shall select the land use categories that most closely represents the actual uses of the drainage areas tributary to BMP. For pervious areas, if the hydrologic soil group (HSG) is known, use the appropriate value. If the HSG is not known, assume HSG C conditions for the phosphorus and/or nitrogen load export rate. For drainage areas with institutional type uses, such as government properties, hospitals, and schools, the permittee shall use the commercial/industrial land use category to calculate phosphorus and/or nitrogen loads. Table 3-3 provides a crosswalk table of nutrient load export rate (PLER and NLER) land use categories in Tables 3-1 and 3-2, and the corresponding land use category codes used in MassGIS.

Table 3-1: Average annual distinct phosphorus (P) load export rates for use in estimating P load reduction credits in the MA MS4 Permit

Phosphorus Source Category by Land Use	Land Surface Cover	P Load Export Rate, lbs./acre/year	P Load Export Rate, kg/ha/yr.
Commercial (COM) and Industrial (IND)	Directly connected impervious	1.78	2.0
	Pervious	See* DevPERV	See* DevPERV
Multi-Family (MFR) and High-Density Residential (HDR)	Directly connected impervious	2.32	2.6
	Pervious	See* DevPERV	See* DevPERV
Medium -Density Residential (MDR)	Directly connected impervious	1.96	2.2
	Pervious	See* DevPERV	See* DevPERV
Low Density Residential (LDR) - "Rural"	Directly connected impervious	1.52	1.7
	Pervious	See* DevPERV	See* DevPERV
Highway (HWY)	Directly connected impervious	1.34	1.5
	Pervious	See* DevPERV	See* DevPERV
Forest (FOR)	Directly connected impervious	1.52	1.7
	Pervious	0.13	0.13
Open Land (OPEN)	Directly connected impervious	1.52	1.7
	Pervious	See* DevPERV	See* DevPERV
Agriculture (AG)	Directly connected impervious	1.52	1.7
	Pervious	0.45	0.5
*Developed Land Pervious (DevPERV) – HSG A	Pervious	0.03	0.03
*Developed Land Pervious (DevPERV) – HSG B	Pervious	0.12	0.13
*Developed Land Pervious (DevPERV) – HSG C	Pervious	0.21	0.24
*Developed Land Pervious (DevPERV) – HSG C/D	Pervious	0.29	0.33
*Developed Land Pervious (DevPERV) – HSG D	Pervious	0.37	0.41

Notes:
<ul style="list-style-type: none"> For pervious areas, if the hydrologic soil group (HSG) is known, use the appropriate value from this table. If the HSG is not known, assume HSG C conditions for the phosphorus load export rate. Agriculture includes row crops, actively managed hay fields, and pasture lands. Institutional land uses, such as government properties, hospitals and schools, are to be included in the commercial and industrial land use grouping for calculating phosphorus loading. Impervious surfaces within the forest land use category are typically roadways adjacent to forested pervious areas.

Table 3-2: Average annual distinct nitrogen (N) load export rates for use in estimating N load reduction credits in the MA MS4 Permit

Nitrogen Source Category by Land Use	Land Surface Cover	N Load Export Rate, lbs./acre/year	N Load Export Rate, kg/ha/yr.
Commercial (COM) and Industrial (IND)	Directly connected impervious	15.0	16.9
	Pervious	See* DevPERV	See* DevPERV
All Residential	Directly connected impervious	14.1	15.8
	Pervious	See* DevPERV	See* DevPERV
Highway (HWY)	Directly connected impervious	10.5	11.8
	Pervious	See* DevPERV	See* DevPERV
Forest (FOR)	Directly connected impervious	11.3	12.7
	Pervious	0.5	0.6
Open Land (OPEN)	Directly connected impervious	11.3	12.7
	Pervious	See* DevPERV	See* DevPERV
Agriculture (AG)	Directly connected impervious	11.3	12.7
	Pervious	2.6	2.9
*Developed Land Pervious (DevPERV) – HSG A	Pervious	0.3	0.3
*Developed Land Pervious (DevPERV) – HSG B	Pervious	1.2	1.3
*Developed Land Pervious (DevPERV) – HSG C	Pervious	2.4	2.7
*Developed Land Pervious (DevPERV) – HSG C/D	Pervious	3.1	3.5
*Developed Land Pervious (DevPERV) – HSG D	Pervious	3.6	4.1

Notes:
<ul style="list-style-type: none"> For pervious areas, if the hydrologic soil group (HSG) is known, use the appropriate value from this table. If the HSG is not known, assume HSG C conditions for the nitrogen load export rate. Agriculture includes row crops. Actively managed hay fields and pasture lands. Institutional land uses such as government properties, hospitals and schools are to be included in the commercial and industrial land use grouping for calculating nitrogen loading. Impervious surfaces within the forest land use category are typically roadways adjacent to forested pervious areas.

Table 3-3. MassGIS land-use categories with associated land-use groups for phosphorus (P) and nitrogen (N) load calculations

Mass GIS Land Use LU_CODE	Description	Land Use group for calculating P Load - MA MS4
1	Crop Land	Agriculture
2	Pasture (active)	Agriculture
3	Forest	Forest
4	Wetland	Forest
5	Mining	Industrial
6	Open Land includes inactive pasture	open land
7	Participation Recreation	open land
8	spectator recreation	open land
9	Water Based Recreation	open land
10	Multi-Family Residential	High Density Residential
11	High Density Residential	High Density Residential
12	Medium Density Residential	Medium Density Residential
13	Low Density Residential	Low Density Residential
14	Saltwater Wetland	Water
15	Commercial	Commercial
16	Industrial	Industrial
17	Urban Open	open land
18	Transportation	Highway
19	Waste Disposal	Industrial
20	Water	Water
23	cranberry bog	Agriculture
24	Powerline	open land
25	Saltwater Sandy Beach	open land
26	Golf Course	Agriculture
29	Marina	Commercial
31	Urban Public	Commercial
34	Cemetery	open land
35	Orchard	Forest
36	Nursery	Agriculture
37	Forested Wetland	Forest
38	Very Low Density residential	Low Density Residential
39	Junkyards	Industrial
40	Brush land/Successional	Forest

BMP Load: To estimate the annual phosphorus and/or nitrogen load reduction for a given stormwater BMP, it is first necessary to estimate the amount of annual stormwater phosphorus and/or nitrogen load that will be directed to the BMP (BMP Load).

For a given BMP:

- 1) Determine the total drainage area to the BMP;
- 2) Distribute the total drainage area into impervious and pervious subareas by land use category as defined by Tables 3-1, 3-2 and 3-3;
- 3) Calculate the nutrient load for each land use-based impervious and pervious subarea by multiplying the subarea by the appropriate nutrient load export rate (i.e., PLER or NLER) provided in Tables 3-1 and 3-2; and
- 4) Determine the total annual phosphorus and/or nitrogen loads to the BMP by summing the calculated impervious and pervious subarea phosphorus and/or nitrogen loads.

Example 3-1 to determine phosphorus and nitrogen loads to a proposed BMP: A permittee is proposing a surface stormwater infiltration system that will treat runoff from an industrial site within the LPCP area that has a total drainage area of 12.87 acres comprised of 10.13 acres of impervious cover (e.g., roadways, parking areas and rooftops), 1.85 acres of landscaped pervious area and 0.89 acres of wooded area both with HSG C soils. The drainage area information for the proposed BMP is:

BMP Subarea ID	Land Use Category	Cover Type	Area (acres)	PLER (lb/acre/yr)*	NLER (lb/acre/yr)**
1	Industrial	impervious	10.13	1.78	15.0
2	Landscaped (HSG C)	pervious	1.85	0.21	2.4
3	Forest (HSG C)	pervious	0.89	0.12	0.5

*From Table 3-1

**From Table 3-2

The phosphorus load to the proposed BMP (BMP Load_p) is calculated as:

$$\begin{aligned}
 \text{BMP Load}_p &= (IA_{\text{Ind}} \times \text{PLER}_{\text{Ind}}) + (PA_{\text{Ind}} \times \text{PLER}_{\text{Ind}}) + (PA_{\text{FOREST}} \times \text{PLER}_{\text{For}}) \\
 &= (10.13 \times 1.78) + (1.85 \times 0.21) + (0.89 \times 0.12) \\
 &= \mathbf{18.53 \text{ lbs P/year}}
 \end{aligned}$$

The nitrogen load to the proposed BMP (BMP Load_N) is calculated as:

$$\begin{aligned}
 \text{BMP Load}_N &= (IA_{\text{Ind}} \times \text{NLER}_{\text{Ind}}) + (PA_{\text{Ind}} \times \text{NLER}_{\text{Ind}}) + (PA_{\text{FOREST}} \times \text{NLER}_{\text{For}}) \\
 &= (10.13 \times 15.0) + (1.85 \times 2.4) + (0.89 \times 0.5) \\
 &= \mathbf{156.9 \text{ lbs N/year}}
 \end{aligned}$$

(1) Method to determine the design volume of a structural BMP to achieve a known phosphorus and/or nitrogen (P/N) load reduction target when the contributing drainage area is 100% impervious:

Flow Chart 1 illustrates the steps to determine the design volume of a structural BMP to achieve a known phosphorus and/or nitrogen (P/N) load reduction target when the contributing drainage area is 100% impervious.

- 2) Determine the contributing impervious drainage area (IA) in acres to the structural BMP;
- 3) Determine the structural BMP type (e.g., infiltration trench, gravel wetland). For infiltration systems, determine the appropriate infiltration rate for the location of the BMP in the Watershed;
- 4) Using the cumulative phosphorus and/or nitrogen removal performance curves for the selected structural BMP (Figures 3-1 through 3-20), determine the storage volume for the BMP (BMP-Volume_{IA-in}), in inches of runoff, needed to treat runoff from the contributing IA to achieve the reduction target;
- 5) Calculate the corresponding BMP storage volume in cubic feet (BMP-Volume_{IA-ft³}) using BMP-Volume_{IA-in} determined from step 4 and equation 3-1:

$$\text{BMP-Volume}_{\text{IA-ft}^3} = \text{IA (acre)} \times \text{BMP-Volume}_{\text{IA-in}} \times 3630 \text{ ft}^3/\text{ac-in} \quad \text{(Equation 3-1)}$$

- 6) Provide supporting calculations using the dimensions and specifications of the proposed structural BMP showing that the necessary storage volume capacity, BMP-Volume_{IA-ft³}, determined from step 5 will be provided to achieve the P/N_{Target}; and
- 7) Calculate the cumulative P/N load reduction in pounds of P/N (BMP-Reduction_{lbs-P/N}) for the structural BMP using the BMP Load (as calculated from the procedure in Attachment 1 to Appendix F) and P/N_{target} by using equation 3-2:

$$\text{BMP-Reduction}_{\text{lbs-P}} = \text{BMP Load} \times (\text{P/N}_{\text{target}} / 100) \quad \text{(Equation 3-2)}$$

Example 3-2 to determine design storage volume capacity of a structural BMP for a 100% impervious drainage area to achieve a known phosphorus load reduction target*:

*Note: The approach used in this example is for phosphorus and is equally applicable for nitrogen.

A permittee is considering a surface infiltration practice to capture and treat runoff from 2.57 acres (1.04 ha) of commercial impervious area in the LPCP area that will achieve a 70% reduction in average annual phosphorus load. The infiltration practice would be located adjacent to the impervious area. The permittee has measured an infiltration rate (IR) of 0.39 inches per hour (in/hr) in the vicinity of the proposed infiltration practice. Determine the:

- A) Design storage volume needed for an surface infiltration practice to achieve a 70% reduction in annual phosphorus load from the contributing drainage area (BMP-Volume_{IA-ft³}); and
- B) Cumulative phosphorus reduction in pounds that would be accomplished by the BMP (BMP-Reduction_{lbs-P})

Solution:

- 1) Phosphorus load reduction target (P_{target}) = 70%
- 2) Contributing impervious drainages area (IA) = 2.57 acres;

3) BMP type is a surface infiltration practice (i.e., basin) with an infiltration rate (IR) of 0.39 in/hr

4) The performance curve for the infiltration basin (i.e., surface infiltration practice), Figure 3-8, IR = 0.27 in/hr is used to determine the design storage volume of the BMP (BMP-Volume_{IA-in}) needed to treat runoff from the contributing IA and achieve a P_{target} = 70%. The curve for an infiltration rate of 0.27 in/hr is chosen because 0.27 in/hr is the nearest simulated IR that is less than the field measured IR of 0.39 in/hr. From Figure 3-8, the BMP-Volume_{IA-in} for a P_{target} = 70% is 0.36 in.

5) The BMP-Volume_{IA-in} is converted to cubic feet (BMP-Volume_{IA-ft³}) using Equation 3-1:

$$\begin{aligned} \text{BMP-Volume}_{\text{IA-ft}^3} &= \text{IA (acre)} \times \text{BMP-Volume}_{\text{IA-in}} \times 3,630 \text{ ft}^3/\text{acre-in} \\ \text{BMP-Volume}_{\text{IA-ft}^3} &= 2.57 \text{ acre} \times 0.36 \text{ in} \times 3,630 \text{ ft}^3/\text{acre-in} \\ &= \mathbf{3,359 \text{ ft}^3} \end{aligned}$$

6) A narrow trapezoidal infiltration basin with the following characteristics is proposed to achieve the P_{Target} of 70%. As indicated in Table 3-5, the Design Storage Volume (DSV) of a surface infiltration practice is equal to the volume of surface ponding:

$$\text{DSV} = (L \times ((W_{\text{bottom}} + W_{\text{top@Dmax}}) / 2) \times D) \text{ (Table 3-5: Surface Infiltration)}$$

Length (ft)	Design Depth (ft)	Side Slopes	Bottom area (ft ²)	Pond surface area (ft ²)	Design Storage Volume (ft ³)
355	1.25	3:1	1,387	4,059	3,404

The proposed DSV of 3,404 ft³ exceeds the BMP-Volume_{IA-ft³} needed, 3,359 ft³ and therefore is sufficient to achieve the P Target of 70%.

7) The cumulative phosphorus load reduction in pounds of phosphorus for the infiltration practice (BMP-Reduction_{lbs-P}) is calculated using Equation 3-2. The BMP Load is first determined using the method described above.

$$\begin{aligned} \text{BMP Load} &= \text{IA} \times \text{impervious cover PLER for commercial use (see Table 3-1)} \\ &= 2.57 \text{ acres} \times 1.78 \text{ lbs/acre/yr} \\ &= 4.58 \text{ lbs/yr} \end{aligned}$$

$$\begin{aligned} \text{BMP-Reduction}_{\text{lbs-P}} &= \text{BMP Load} \times (P_{\text{target}} / 100) \\ \text{BMP-Reduction}_{\text{lbs-P}} &= 4.58 \text{ lbs/yr} \times (70/100) \\ &= \mathbf{3.21 \text{ lbs/yr}} \end{aligned}$$

Alternate Solution: Alternatively, the permittee could determine the design storage volume needed for an IR = 0.39 in/hr by performing interpolation of the results from the surface infiltration performance curves for IR = 0.27 in/hr and IR = 0.52 in/hr as follows (replacing steps 3 and 4 on the previous page):

Using the performance curves for the infiltration basin (i.e., surface infiltration practice), Figures 3-8, IR = 0.27 in/hr and 3-9, IR = 0.52 in/hr, interpolate between the curves to determine the design storage volume of the BMP (BMP-Volume_{IA-in}) needed to treat runoff from the contributing IA and achieve a P_{target} = 70%.

First calculate the interpolation adjustment factor (IAF) to interpolate between the infiltration basin performance curves for infiltration rates of 0.27 and 0.52 in/hr:

$$IAF = (0.39 - 0.27) / (0.52 - 0.27) = 0.48$$

From the two performance curves, develop the following table to estimate the general magnitude of the needed storage volume for an infiltration swale with an IR = 0.39 in/hr and a P_{target} of 70%.

Table Example 3-1-1: Interpolation Table for determining design storage volume of infiltration basin with IR = 0.39 in/hr and a phosphorus load reduction target of 70%

BMP Storage Volume	% Phosphorus Load Reduction IR = 0.27 in/hr (PR _{IR=0.27})	% Phosphorus Load Reduction IR = 0.52 in/hr (PR _{IR=0.52})	Interpolated % Phosphorus Load Reduction IR = 0.39 in/hr (PR _{IR=0.39}) PR _{IR=0.39} = IAF(PR _{IR=0.52} - PR _{IR=0.27}) + PR _{IR=0.27}
0.3	64%	67%	65%
0.4	74%	77%	75%
0.5	79%	82%	80%

As indicated from Table Example 3-1, the BMP-Volume_{IA-in} for PR_{IR=0.39} of 70% is between 0.3 and 0.4 inches and can be determined by interpolation:


$$\begin{aligned} \text{BMP-Volume}_{IA-in} &= (70\% - 65\%) / (75\% - 65\%) \times (0.4 \text{ in} - 0.3 \text{ in}) + 0.3 \text{ in} \\ &= 0.35 \text{ inches} \end{aligned}$$

5 alternative) Convert the resulting BMP-Volume_{IA-in} to cubic feet (BMP-Volume_{IA-ft³}) using equation 3-1:

$$\begin{aligned} \text{BMP-Volume}_{IA-ft^3} &= 2.57 \text{ acre} \times 0.35 \text{ in} \times 3,630 \text{ ft}^3/\text{acre-in} \\ &= 3,265 \text{ ft}^3 \end{aligned}$$

(2) Method to determine the phosphorus and/or nitrogen (N/P) load reduction credit for a structural BMP with a known design storage volume when the contributing drainage area is 100% impervious:

Flow Chart 2 illustrates the steps to determine the phosphorus and/or nitrogen (N/P) load reduction for a structural BMP with a known design volume when the contributing drainage area is 100% impervious.

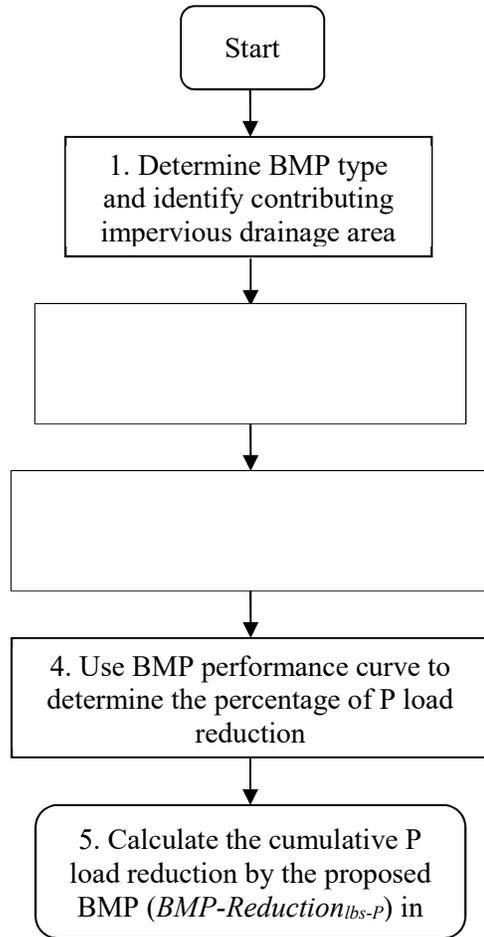

Flow Chart 2: Method to determine the phosphorus and/or nitrogen load reduction for a BMP with a known design volume when contributing drainage area is 100% impervious.

- 1) Identify the structural BMP type and contributing impervious drainage area (IA);
- 2) Document the available storage volume (ft³) of the structural BMP (BMP-Volume ft³) using the BMP dimensions and design specifications (e.g., maximum storage depth, filter media porosity);
- 3) Convert BMP-Volume ft³ into inches of runoff from the contributing impervious area (BMP-Volume_{IA-in}) using equation 3-3:

$$\text{BMP-Volume}_{\text{IA-in}} = \text{BMP-Volume}_{\text{ft}^3} / \text{IA (acre)} \times 12 \text{ in/ft} \times 1 \text{ acre}/43560 \text{ ft}^2 \text{ (Equation 3-3)}$$

- 4) Determine the % P/N load reduction for the structural BMP (BMP Reduction_{%-P}) using the appropriate BMP performance curve (Figures 3-1 through 3-20) and the BMP-Volume_{IA-in} calculated in step 3; and

- 5) Calculate the cumulative P/N load reduction in pounds for the structural BMP (BMP Reduction $_{lbs-P/N}$) using the BMP Load as calculated from the procedure described above and the percent P/N load reduction determined in step 4 by using equation 3-4:

$$\text{BMP Reduction}_{lbs-P/N} = \text{BMP Load} \times (\text{BMP Reduction}_{\%P/N} / 100) \quad \text{(Equation 3-4)}$$

Example 3-2: Determine the nitrogen load reduction for a structural BMP with a known storage volume capacity when the contributing drainage area is 100% impervious*:

*The approach used in this example is for nitrogen and is equally applicable for phosphorus.

A permittee is considering an Enhanced Bio-filtration w/ISR system to treat runoff from 1.49 acres of high density residential (HDR) impervious area. Site constraints would limit the enhanced bio-filtration system to have a surface area of 1200 ft² and the system would have to be located next to the impervious drainage area to be treated. The design parameters for the enhanced bio-filtration w/ ISR system are presented in Table Example 3-2-1.

Table Example 3-2-1: Design parameters for bio-filtration system for Example 3-2

Components of representation	Parameters	Value
Ponding	Maximum depth	0.5 ft
	Surface area	1200 ft ²
	Vegetative parameter ^a	85-95%
Soil mix	Depth	2.0 ft
	Porosity	0.35
	Hydraulic conductivity	4 inches/hour
Gravel layer	Depth	2.0 ft
	Porosity	0.45
Orifice #1	Diameter	0.08 ft

^a Refers to the percentage of surface covered with vegetation

Determine the:

- A) Percent nitrogen load reduction (BMP Reduction $_{\%N}$) for the specified enhanced bio-filtration w/ISR system and contributing impervious HDR drainage area; and
- B) Cumulative nitrogen reduction in pounds that would be accomplished by the system (BMP-Reduction $_{lbs-N}$)

Solution:

- 1) The BMP is an enhanced bio-filtration w/ISR system that will treat runoff from 1.49 acres of HDR impervious area (IA = 1.49 acre);
- 2) The available storage volume capacity (ft³) of the enhanced bio-filtration system (BMP-Volume $_{BMP-ft^3}$) is determined using the surface area of the system, depth of ponding, and the porosities of the filter media and subsurface gravel ISR:

$$\begin{aligned} \text{BMP-Volume}_{BMP-ft^3} &= (\text{surface area} \times \text{pond maximum depth}) + (\text{surface area} \times ((\text{soil mix depth} \times \text{soil layer porosity}) + (\text{gravel layer depth} \times \text{gravel layer porosity}))) \\ &= (1,200 \text{ ft}^2 \times 0.5 \text{ ft}) + (1,200 \text{ ft}^2 \times ((2.0 \times 0.35) + (2.0 \times 0.45))) \\ &= 600 + 1920 \end{aligned}$$

$$= 2,520 \text{ ft}^3$$

- 3) The available storage volume capacity of the enhanced bio-filtration system in inches of runoff from the contributing impervious area (BMP-Volume_{IA-in}) is calculated using equation 3-3:

$$\begin{aligned} \text{BMP-Volume}_{\text{IA-in}} &= (\text{BMP-Volume}_{\text{ft}^3} / \text{IA (acre)}) \times 12 \text{ in/ft} \times 1 \text{ acre} / 43560 \text{ ft}^2 \\ \text{BMP-Volume}_{\text{IA-in}} &= (2520 \text{ ft}^3 / 1.49 \text{ acre}) \times 12 \text{ in/ft} \times 1 \text{ acre} / 43560 \text{ ft}^2 \\ &= 0.47 \text{ in} \end{aligned}$$


- 4) Using the enhanced bio-filtration performance curve shown in Figure 3-15, a **61%** nitrogen load reduction (BMP Reduction_{%-N}) is determined for the system with a design storage capacity of 0.47 inches for treating runoff from 1.49 acres of impervious area; and
- 5) Calculate the cumulative nitrogen load reduction in pounds of for the enhanced bio-filtration w/ISR system (BMP Reduction_{lbs-N}) using the BMP Load as calculated from the procedure described above and the BMP Reduction_{%-N} determined in step 4 by using equation 3-4. First, the BMP Load is determined as specified above:

$$\begin{aligned} \text{BMP Load}_N &= \text{IA} \times \text{impervious cover nitrogen export loading rate for HDR} \\ &\text{(see Table 3-2)} \\ &= 1.49 \text{ acres} \times 15.8 \text{ lbs/acre/yr} \\ &= 23.5 \text{ lbs/yr} \end{aligned}$$

$$\begin{aligned} \text{BMP Reduction}_{\text{lbs-N}} &= \text{BMP Load} \times (\text{BMP Reduction}_{\text{\%-P}} / 100) \\ \text{BMP Reduction}_{\text{lbs-N}} &= 23.5 \text{ lbs/yr} \times (61 / 100) \\ &= \mathbf{14.4 \text{ lbs/yr}} \end{aligned}$$

(3) Method to determine the design storage volume of a structural BMP to achieve a known phosphorus and/or nitrogen load reduction target when the contributing drainage area has impervious and pervious surfaces:

Flow Chart 3 illustrates the steps to determine the design storage volume of a structural BMP to achieve a known phosphorus load reduction target when the contributing drainage area has impervious and pervious surfaces.

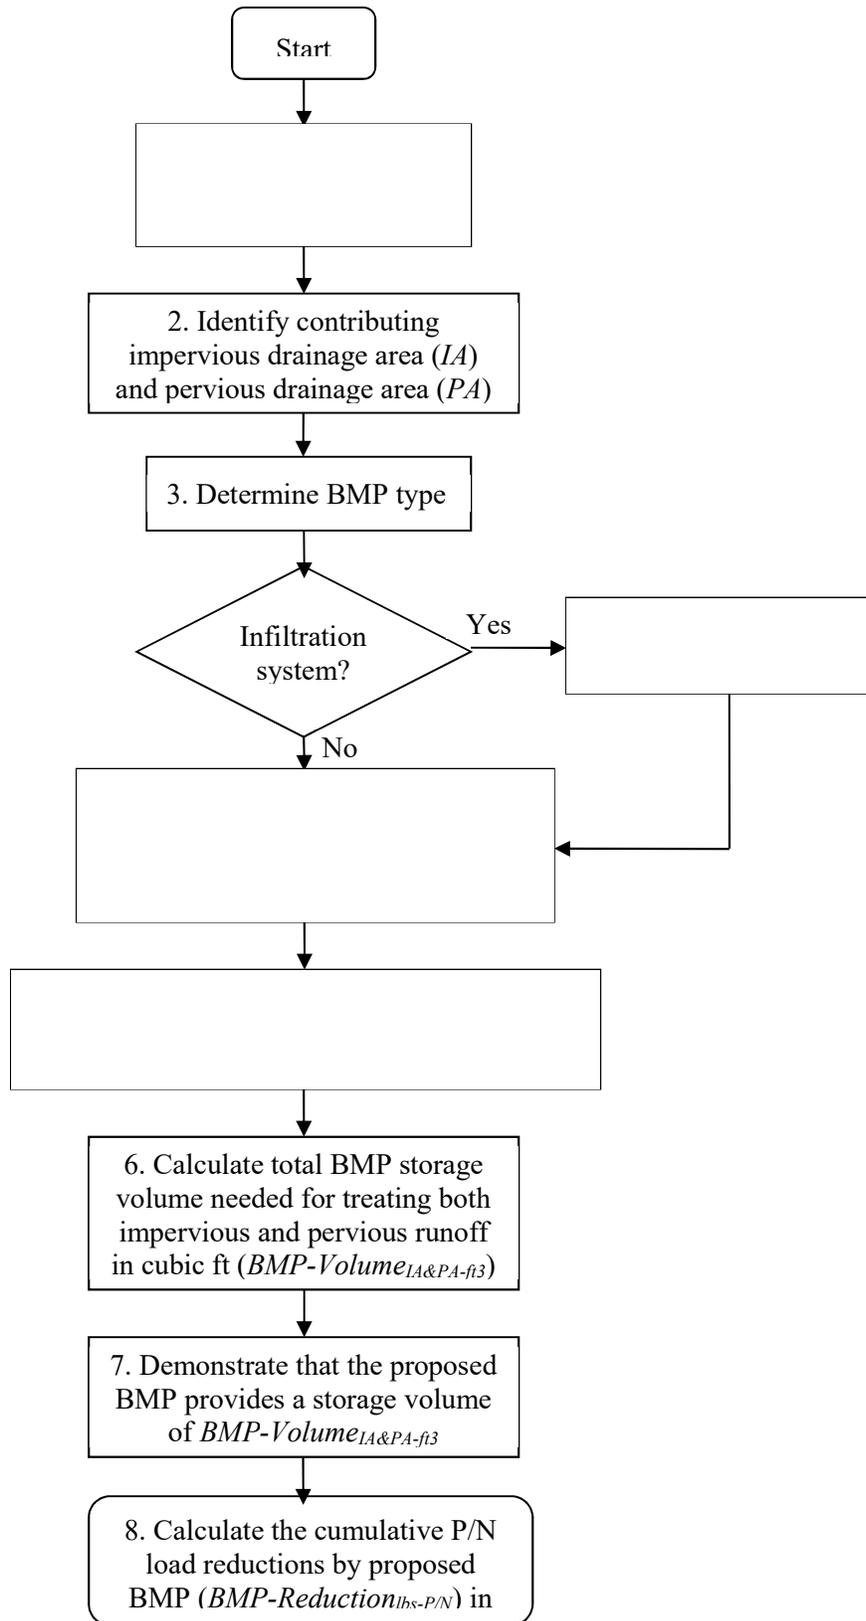

Flow Chart 3: Method to determine the design storage volume of a BMP to reach a known P/N load reduction when both impervious and pervious drainage areas are present.

- 1) Determine the desired cumulative P/N load reduction target (P/N_{target}) in percentage for the structural BMP;
- 2) Characterize the contributing drainage area to the structural BMP by identifying the following information for the impervious and pervious surfaces:
Impervious area (IA) - Area (acre) and land use (e.g., commercial)
Pervious area (PA) – Area (acre), land use and hydrologic soil group (HSG).
- 3) Determine the structural BMP type (e.g., infiltration trench, gravel wetland). For infiltration systems, determine the appropriate infiltration rate for the location of the BMP in the Watershed;
- 4) Using the cumulative P/N removal performance curve for the selected structural BMP, determine the storage volume capacity of the BMP in inches needed to treat runoff from the contributing impervious area (BMP-Volume_{IA-in});
- 5) Using Equation 3-5 below and the pervious area runoff depth information from Table 3-4, below, determine the total volume of runoff from the contributing pervious drainage area in cubic feet (BMP Volume_{PA-ft³}) for a rainfall size equal to the sum of BMP Volume_{IA-in}, determined in step 4. The runoff volume for each distinct pervious area must be determined;

$$\text{BMP-Volume}_{PA\text{ ft}^3} = \sum (\text{PA} \times (\text{runoff depth}) \times 3,630 \text{ ft}^3/\text{acre-in})_{(PA1, PAN)} \text{ (Equation 3-5)}$$

Table 3-4 provides values of runoff depth from pervious areas for various rainfall depths and HSGs. Soils are assigned to an HSG on the basis of their permeability. HSG A is the most permeable, and HSG D is the least permeable. HSG categories for pervious areas in the drainage area shall be estimated by consulting local soil surveys prepared by the National Resource Conservation Service (NRCS) or by a storm water professional evaluating soil testing results from the drainage area. If the HSG condition is not known, an HSG C soil condition should be assumed.

- 6) Using equation 3-6 below, calculate the BMP storage volume in cubic feet (BMP-Volume_{IA&PA-ft³}) needed to treat the runoff depth from the contributing impervious (IA) and pervious areas (PA);

$$\text{BMP-Volume}_{IA\&PA\text{-ft}^3} = \text{BMP Volume}_{PA\text{-ft}^3} + (\text{BMP Volume}_{IA\text{-in}} \times \text{IA (acre)}) \times 3,630 \text{ ft}^3/\text{acre-in} \text{ (Equation 3-6)}$$
- 7) Provide supporting calculations using the dimensions and specifications of the proposed structural BMP showing that the necessary storage volume determined in step 6, BMP-Volume_{IA&PA-ft³}, will be provided to achieve the P/N_{Target} ; and
- 8) Calculate the cumulative phosphorus load reduction in pounds of phosphorus (BMP-Reduction_{lbs-P/N}) for the structural BMP using the BMP Load (as calculated in example 1) and the P/N_{target} by using equation 3-2:

$$\text{BMP-Reduction}_{\text{lbs-P/N}} = \text{BMP Load} \times (P_{target} / 100) \text{ (Equation 3-2)}$$

Table 3- 4: Developed Land Pervious Area Runoff Depths based on Precipitation depth and Hydrological Soil Groups (HSGs)

Developed Land Pervious Area Runoff Depths based on Precipitation depth and Hydrological Soil Groups					
Rainfall Depth, Inches	Runoff Depth, inches				
	Pervious HSG A	Pervious HSG B	Pervious HSG C	Pervious HSG C/D	Pervious HSG D
0.10	0.00	0.00	0.00	0.00	0.00
0.20	0.00	0.00	0.01	0.02	0.02
0.40	0.00	0.00	0.03	0.05	0.06
0.50	0.00	0.01	0.05	0.07	0.09
0.60	0.01	0.02	0.06	0.09	0.11
0.80	0.02	0.03	0.09	0.13	0.16
1.00	0.03	0.04	0.12	0.17	0.21
1.20	0.04	0.05	0.14	0.27	0.39
1.50	0.08	0.11	0.39	0.55	0.72
2.00	0.14	0.22	0.69	0.89	1.08

Notes: Runoff depths derived from combination of volumetric runoff coefficients from Table 5 of *Small Storm Hydrology and Why it is Important for the Design of Stormwater Control Practices*, (Pitt, 1999), and using the Stormwater Management Model (SWMM) in continuous model mode for hourly precipitation data for Boston, MA, 1998-2002.

Example 3-3: Determine the design storage volume of a structural BMP to achieve a known phosphorus load reduction target when the contributing drainage area has impervious and pervious surfaces*:

*The approach used in this example for phosphorus is equally applicable for nitrogen.

A permittee is considering a gravel wetland system to treat runoff from a high-density residential (HDR) site. The site is 7.5 acres of which 4.0 acres are impervious surfaces and 3.50 acres are pervious surfaces. The pervious area is made up of 2.5 acres of lawns in good condition surrounding cluster housing units and 1.0 acre of stable unmanaged woodland. Soils information indicates that all of the woodland and 0.5 acres of the lawn is hydrologic soil group (HSG) B and the other 2.0 acres of lawn are HSG C. The permittee wants to size the gravel wetland system to achieve a cumulative phosphorus load reduction (P_{Target}) of 55% from the entire 7.5 acres.

Determine the:

- A) Design storage volume needed for a gravel wetland system to achieve a 55% reduction in annual phosphorus load from the contributing drainage area (BMP-Volume $IA \& PA - ft^3$); and
- B) Cumulative phosphorus reduction in pounds that would be accomplished by the BMP (BMP-Reduction $lbs-P$)

Example 3-3 continued:

Solution:

- 1) The BMP type is gravel wetland system.
- 2) The phosphorus load reduction target ($P_{\text{Target}} = 55\%$).
- 3) Using the cumulative phosphorus removal performance curve for the gravel wetland system shown in Figure 3-14, the storage volume capacity in inches needed to treat runoff from the contributing impervious area (BMP Volume_{IA-in}) is 0.71 in;

Using equation 3-5 and the pervious runoff depth information from Table 3-4, the volume of runoff from the contributing pervious drainage area in cubic feet (BMP Volume_{PA-ft³}) for a rainfall size equal to 0.71 in is summarized in Table Example 3-3-A. As indicated from Table 3-4, the runoff depth for a rainfall size equal to 0.71 inches is between 0.6 and 0.8 inches and can be determined by interpolation (example shown for runoff depth of HSG C):

$$\begin{aligned} \text{Runoff depth (HSG C)} &= (0.71 - 0.6)/(0.8 - 0.6) \times (0.09 \text{ in} - 0.06 \text{ in}) + 0.06 \text{ in} \\ &= 0.07 \text{ inches} \end{aligned}$$

Table Example 3-3-A: Runoff contributions from pervious areas for HDR site

ID	Type	Pervious Area (acre)	HSG	Runoff (in)	Runoff = (runoff) x PA (acre-in)	Runoff = Runoff (acre-in) x 3630 ft ³ /acre-in (ft ³)
PA1	Grass	2.00	C	0.07	0.14	508
PA2	Grass	0.50	B	0.01	0.0	0.0
PA3	Woods	1.00	B	0.01	0.0	0.0
Total	-----	3.50	-----	-----	0.14	508

- 4) Using equation 3-6, determine the BMP storage volume in cubic feet (BMP-Volume_{IA&PA-ft³}) needed to treat 0.71 inches of runoff from the contributing impervious area (IA) and the runoff of 0.14 acre-in from the contributing pervious areas, determined in step 5 is:

$$\text{BMP Volume}_{\text{IA\&PA-ft}^3} = \text{BMP Volume}_{\text{PA ac-in}} + (\text{BMP Volume}_{\text{IA-in}} \times \text{IA (acre)}) \times 3,630 \text{ ft}^3/\text{acre-in}$$

$$\begin{aligned} \text{BMP Volume}_{\text{IA\&PA-ft}^3} &= (508 \text{ ft}^3 + ((0.71 \text{ in} \times 4.00 \text{ acre}) \times 3,630 \text{ ft}^3/\text{acre-in})) \\ &= 10,817 \text{ ft}^3 \end{aligned}$$

- 5) Table Example 3-3-B provides design details for of a potential gravel wetland system

Solution continued:

Table Example 3-3-B: Design details for gravel wetland system

Gravel Wetland System Components	Design Detail	Depth (ft)	Surface Area (ft ²)	Volume (ft ³)
Sediment Forebay	10% of Treatment Volume			
Pond area	---	1.33	896	1,192
Wetland Cell #1	45% of Treatment Volume	-----	-----	-----
Pond area	---	2.00	1,914	3,828
Gravel layer	porosity = 0.4	2.00	1,914	1,531
Wetland Cell #2	45% of Treatment Volume	-----	-----	-----
Pond area	---	2.00	1,914	3,828
Gravel layer	porosity = 0.4	2.00	1,914	1,531

The total design storage volume for the proposed gravel wetland system identified in Table Example 3-3-C is 11,910 ft³. This volume is greater than 11,834 ft³ ((BMP-Volume_{IA&PA-ft³}), calculated in step 4) and is therefore sufficient to achieve a P_{Target} of 55%.

6) The cumulative phosphorus load reduction in pounds of phosphorus (BMP-Reduction_{lbs-P}) for the proposed gravel wetland system is calculated by using equation 3-2 with the BMP Load and the P_{target} = 55%.

$$\text{BMP-Reduction}_{\text{lbs-P}} = \text{BMP Load} \times (\text{P}_{\text{target}} / 100) \quad \text{(Equation 3-2)}$$

Using Table 3-1, the BMP Load is calculated:


$$\begin{aligned} \text{BMP Load} &= (\text{IA} \times \text{PLER}_{\text{IC HDR}}) + (\text{PA}_{\text{lawn HSG B}} \times \text{PLER}_{\text{HSG B}}) + (\text{PA}_{\text{lawn HSG C}} \times \text{PLER}_{\text{HSG C}}) + (\text{PA}_{\text{forest}} \times \text{PA}_{\text{PLER}_{\text{For}}}) \\ &= (4.00 \text{ acre} \times 2.32 \text{ lbs/acre/yr}) + (0.50 \text{ acres} \times 0.12 \text{ lbs/acre/yr}) + (2.00 \text{ acre} \times 0.21 \text{ lbs/acre/yr}) + (1.00 \text{ acres} \times 0.13) \\ &= 9.68 \text{ lbs/yr} \end{aligned}$$

$$\text{BMP-Reduction}_{\text{lbs-P}} = \text{BMP Load} \times (\text{P}_{\text{target}} / 100)$$

$$\begin{aligned} \text{BMP-Reduction}_{\text{lbs-P}} &= 9.68 \text{ lbs/yr} \times 55/100 \\ &= \mathbf{5.32 \text{ lbs/yr}} \end{aligned}$$

(4) Method to determine the phosphorus and/or nitrogen load reduction for a structural BMP with a known storage volume when the contributing drainage area has impervious and pervious surfaces:

Flow Chart 4 illustrates the steps to determine the phosphorus and/or nitrogen (P/N) load reduction for a structural BMP with a known storage volume when the contributing drainage area has impervious and pervious surfaces.

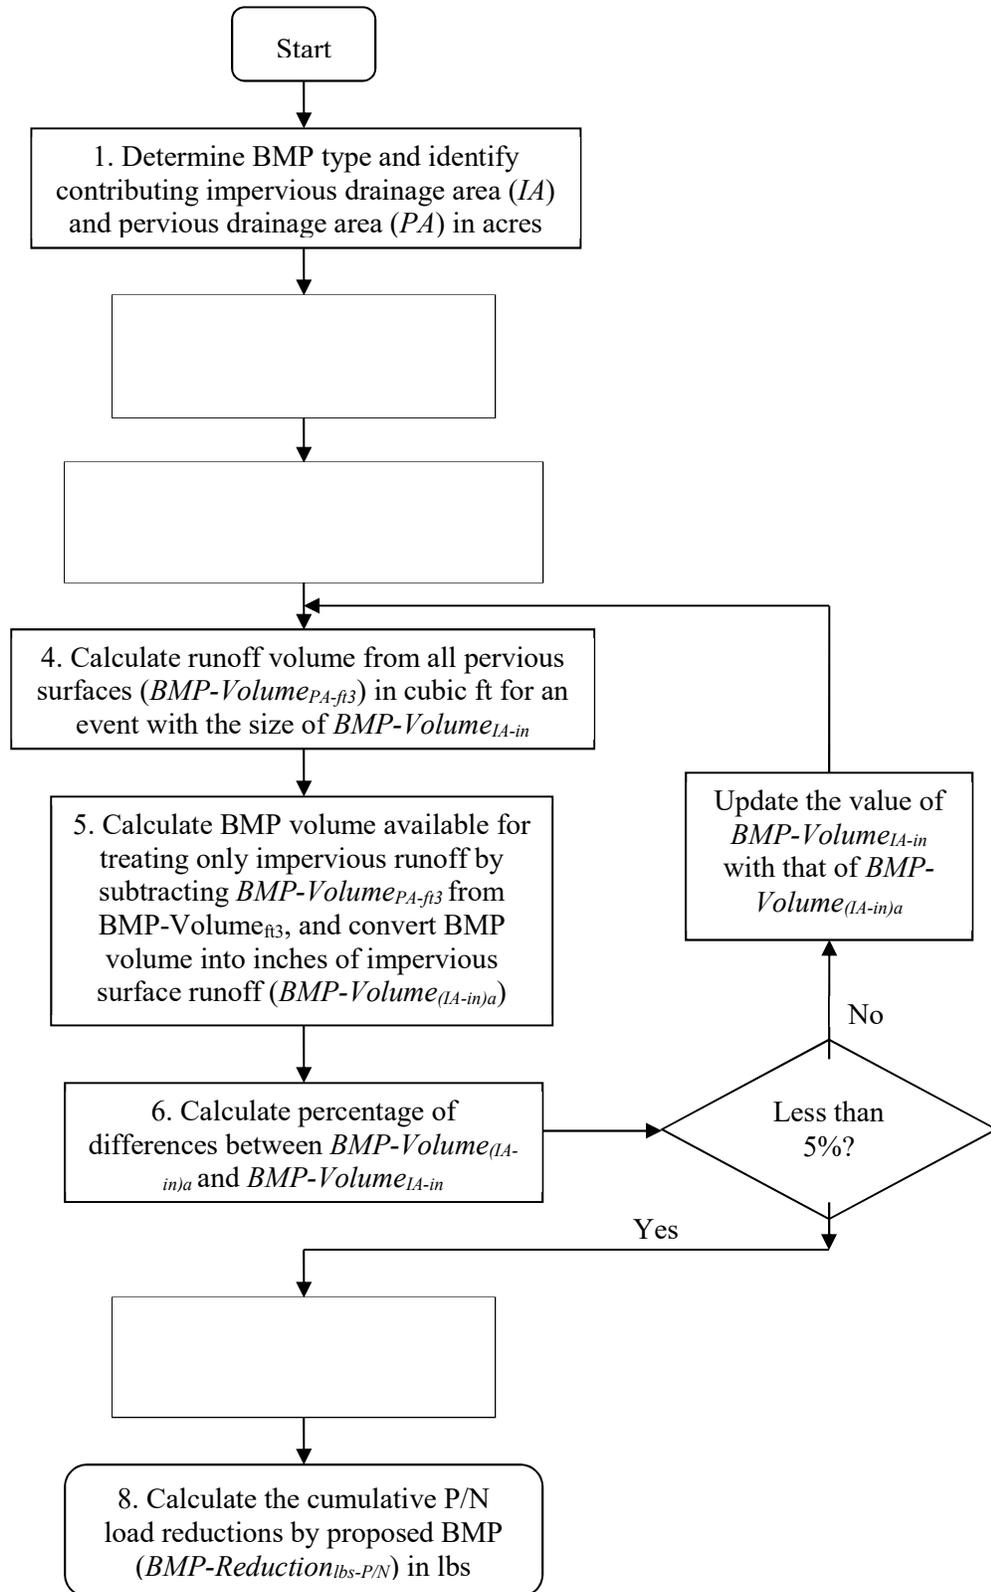

Flow Chart 4: Method to determine the P/N load reduction for a BMP with known storage volume when both pervious and impervious drainage areas are present.

- 1) Identify the type of structural BMP and characterize the contributing drainage area to the structural BMP by identifying the following information for the impervious and pervious surfaces:

Impervious area (IA) – Area (acre) and land use (e.g., commercial)

Pervious area (PA) – Area (acre), land use, and hydrologic soil group (HSG)

- 2) Determine the available storage volume (ft³) of the structural BMP (BMP-Volume ft³) using the BMP dimensions and design specifications (e.g., maximum storage depth, filter media porosity);
- 3) To estimate the P/N load reduction of a BMP with a known storage volume capacity, it is first necessary to determine the portion of available BMP storage capacity (BMP-Volume ft³) that would treat the runoff volume generated from the contributing impervious area (IA) for a rainfall event with a depth of *i* inches (in). This will require knowing the corresponding amount of runoff volume that would be generated from the contributing pervious area (PA) for the same rainfall event (depth of *i* inches). Using equation 3-6a below, solve for the BMP capacity that would be available to treat runoff from the contributing impervious area for the unknown rainfall depth of *i* inches (see equation 3-6b):

$$\text{BMP-Volume}_{\text{ft}^3} = \text{BMP-Volume}_{(\text{IA-ft}^3)_i} + \text{BMP-Volume}_{(\text{PA-ft}^3)_i} \quad \text{(Equation 3-6a)}$$

Where:

BMP-Volume_{ft³} = the available storage volume of the BMP;

BMP-Volume_{(IA-ft³)_i} = the available storage volume of the BMP that would fully treat runoff generated from the contributing impervious area for a rainfall event of size *i* inches; and

BMP-Volume_{(PA-ft³)_i} = the available storage volume of the BMP that would fully treat runoff generated from the contributing pervious area for a rainfall event of size *i* inches

Solving for BMP-Volume_{(IA-ft³)_i}:

$$\text{BMP-Volume}_{(\text{IA-ft}^3)_i} = \text{BMP-Volume}_{\text{ft}^3} - \text{BMP-Volume}_{(\text{PA-ft}^3)_i} \quad \text{(Equation 3-6b)}$$

To determine BMP-Volume_{(IA-ft³)_i}, requires performing an iterative process of refining estimates of the rainfall depth used to calculate runoff volumes until the rainfall depth used results in the sum of runoff volumes from the contributing IA and PA equaling the available BMP storage capacity (BMP-Volume ft³). For the purpose of estimating BMP

performance, it will be considered adequate when the IA runoff depth (in) is within 5% IA runoff depth used in the previous iteration.

For the first iteration (1), convert the BMP-Volume ft^3 determined in step 2 into inches of runoff from the contributing impervious area (BMP Volume $_{(IA-in)1}$) using equation 3-7a.

$$\text{BMP-Volume}_{(IA-in)1} = (\text{BMP-Volume}_{\text{ft}^3} / \text{IA (acre)}) \times (12 \text{ in/ft} / 43,560 \text{ ft}^2/\text{acre})$$

(Equation 3-7a);

For iterations 2 through n (2...n), convert the BMP Volume $_{(IA-ft^3)2...n}$, determined in step 6) below, into inches of runoff from the contributing impervious area (BMP Volume $_{(IA-in)2...n}$) using equation 3-7b.

$$\text{BMP-Volume}_{(IA-in)2...n} = (\text{BMP-Volume}_{(IA-ft^3)2...n} / \text{IA (acre)}) \times (12 \text{ in/ft} / 43,560 \text{ ft}^2/\text{acre})$$

(Equation 3-7b);

- 4) For 1 to n iterations, use the pervious runoff depth information from Table 3-4 (repeated below) and equation 3-8 to determine the total volume of runoff (ft^3) from the contributing PA (BMP Volume $_{PA-ft^3}$) for a rainfall size equal to the sum of BMP-Volume $_{(IA-in)1}$, determined in step 3. The runoff volume for each distinct pervious area must be determined.

$$\text{BMP Volume}_{(PA-ft^3)1...n} = \sum ((\text{PA} \times (\text{runoff depth})_{(PA1, PA2..PAN)}) \times (3,630 \text{ ft}^3/\text{acre-in}))$$

(Equation 3-8)

Table 3-4 provides values of runoff depth from pervious areas for various rainfall depths and HSGs. Soils are assigned to an HSG on the basis of their permeability. HSG A is the most permeable, and HSG D is the least permeable. HSG categories for pervious areas in the drainage area shall be estimated by consulting local soil surveys prepared by the National Resource Conservation Service (NRCS) or by a storm water professional evaluating soil testing results from the drainage area. If the HSG condition is not known, an HSG C soil condition should be assumed.

Table 3- 4: Developed Land Pervious Area Runoff Depths based on Precipitation depth and Hydrological Soil Groups (HSGs) (reprinted for ease of use in example)

Developed Land Pervious Area Runoff Depths based on Precipitation depth and Hydrological Soil Groups					
Rainfall Depth, Inches	Runoff Depth, inches				
	Pervious HSG A	Pervious HSG B	Pervious HSG C	Pervious HSG C/D	Pervious HSG D
0.10	0.00	0.00	0.00	0.00	0.00
0.20	0.00	0.00	0.01	0.02	0.02
0.40	0.00	0.00	0.03	0.05	0.06
0.50	0.00	0.01	0.05	0.07	0.09
0.60	0.01	0.02	0.06	0.09	0.11
0.80	0.02	0.03	0.09	0.13	0.16
1.00	0.03	0.04	0.12	0.17	0.21

1.20	0.04	0.05	0.14	0.27	0.39
1.50	0.08	0.11	0.39	0.55	0.72
2.00	0.14	0.22	0.69	0.89	1.08

Notes: Runoff depths derived from combination of volumetric runoff coefficients from Table 5 of *Small Storm Hydrology and Why it is Important for the Design of Stormwater Control Practices*, (Pitt, 1999), and using the Stormwater Management Model (SWMM) in continuous model mode for hourly precipitation data for Boston, MA, 1998-2002.

- 5) For iteration 1, estimate the portion of BMP Volume that is available to treat runoff from only the IA by subtracting BMP-Volume_{PA-ft³}, determined in step 4, from BMP-Volume_{ft³}, determined in step 2, and convert to inches of runoff from IA (see equations 3-9a and 3-9b):

$$\text{BMP-Volume}_{(IA-ft^3)_2} = ((\text{BMP-Volume}_{ft^3} - \text{BMP Volume}_{(PA-ft^3)_1}) \text{ (Equation 3-9a)})$$

$$\text{BMP-Volume}_{(IA-in)_2} = (\text{BMP-Volume}_{(IA-ft^3)_2} / \text{IA (acre)}) \times (12 \text{ in/ft} \times 1 \text{ acre} / 43,560 \text{ ft}^2) \text{ (Equation 3-9b)}$$

If additional iterations (i.e., 2 through n) are needed, estimate the portion of BMP volume that is available to treat runoff from only the IA (BMP-Volume_{(IA-in)^{3..n+1}}) by subtracting BMP Volume_{(PA-ft³)_{2..n}}, determined in step 4, from BMP Volume_{(IA-ft³)_{3..n+1}}, determined in step 5, and by converting to inches of runoff from IA using equation 3-9b):

- 6) For iteration a (an iteration between 1 and n+1), compare BMP Volume_{(IA-in)_a} to BMP Volume_{(IA-in)_{a-1}} determined from the previous iteration (a-1). If the difference in these values is greater than 5% of BMP Volume_{(IA-in)_a} then repeat steps 4 and 5, using BMP Volume_{(IA-in)_a} as the new starting value for the next iteration (a+1). If the difference is less than or equal to 5 % of BMP Volume_{(IA-in)_a} then the permittee may proceed to step 7;
- 7) Determine the % P/N load reduction for the structural BMP (BMP Reduction_{%-P/N}) using the appropriate BMP performance curve and the BMP-Volume_{(IA-in)_n} calculated in the final iteration of steps 5 and 6; and
- 8) Calculate the cumulative P/N load reduction in pounds for the structural BMP (BMP Reduction_{lbs-P/N}) using the BMP Load as calculated Example 3-1 above and the percent P/N load reduction (BMP Reduction_{%-P/N}) determined in step 7 by using equation 3-4:

$$\text{BMP Reduction}_{lbs-P/N} = \text{BMP Load} \times (\text{BMP Reduction}_{\%-P/N} / 100) \text{ (Equation 3-4)}$$

Example 3-4: Determine the phosphorus load reduction for a structural BMP with a known design volume when the contributing drainage area has impervious and pervious surfaces:*

*The approach used in this example for phosphorus is equally applicable for nitrogen.

A permittee is considering an infiltration basin to capture and treat runoff from a portion of the medium density residential area (MDR). The contributing drainage area is 16.55 acres and has 11.75 acres of impervious area and 4.8 acres of pervious area (PA) made up mostly of lawns and landscaped areas that is 80% HSG D and 20% HSG C. An infiltration basin with the following specifications can be placed at the down-gradient end of the contributing drainage area where soil testing results indicates an infiltration rate (IR) of 0.28 in/hr:

Table Example 3-4-A: Infiltration basin characteristics

Structure	Bottom area (acre)	Top surface area (acre)	Maximum pond depth (ft)	Design storage volume (ft ³)	Infiltration Rate (in/hr)
Infiltration basin	0.65	0.69	1.65	48,155	0.28

Determine the:

- A) Percent phosphorus load reduction (BMP Reduction %-P) for the specified infiltration basin and the contributing impervious and pervious drainage area; and
- B) Cumulative phosphorus reduction in pounds that would be accomplished by the BMP (BMP-Reduction lbs-P)

Solution:

- 1) A surface infiltration basin is being considered. Information for the contributing impervious (IA) and pervious (PA) areas are summarized in Tables Example 3-4-A and Example 3-4-B, respectively.

Table Example 3-4-B: Impervious area characteristics

ID	Land use	Area (acre)
IA1	MDR	11.75

Table Example 3-4-C: Pervious area characteristics

ID	Area (acre)	Hydrologic Soil Group (HSG)
PA1	3.84	D
PA2	0.96	C

- 2) The available storage volume (ft³) of the infiltration basin (BMP-Volume ft³) is determined from the design details and basin dimensions; BMP-Volume ft³ = 48,155 ft³.
- 3) To determine what the BMP design storage volume is in terms of runoff depth (in) from IA, an iterative process is undertaken:

Solution Iteration 1

For the first iteration (1), the BMP-Volume_{ft³} is converted into inches of runoff from the contributing impervious area (BMP Volume_{(IA-in)1}) using equation 3-7a.

$$\begin{aligned} \text{BMP Volume}_{(IA-in)1} &= (48,155 \text{ ft}^2 / 11.75 \text{ acre}) \times (12 \text{ in/ft} / 43,560 \text{ ft}^2/\text{acre}) \\ &= 1.13 \text{ in} \end{aligned}$$

4-1) The total volume of runoff (ft³) from the contributing PA (BMP Volume_{PA-ft³}) for a rainfall size equal to the sum of BMP Volume_{(IA-in)1} determined in step 3 is determined for each distinct pervious area identified in Table Example 3-4-C using the information from Table 3-4 and equation 3-5. Interpolation was used to determine runoff depths.

$$\begin{aligned} \text{BMP Volume}_{(PA-ft^3)1} &= ((3.84 \text{ acre} \times (0.33 \text{ in}) + (0.96 \text{ acre} \times (0.13 \text{ in})) \times 3,630 \text{ ft}^3/\text{acre-in} \\ &= 5052 \text{ ft}^3 \end{aligned}$$

5-1) For iteration 1, the portion of BMP Volume that is available to treat runoff from only the IA is estimated by subtracting the BMP Volume_{(PA-ft³)1}, determined in step 4-1, from BMP Volume_{ft³}, determined in step 2, and converted to inches of runoff from IA:

$$\begin{aligned} \text{BMP Volume}_{(IA-ft^3)2} &= 48,155 \text{ ft}^3 - 5052 \text{ ft}^3 \\ &= 43,103 \text{ ft}^3 \\ \text{BMP Volume}_{(IA-in)2} &= (43,103 \text{ ft}^3 / 11.75 \text{ acre}) \times (12 \text{ in/ft} \times 1 \text{ acre} / 43,560 \text{ ft}^2) \\ &= 1.01 \text{ in} \end{aligned}$$

6-1) The % difference between BMP Volume_{(IA-in)2}, 1.01 in, and BMP Volume_{(IA-in)1}, 1.13 in is determined and found to be significantly greater than 5%:

$$\begin{aligned} \% \text{ Difference} &= ((1.13 \text{ in} - 1.01 \text{ in}) / 1.01 \text{ in}) \times 100 \\ &= 12\% \end{aligned}$$

Therefore, steps 4 through 6 are repeated starting with BMP Volume_{(IA-in)2} = 1.01 in.

Solution Iteration 2

4-2) BMP-Volume_{(PA-ft³)2} = ((3.84 acre x 0.21 in) + (0.96 acre x 0.12 in)) x 3,630 ft³/acre-in = 3,345 ft³

5-2) BMP-Volume_{(IA-ft³)3} = 48,155 ft³ - 3,345 ft³ = 44,810 ft³
 BMP-Volume_{(IA-in)3} = (44,810 ft³/11.75 acre) x (12 in/ft x 1 acre/43,560 ft²) = 1.05 in

6-2) % Difference = ((1.05 in - 1.01 in)/1.05 in) x 100 = 4%

The difference of 4% is acceptable.

- 7) The % phosphorus load reduction for the infiltration basin (BMP Reduction %-P) is determined by using the infiltration basin performance curve for an infiltration rate of 0.27 in/hr and the treatment volume (BMP-Volume_{Net IA-in} = 1.05 in) calculated in step 5-2 and is **BMP Reduction %-P = 93%**.

The performance curve for IR = 0.27 is used rather than interpolating between the performance curves for IR = 0.27 in/hr and 0.52 in/hr to estimate performance for IR = 0.28 in/hr. An evaluation of the performance curves for IR = 0.27 in/hr and IR = 0.52 in/hr for a design storage volume of 1.05 in indicate a small difference in estimated performance (BMP Reduction %-P = 93% for IR = 0.27 in/hr and BMP Reduction %-P = 95% for IR = 0.52 in/hr).

- 8) The cumulative phosphorus load reduction in pounds of phosphorus (BMP-Reduction_{lbs-P}) for the proposed infiltration basin is calculated by using equation 3-2 with the BMP Load and the P_{target} of 93%.

$$\text{BMP-Reduction}_{\text{lbs-P}} = \text{BMP Load} \times (\text{P}_{\text{target}} / 100) \quad \text{(Equation 3-2)}$$

Using Table 3-1, the BMP load is calculated:

$$\begin{aligned} \text{BMP Load} = & (\text{IA} \times \text{impervious cover phosphorus export loading rate for industrial}) \\ & + (\text{PA}_{\text{HSG D}} \times \text{pervious cover phosphorus export loading rate for HSG D}) \\ & + (\text{PA}_{\text{HSG C}} \times \text{pervious cover phosphorus export loading rate for HSG C}) \end{aligned}$$

$$\begin{aligned} \text{BMP Load} = & (11.75 \text{ acre} \times 1.96 \text{ lbs/acre/yr}) + (3.84 \text{ acre} \times 0.37 \text{ lbs/acre/yr}) \\ & + (0.96 \text{ acre} \times 0.21 \text{ lbs/acre/yr}) \\ = & 24.65 \text{ lbs/yr} \end{aligned}$$

$$\text{BMP-Reduction}_{\text{lbs-P}} = 24.65 \text{ lbs/yr} \times 93/100 = \mathbf{22.92 \text{ lbs/yr}}$$

Example 3-5: Determine the phosphorus and nitrogen load reductions for disconnecting impervious area using storage with delayed release:

A commercial operation has an opportunity to divert runoff from 0.75 acres of impervious roof top to a 5000 gallon (668.4 ft³) storage tank for temporary storage and subsequent release to 0.09 acres of pervious area (PA) with HSG C soils.

Determine the:

- A) Percent phosphorus and nitrogen load reduction rates (BMP Reduction %-P&N) for the specified impervious area (IA) disconnection and storage system assuming release times of 1, 2 and 3 days for the stored volumes to discharge to the pervious area; and
- B) Cumulative phosphorus and nitrogen load reductions in pounds that would be accomplished by the system (BMP-Reduction_{lbs-P&N}) for the three storage release times, 1, 2 and 3 days.

Solution:

- Determine the storage volume in units of inches of runoff depth from contributing impervious area:

$$\text{Storage Volume}_{\text{IA-in}} = (668.4 \text{ ft}^3 / (0.75 \text{ acre} \times 43.560 \text{ ft}^2/\text{acre})) \times 12 \text{ inch/ft}$$

$$= 0.25 \text{ inches}$$
- Determine the ratio of the contributing impervious area to the receiving pervious area:

$$\text{IA:PA} = 0.75 \text{ acres} / 0.09 \text{ acres}$$

$$= 8.3$$
- Using Table 3-26 or Figure 3-23 for a IA:PA ratio of 8:1, determine the phosphorus and nitrogen load reduction rates for a storage volume of 0.25 inches that discharges to HSG C with release rates of 1, 2 and 3 days: Using interpolation the reduction rates are shown in Table 3-5-A:

Table Example 3-5-A: P&N Reduction Rates

Percent Phosphorus & Nitrogen load reduction for IA disconnection with storage to PA HSG C			
Storage Volume _{IA-in}	Storage release rate, days		
	1	2	3
0.25	39%	42%	43%

- The cumulative phosphorus and nitrogen load reductions in pounds of phosphorus for the IA disconnection with storage (BMP-Reduction _{lbs-P/N}) is calculated using Equation 3-2. The BMP Loads for phosphorus and nitrogen are first determined using the method presented in Example 3-1.

Phosphorus:

$$\text{BMP Load}_P = \text{IA (acre)} \times \text{PLER}_{\text{IC-Com}} \text{ (see Table 3-1)}$$

$$= 0.75 \text{ acres} \times 1.78 \text{ lbs/acre/yr}$$

$$= 1.34 \text{ lbs/yr}$$

$$\text{BMP Reduction}_{\text{lbs-P}} = \text{BMP Load} \times (\text{BMP Reduction}_{\%P} / 100)$$

$$\text{BMP Reduction}_{\text{lbs-P}} = 1.34 \text{ lbs/yr} \times (39/100)$$

$$= \mathbf{0.53 \text{ lbs/yr}}$$

Table Example 3-5-B presents the BMP Reduction _{lbs-P} for each of the release rates:

Table Example 3-5-B: P Reduction Loads

Phosphorus load reduction for IA disconnection with storage to PA HSG C, lbs			
Storage Volume _{IA-in}	Storage release rate, days		
	1	2	3
0.25	0.53	0.56	0.58

Nitrogen:

$$\text{BMP Load}_N = \text{IA (acre)} \times \text{NLER}_{\text{IC-Com}} \text{ (see Table 3-2)}$$

$$= 0.75 \text{ acres} \times 15.0 \text{ lbs/acre/yr}$$

$$= 11.3 \text{ lbs/yr}$$

$$\text{BMP Reduction}_{\text{lbs-N}} = \text{BMP Load} \times (\text{BMP Reduction}_{\%P} / 100)$$

$$\text{BMP Reduction}_{\text{lbs-N}} = 11.3 \text{ lbs/yr} \times (39/100)$$

$$\text{BMP Reduction}_{\text{lbs-N}} = \mathbf{4.4 \text{ lbs/yr}}$$

Table Example 3-5-C presents the BMP Reduction $_{lbs-N}$ for each of the release rates:

Table Example 3-5-C: N Reduction Loads

Nitrogen load reduction for IA disconnection with storage to PA HSG C, lbs			
Storage Volume $_{IA-in}$	Storage release rate, days		
	1	2	3
0.25	4.4	4.7	4.9

Example 3-6: Determine the phosphorus load reduction for disconnecting impervious area with and without soil augmentation in the receiving pervious area:*

*The approach used in this example for phosphorus is equally applicable for nitrogen

The same commercial property as in Example 3-5 wants to evaluate disconnecting drainage from the 0.75 acre impervious roof top and discharging it directly to 0.09 acres of pervious area (PA) with HSG C. Also, the property has the opportunity to purchase a small adjoining area (0.06 acres), also HSG C, to increase the size of the receiving PA from 0.09 to 0.15 acres and to allow the property owner to avoid having to install a drainage structure to capture overflow runoff from the PA. The property owner has been informed that the existing PA soil can be tilled and augmented with soil amendments to support denser vegetative growth and improve hydrologic function to approximate HSG B.

Determine the:

- A) Percent phosphorus load reduction rates (BMP Reduction $_{%-P}$) for the specified impervious area (IA) disconnection to both the 0.09 and 0.15 acre receiving PAs with and without soil augmentation; and
- B) Cumulative phosphorus reductions in pounds that would be accomplished by the IA disconnection for the various scenarios (BMP-Reduction $_{lbs-P}$).

Solution:

1. Determine the ratio of the contributing impervious area to the receiving pervious area:
 - IA:PA = 0.75 acres/0.09 acres
= 8.3
 - IA:PA = 0.75 acres/0.15 acres
= 5.0
2. Using Table 3-31 and Figure 3-41 for a IA:PA ratios of 8:1 and 5:1, respectively, determine the phosphorus load reduction rates for IA disconnections to HSG C and HSG B:

Table Example 3-6-A: Reduction Rates

Percent Phosphorus load reduction rates for IA disconnection		
Receiving PA	IA:PA	
	8:1	5:1
HSG C	7%	14%
HSG B (soil augmentation)	14%	22%

3. The cumulative phosphorus load reduction in pounds of phosphorus for the IA disconnection with storage (BMP-Reduction_{lbs-P}) is calculated using Equation 3-2. The BMP Load was calculated in example 3-5 and is 1.34 lbs/yr.

$$\text{BMP Reduction}_{\text{lbs-P}} = \text{BMP Load} \times (\text{BMP Reduction}_{\%P} / 100)$$

For PA of 0.09 acres HSG C the BMP Reduction_{lbs-P} is calculated as follows:

$$\begin{aligned} \text{BMP Reduction}_{\text{lbs-P}(0.09\text{ac- HSG C})} &= 1.34 \text{ lbs/yr} \times (7/100) \\ &= \mathbf{0.09 \text{ lbs/yr}} \end{aligned}$$

Table Example 3-6-B presents the BMP Reduction_{lbs-P} for each of the scenarios:

Table Example 3-6-B: Reduction

Pounds Phosphorus load reduction for IA disconnection, lbs/yr		
Receiving PA	Area of Receiving PA, acres	
	0.09	0.15
HSG C	0.09	0.19
HSG B (soil augmentation)	0.19	0.29

Example 3-7: Determine the phosphorus load reduction for converting impervious area to permeable/pervious area:*

*The approach used in this example for phosphorus is equally applicable for nitrogen.

A municipality is planning upcoming road reconstruction work in medium density residential (MDR) neighborhoods, and has identified an opportunity to convert impervious surfaces to permeable/pervious surfaces by narrowing the road width of 3.7 miles (mi) of roadway from 32 feet (ft) to 28 ft and eliminating 3.2 miles of 4 ft wide paved sidewalk (currently there are sidewalks on both sides of the roadways targeted for restoration). The newly created permeable/pervious area will be tilled and treated with soil amendments to support vegetated growth in order to restore hydrologic function to at least HSG B.

Determine the:

- A) Percent phosphorus load reduction rate (BMP Reduction_{%P}) for the conversion of impervious area (IA) to permeable/pervious area (PA); and

B) Cumulative phosphorus reduction in pounds that would be accomplished by the project (BMP-Reduction_{lbs-P}).

Solution:

1. Determine the area of IA to be converted to PA:

$$\begin{aligned}\text{New PA} &= (((3.7 \text{ mi} \times 4 \text{ ft}) + (3.2 \text{ mi} \times 4 \text{ ft})) \times 5280 \text{ ft/mi}) / 43,560 \text{ ft}^2/\text{acre} \\ &= 3.35 \text{ acres}\end{aligned}$$

2. Using Table 3-32, the phosphorus load reduction rate for converting IA to HSG B is 94.1%

3. The BMP Load is first determined using the method described above.

$$\begin{aligned}\text{BMP Load} &= \text{IA} \times \text{phosphorus export loading rate for MDR IA (see Table 3-1)} \\ &= 3.35 \text{ acres} \times 1.96 \text{ lbs/acre/yr} \\ &= 6.57 \text{ lbs/yr}\end{aligned}$$

4. The cumulative phosphorus load reduction in pounds of phosphorus for the IA conversion (BMP-Reduction_{lbs-P}) is calculated using Equation 3-2.

$$\begin{aligned}\text{BMP Reduction}_{\text{lbs-P}} &= \text{BMP Load} \times (\text{BMP Reduction}_{\%-\text{P}} / 100) \\ \text{BMP Reduction}_{\text{lbs-P}} &= 6.57 \text{ lbs/yr} \times (94.1 / 100) \\ &= 6.18 \text{ lbs/yr}\end{aligned}$$

Table 3-5 Method for determining stormwater control design volume (DSV) (i.e., capacity) using long-term cumulative performance curves

Stormwater Control Type	Description	Applicable Structural Stormwater Control Performance Curve	Equation for calculating Design Storage Capacity for Estimating Cumulative Reductions using Performances Curves
Infiltration Trench	Provides temporary storage of runoff using the void spaces within the soil/sand/gravel mixture that is used to backfill the trench for subsequent infiltration into the surrounding sub-soils.	Infiltration Trench (6 infiltration rates: 0.17, 0.27, 0.52, 1.02, 2.41 and 8.27 inches per hour)	DSV = void space volumes of gravel and sand layers $DSV = (L \times W \times D_{stone} \times n_{stone}) + (L \times W \times D_{sand} \times n_{sand})$
Subsurface Infiltration	Provides temporary storage of runoff using the combination of storage structures (e.g., galleys, chambers, pipes, etc.) and void spaces within the soil/sand/gravel mixture that is used to backfill the system for subsequent infiltration into the surrounding sub-soils.	Infiltration Trench (6 infiltration rates: 0.17, 0.27, 0.52, 1.02, 2.41 and 8.27 inches per hour)	DSV = Water storage volume of storage units and void space volumes of backfill materials. Example for subsurface galleys backfilled with washed stone: $DSV = (L \times W \times D)_{galley} + (L \times W \times D_{stone} \times n_{stone})$
Surface Infiltration	Provides temporary storage of runoff through surface ponding storage structures (e.g., basin or swale) for subsequent infiltration into the underlying soils.	Infiltration Basin (6 infiltration rates: 0.17, 0.27, 0.52, 1.02, 2.41 and 8.27 inches per hour)	DSV = Water volume of storage structure before bypass. Example for linear trapezoidal vegetated swale $DSV = (L \times ((W_{bottom} + W_{top@D_{max}}) / 2) \times D)$
Rain Garden/Bio-retention (no underdrains)	Provides temporary storage of runoff through surface ponding and possibly void spaces within the soil/sand/gravel mixture that is used to filter runoff prior to infiltration into underlying soils.	Infiltration Basin (6 infiltration rates: 0.17, 0.27, 0.52, 1.02, 2.41 and 8.27 inches per hour)	DSV = Ponding water storage volume and void space volumes of soil filter media. Example for raingarden: $DSV = (A_{pond} \times D_{pond}) + (A_{soil} \times D_{soil} \times n_{soil \text{ mix}})$
Tree Filter (no underdrain)	Provides temporary storage of runoff through surface ponding and void spaces within the soil/sand/gravel mixture that is used to filter runoff prior to infiltration into underlying soils.	Infiltration Trench (6 infiltration rates: 0.17, 0.27, 0.52, 1.02, 2.41 and 8.27 inches per hour)	DSV = Ponding water storage volume and void space volumes of soil filter media. $DSV = (L \times W \times D_{ponding}) + (L \times W \times D_{soil} \times n_{soil \text{ mix}})$
Bio-Filtration (w/underdrain)	Provides temporary storage of runoff for filtering through an engineered soil media. The storage capacity includes void spaces in the filter media and temporary ponding at the surface. After runoff has passed through the filter media it is collected by an under-drain pipe for discharge. Manufactured or packaged bio-filter systems such as tree box filters may be suitable for using the bio-filtration performance results.	Bio-filtration	DSV = Ponding water storage volume and void space volume of soil filter media. Example of a linear biofilter: $DSV = (L \times W \times D_{ponding}) + (L \times W \times D_{soil} \times n_{soil})$
Enhanced Bio-filtration w/ Internal Storage Reservoir (ISR) (no infiltration)	Based on design by the UMA Stormwater Center (UMASC). Provides temporary storage of runoff for filtering through an engineered soil media, augmented for enhanced phosphorus removal, followed by detention and denitrification in a subsurface internal storage reservoir (ISR) comprised of gravel. An elevated outlet control at the top of the ISR is designed to provide a retention time of at least 24 hours in the system to allow for sufficient time for denitrification and nitrogen reduction to occur prior to discharge. The design storage capacity for using the cumulative performance curves is comprised of void spaces in the filter media, temporary ponding at the surface of the practice and the void spaces in the gravel ISR.	Enhanced Bio-filtration w/ISR	DSV = Ponding water storage volume and void space volume of soil filter media and gravel ISR. $DSV = (A_{bed} \times D_{ponding}) + (A_{bed} \times D_{soil} \times n_{soil}) + (A_{ISR} \times D_{gravel} \times n_{gravel})$
Gravel Wetland	Provides temporary surface ponding storage of runoff in a vegetated wetland cell that is eventually routed to an underlying saturated gravel internal storage reservoir (ISR) for nitrogen treatment. Outflow is controlled by an elevated orifice that has its invert elevation equal to the top of the ISR layer and provides a retention time of at least 24 hours.	Gravel Wetland	DSV = pretreatment volume + ponding volume + void space volume of gravel ISR. $DSV = (A_{pretreatment} \times D_{pretreatment}) + (A_{wetland} \times D_{ponding}) + (A_{ISR} \times D_{gravel} \times n_{gravel})$
Porous Pavement with subsurface infiltration	Provides filtering of runoff through a filter course and temporary storage of runoff within the void spaces of a subsurface gravel reservoir prior to infiltration into subsoils.	Infiltration Trench (6 infiltration rates: 0.17, 0.27, 0.52, 1.02, 2.41 and 8.27 inches per hour)	DSV = void space volumes of gravel layer $DSV = (L \times W \times D_{stone} \times n_{stone})$
Porous pavement w/ impermeable underliner w/underdrain	Provides filtering of runoff through a filter course and temporary storage of runoff within the void spaces prior to discharge by way of an underdrain.	Porous Pavement	Depth of Filter Course = D_{FC}
Sand Filter w/underdrain	Provides filtering of runoff through a sand filter course and temporary storage of runoff through surface ponding and within void spaces of the sand and washed stone layers prior to discharge by way of an underdrain.	Sand Filter	DSV = pretreatment volume + ponding volume + void space volume of sand and washed stone layers. $DSV = (A_{pretreatment} \times D_{pretreatment}) + (A_{bed} \times D_{ponding}) + (A_{bed} \times D_{sand} \times n_{sand}) + (A_{bed} \times D_{stone} \times n_{stone})$
Wet Pond	Provides treatment of runoff through routing through permanent pool.	Wet Pond	DSV= Permanent pool volume prior to high flow bypass $DSV = A_{pond} \times D_{pond}$ (does not include pretreatment volume)
Extended Dry Detention Basin	Provides temporary detention storage for the design storage volume to drain in 24 hours through multiple out let controls.	Dry Pond	DSV= Ponding volume prior to high flow bypass $DSV = A_{pond} \times D_{pond}$ (does not include pretreatment volume)
Dry Water Quality Swale/Grass Swale	Based on MA design standards. Provides temporary surface ponding storage of runoff in an open vegetated channel through permeable check dams. Treatment is provided by filtering of runoff by vegetation and check dams and infiltration into subsurface soils.	Water Quality Grass Swale	DSV = Volume of swale at full design depth $DSV = L_{swale} \times W_{swale} \times D_{ponding \text{ swale}}$
Definitions: DSV= Design Storage Volume = physical storage capacity to hold water; VSV = Void Space Volume; L = length, W = width, D = depth at design capacity before bypass, n = porosity fill material, A= average surface area for calculating volume; Infiltration rate = saturated soil hydraulic conductivity			

Table 3- 6: Infiltration Trench (IR = 0.17 in/hr) BMP Performance Table

Infiltration Trench (IR = 0.17 in/hr) BMP Performance Table: Long-Term Phosphorus & Nitrogen Load Reduction								
BMP Capacity: Depth of Runoff from Impervious Area (inches)	0.1	0.2	0.4	0.6	0.8	1.0	1.5	2.0
Runoff Volume Reduction	15%	28%	49%	64%	75%	82%	92%	95%
Cumulative Phosphorus Load Reduction	18%	33%	57%	73%	83%	90%	97%	99%
Cumulative Nitrogen Load Reduction	56%	72%	87%	93%	96%	98%	99%	100%

Figure 3- 1: BMP Performance Curve: Infiltration Trench (infiltration rate = 0.17 in/hr)

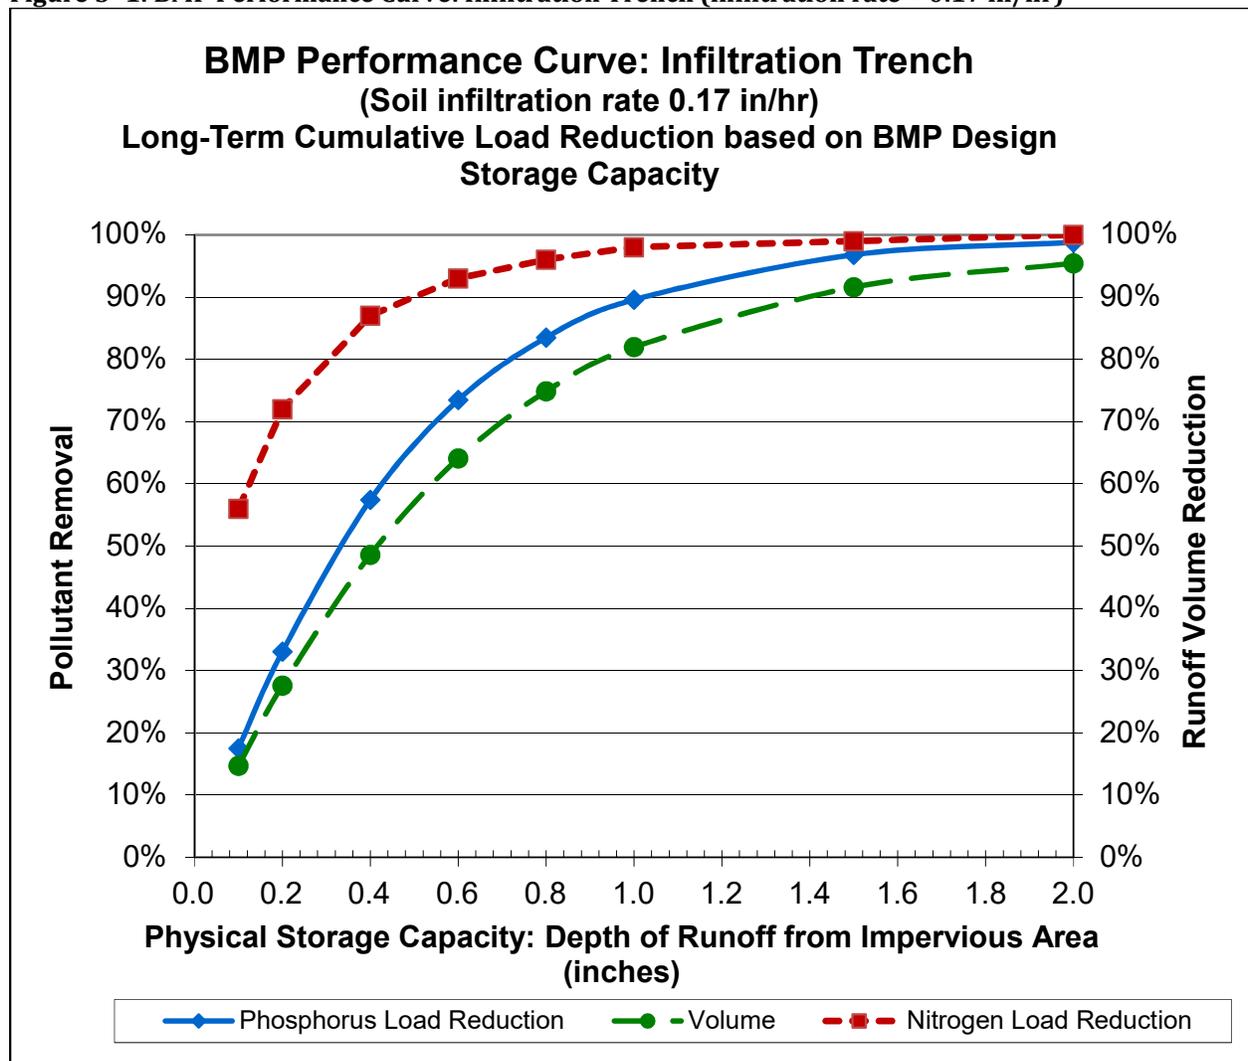


Table 3- 7: Infiltration Trench (IR = 0.27 in/hr) BMP Performance Table

Infiltration Trench (IR = 0.27 in/hr) BMP Performance Table: Long-Term Phosphorus & Nitrogen Load Reduction								
BMP Capacity: Depth of Runoff from Impervious Area (inches)	0.1	0.2	0.4	0.6	0.8	1.0	1.5	2.0
Runoff Volume Reduction	17.8%	32.5%	55.0%	70.0%	79.3%	85.2%	93.3%	96.3%
Cumulative Phosphorus Load Reduction	20%	37%	63%	78%	86%	92%	97%	99%
Cumulative Nitrogen Load Reduction	57%	74%	88%	94%	97%	98%	99%	100%

Figure 3- 2: BMP Performance Curve: Infiltration Trench (infiltration rate = 0.27 in/hr)

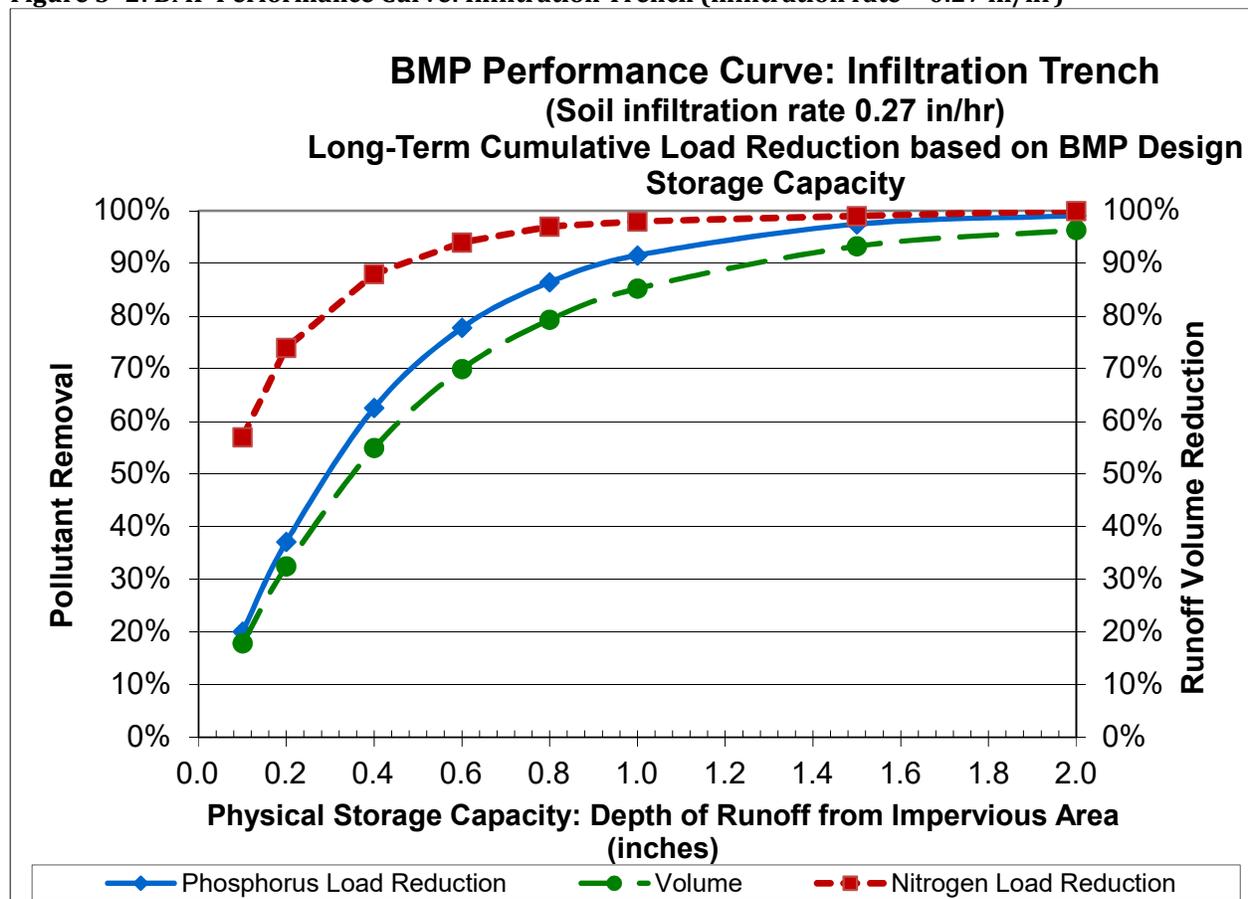


Table 3- 8: Infiltration Trench (IR = 0.52 in/hr) BMP Performance Table

Infiltration Trench (IR = 0.52 in/hr) BMP Performance Table: Long-Term Phosphorus & Nitrogen Load Reduction								
BMP Capacity: Depth of Runoff from Impervious Area (inches)	0.1	0.2	0.4	0.6	0.8	1.0	1.5	2.0
Runoff Volume Reduction	22.0%	38.5%	61.8%	75.7%	83.7%	88.8%	95.0%	97.2%
Cumulative Phosphorus Load Reduction	23%	42%	68%	82%	89%	94%	98%	99%
Cumulative Nitrogen Load Reduction	59%	76%	90%	95%	98%	99%	100%	100%

Figure 3- 3: BMP Performance Curve: Infiltration Trench (infiltration rate = 0.52 in/hr)

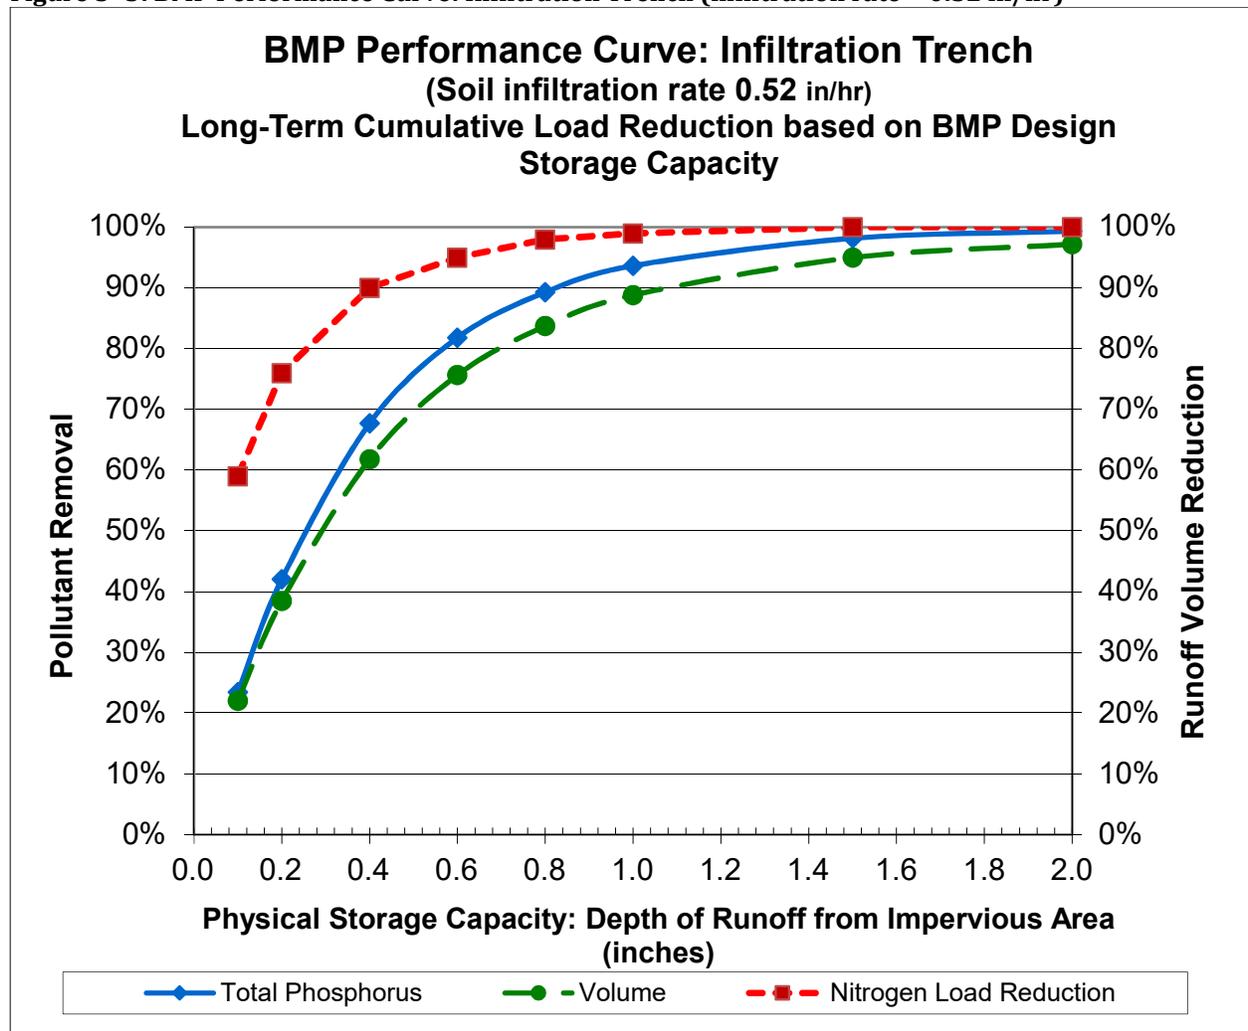


Table 3- 9: Infiltration Trench (IR = 1.02 in/hr) BMP Performance Table

Infiltration Trench (IR = 1.02 in/hr) BMP Performance Table: Long-Term Phosphorus & Nitrogen Load Reduction								
BMP Capacity: Depth of Runoff from Impervious Area (inches)	0.1	0.2	0.4	0.6	0.8	1.0	1.5	2.0
Runoff Volume Reduction	26.3%	44.6%	68.2%	81.0%	88.0%	92.1%	96.5%	98.3%
Cumulative Phosphorus Load Reduction	27%	47%	73%	86%	92%	96%	99%	100%
Cumulative Nitrogen Load Reduction	61%	78%	92%	97%	98%	99%	100%	100%

Figure 3- 4: BMP Performance Curve: Infiltration Trench (infiltration rate = 1.02 in/hr)

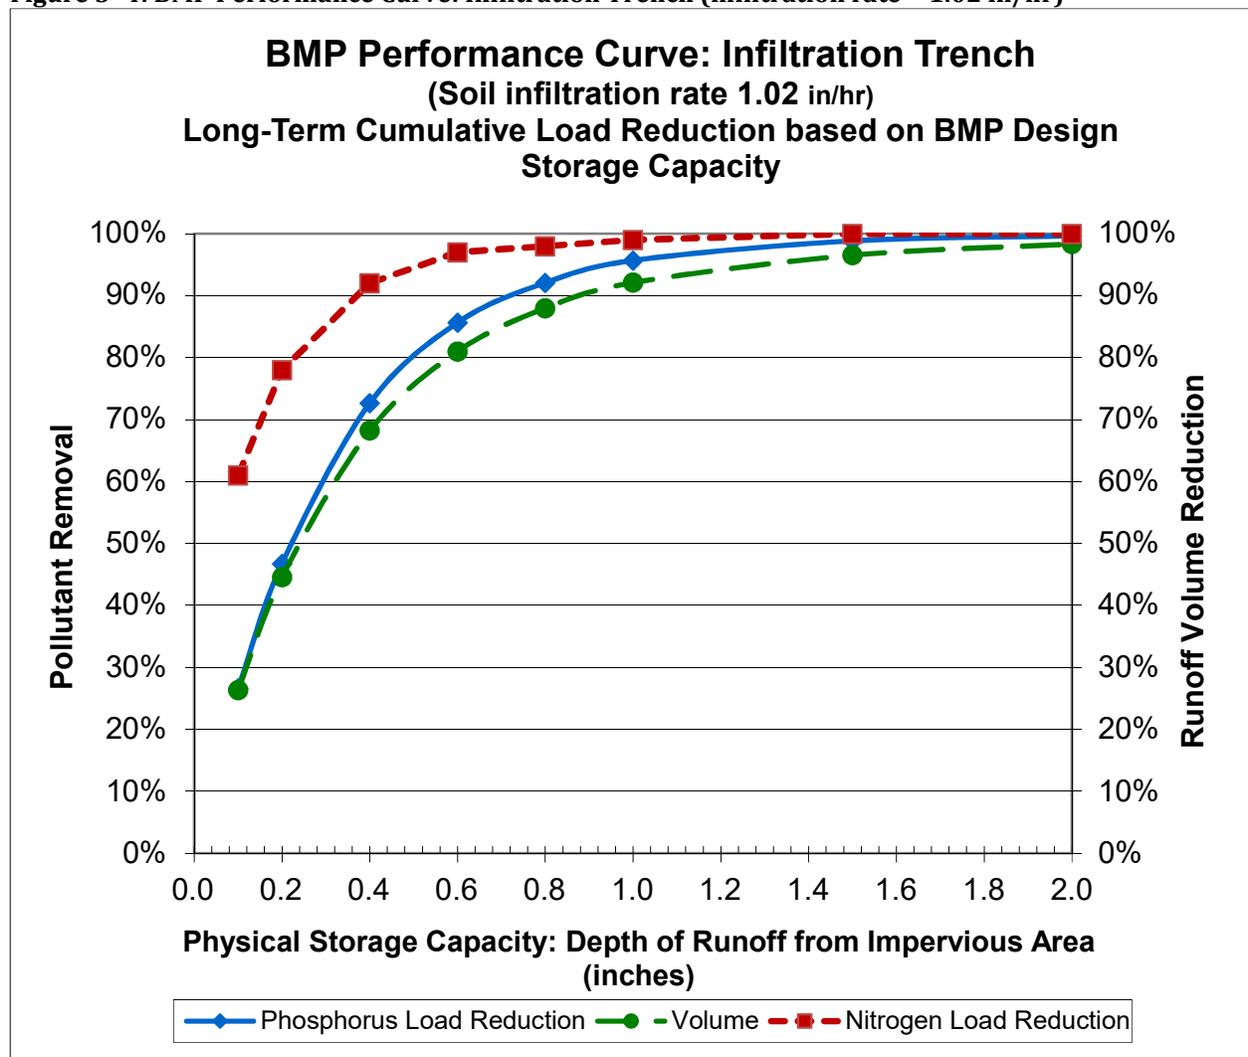


Table 3- 10: Infiltration Trench (IR = 2.41 in/hr) BMP Performance Table

Infiltration Trench (IR = 2.41 in/hr) BMP Performance Table: Long-Term Phosphorus Load Reduction								
BMP Capacity: Depth of Runoff Treated from Impervious Area (inches)	0.1	0.2	0.4	0.6	0.8	1.0	1.5	2.0
Runoff Volume Reduction	34%	55%	78%	88%	93%	96%	99%	100%
Cumulative Phosphorus Load Reduction	33%	55%	81%	91%	96%	98%	100%	100%
Cumulative Nitrogen Load Reduction	65%	83%	95%	98%	99%	100%	100%	100%

Figure 3- 5: BMP Performance Curve: Infiltration Trench (infiltration rate = 2.41 in/hr)

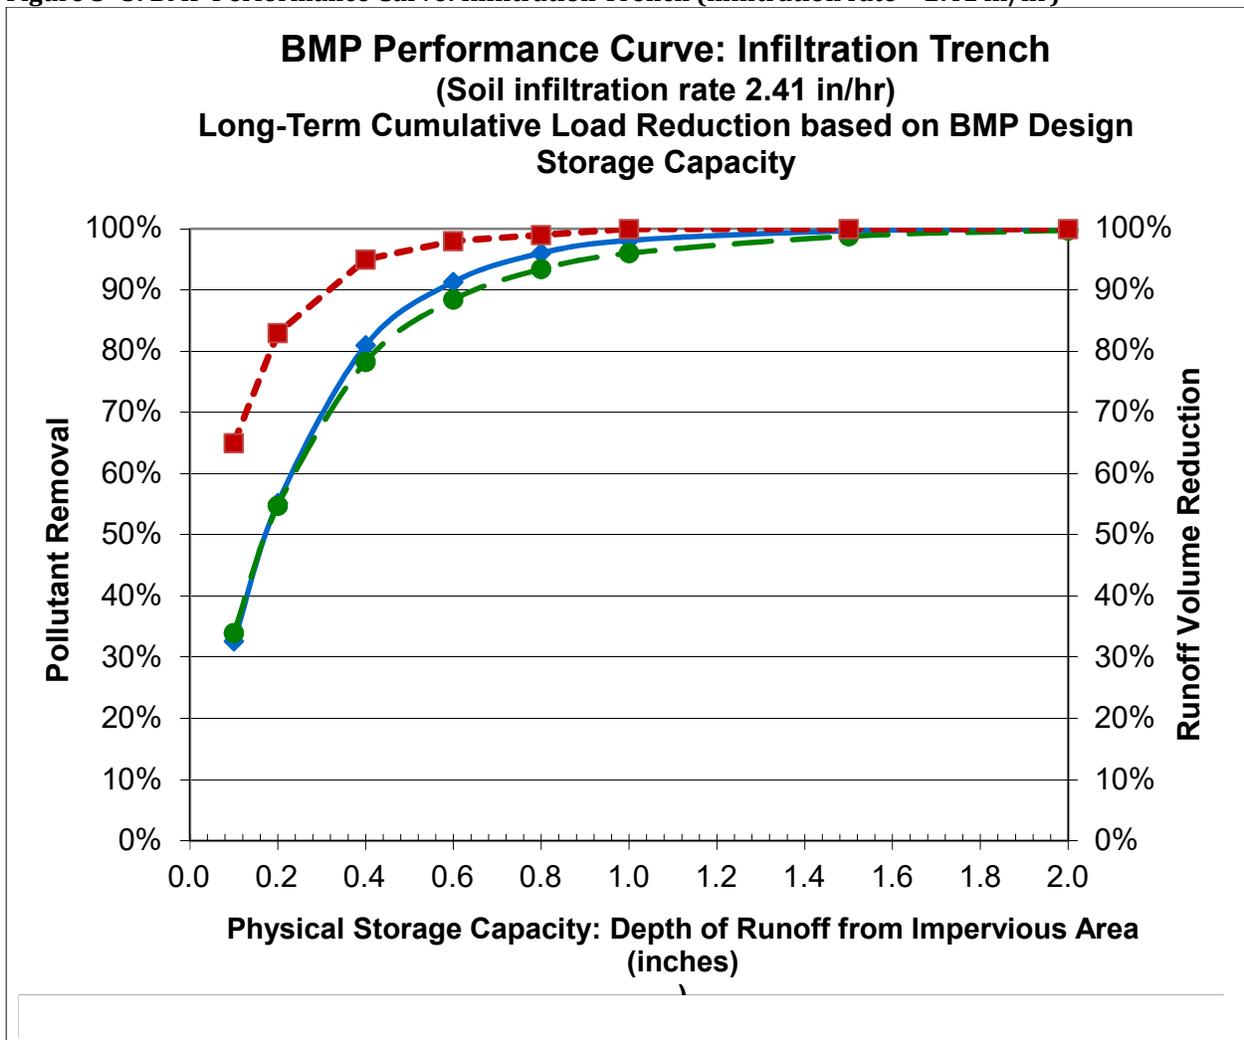


Table 3- 11: Infiltration Trench (8.27 in/hr) BMP Performance Table

Infiltration Trench (8.27 in/hr) BMP Performance Table: Long-Term Phosphorus & Nitrogen Load Reduction								
BMP Capacity: Depth of Runoff from Impervious Area (inches)	0.1	0.2	0.4	0.6	0.8	1.0	1.5	2.0
Runoff Volume Reduction	53.6%	76.1%	92.6%	97.2%	98.9%	99.5%	100.0%	100.0%
Cumulative Phosphorus Load Reduction	50%	75%	94%	98%	99%	100%	100%	100%
Cumulative Nitrogen Load Reduction	76%	92%	98%	100%	100%	100%	100%	100%

Figure 3- 6: BMP Performance Curve: Infiltration Trench (infiltration rate = 8.27 in/hr)

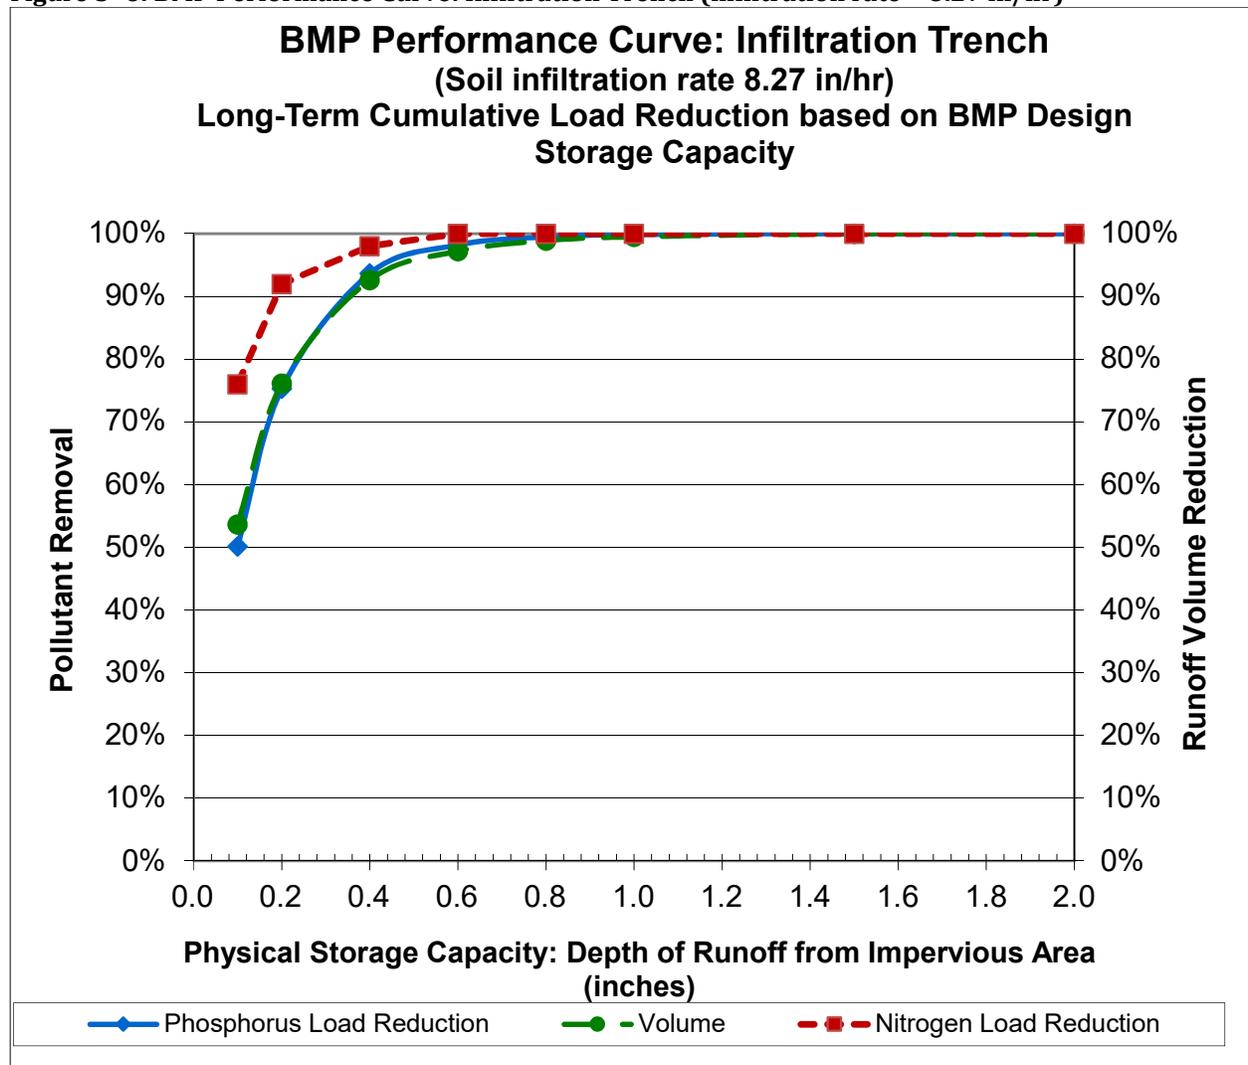


Table 3- 12: Surface Infiltration (0.17 in/hr) BMP Performance Table

Surface Infiltration (0.17 in/hr) BMP Performance Table: Long-Term Phosphorus & Nitrogen Load Reduction								
BMP Capacity: Depth of Runoff from Impervious Area (inches)	0.1	0.2	0.4	0.6	0.8	1.0	1.5	2.0
Runoff Volume Reduction	13%	25%	44%	59%	71%	78%	89%	94%
Cumulative Phosphorus Load Reduction	35%	52%	72%	82%	88%	92%	97%	99%
Cumulative Nitrogen Load Reduction	52%	69%	85%	92%	96%	98%	99%	100%

Figure 3- 7: BMP Performance Curve: Infiltration Basin (infiltration rate = 0.17 in/hr)

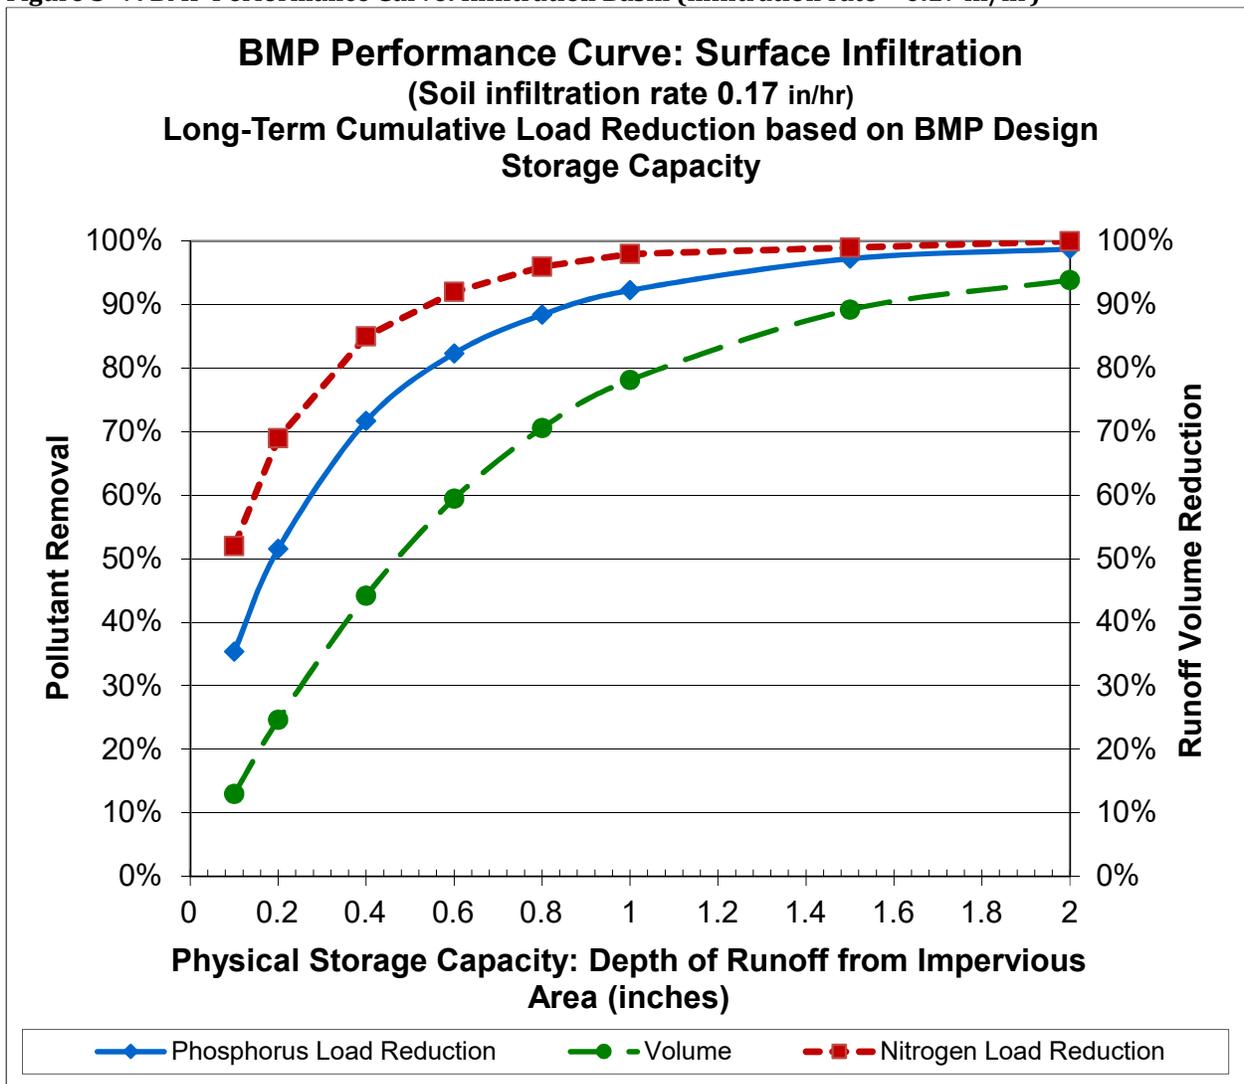


Table 3- 13: Infiltration Basin (0.27 in/hr) BMP Performance Table

Surface Infiltration (0.27 in/hr) BMP Performance Table: Long-Term Phosphorus & Nitrogen Load Reduction								
BMP Capacity: Depth of Runoff from Impervious Area (inches)	0.1	0.2	0.4	0.6	0.8	1.0	1.5	2.0
Runoff Volume Reduction	16%	30%	51%	66%	76%	82%	91%	95%
Cumulative Phosphorus Load Reduction	37%	54%	74%	85%	90%	93%	98%	99%
Cumulative Nitrogen Load Reduction	54%	71%	87%	93%	97%	98%	99%	100%

Figure 3- 8: BMP Performance Curve: Surface Infiltration (infiltration rate = 0.27 in/hr)

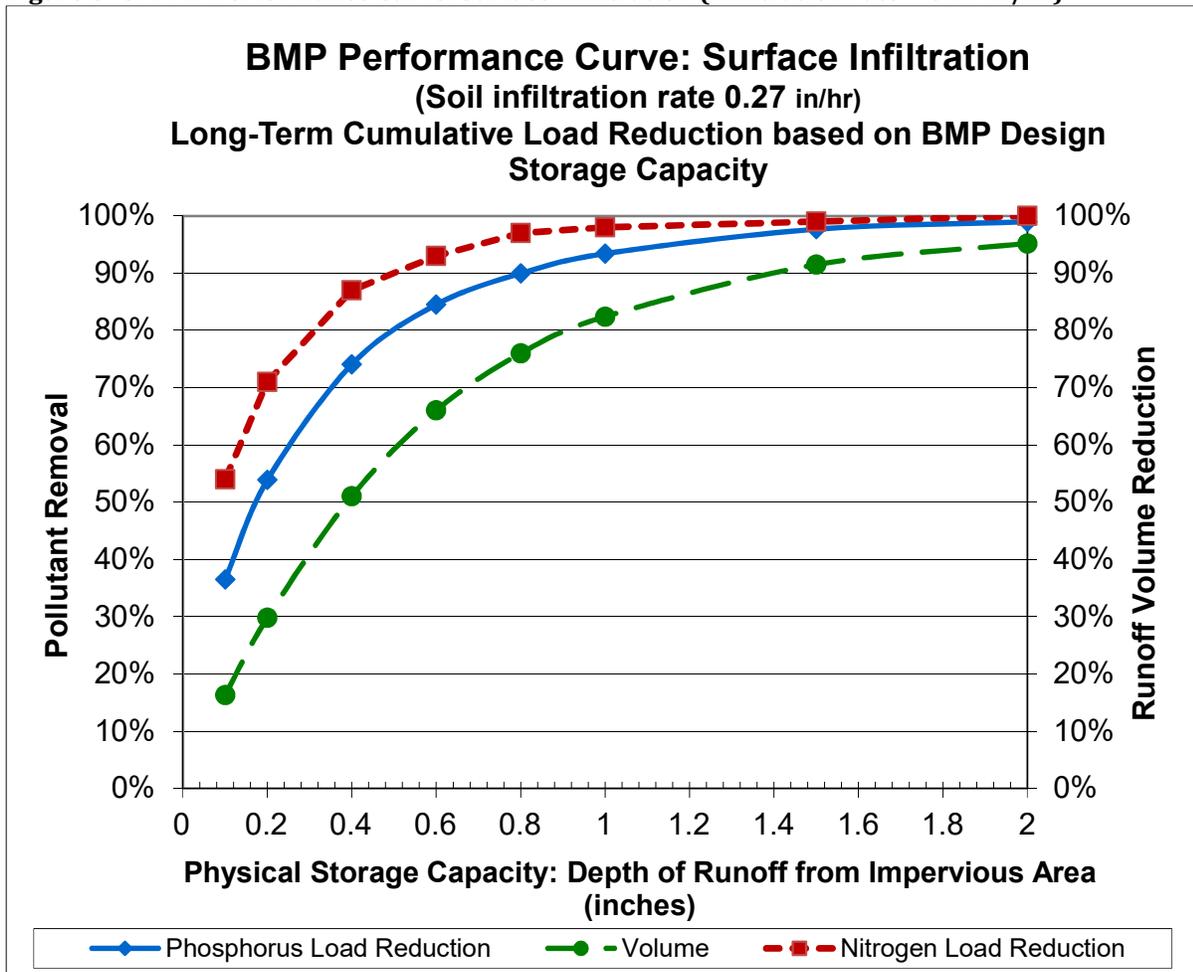


Table 3- 14: Infiltration Basin (0.52 in/hr) BMP Performance Table

Surface Infiltration (0.52 in/hr) BMP Performance Table: Long-Term Phosphorus Load Reduction								
BMP Capacity: Depth of Runoff from Impervious Area (inches)	0.1	0.2	0.4	0.6	0.8	1.0	1.5	2.0
Runoff Volume Reduction	20%	36%	58%	73%	81%	87%	94%	97%
Cumulative Phosphorus Load Reduction	38%	56%	77%	87%	92%	95%	98%	99%
Cumulative Nitrogen Load Reduction	56%	74%	89%	94%	98%	99%	100%	100%

Figure 3- 9: BMP Performance Curve: Surface Infiltration (infiltration rate = 0.52 in/hr)

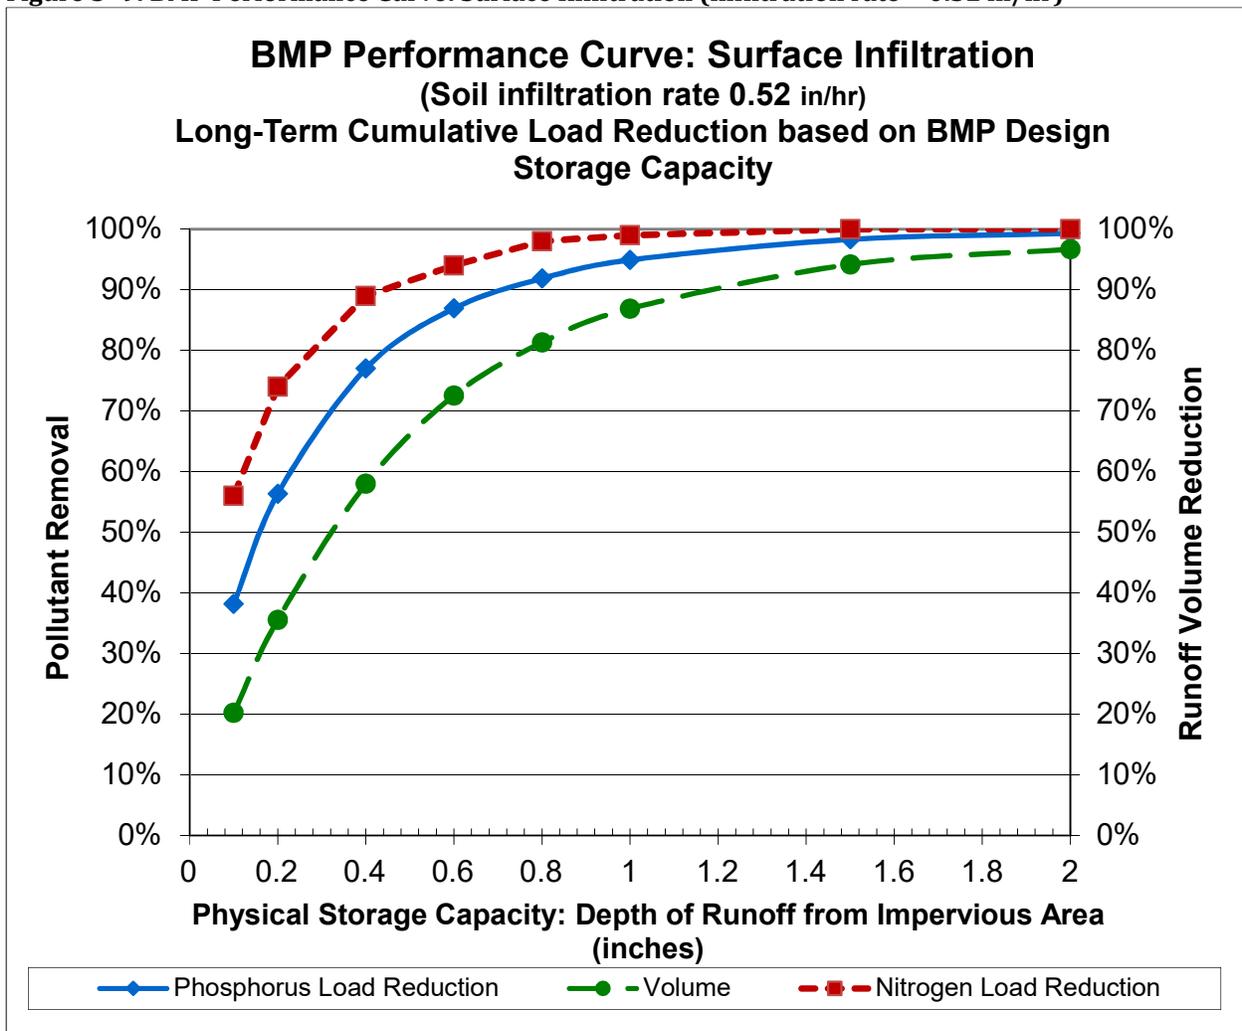


Table 3-15: Infiltration Basin (1.02 in/hr) BMP Performance Table

Surface Infiltration (1.02 in/hr) BMP Performance Table: Long-Term Phosphorus Load Reduction								
BMP Capacity: Depth of Runoff from Impervious Area (inches)	0.1	0.2	0.4	0.6	0.8	1.0	1.5	2.0
Runoff Volume Reduction	24.5%	42.0%	65.6%	79.4%	86.8%	91.3%	96.2%	98.1%
Cumulative Phosphorus Load Reduction	41%	60%	81%	90%	94%	97%	99%	100%
Cumulative Nitrogen Load Reduction	59%	77%	92%	96%	98%	100%	100%	100%

Figure 3- 10: BMP Performance Curve: Surface Infiltration (Soil infiltration rate = 1.02 in/hr)

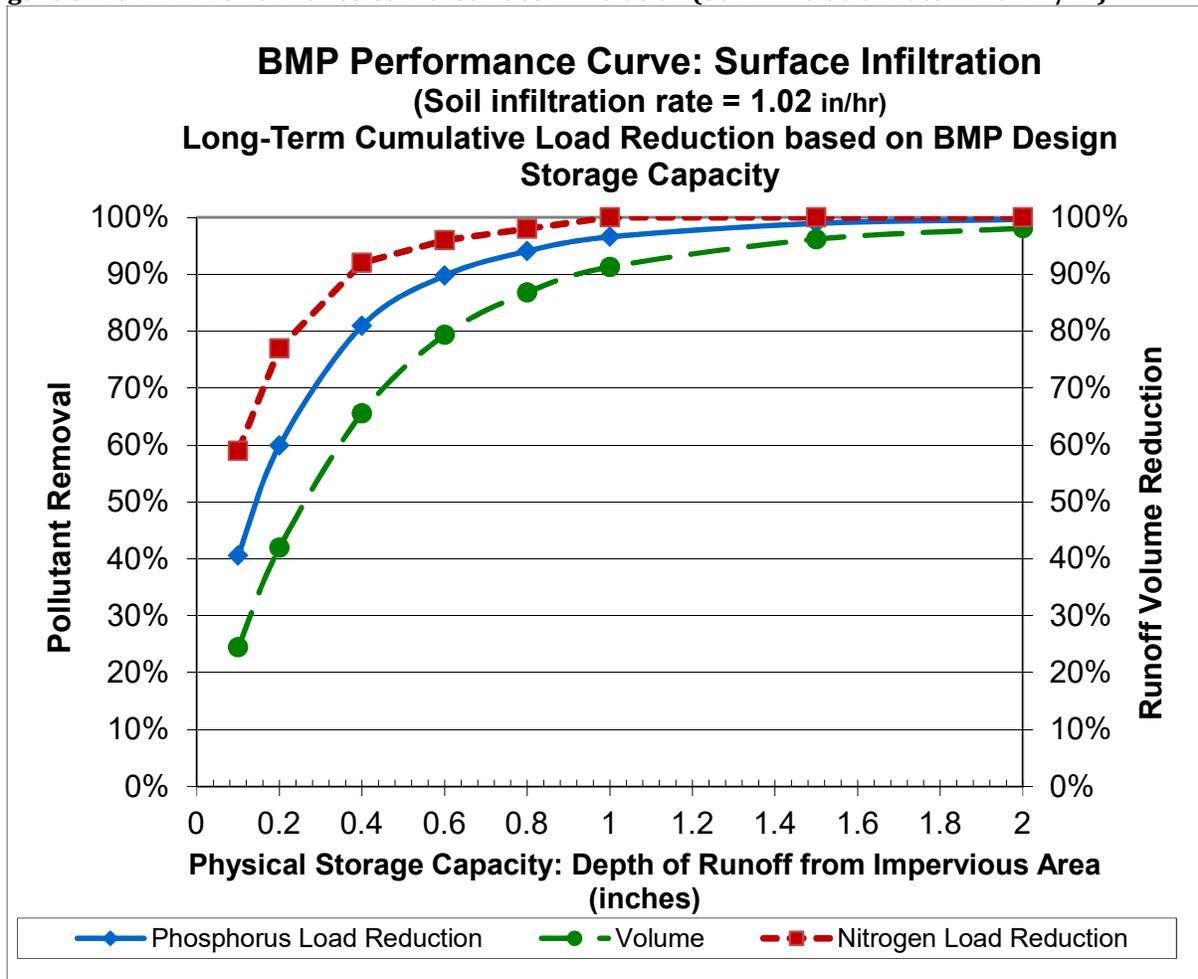


Table 3- 16: Surface Infiltration (2.41 in/hr) BMP Performance Table

Surface Infiltration (2.41 in/hr) BMP Performance Table: Long-Term Phosphorus Load Reduction								
BMP Capacity: Depth of Runoff from Impervious Area (inches)	0.1	0.2	0.4	0.6	0.8	1.0	1.5	2.0
Runoff Volume Reduction	32.8%	53.8%	77.8%	88.4%	93.4%	96.0%	98.8%	99.8%
Cumulative Phosphorus Load Reduction	46%	67%	87%	94%	97%	98%	100%	100%
Cumulative Nitrogen Load Reduction	64%	82%	95%	98%	99%	100%	100%	100%

Figure 3- 11: BMP Performance Curve: Infiltration Basin (infiltration rate = 2.41 in/hr)

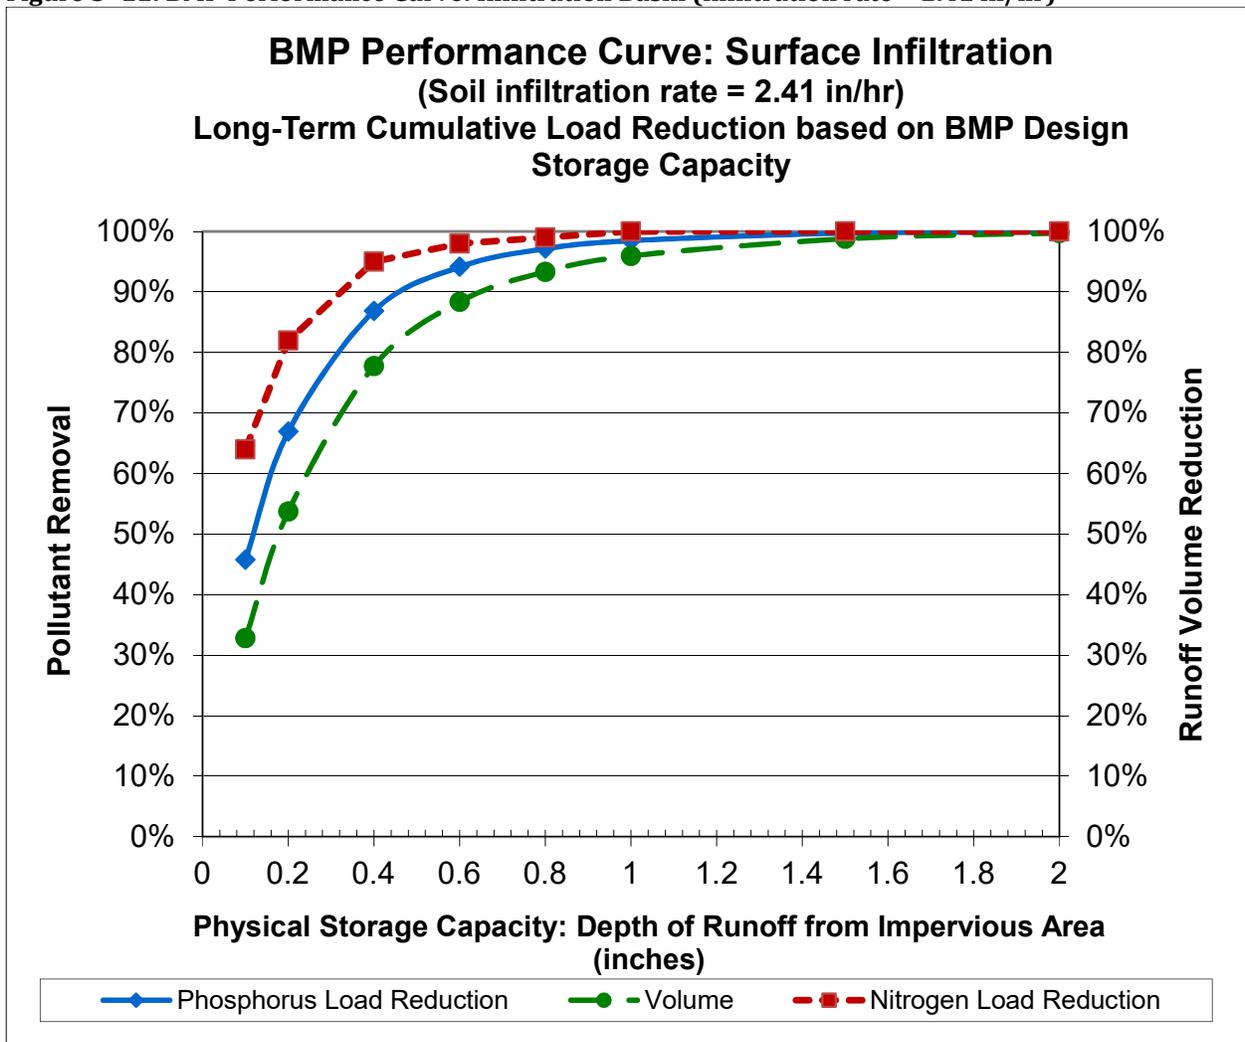


Table 3- 17: Surface Infiltration (8.27 in/hr) BMP Performance Table

Surface Infiltration (8.27 in/hr) BMP Performance Table: Long-Term Phosphorus Load Reduction								
BMP Capacity: Depth of Runoff from Impervious Area (inches)	0.1	0.2	0.4	0.6	0.8	1.0	1.5	2.0
Runoff Volume Reduction	54.6%	77.2%	93.4%	97.5%	99.0%	99.6%	100.0%	100.0%
Cumulative Phosphorus Load Reduction	59%	81%	96%	99%	100%	100%	100%	100%
Cumulative Nitrogen Load Reduction	75%	92%	99%	100%	100%	100%	100%	100%

Figure 3- 12: BMP Performance Curve: Surface Infiltration (infiltration rate = 8.27 in/hr)

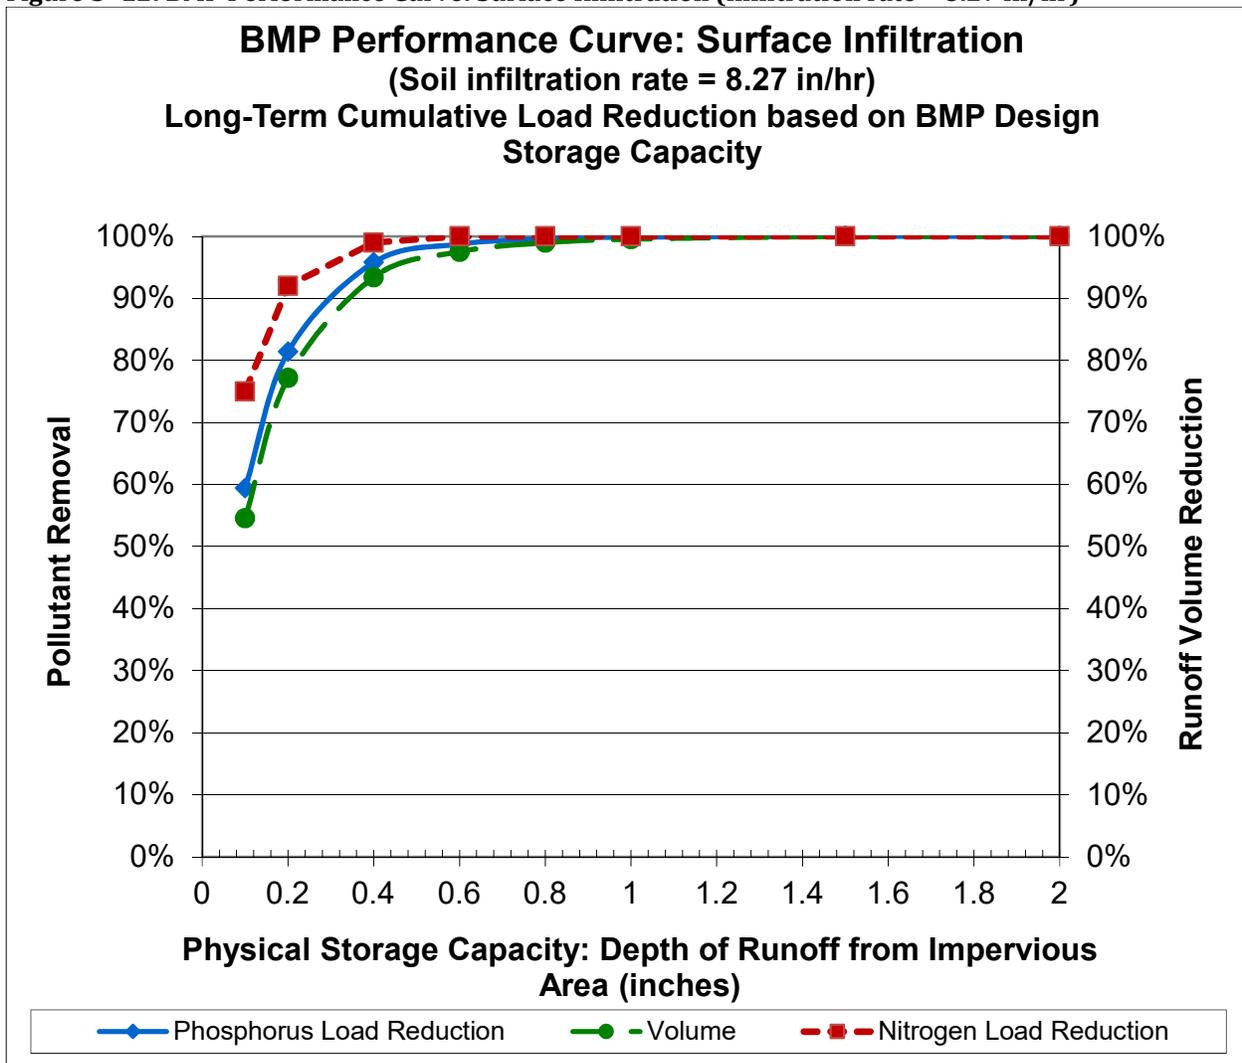


Table 3-18: Bio-filtration BMP Performance Table

Bio-filtration BMP Performance Table: Long-Term Phosphorus & Nitrogen Load Reduction								
BMP Capacity: Depth of Runoff from Impervious Area (inches)	0.1	0.2	0.4	0.6	0.8	1.0	1.5	2.0
Cumulative Phosphorus Load Reduction	14%	25%	37%	44%	48%	53%	58%	63%
Cumulative Nitrogen Load Reduction	9%	16%	23%	28%	31%	32%	37%	40%

Figure 3- 13: BMP Performance Curve: Bio-filtration

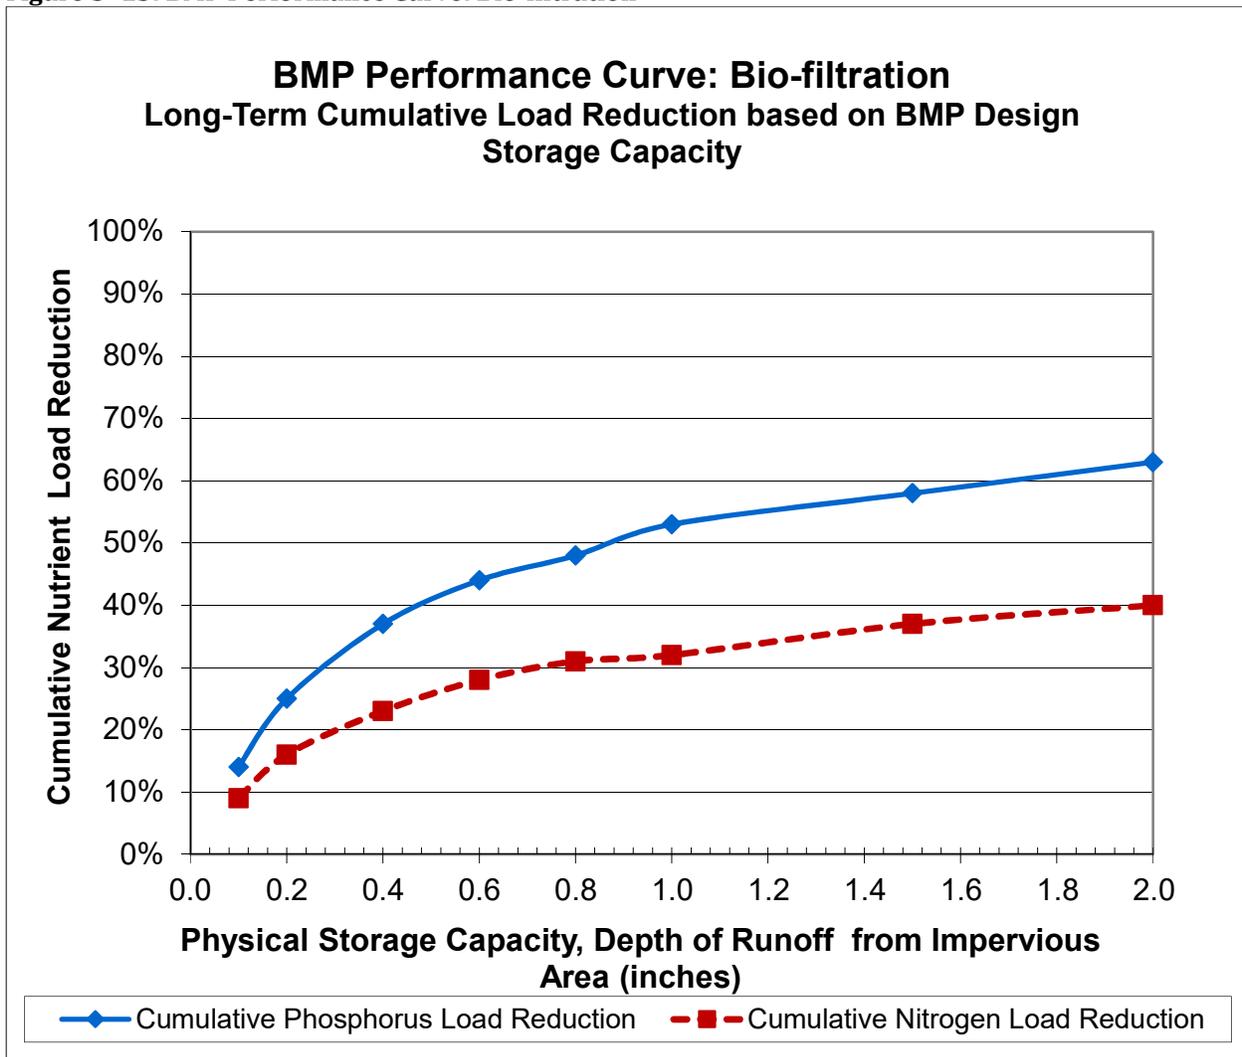


Table 3- 19: Gravel Wetland BMP Performance Table

Gravel Wetland BMP Performance Table: Long-Term Phosphorus & Nitrogen Load Reduction								
BMP Capacity: Depth of Runoff from Impervious Area (inches)	0.1	0.2	0.4	0.6	0.8	1.0	1.5	2.0
Cumulative Phosphorus Load Reduction	19%	26%	41%	51%	57%	61%	65%	66%
Cumulative Nitrogen Load Reduction	22%	33%	48%	57%	64%	68%	74%	79%

Figure 3- 14: BMP Performance Curve: Gravel Wetland

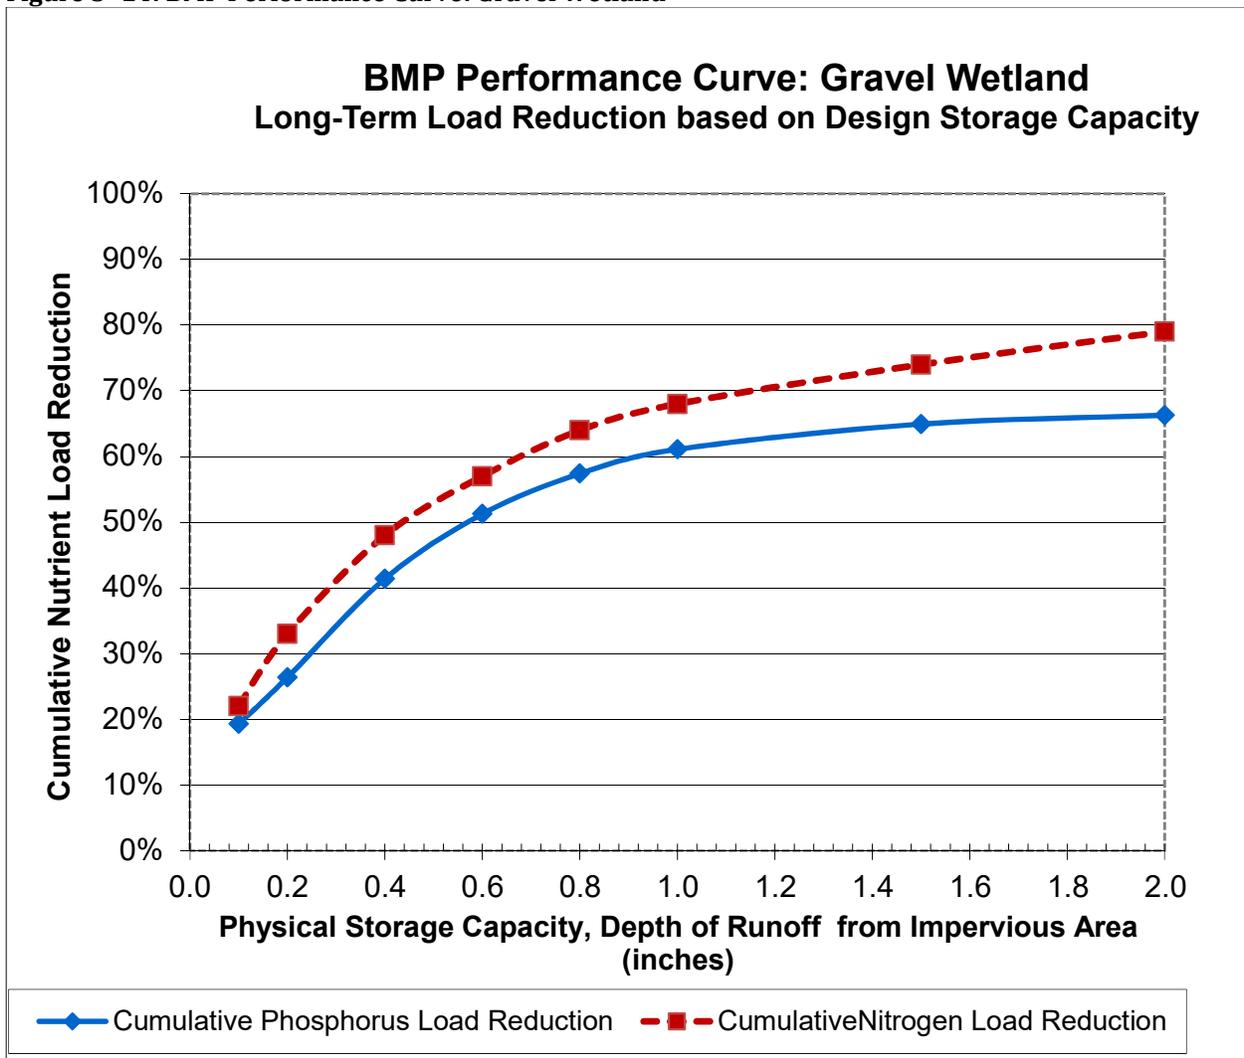


Table 3- 20: Enhanced Bio-filtration* with Internal Storage Reservoir (ISR) BMP Performance Table

Enhanced Bio-filtration* w/ ISR BMP Performance Table: Long-Term Phosphorus & Nitrogen Load Reduction	
---	--

BMP Capacity: Depth of Runoff from Impervious Area (inches)	0.1	0.2	0.4	0.6	0.8	1.0	1.5	2.0
Cumulative Phosphorus Load Reduction	19%	34%	53%	64%	71%	76%	84%	89%
Cumulative Nitrogen Load Reduction	32%	44%	58%	66%	71%	75%	82%	86%

***Filter media augmented with phosphorus sorbing materials to enhance phosphorus removal.**

**Figure 3-15: BMP Performance Curve: Enhanced Bio-filtration with Internal Storage Reservoir (ISR)
BMP Performance Table**

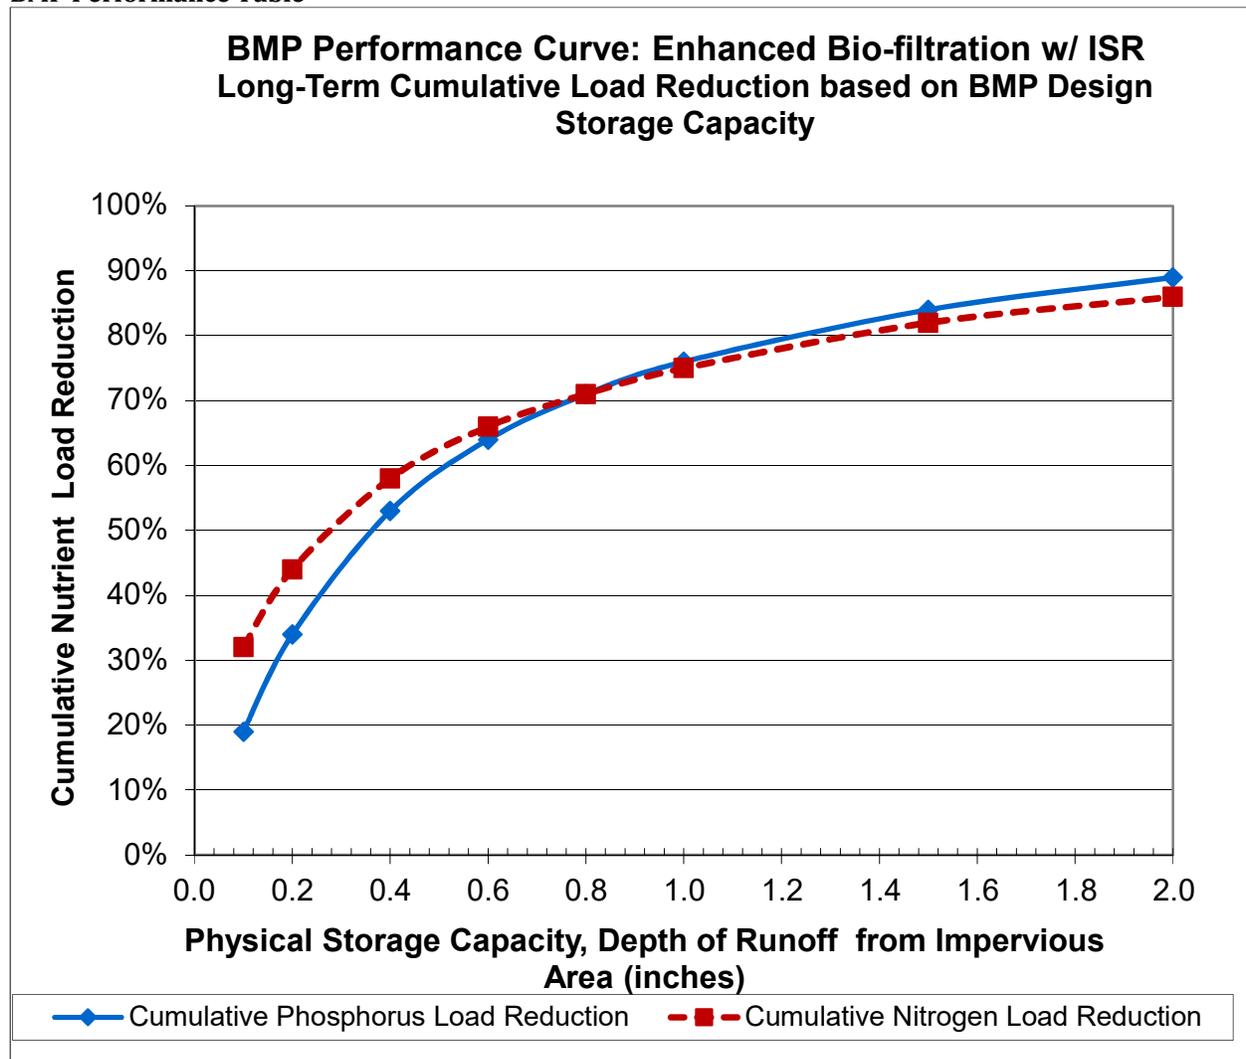


Table 3-21: Sand Filter BMP Performance Table

Sand Filter BMP Performance Table: Long-Term Phosphorus & Nitrogen Load Reduction
--

BMP Capacity: Depth of Runoff from Impervious Area (inches)	0.1	0.2	0.4	0.6	0.8	1.0	1.5	2.0
Cumulative Phosphorus Load Reduction	14%	25%	37%	44%	48%	53%	58%	63%
Cumulative Nitrogen Load Reduction	9%	16%	23%	28%	31%	32%	37%	40%

Figure 3-16: BMP Performance Curve: Sand Filter

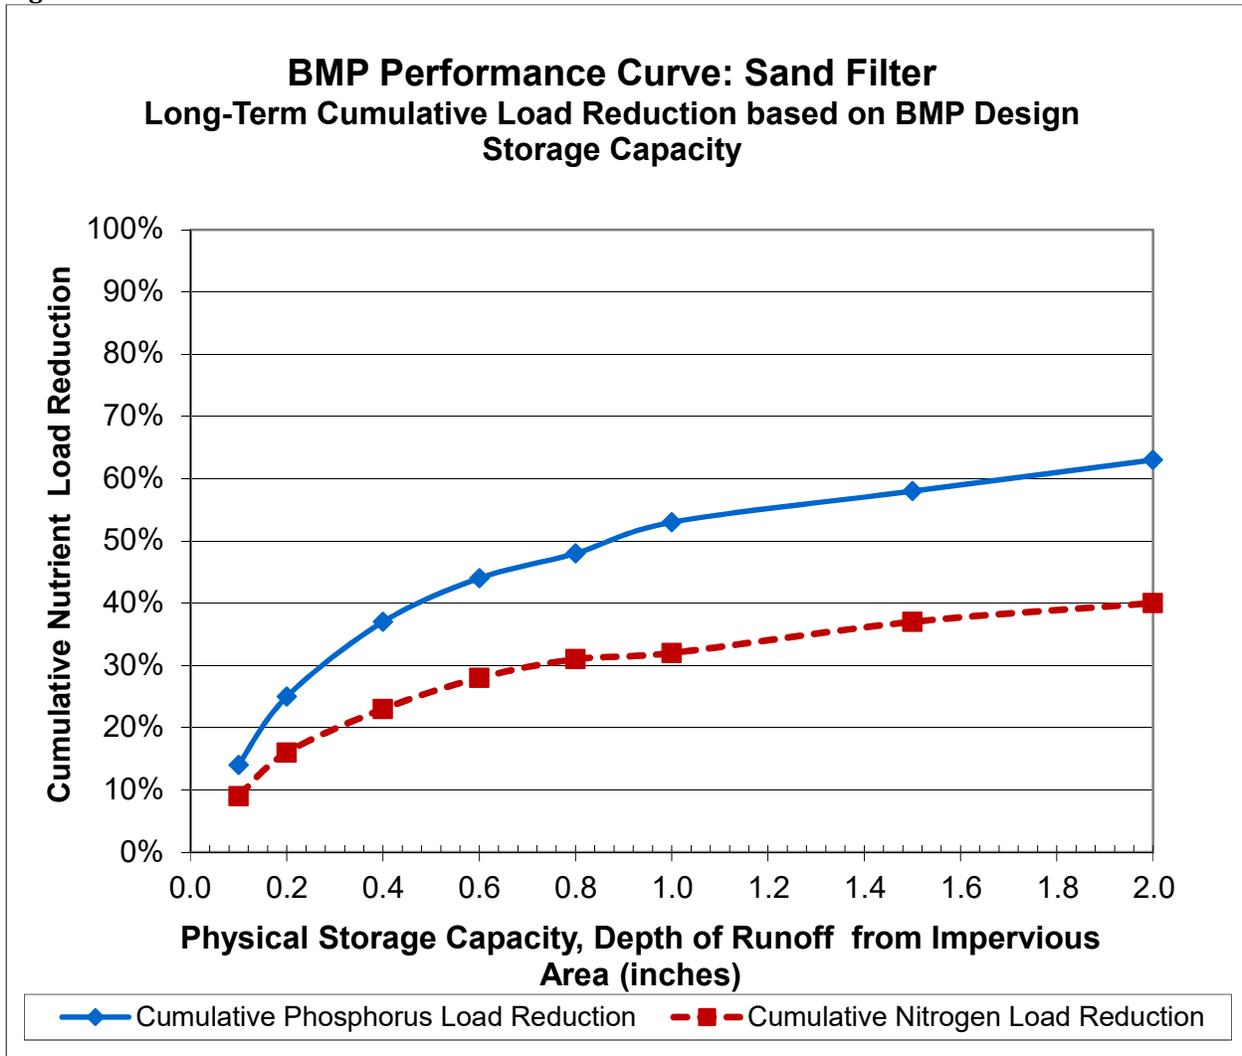


Table 3- 22 Porous Pavement BMP Performance Table

<p>Porous Pavement BMP Performance Table: Long-Term Phosphorus Load Reduction</p>

BMP Capacity: Depth of Filter Course Area (inches)	12.0	18.0	24.0	32.0
Cumulative Phosphorus Load Reduction	62%	70%	75%	78%
Cumulative Nitrogen Load Reduction	76%	77%	77%	79%

Figure 3- 17: BMP Performance Curve: Porous Pavement

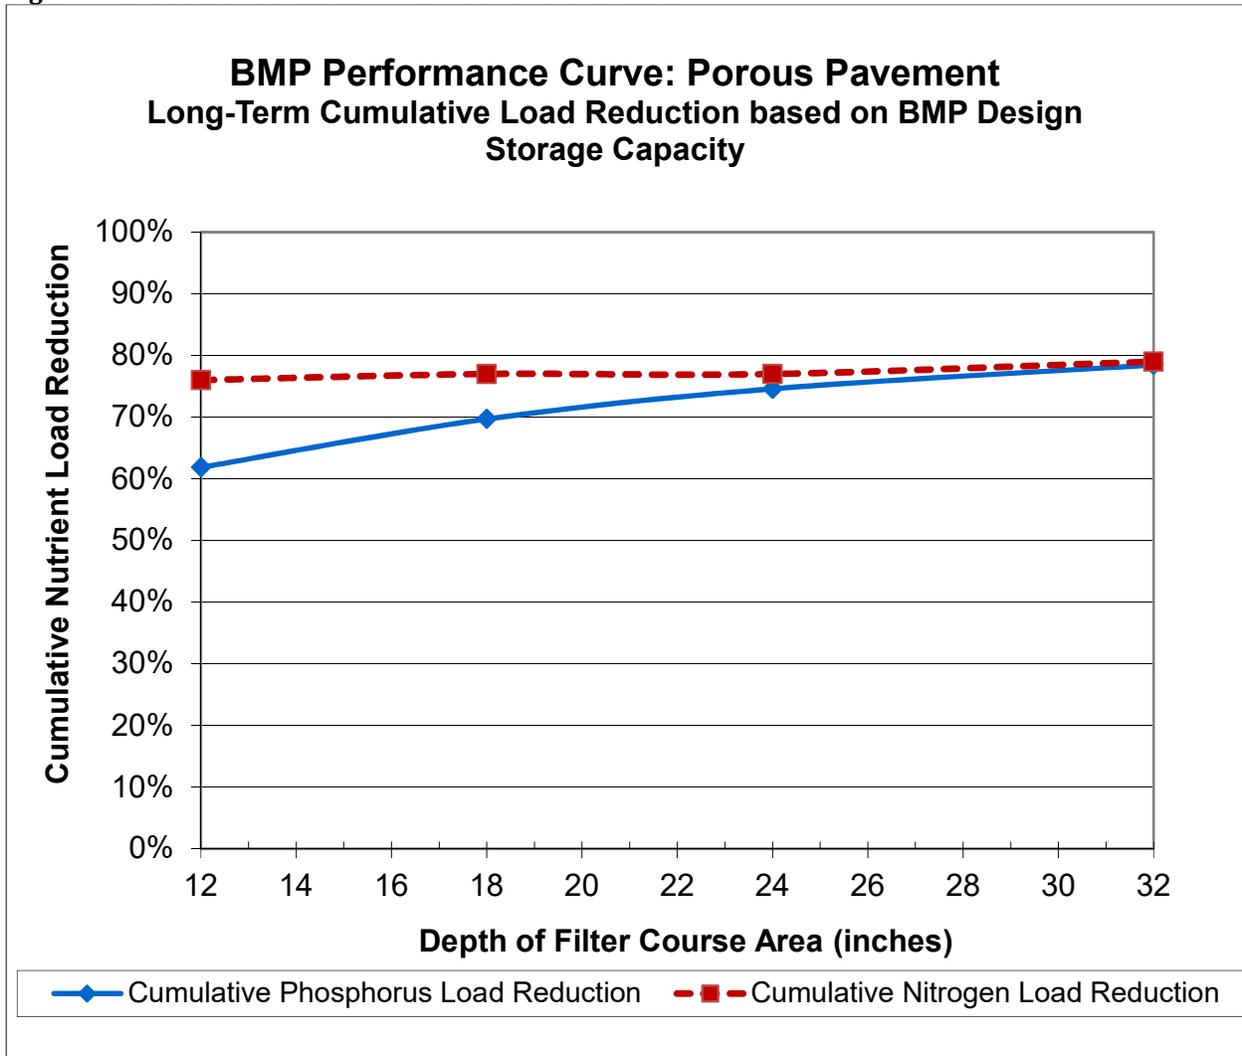


Table 3- 23: Wet Pond BMP Performance Table

Wet Pond BMP Performance Table: Long-Term Phosphorus Load Reduction

BMP Capacity: Depth of Runoff from Impervious Area (inches)	0.1	0.2	0.4	0.6	0.8	1.0	1.5	2.0
Cumulative Phosphorus Load Reduction	14%	25%	37%	44%	48%	53%	58%	63%
Cumulative Nitrogen Load Reduction	9%	16%	23%	28%	31%	32%	37%	40%

Figure 3-18: BMP Performance Curve: Wet Pond

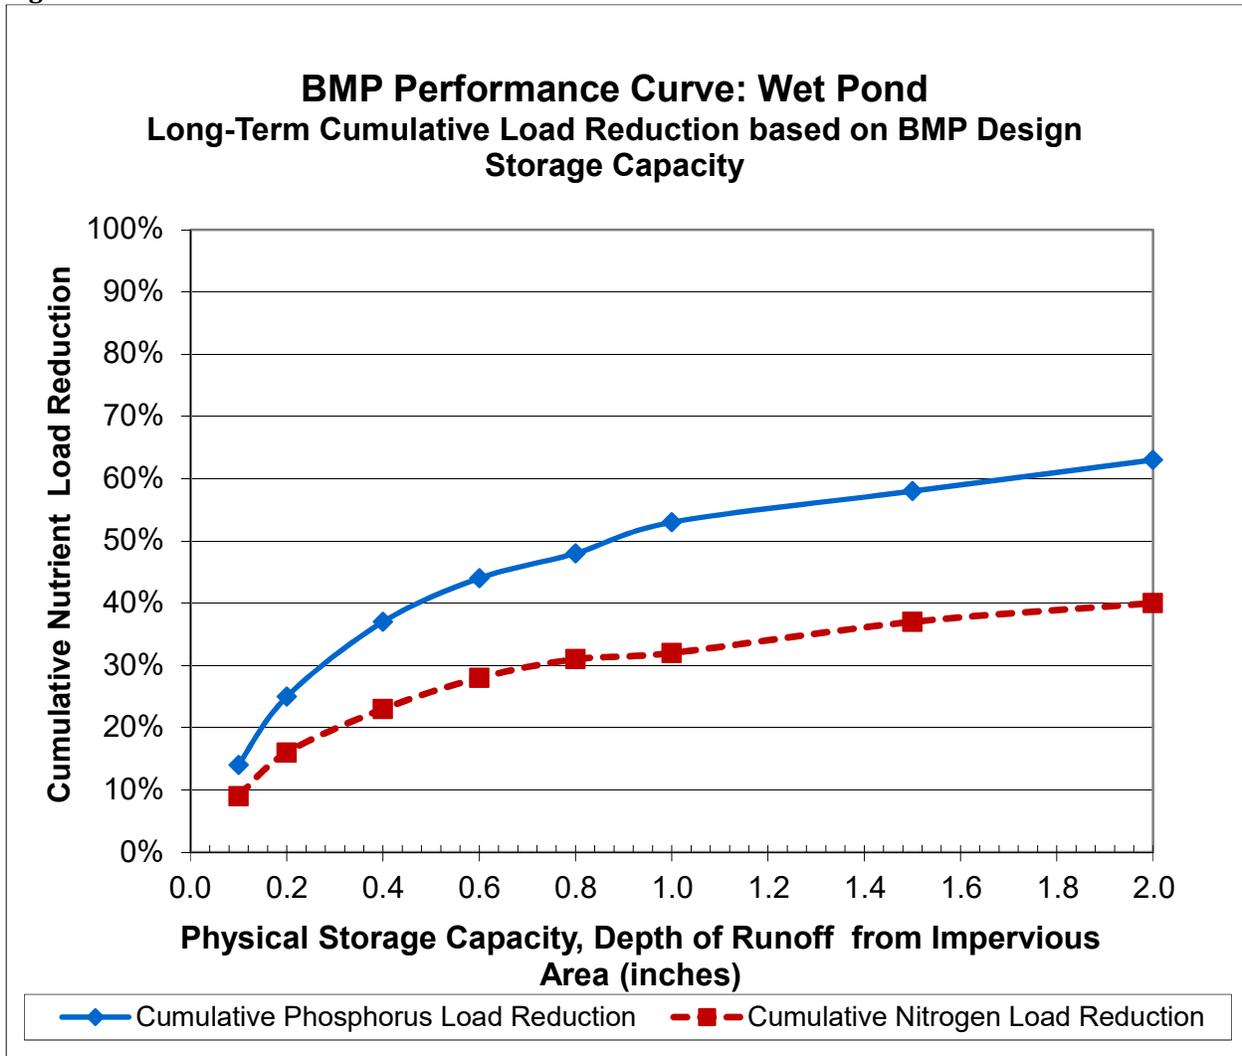


Table 3-24: Dry Pond BMP Performance Table

<p>Extended Dry Pond BMP Performance Table: Long-Term Phosphorus & Nitrogen Load Reduction</p>
--

BMP Capacity: Depth of Runoff from Impervious Area (inches)	0.1	0.2	0.4	0.6	0.8	1.0	1.5	2.0
Cumulative Phosphorus Load Reduction	2%	5%	9%	13%	17%	21%	29%	36%
Cumulative Nitrogen Load Reduction	1%	3%	6%	9%	11%	13%	19%	23%

Figure 3- 19: BMP Performance Curve: Dry Pond

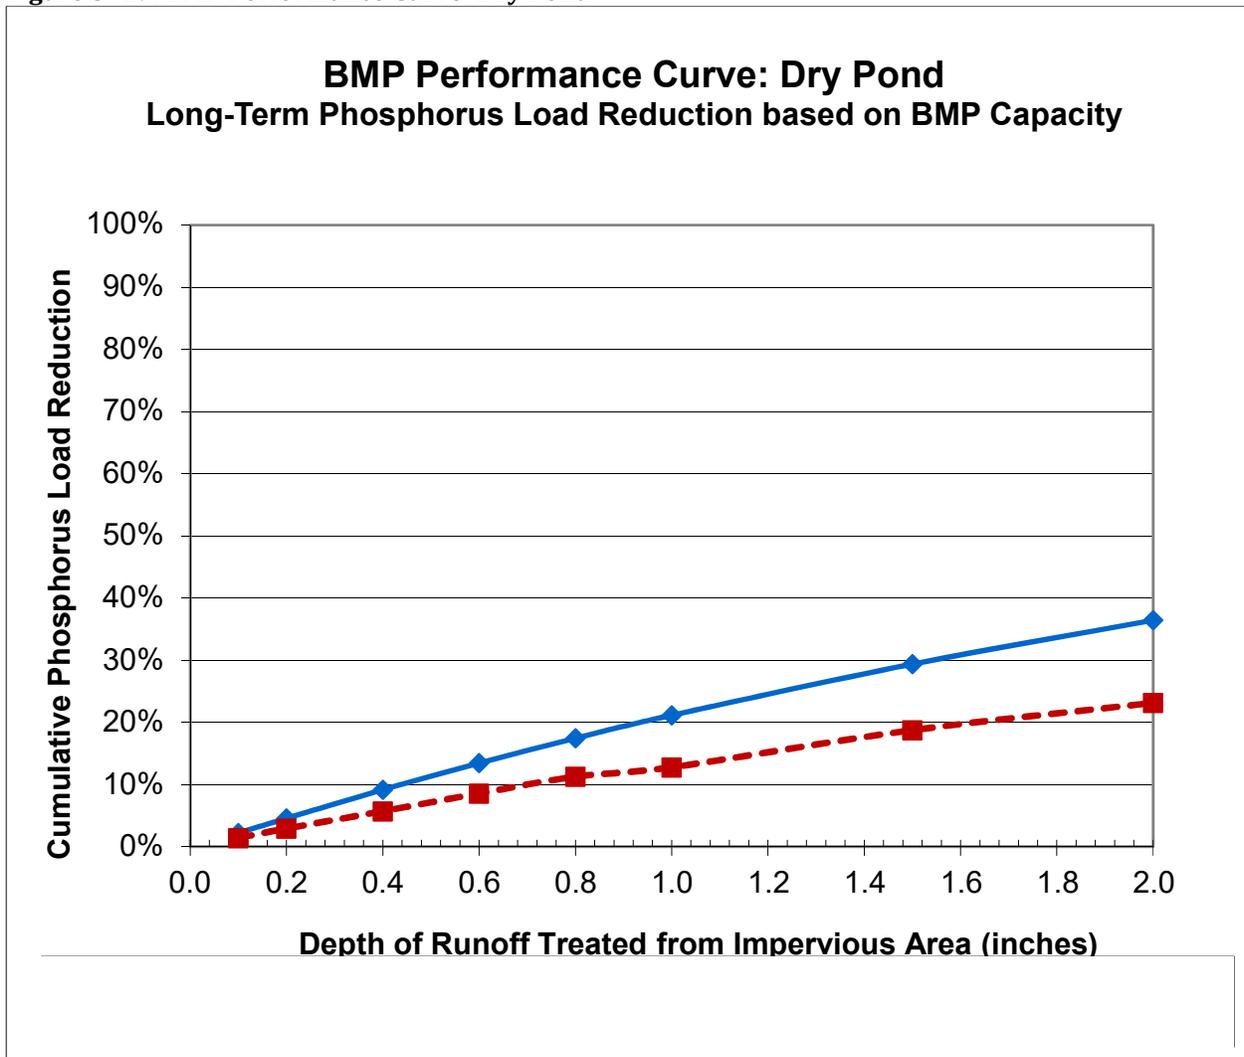


Table 3- 25: Water Quality Grass Swale with Detention BMP Performance Table

<p>Water Quality Grass Swale with Detention Performance Table: Long-Term Phosphorus & Nitrogen Load Reduction</p>

BMP Capacity: Depth of Runoff from Impervious Area (inches)	0.1	0.2	0.4	0.6	0.8	1.0	1.5	2.0
Phosphorus Load Reduction	2%	5%	9%	13%	17%	21%	29%	36%
Nitrogen Load Reduction	1%	3%	6%	9%	11%	13%	19%	23%

Figure 3-20: BMP Performance Curve: Water Quality Grass Swale with Detention

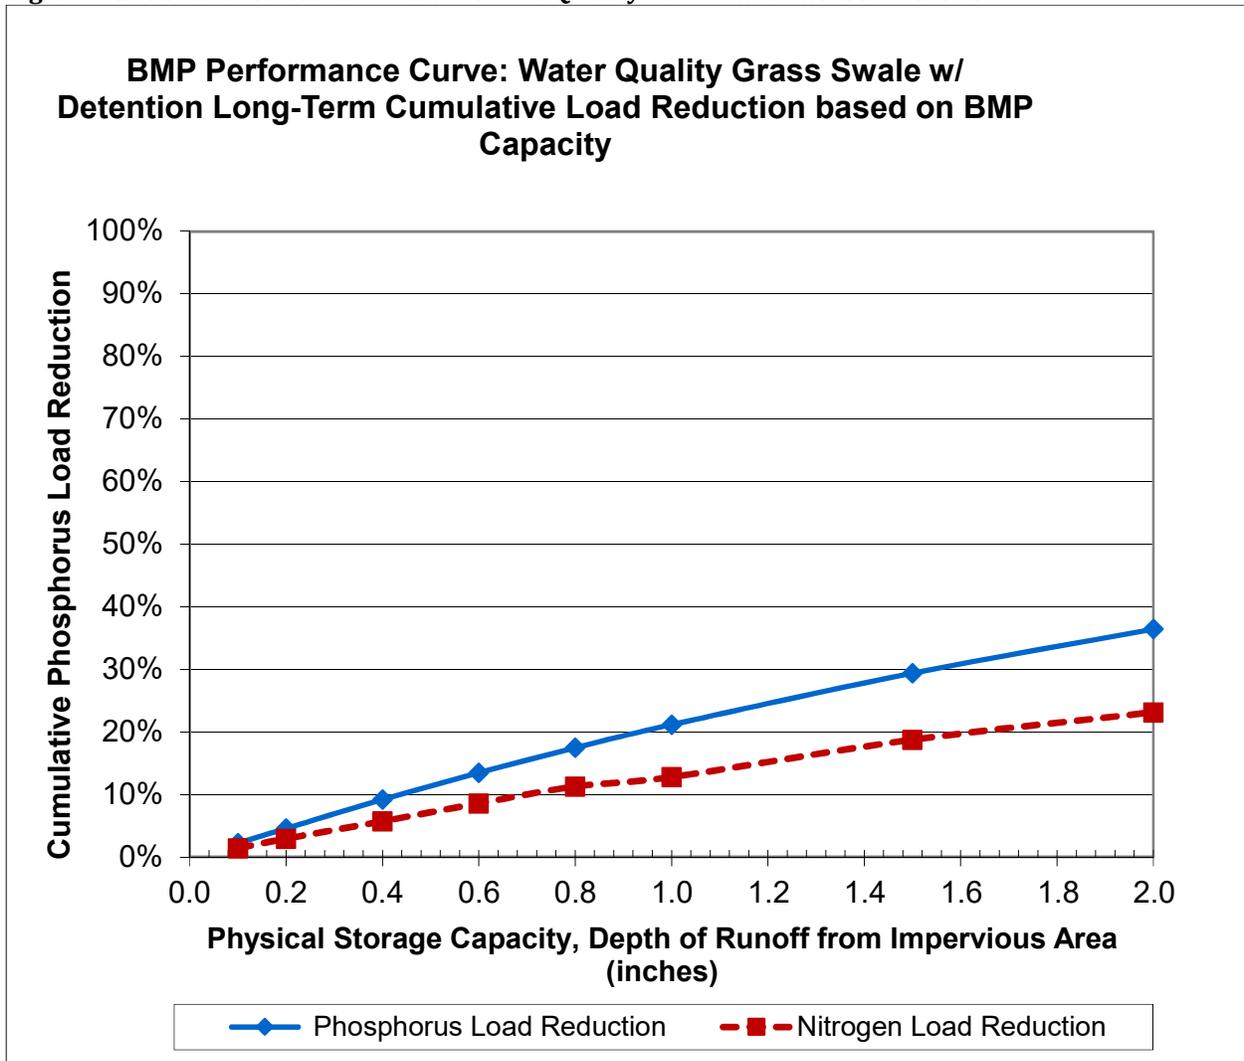


Table 3- 26: Impervious Area Disconnection through Storage: Impervious Area to Pervious Area Ratio = 8:1

Impervious Area Disconnection through Storage : Impervious Area to Pervious Area Ratio = 8:1	
Total Runoff Volume (TP) Reduction Percentages	

Storage volume to impervious area ratio	HSG A			HSG B			HSG C			HSG D		
	1-day	2-day	3-day									
0.1 in	24%	23%	22%	24%	23%	22%	24%	23%	22%	22%	22%	21%
0.2 in	40%	38%	37%	40%	38%	37%	37%	38%	37%	24%	26%	27%
0.3 in	52%	50%	49%	52%	50%	49%	40%	46%	49%	24%	26%	27%
0.4 in	61%	59%	58%	59%	59%	58%	40%	48%	54%	24%	26%	27%
0.5 in	67%	66%	64%	62%	66%	64%	40%	48%	56%	24%	26%	27%
0.6 in	70%	71%	70%	62%	70%	70%	40%	48%	56%	24%	26%	27%
0.8 in	71%	78%	77%	62%	73%	77%	40%	48%	56%	24%	26%	27%
1.0 in	71%	80%	80%	62%	73%	79%	40%	48%	56%	24%	26%	27%
1.5 in	71%	81%	87%	62%	73%	81%	40%	48%	56%	24%	26%	27%
2.0 in	71%	81%	88%	62%	73%	81%	40%	48%	56%	24%	26%	27%

Figure 3- 21: Impervious Area Disconnection through Storage: Impervious Area to Pervious Area Ratio = 8:1 for HSG A Soils

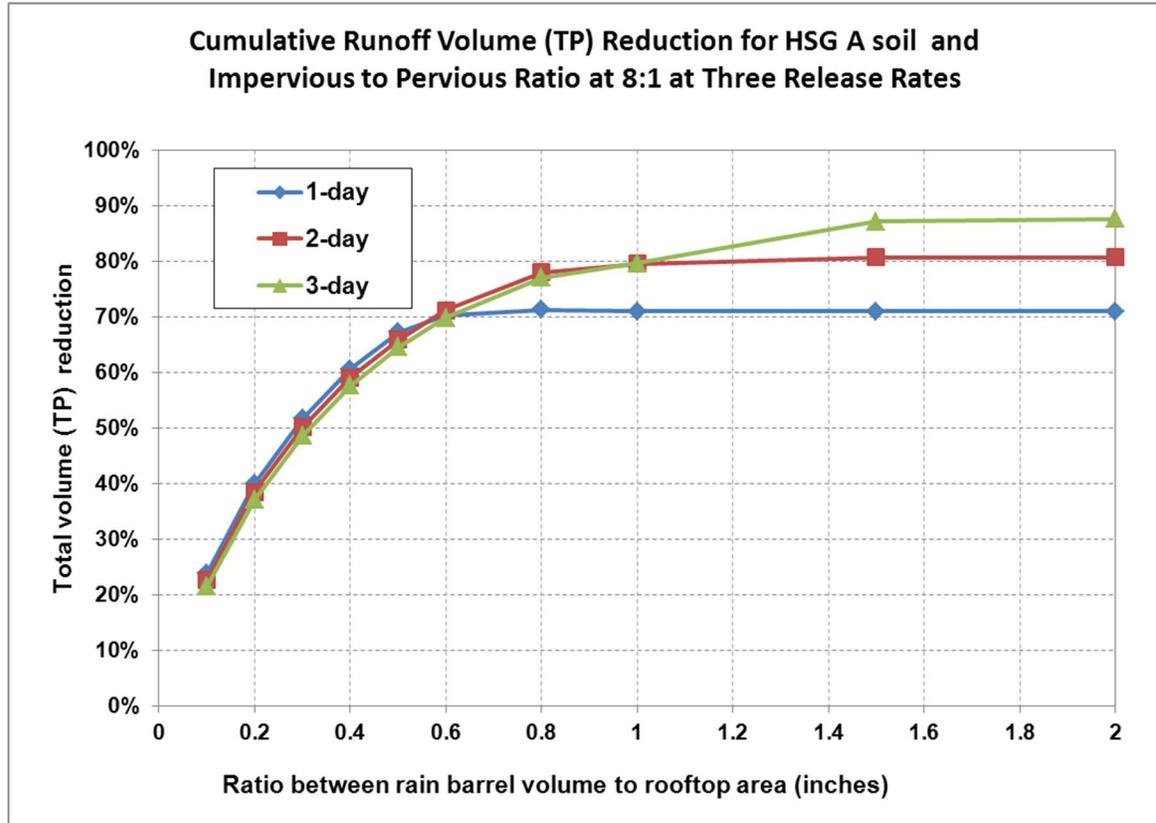


Figure 3- 22: Impervious Area Disconnection through Storage: Impervious Area to Pervious Area Ratio = 8:1 for HSG B Soils

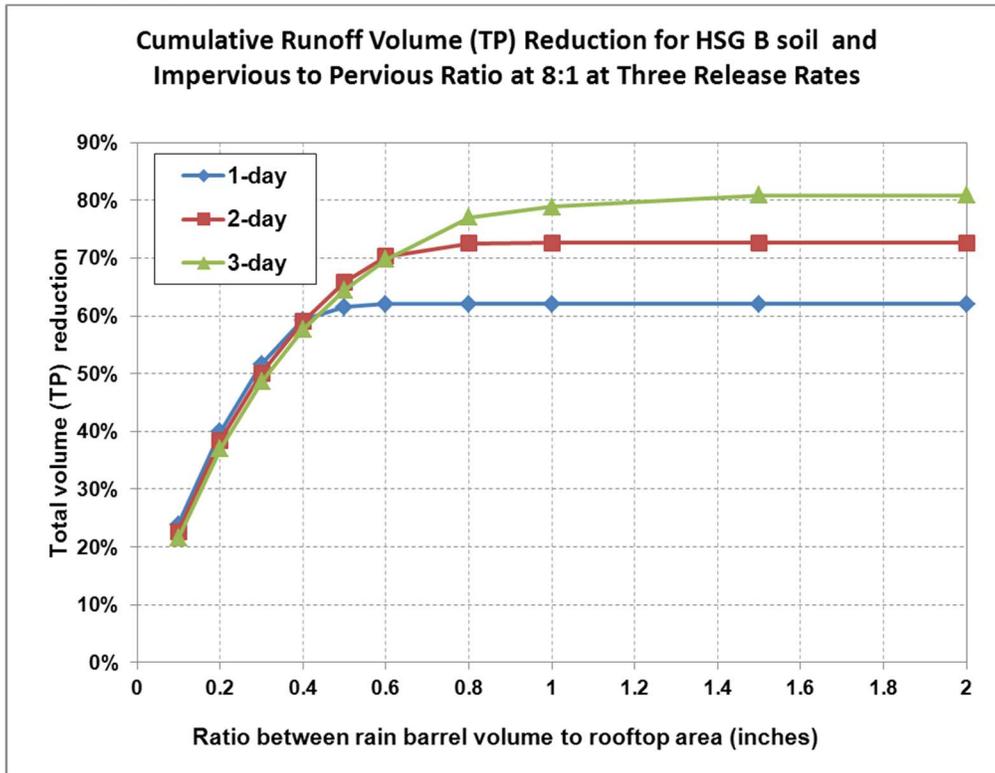


Figure 3- 23: Impervious Area Disconnection through Storage: Impervious Area to Pervious Area Ratio = 8:1 for HSG C Soils

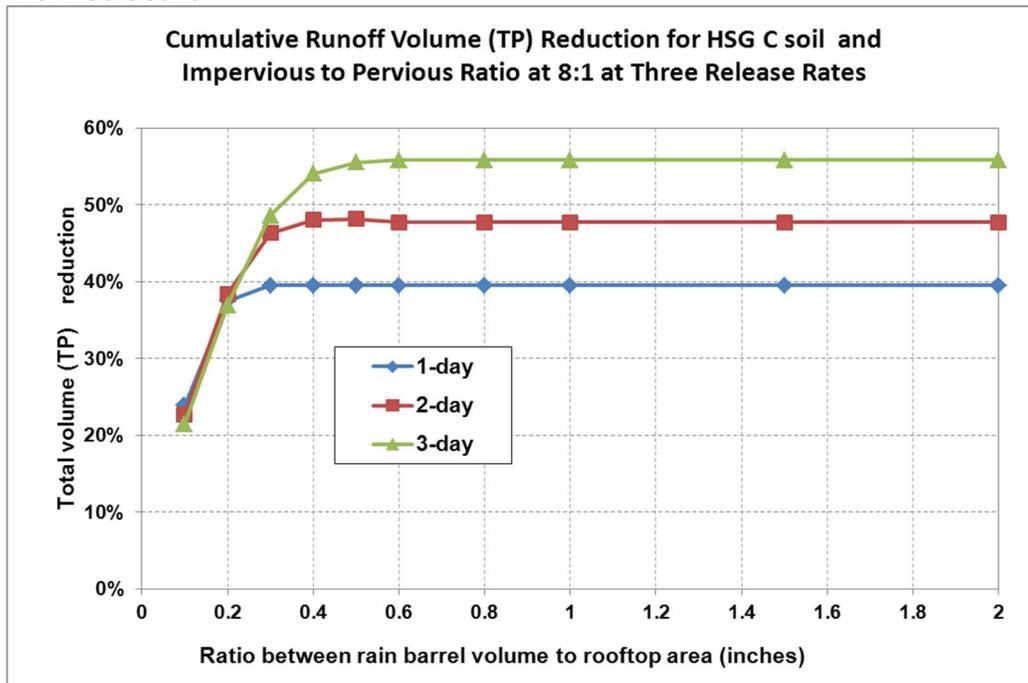


Figure 3- 24: Impervious Area Disconnection through Storage: Impervious Area to Pervious Area Ratio = 8:1 for HSG D Soils

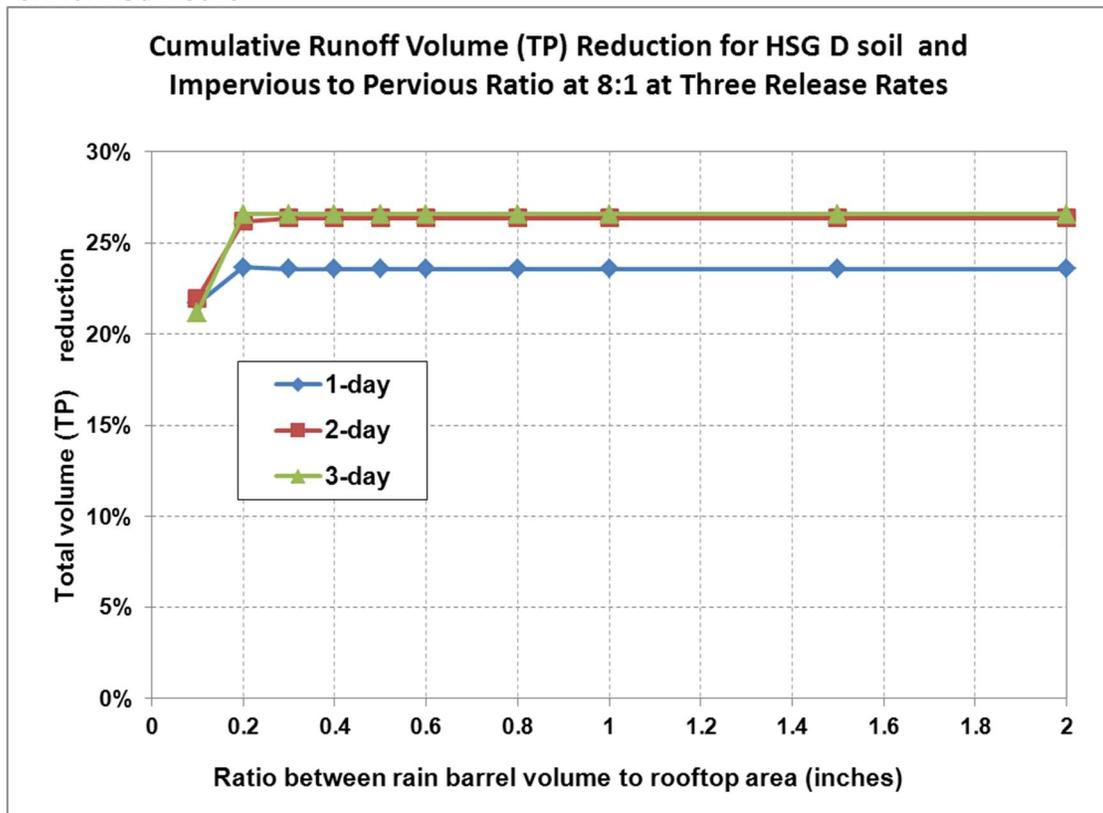


Table 3- 27: Impervious Area Disconnection through Storage: Impervious Area to Pervious Area Ratio = 6:1

Impervious Area Disconnection through Storage: Impervious Area to Pervious Area Ratio = 6:1												
Rain barrel volume to impervious area ratio	Total Runoff Volume and Phosphorus Load (TP) Reduction Percentages											
	HSG A			HSG B			HSG C			HSG D		
	1-day	2-day	3-day	1-day	2-day	3-day	1-day	2-day	3-day	1-day	2-day	3-day
0.1 in	24%	23%	22%	24%	23%	22%	24%	23%	22%	23%	23%	22%
0.2 in	40%	38%	37%	40%	38%	37%	40%	38%	37%	28%	30%	33%
0.3 in	52%	50%	49%	52%	50%	49%	47%	50%	49%	29%	31%	34%
0.4 in	61%	59%	58%	61%	59%	58%	48%	55%	58%	29%	31%	34%
0.5 in	67%	66%	64%	67%	66%	64%	48%	57%	63%	29%	31%	34%
0.6 in	73%	71%	70%	70%	71%	70%	48%	57%	65%	29%	31%	34%
0.8 in	78%	78%	77%	71%	78%	77%	48%	57%	66%	29%	31%	34%
1.0 in	79%	81%	80%	71%	79%	80%	48%	57%	66%	29%	31%	34%
1.5 in	79%	87%	88%	71%	80%	87%	48%	57%	66%	29%	31%	34%
2.0 in	79%	87%	91%	71%	80%	87%	48%	57%	66%	29%	31%	34%

Figure 3- 25: Impervious Area Disconnection through Storage: Impervious Area to Pervious Area Ratio = 6:1 for HSG A Soils

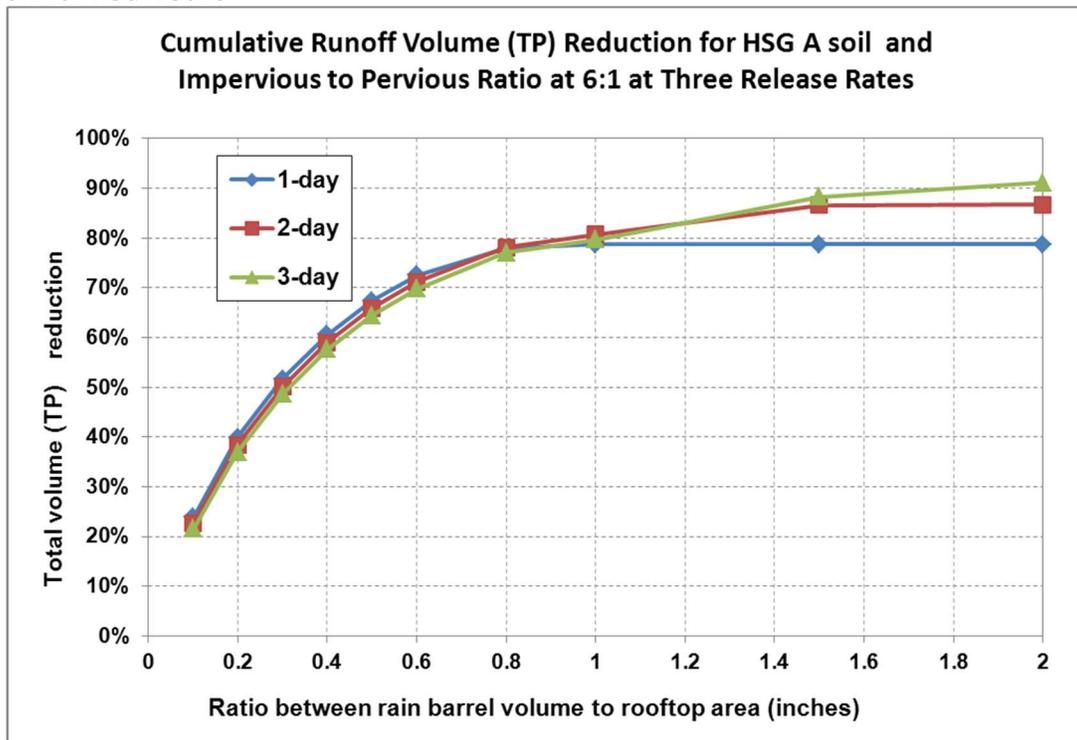


Figure 3- 26: Impervious Area Disconnection through Storage: Impervious Area to Pervious Area Ratio = 6:1 for HSG B Soils

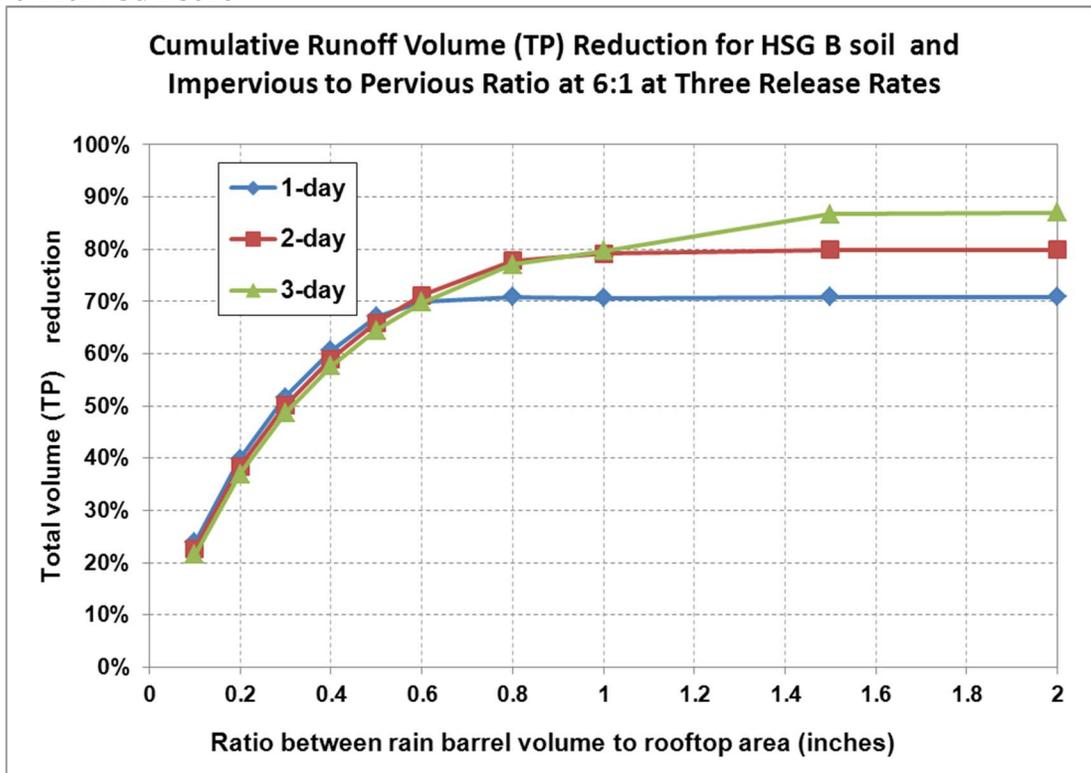


Figure 3- 27: Impervious Area Disconnection through Storage: Impervious Area to Pervious Area Ratio = 6:1 for HSG C Soils

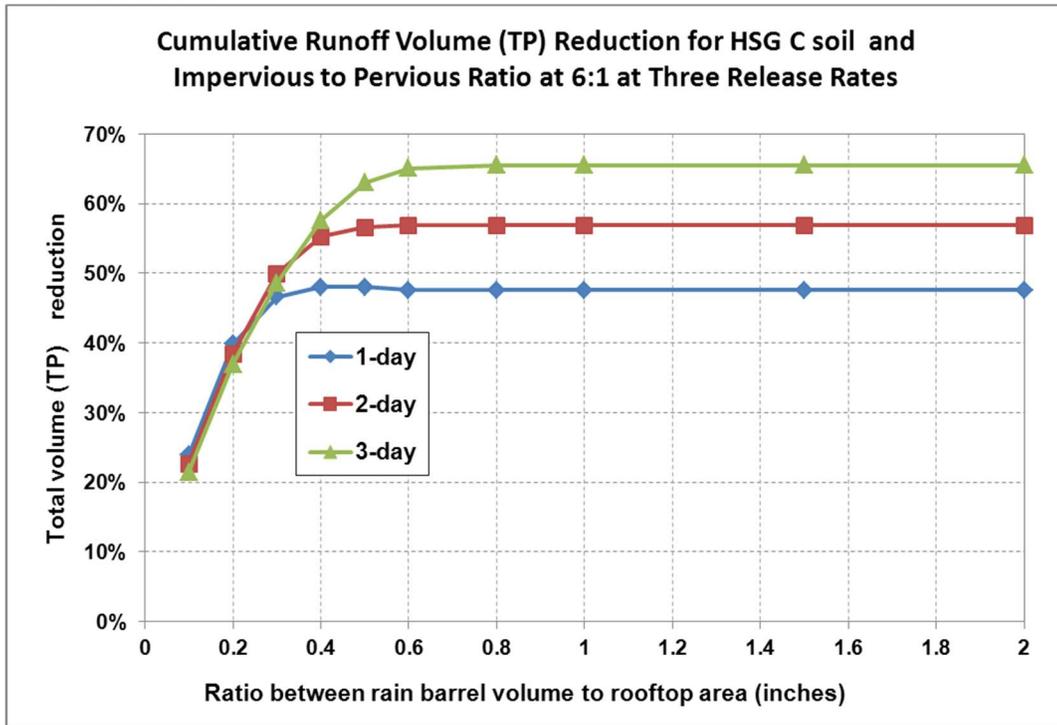


Figure 3- 28: Impervious Area Disconnection through Storage: Impervious Area to Pervious Area Ratio = 6:1 for HSG D Soils

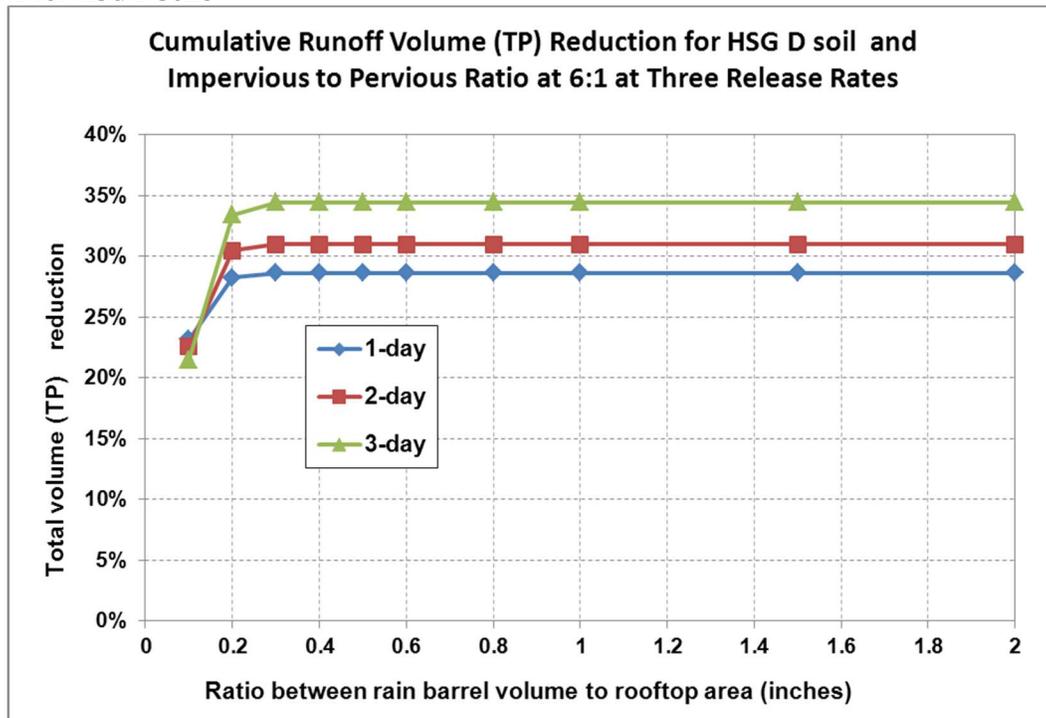


Table 3- 28: Impervious Area Disconnection through Storage: Impervious Area to Pervious Area Ratio = 4:1

Impervious Area Disconnection through Storage: Impervious Area to Pervious Area Ratio = 4:1												
Storage volume to impervious area ratio	Total Runoff Volume and Phosphorus Load (TP) Reduction Percentages											
	HSG A			HSG B			HSG C			HSG D		
	1-day	2-day	3-day	1-day	2-day	3-day	1-day	2-day	3-day	1-day	2-day	3-day
0.1 in	24%	23%	22%	24%	23%	22%	24%	23%	22%	24%	23%	22%
0.2 in	40%	38%	37%	40%	38%	37%	40%	38%	37%	37%	37%	37%
0.3 in	52%	50%	49%	52%	50%	49%	52%	50%	49%	39%	42%	45%
0.4 in	61%	59%	58%	61%	59%	58%	58%	59%	58%	39%	42%	47%
0.5 in	67%	66%	64%	67%	66%	64%	60%	65%	64%	40%	42%	47%
0.6 in	73%	71%	70%	73%	71%	70%	61%	68%	70%	40%	42%	47%
0.8 in	79%	78%	77%	79%	78%	77%	61%	69%	75%	40%	42%	47%
1.0 in	82%	81%	80%	80%	81%	80%	61%	69%	76%	40%	42%	47%
1.5 in	87%	89%	88%	80%	87%	88%	61%	69%	76%	40%	42%	47%
2.0 in	87%	91%	91%	80%	88%	91%	61%	69%	76%	40%	42%	47%

Figure 3- 29: Impervious Area Disconnection through Storage: Impervious Area to Pervious Area Ratio = 4:1 for HSG A Soils

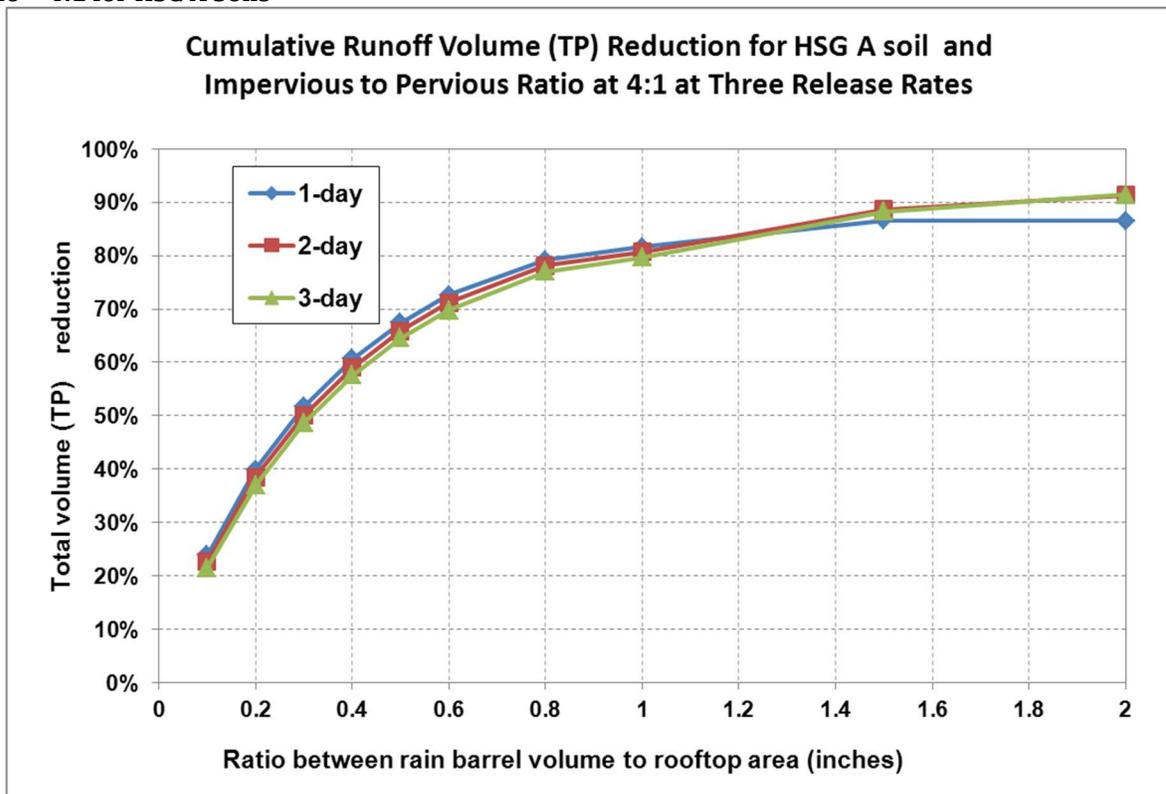


Figure 3- 30: Impervious Area Disconnection through Storage: Impervious Area to Pervious Area Ratio = 4:1 for HSG B Soils

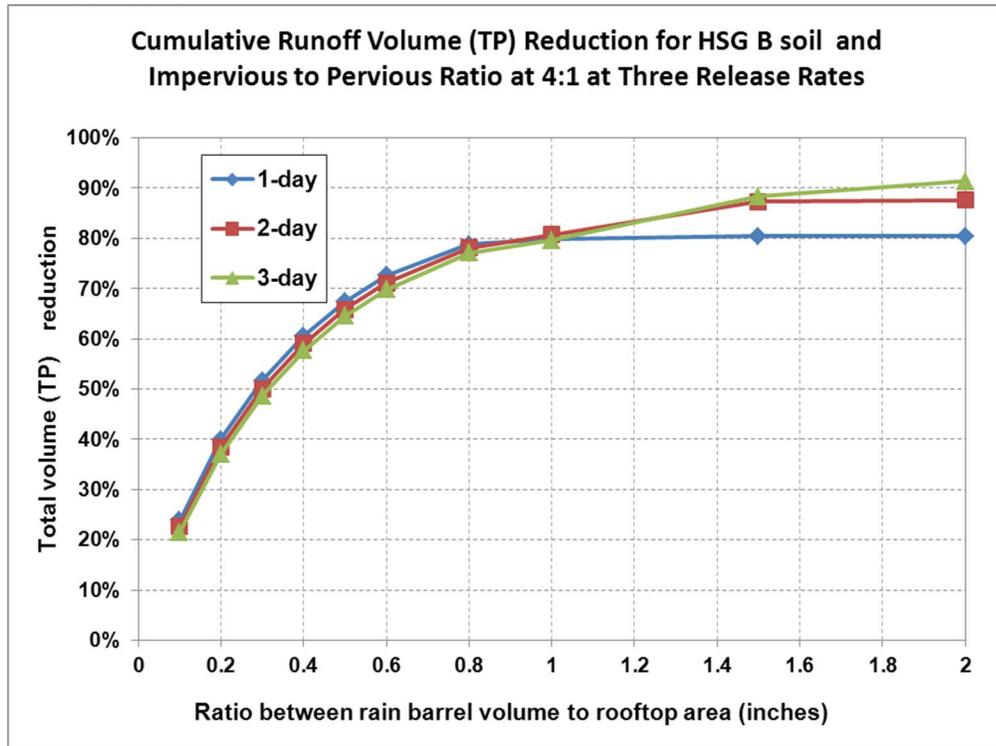


Figure 3- 31: Impervious Area Disconnection through Storage: Impervious Area to Pervious Area Ratio = 4:1 for HSG C Soils

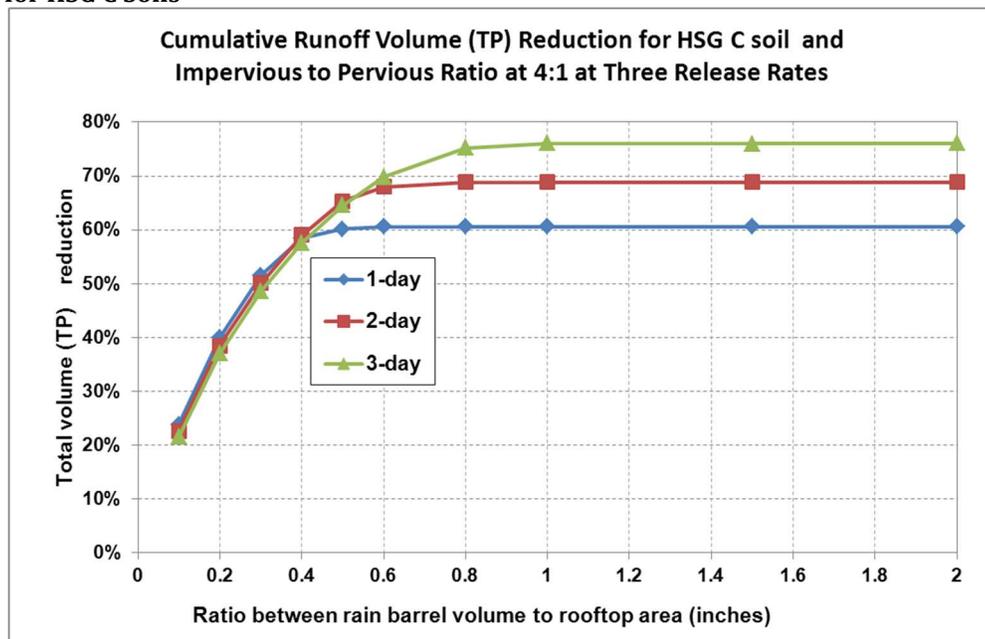


Figure 3- 32: Impervious Area Disconnection through Storage: Impervious Area to Pervious Area Ratio = 4:1 for HSG D Soils

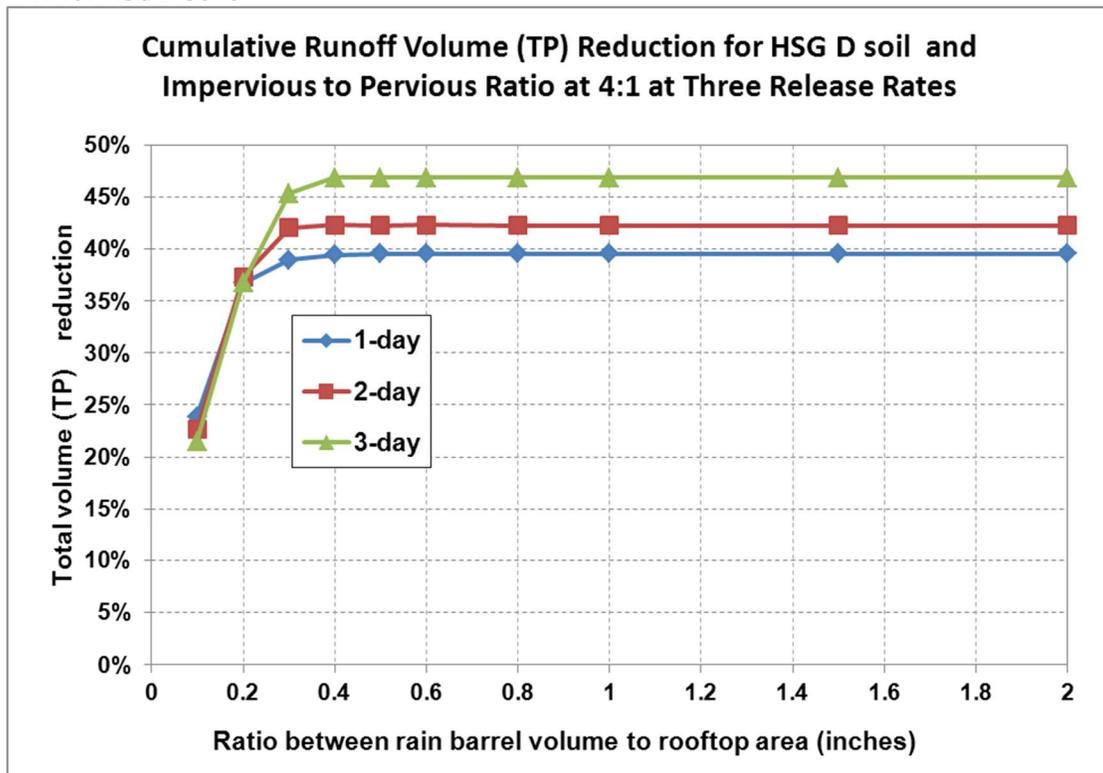


Table 3- 29: Impervious Area Disconnection through Storage: Impervious Area to Pervious Area Ratio = 2:1

Impervious Area Disconnection through Storage: Impervious Area to Pervious Area Ratio = 2:1

Storage volume to impervious area ratio	Total Runoff Volume and Phosphorus Load (TP) Reduction Percentages											
	HSG A			HSG B			HSG C			HSG D		
	1-day	2-day	3-day	1-day	2-day	3-day	1-day	2-day	3-day	1-day	2-day	3-day
0.1 in	24%	23%	22%	24%	23%	22%	24%	23%	22%	24%	23%	22%
0.2 in	40%	38%	37%	40%	38%	37%	40%	38%	37%	40%	38%	37%
0.3 in	52%	50%	49%	52%	50%	49%	52%	50%	49%	51%	50%	49%
0.4 in	61%	59%	58%	61%	59%	58%	61%	59%	58%	57%	58%	57%
0.5 in	67%	66%	64%	67%	66%	64%	67%	66%	64%	59%	62%	63%
0.6 in	73%	71%	70%	73%	71%	70%	72%	71%	70%	59%	62%	67%
0.8 in	79%	78%	77%	79%	78%	77%	77%	78%	77%	59%	62%	67%
1.0 in	82%	81%	80%	82%	81%	80%	78%	81%	80%	59%	62%	67%
1.5 in	89%	89%	88%	89%	89%	88%	78%	84%	88%	59%	62%	67%
2.0 in	92%	92%	91%	91%	92%	91%	78%	84%	89%	59%	62%	67%

Figure 3- 33: Impervious Area Disconnection through Storage: Impervious Area to Pervious Area Ratio= 2:1 for HSG A Soils

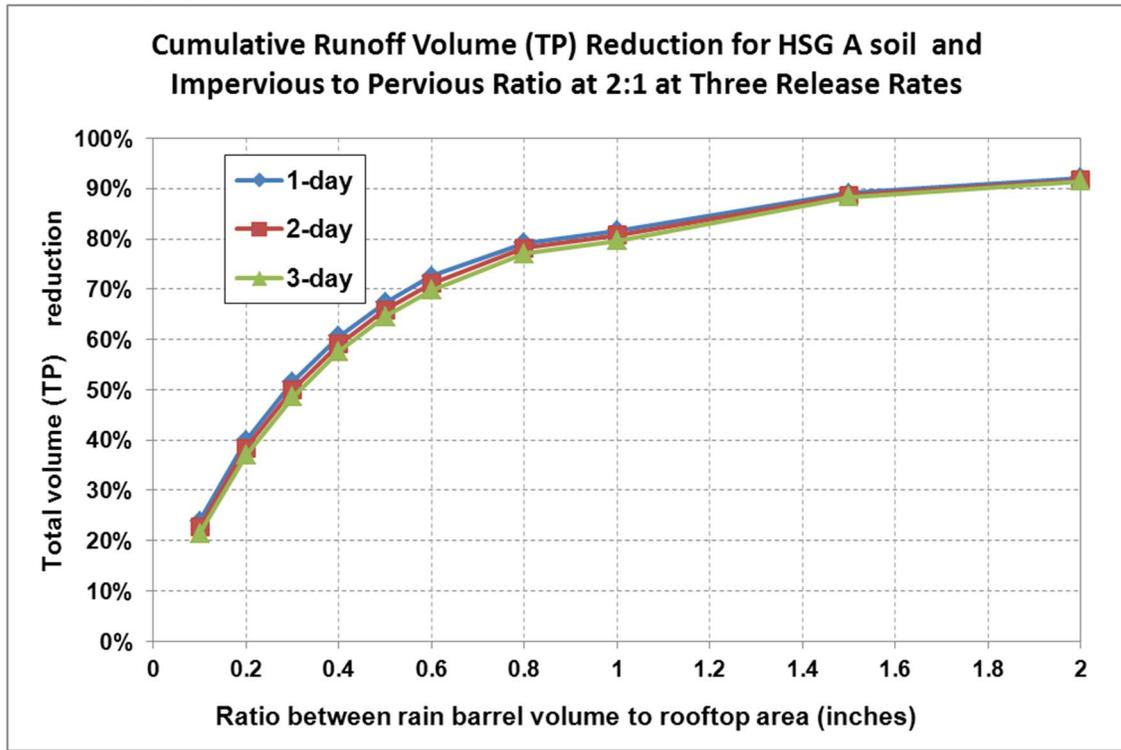


Figure 3- 34: Impervious Area Disconnection through Storage: Impervious Area to Pervious Area Ratio= 2:1 for HSG B Soils

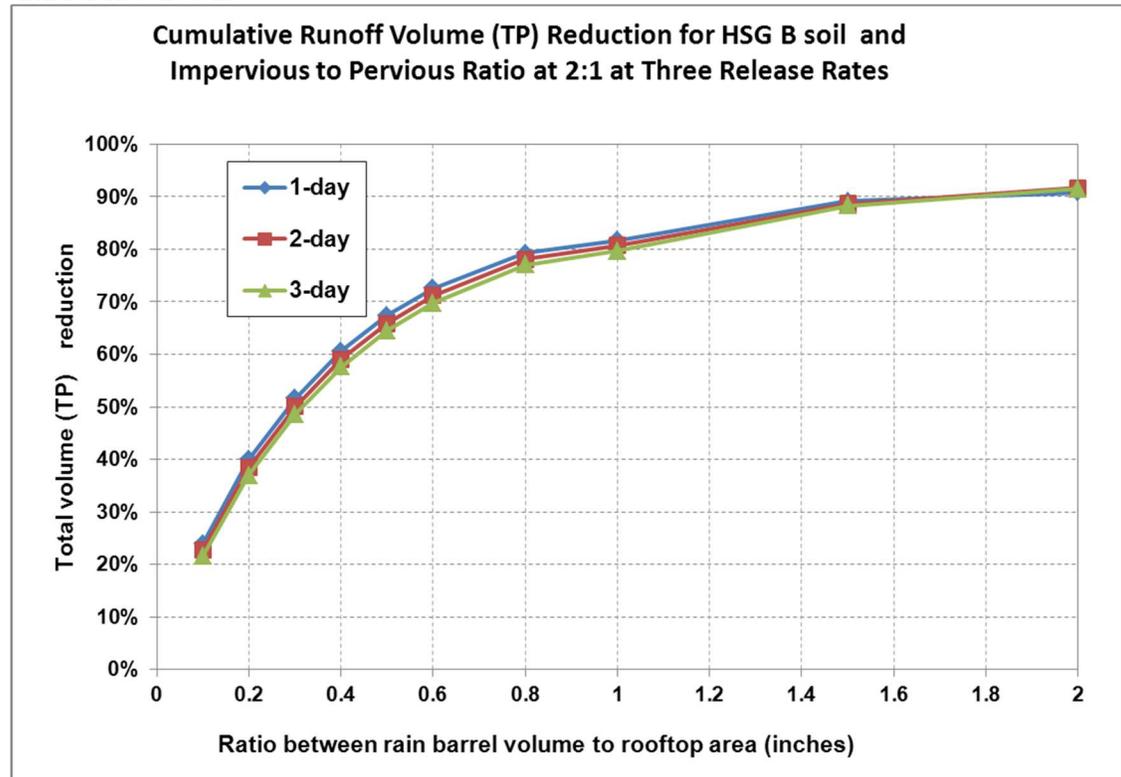


Figure 3- 35: Impervious Area Disconnection through Storage: Impervious Area to Pervious Area Ratio= 2:1 for HSG C Soils

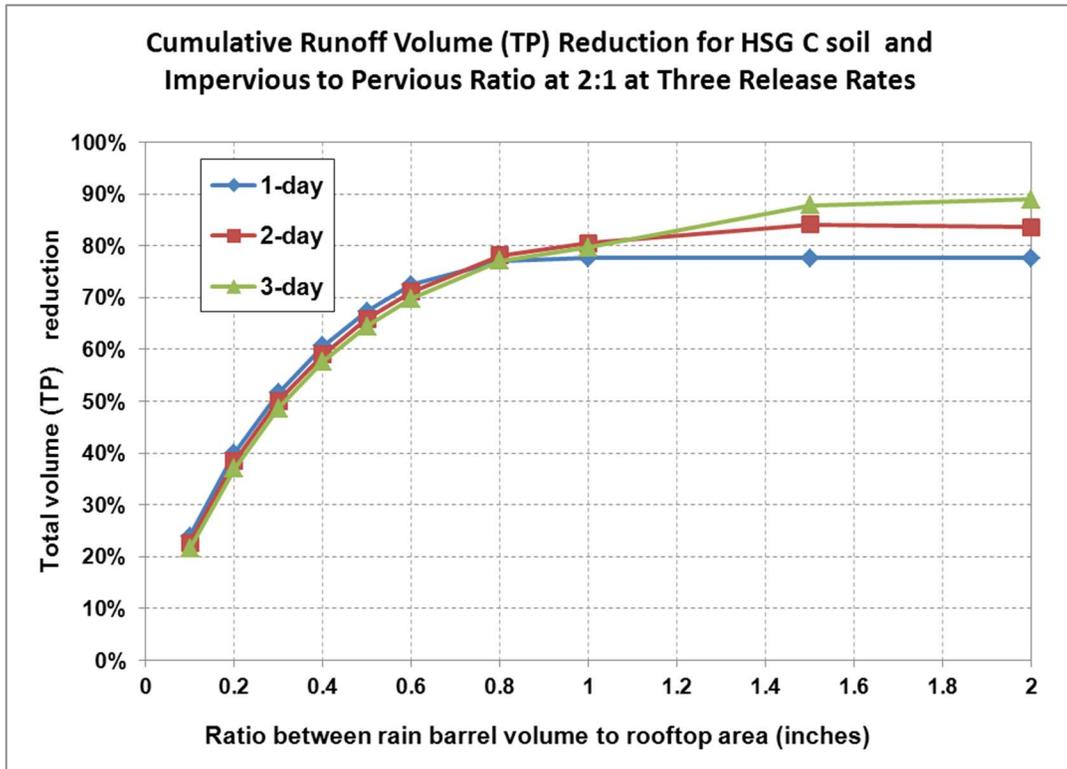


Figure 3- 36: Impervious Area Disconnection through Storage: Impervious Area to Pervious Area Ratio= 2:1 for HSG D Soils

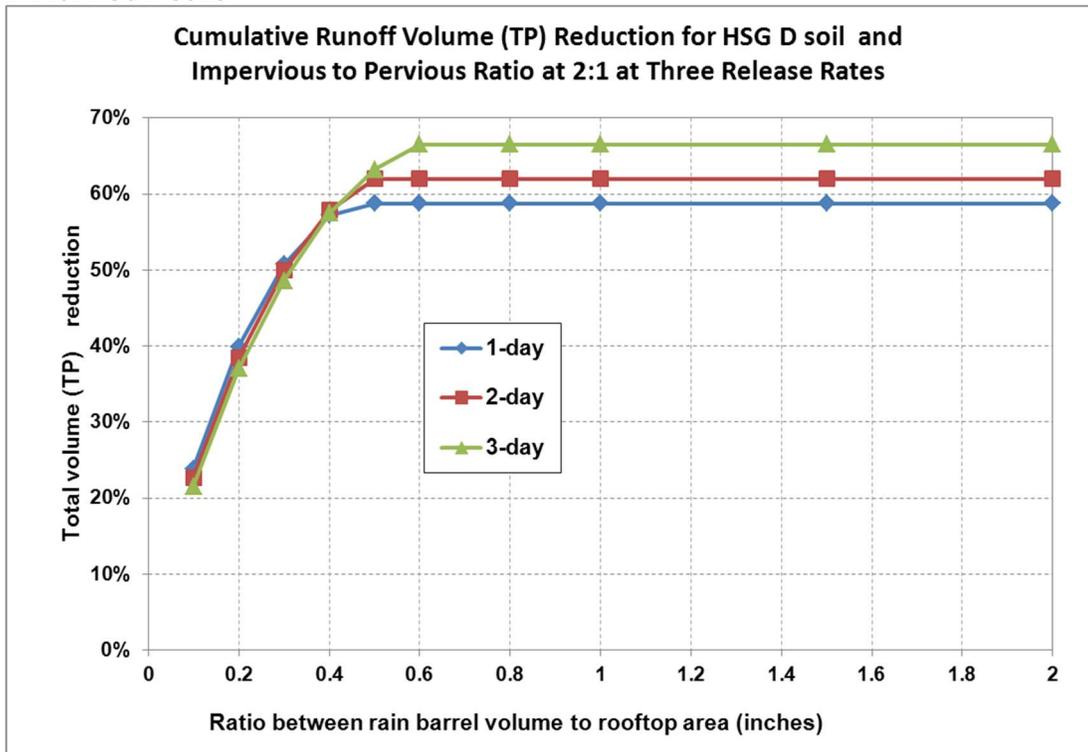


Table 3- 30: Impervious Area Disconnection through Storage: Impervious Area to Pervious Area Ratio = 1:1

Impervious Area Disconnection through Storage: Impervious Area to Pervious Area Ratio = 1:1												
Storage volume to impervious area ratio	Total Runoff Volume and Phosphorus Load (TP) Reduction Percentages											
	HSG A			HSG B			HSG C			HSG D		
	1-day	2-day	3-day	1-day	2-day	3-day	1-day	2-day	3-day	1-day	2-day	3-day
0.1 in	24%	23%	22%	24%	23%	22%	24%	23%	22%	24%	23%	22%
0.2 in	40%	38%	37%	40%	38%	37%	40%	38%	37%	40%	38%	37%
0.3 in	52%	50%	49%	52%	50%	49%	52%	50%	49%	52%	50%	49%
0.4 in	61%	59%	58%	61%	59%	58%	61%	59%	58%	61%	59%	58%
0.5 in	67%	66%	64%	67%	66%	64%	67%	66%	64%	67%	66%	64%
0.6 in	73%	71%	70%	73%	71%	70%	73%	71%	70%	72%	71%	70%
0.8 in	79%	78%	77%	79%	78%	77%	79%	78%	77%	78%	78%	77%
1.0 in	82%	81%	80%	82%	81%	80%	82%	81%	80%	79%	80%	80%
1.5 in	89%	89%	88%	89%	89%	88%	89%	89%	88%	80%	82%	86%
2.0 in	92%	92%	91%	92%	92%	91%	91%	92%	91%	80%	82%	86%

Figure 3- 37: Impervious Area Disconnection through Storage: Impervious Area to Pervious Area Ratio = 1:1 for HSG A Soils

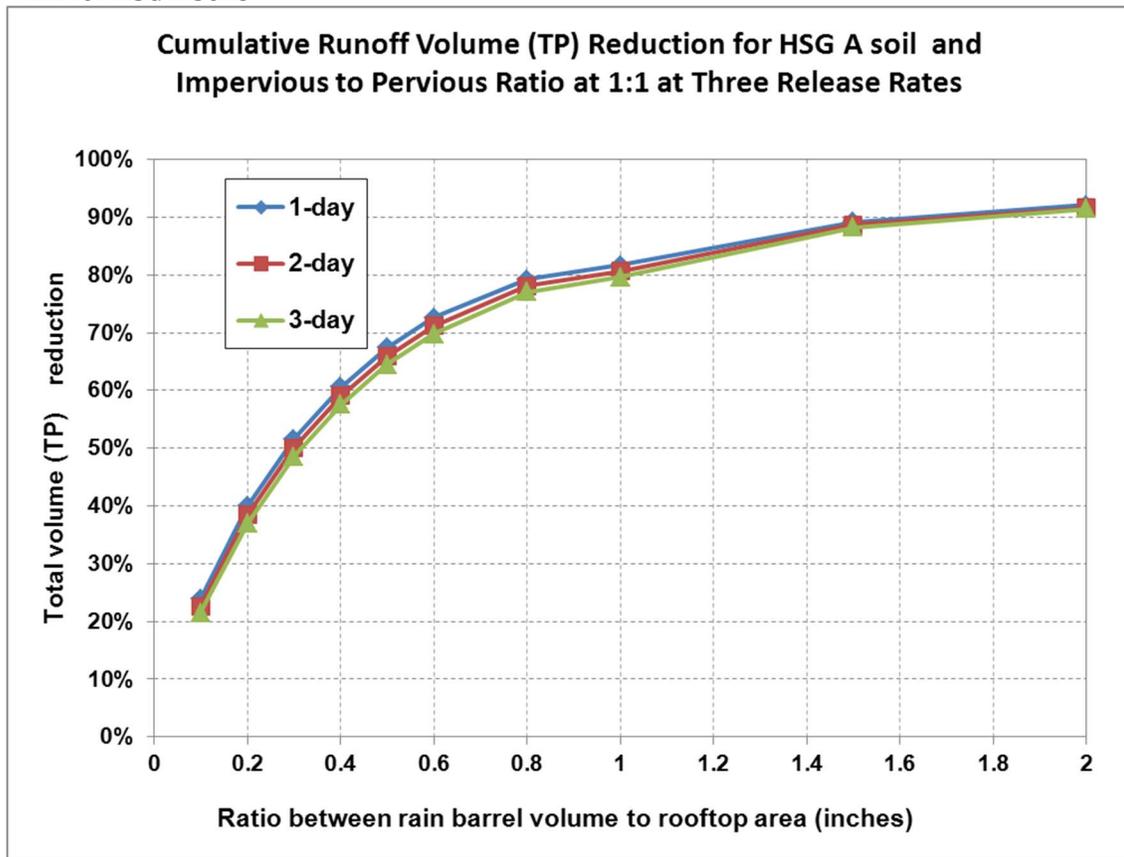


Figure 3- 38: Impervious Area Disconnection through Storage: Impervious Area to Pervious Area Ratio = 1:1 for HSG B Soils

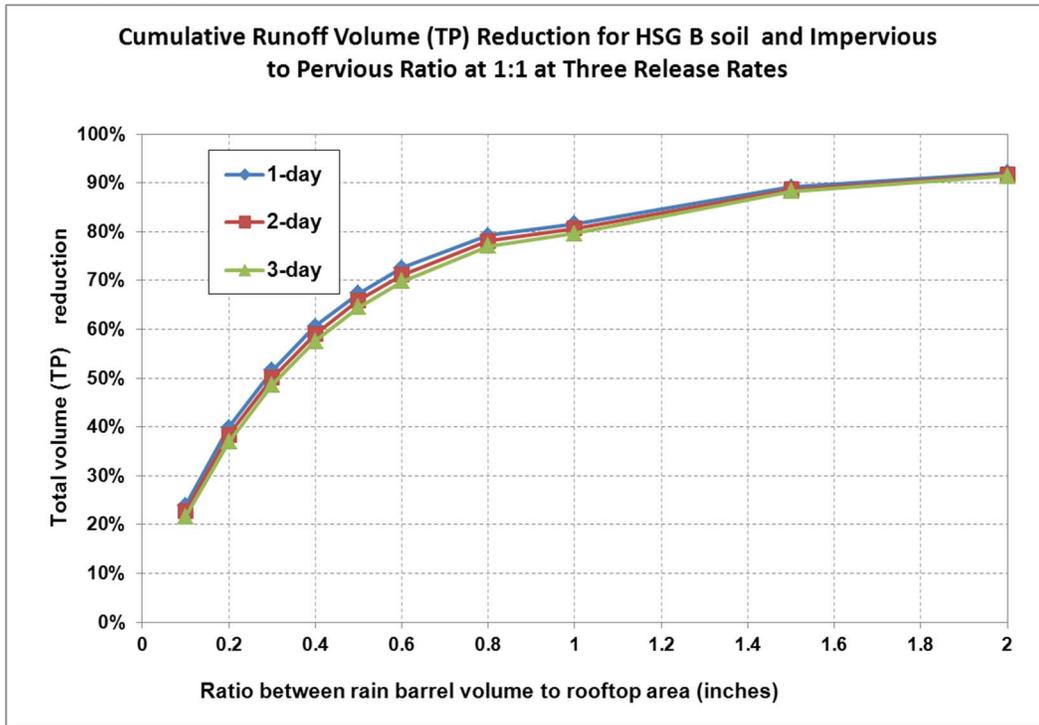


Figure 3- 39: Impervious Area Disconnection through Storage: Impervious Area to Pervious Area Ratio = 1:1 for HSG C Soils

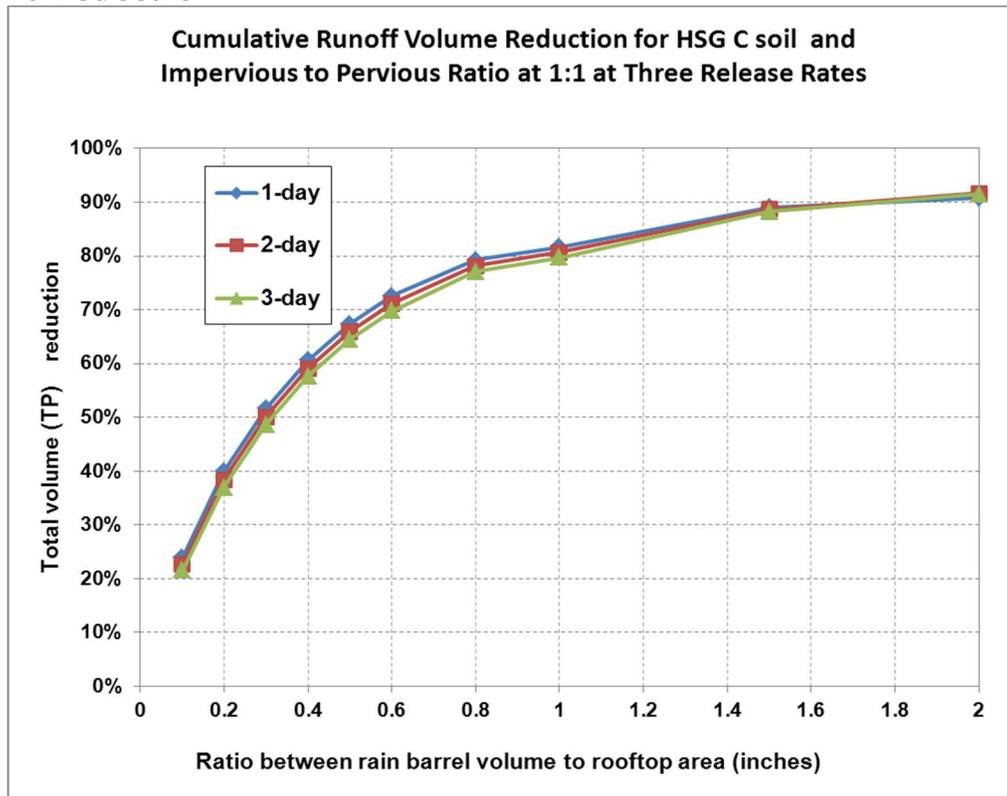


Figure 3- 40: Impervious Area Disconnection through Storage: Impervious Area to Pervious Area Ratio = 1:1 for HSG D Soils

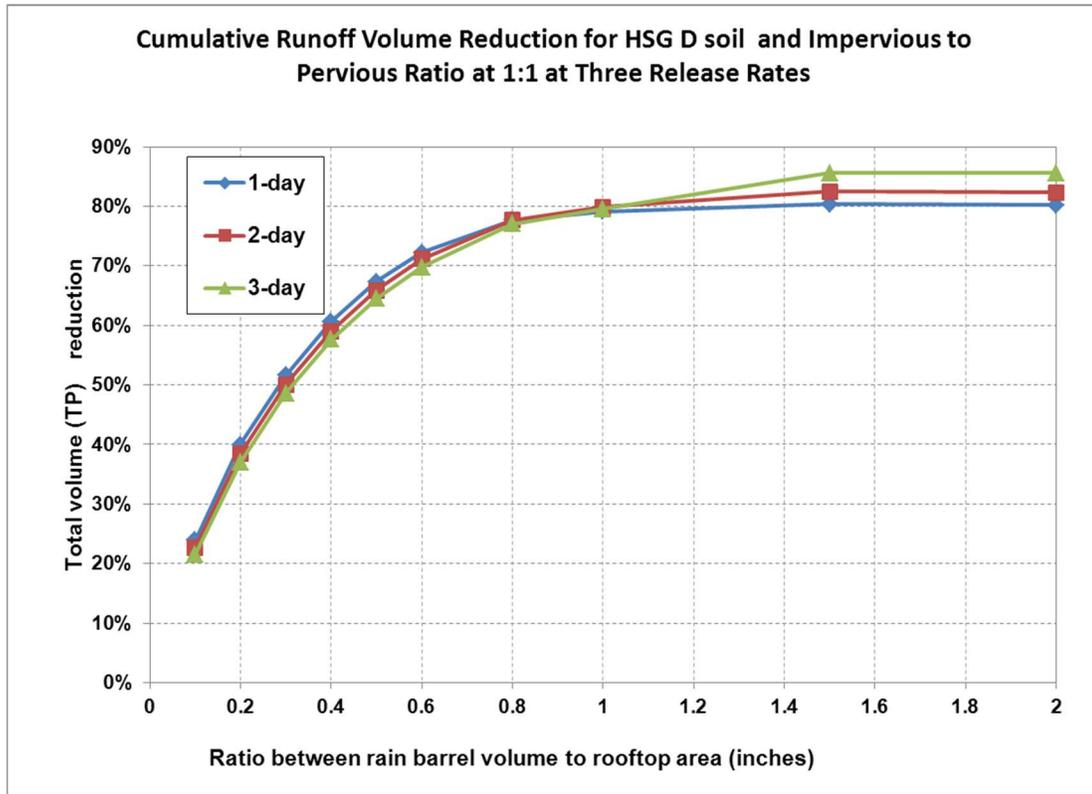


Table 3- 31: Impervious Area Disconnection Performance Table

Impervious area to pervious area ratio	Soil type of Receiving Pervious Area			
	HSG A	HSG B	HSG C	HSG D
8:1	30%	14%	7%	3%
6:1	37%	18%	11%	5%
4:1	48%	27%	17%	9%
2:1	64%	45%	33%	21%
1:1	74%	59%	49%	36%
1:2	82%	67%	60%	49%
1:4	85%	72%	67%	57%

Figure 3- 41: Impervious Area Disconnection Performance Curves

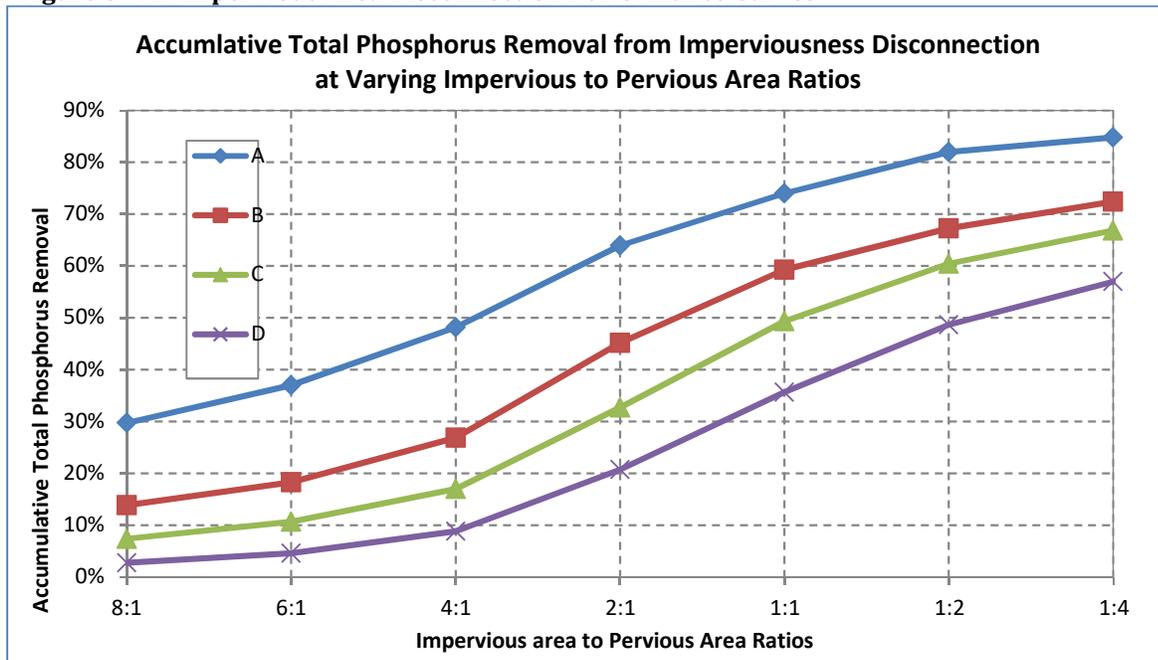


Table 3- 32: Performance Table for Conversion of Impervious Areas to Pervious Area based on Hydrological Soil Groups

Land-Use Group	Cumulative Reduction in Annual Stormwater Phosphorus Load
----------------	---

	Conversion of impervious area to pervious area-HSG A	Conversion of impervious area to pervious area-HSG B	Conversion of impervious area to pervious area-HSG C	Conversion of impervious area to pervious area-HSG C/D	Conversion of impervious area to pervious area-HSG D
Commercial (Com) and Industrial (Ind)	98.5%	93.5%	88.0%	83.5%	79.5%
Multi-Family (MFR) and High-Density Residential (HDR)	98.8%	95.0%	90.8%	87.3%	84.2%
Medium -Density Residential (MDR)	98.6%	94.1%	89.1%	85.0%	81.4%
Low Density Residential (LDR) - "Rural"	98.2%	92.4%	85.9%	80.6%	75.9%
Highway (HWY)	98.0%	91.3%	84.0%	78.0%	72.7%
Forest (For)	98.2%	92.4%	85.9%	80.6%	75.9%
Open Land (Open)	98.2%	92.4%	85.9%	80.6%	75.9%
Agriculture (Ag)	70.6%	70.6%	70.6%	70.6%	70.6%

Table 3- 33: Performance Table for Conversion of Low Permeable Pervious Area to High Permeable Pervious Area based on Hydrological Soil Group

Land Cover	Cumulative Reduction in Annual SW Phosphorus Load from Pervious Area				
	Conversion of pervious area HSG D to pervious area-HSG A	Conversion of pervious area HSG D to pervious area-HSG B	Conversion of pervious area HSG D to pervious area-HSG C	Conversion of pervious area HSG C to pervious area-HSG A	Conversion of pervious area HSG C to pervious area-HSG B
Developed Pervious Land	92.7%	68.3%	41.5%	83.5%	79.5%

APPENDIX H

Requirements Related to Discharges to Certain Water Quality Limited Waterbodies

Table of Contents

I. Discharges to water quality limited waterbodies and their tributaries where nitrogen is the cause of the impairment 1

II. Discharges to water quality limited waterbodies and their tributaries where phosphorus is the cause of the impairment 5

III. Discharges to water quality limited waterbodies where bacteria or pathogens is the cause of the impairment 8

IV. Discharges to water quality limited waterbodies where chloride is the cause of the impairment 10

V. Discharges to water quality limited waterbodies and their tributaries where solids, oil and grease (hydrocarbons), or metals is the cause of the impairment 13

Attachment 1- Nitrogen Reduction Credits for Selected Structural BMPs

I. Discharges to water quality limited waterbodies and their tributaries where nitrogen is the cause of the impairment

1. Part 2.2.2.a.i. of the permit identifies the permittees subject to additional requirements to address nitrogen in their stormwater discharges because they discharge to waterbodies that are water quality limited due to nitrogen, or their tributaries, without an EPA approved TMDL. Permittees identified in part 2.2.2.a.i of the permit must identify and implement BMPs designed to reduce nitrogen discharges in the impaired catchment(s). To address nitrogen discharges each permittee shall comply with the following requirements:

a. Additional or Enhanced BMPs

i. The permittee remains subject to all the requirements of part 2.3. of the permit and shall include the following enhancements to the BMPs required by part 2.3 of the permit:

1. Part 2.3.2, Public education and outreach: The permittee shall supplement its Residential and Business/Commercial/Institution program with annual timed messages on specific topics. The permittee shall distribute an annual message in the spring (April/May) timeframe that encourages the proper use and disposal of grass clippings and encourages the proper use of slow-release fertilizers. The permittee shall distribute an annual message in the summer (June/July) timeframe encouraging the proper management of pet waste, including noting any existing ordinances where appropriate. The permittee shall distribute an annual message in the Fall (August/September/October) timeframe encouraging

the proper disposal of leaf litter. The permittee shall deliver an annual message on each of these topics, unless the permittee determines that one or more of these issues is not a significant contributor of nitrogen to discharges from the MS4 and the permittee retains documentation of this finding in the SWMP. All public education messages can be combined with requirements of Appendix H part II and III as well as Appendix F part A.III, A.IV, A.V, B.I, B.II and B.III where appropriate.

2. Part 2.3.6, Stormwater Management in New Development and Redevelopment: the requirement for adoption/amendment of the permittee's ordinance or other regulatory mechanism shall include a requirement that new development and redevelopment stormwater management BMPs be optimized for nitrogen removal; retrofit inventory and priority ranking under 2.3.6.1.b shall include consideration of BMPs to reduce nitrogen discharges.
3. Part 2.3.7, Good House Keeping and Pollution Prevention for Permittee Owned Operations: establish requirements for use of slow release fertilizers on permittee owned property currently using fertilizer, in addition to reducing and managing fertilizer use as provided in 2.3.7.1; establish procedures to properly manage grass cuttings and leaf litter on permittee property, including prohibiting blowing organic waste materials onto adjacent impervious surfaces; increase street sweeping frequency of all municipal owned streets and parking lots subject to Permit part 2.3.7.a.iii.(c) to a minimum of two times per year, once in the spring (following winter activities such as sanding) and at least once in the fall (Sept 1 – Dec 1; following leaf fall).

b. Nitrogen Source Identification Report

- i. Within four years of the permit effective date the permittee shall complete a Nitrogen Source Identification Report. The report shall include the following elements:
 1. Calculation of total MS4 area draining to the water quality limited water segments or their tributaries, incorporating updated mapping of the MS4 and catchment delineations produced pursuant to part 2.3.4.6,
 2. All screening and monitoring results pursuant to part 2.3.4.7.d., targeting the receiving water segment(s)
 3. Impervious area and DCIA for the target catchment
 4. Identification, delineation and prioritization of potential catchments with high nitrogen loading
 5. Identification of potential retrofit opportunities or opportunities for the installation of structural BMPs during redevelopment
- ii. The final Nitrogen Source Identification Report shall be submitted to EPA as part of the year 4 annual report.

c. Potential Structural BMPs

- i. Within five years of the permit effective date, the permittee shall evaluate all permittee-owned properties identified as presenting retrofit opportunities or areas for structural BMP installation under permit part 2.3.6.d.ii or identified in the Nitrogen Source Identification Report that are within the drainage area of the impaired water or its tributaries. The evaluation shall include:
 1. The next planned infrastructure, resurfacing or redevelopment activity planned for the property (if applicable) OR planned retrofit date;
 2. The estimated cost of redevelopment or retrofit BMPs; and
 3. The engineering and regulatory feasibility of redevelopment or retrofit BMPs.
- ii. The permittee shall provide a listing of planned structural BMPs and a plan and schedule for implementation in the year 5 annual report. The permittee shall plan and install a minimum of one structural BMP as a demonstration project within the drainage area of the water quality limited water or its tributaries within six years of the permit effective date. The demonstration project shall be installed targeting a catchment with high nitrogen load potential. The permittee shall install the remainder of the structural BMPs in accordance with the plan and schedule provided in the year 5 annual report.
- iii. Any structural BMPs listed in Table 3 of Attachment 1 to Appendix H already existing or installed in the regulated area by the permittee or its agents shall be tracked and the permittee shall estimate the nitrogen removal by the BMP consistent with Attachment 1 to Appendix H. The permittee shall document the BMP type, total area treated by the BMP, the design storage volume of the BMP and the estimated nitrogen removed in mass per year by the BMP in each annual report.

2. Upon EPA or MassDEP notification that the permittee is discharging to a waterbody that is water quality limited due to nitrogen, the permittee shall update their SWMP within 90 days to incorporate the requirements of Appendix H part I.1 and document the date of SWMP update. When notification occurs beyond the effective date of the permit, deadlines in Appendix H part I.1 shall be extended based on the date of the required SWMP update rather than the permit effective date.

2.3. At any time during the permit term the permittee may be relieved of additional requirements in Appendix H part I.1. applicable to it when in compliance with this part.

- a. The permittee is relieved of its additional requirements as of the date when one of the following criteria are met:

- i. The receiving water and all downstream segments are determined to no longer be impaired due to nitrogen by MassDEP and EPA concurs with such determination.
 - ii. An EPA approved TMDL for the receiving water or downstream receiving water indicates that no additional stormwater controls for the control of nitrogen are necessary for the permittee's discharge based on wasteload allocations as part of the approved TMDL.
- b. In such a case, the permittee shall document the date of the determination provided for in paragraph a. above or the approved TMDL date in its SWMP and is relieved of any additional requirements of Appendix H part I.1. as of the applicable date and the permittee shall comply with the following:
 - i. The permittee shall identify in its SWMP all activities that have been implemented in accordance with the requirements of Appendix H part I.1. as of the applicable date to reduce nitrogen in its discharges, including implementation schedules for non-structural BMPs and any maintenance requirements for structural BMPs
 - ii. The permittee shall continue to implement all requirements of Appendix H part I.1. required to be done prior to the date of determination or the date of the approved TMDL, including ongoing implementation of identified non-structural BMPs and routine maintenance and replacement of all structural BMPs in accordance with manufacturer or design specifications.

II. Discharges to water quality limited waterbodies and their tributaries where phosphorus is the cause of the impairment

1. Part 2.2.2.b.i. of the permit identifies the permittees subject to additional requirements to address phosphorus in their stormwater discharges because they discharge to waterbodies that are water quality limited due to phosphorus, or their tributaries, without an EPA approved TMDL. Permittees identified in part 2.2.2.b.i. of the permit must identify and implement BMPs designed to reduce phosphorus discharges in the impaired catchment(s). To address phosphorus discharges each permittee shall comply with the following requirements:

- a. Additional or Enhanced BMPs

- i. The permittee remains subject to the requirements of part 2.3. of the permit and shall include the following enhancements to the BMPs required by part 2.3 of the permit:

1. Part 2.3.2, Public education and outreach: The permittee shall supplement its Residential and Business/Commercial/Institution program with annual timed messages on specific topics. The permittee shall distribute an annual message in the spring (March/April) timeframe that encourages the proper use and disposal of grass clippings and encourages the proper use of slow-release and phosphorous-free fertilizers. The permittee shall distribute an annual message in the summer (June/July) timeframe encouraging the proper management of pet waste, including noting any existing ordinances where appropriate. The permittee shall distribute an annual message in the fall (August/September/October) timeframe encouraging the proper disposal of leaf litter. The permittee shall deliver an annual message on each of these topics, unless the permittee determines that one or more of these issues is not a significant contributor of phosphorous to discharges from the MS4 and the permittee retains documentation of this finding in the SWMP. All public education messages can be combined with requirements of Appendix H part I and III as well as Appendix F part A.III, A.IV, A.V, B.I, B.II and B.III where appropriate.
2. Part 2.3.6, Stormwater Management in New Development and Redevelopment: the requirement for adoption/amendment of the permittee's ordinance or other regulatory mechanism shall include a requirement that new development and redevelopment stormwater management BMPs be optimized for phosphorus removal; retrofit inventory and priority ranking under 2.3.6.1.b shall include consideration of BMPs that infiltrate stormwater where feasible.
3. Part 2.3.7, Good House Keeping and Pollution Prevention for Permittee Owned Operations: Establish procedures to properly manage grass cuttings and leaf litter on permittee property, including prohibiting blowing organic waste materials onto adjacent impervious surfaces; increased street sweeping frequency of all municipal owned

streets and parking lots subject to Permit part 2.3.7.a.iii.(c) to a minimum of two times per year, once in the spring (following winter activities such as sanding) and at least once in the fall (Sept 1 – Dec 1; following leaf fall).

b. Phosphorus Source Identification Report

- i. Within four years of the permit effective date the permittee shall complete a Phosphorus Source Identification Report. The report shall include the following elements:
 1. Calculation of total MS4 area draining to the water quality limited receiving water segments or their tributaries, incorporating updated mapping of the MS4 and catchment delineations produced pursuant to part 2.3.4.6,
 2. All screening and monitoring results pursuant to part 2.3.4.7.d., targeting the receiving water segment(s)
 3. Impervious area and DCIA for the target catchment
 4. Identification, delineation and prioritization of potential catchments with high phosphorus loading
 5. Identification of potential retrofit opportunities or opportunities for the installation of structural BMPs during redevelopment, including the removal of impervious area
- ii. The phosphorus source identification report shall be submitted to EPA as part of the year 4 annual report.

c. Potential Structural BMPs

- i. Within five years of the permit effective date, the permittee shall evaluate all permittee-owned properties identified as presenting retrofit opportunities or areas for structural BMP installation under permit part 2.3.6.d.ii or identified in the Phosphorus Source Identification Report that are within the drainage area of the water quality limited water or its tributaries. The evaluation shall include:
 1. The next planned infrastructure, resurfacing or redevelopment activity planned for the property (if applicable) OR planned retrofit date;
 2. The estimated cost of redevelopment or retrofit BMPs; and
 3. The engineering and regulatory feasibility of redevelopment or retrofit BMPs.
- ii. The permittee shall provide a listing of planned structural BMPs and a plan and schedule for implementation in the year 5 annual report. The permittee shall plan and install a minimum of one structural BMP as a demonstration project within the drainage area of the water quality limited water or its tributaries within six years of the permit effective date. The demonstration project shall be installed targeting a catchment

with high phosphorus load potential. The permittee shall install the remainder of the structural BMPs in accordance with the plan and schedule provided in the year 5 annual report.

- iii. Any structural BMPs installed in the regulated area by the permittee or its agents shall be tracked and the permittee shall estimate the phosphorus removal by the BMP consistent with Attachment 3 to Appendix F. The permittee shall document the BMP type, total area treated by the BMP, the design storage volume of the BMP and the estimated phosphorus removed in mass per year by the BMP in each annual report.

2. Upon EPA or MassDEP notification that the permittee is discharging to a waterbody that is water quality limited due to phosphorus, the permittee shall update their SWMP within 90 days to incorporate the requirements of Appendix H part II.1 and document the date of SWMP update. When notification occurs beyond the effective date of the permit, deadlines in Appendix H part II.1 shall be extended based on the date of the required SWMP update rather than the permit effective date.

2.3. At any time during the permit term the permittee may be relieved of additional requirements in Appendix H part II.1. applicable to it when in compliance with this part.

- a. The permittee is relieved of its additional requirements as of the date when one of the following criteria are met:
 - i. The receiving water and all downstream segments are determined to no longer be impaired due to phosphorus by MassDEP and EPA concurs with such determination.
 - ii. An EPA approved TMDL for the receiving water or downstream receiving water indicates that no additional stormwater controls for the control of phosphorus are necessary for the permittee's discharge based on wasteload allocations as part of the approved TMDL.
- b. In such a case, the permittee shall document the date of the determination provided for in paragraph a. above or the approved TMDL date in its SWMP and is relieved of any additional requirements of Appendix H part II.1. as of the applicable date and the permittee shall comply with the following:
 - i. The permittee shall identify in its SWMP all activities that have been implemented in accordance with the requirements of Appendix H part II.1. as of the applicable date to reduce phosphorus in its discharges, including implementation schedules for non-structural BMPs and any maintenance requirements for structural BMPs
 - ii. The permittee shall continue to implement all requirements of Appendix H part II.1. required to be done prior to the date of determination or the date of the approved TMDL, including ongoing implementation of identified non-structural BMPs and routine maintenance and replacement of all structural BMPs in accordance with manufacturer or design specifications.

III. Discharges to water quality limited waterbodies where bacteria or pathogens is the cause of the impairment

1. Consistent with part 2.2.2.c.i. of the permit, permittees that discharge to waterbodies that are water quality limited due to bacteria or pathogens, without an EPA approved TMDL, are subject to the following additional requirements to address bacteria or pathogens in their stormwater discharges.
2. Additional or Enhanced BMPs
 - a. The permittee remains subject to the requirements of part 2.3. of the permit and shall include the following enhancements to the BMPs required by part 2.3 of the permit:
 - i. Part 2.3.2. Public Education and outreach: The permittee shall supplement its Residential program with an annual message encouraging the proper management of pet waste, including noting any existing ordinances where appropriate. The permittee or its agents shall disseminate educational materials to dog owners at the time of issuance or renewal of a dog license, or other appropriate time. Education materials shall describe the detrimental impacts of improper management of pet waste, requirements for waste collection and disposal, and penalties for non-compliance. The permittee shall also provide information to owners of septic systems about proper maintenance in any catchment that discharges to a water body impaired for bacteria or pathogens. All public education messages can be combined with requirements of Appendix H part I and II as well as Appendix F part A.III, A.IV, A.V, B.I, B.II and B.III where appropriate.
 - ii. Part 2.3.4 Illicit Discharge: The permittee shall implement the illicit discharge program required by this permit. Catchments draining to any waterbody impaired for bacteria or pathogens shall be designated either Problem Catchments or HIGH priority in implementation of the IDDE program.

3. Upon EPA or MassDEP notification that the permittee is discharging to a waterbody that is water quality limited due to bacteria or pathogens, the permittee shall update their SWMP within 90 days to incorporate the requirements of Appendix H part III.1 and document the date of SWMP update. When notification occurs beyond the effective date of the permit, deadlines in Appendix H part III.1 shall be extended based on the date of the required SWMP update rather than the permit effective date.

3.4. At any time during the permit term the permittee may be relieved of additional requirements in Appendix H part III.2. applicable to it when in compliance with this part.

- a. The permittee is relieved of its additional requirements as of the date when one of the following criteria are met:
 - i. The receiving water is determined to be no longer impaired due to bacteria or pathogens by MassDEP and EPA concurs with such a determination.
 - ii. An EPA approved TMDL for the receiving water indicates that no additional stormwater controls are necessary for the control of bacteria or pathogens from

the permittee's discharge based on wasteload allocations as part of the approved TMDL.

- iii. The permittee's discharge is determined to meet applicable water quality standards~~be below applicable water quality criteria~~¹ and EPA agrees with such a determination. The permittee shall submit data to EPA that accurately characterizes the concentration of bacteria or pathogens in their discharge. The characterization shall include water quality and flow data sufficient to accurately assess the concentration of bacteria or pathogens in all seasons during storm events of multiple sizes and for the duration of the storm events including the first flush, peak storm flow and return to baseflow.
- b. In such a case, the permittee shall document the date of the determination, date of approved TMDL or date of EPA concurrence that the discharge meets water quality standards ~~criteria~~ in its SWMP and is relieved of any additional requirements of Appendix H part III.2. as of that date and the permittee shall comply with the following:
 - i. The permittee shall identify in its SWMP all activities implemented in accordance with the requirements of Appendix H part III.2. to date to reduce bacteria or pathogens in its discharges, including implementation schedules for non-structural BMPs and any maintenance requirements for structural BMPs
 - ii. The permittee shall continue to implement all requirements of Appendix H part III.3. required to be done prior to the date of determination date, date of approved TMDL, or date of EPA concurrence that the discharge meets water quality ~~criteria~~standards, including ongoing implementation of identified non-structural BMPs and routine maintenance and replacement of all structural BMPs in accordance with manufacturer or design specifications

¹ Applicable water quality ~~criteria~~ standards are the state standards that have been federally approved or promulgated as of the effective-issuance date of this permit and ~~are may be~~ compiled by EPA at <http://www.epa.gov/waterscience/standards/wqslibrary/>

IV. Discharges to water quality limited waterbodies where chloride is the cause of the impairment

1. Consistent with part 2.2.2.c.i. of the permit, permittees that discharge to waterbodies that are water quality limited due to chloride, without an EPA approved TMDL, are subject to the following additional requirements to address chloride in their stormwater discharges.
2. Permittees discharging to a waterbody listed as impaired due to chloride in categories 5 or 4b on the Massachusetts Integrated Report of waters listed pursuant to Clean Water Act sections 303(d) and 305(b) shall develop a Salt Reduction Plan that includes specific actions designed to achieve salt reduction on municipal roads and facilities, and on private facilities that discharge to its MS4 in the impaired catchment(s). The Salt Reduction Plan shall be completed within three years of the effective date of the permit and include the BMPs in part IV.4. below. The Salt Reduction Plan shall be fully implemented five years after the effective date of the permit.
3. Permittees that, during the permit term, become aware that their discharge is to a waterbody that is impaired due to chloride must update their Salt Reduction Plan within 60 days of becoming aware of the situation to include salt reduction practices targeted at lowering chloride in discharges to the impaired waterbody. If the permittee does not have a Salt Reduction Plan already in place, then the permittee shall complete a Salt Reduction Plan that includes the BMPs in part IV 4) below within 3 years of becoming aware of the situation and fully implement the Salt Reduction Plan within 5 years of becoming aware of the situation.
4. Additional or Enhanced BMPs
 - a. For municipally maintained surfaces:
 - i. Tracking of the types and amount of salt applied to all permittee owned and maintained surfaces and reporting of salt use beginning in the year of the completion of the Salt Reduction Plan in the permittee's annual reports;
 - ii. Planned activities for salt reduction on municipally owned and maintained surfaces, which shall include but are not limited to the following unless the permittee determines one or more of the following is not applicable to its system and documents that determination as part of the Salt Reduction Plan:
 - Operational changes such as pre-wetting, pre-treating the salt stockpile, increasing plowing prior to de-icing, monitoring of road surface temperature, etc.;
 - Implementation of new or modified equipment providing pre-wetting capability, better calibration rates, or other capability for minimizing salt use;
 - Training for municipal staff and/or contractors engaged in winter maintenance activities;

- Adoption of guidelines for application rates for roads and parking lots (see *Winter Parking Lot and Sidewalk Maintenance Manual (Revised edition June 2008)* <http://www.pca.state.mn.us/publications/parkinglotmanual.pdf>; and the application guidelines on page 17 of *Minnesota Snow and Ice Control: Field Handbook for Snow Operators (September 2012)* <http://www.mnltap.umn.edu/publications/handbooks/documents/snowice.pdf> for examples);
 - Regular calibration of spreading equipment;
 - Designation of no-salt and/or low salt zones;
 - Measures to prevent exposure of salt stockpiles (if any) to precipitation and runoff; and
 - An estimate of the total tonnage of salt reduction expected by each activity.
- b. For privately maintained facilities that discharge to the MS4:
- i. Establish an ordinance, bylaw, or other regulatory mechanism requiring measures to prevent exposure of any salt stockpiles to precipitation and runoff at all commercial and industrial properties within the regulated area.
 - ii. Part 2.3.2. Public Education and Outreach: The permittee shall supplement its Commercial/Industrial education program with an annual message to private road salt applicators and commercial and industrial site owners on the proper storage and application rates of winter deicing material. The educational materials shall be disseminated in the November/December timeframe and shall describe steps that can be taken to minimize salt use and protect local waterbodies.
 - iii. Part 2.3.6, Stormwater Management in New Development and Redevelopment – establish procedures and requirements to minimize salt usage and require the use of salt alternatives where the permittee deems necessary.
- c. The completed Salt Reduction Plan shall be submitted to EPA along with the annual report following the Salt Reduction Plan’s completion. Each subsequent annual report shall include an update on Plan implementation progress, any updates to the Salt Reduction Plan deemed necessary by the permittee, as well as the types and amount of salt applied to all permittee owned and maintained surfaces.
5. At any time during the permit term the permittee may be relieved of additional requirements in Appendix H part IV as follows:
- a. The permittee is relieved of its additional requirements as of the date when one of the following criteria are met:

- i. The receiving water is determined to be no longer impaired due to chloride by MassDEP and EPA concurs with such a determination.
 - ii. An EPA approved TMDL for the receiving water indicates that no additional stormwater controls are necessary for the control of chloride from the permittee's discharge based on wasteload allocations as part of the approved TMDL.
 - iii. The permittee's discharge is determined to be meet applicable water quality standards below applicable water quality criteria² and EPA agrees with such a determination. The permittee shall submit data to EPA that accurately characterizes the concentration of chloride in their discharge during the deicing season (November – March). The characterization shall include water quality and flow data sufficient to accurately assess the concentration of chloride in the deicing season during storm events of multiple sizes and for the duration of the storm events including the first flush, peak storm flow and return to baseflow and include samples collected during deicing activities.
- b. In such a case, the permittee shall document the date of the determination, date of approved TMDL or date of EPA concurrence that the discharge meets water quality standards eriteria in its SWMP and is relieved of any additional requirements of Appendix H part IV as of that date and the permittee shall comply with the following:
- i. The permittee shall identify in its SWMP all activities implemented in accordance with the requirements of Appendix H part IV to date to reduce chloride in its discharges, including implementation schedules for non-structural BMPs
 - iii. The permittee shall continue to implement all requirements of Appendix H part IV required to be done by the date of determination date, date of approved TMDL, or date of EPA concurrence that the discharge meets water quality standards eriteria, including ongoing implementation of identified non-structural BMPs and routine maintenance and replacement of all structural BMPs in accordance with manufacturer or design specifications

² Applicable water quality standards eriteria are the state standards that have been federally approved or promulgated as of the issuance effective date of this permit and may be are compiled by EPA at <http://www.epa.gov/waterscience/standards/wqslibrary/>

V. Discharges to water quality limited waterbodies and their tributaries where solids, oil and grease (hydrocarbons), or metals is the cause of the impairment

1. Consistent with part 2.2.2.c.i. of the permit, permittees that discharge to waterbodies that are water quality limited due to solids, metals, or oil and grease (hydrocarbons), without an EPA approved TMDL, are subject to the following additional requirements to address solids, metals, or oil and grease (hydrocarbons) in their stormwater discharges.

2. Additional or Enhanced BMPs

a. The permittee remains subject to the requirements of part 2.3. of the permit and shall include the following enhancements to the BMPs required by part 2.3 of the permit:

i. Part 2.3.6, Stormwater Management in New Development and Redevelopment: stormwater management systems designed on commercial and industrial land use area draining to the water quality limited waterbody shall incorporate designs that allow for shutdown and containment where appropriate to isolate the system in the event of an emergency spill or other unexpected event. EPA also encourages the permittee to require any stormwater management system designed to infiltrate stormwater on commercial or industrial sites to provide the level of pollutant removal equal to or greater than the level of pollutant removal provided through the use of biofiltration of the same volume of runoff to be infiltrated, prior to infiltration.

ii. Part 2.3.7, Good House Keeping and Pollution Prevention for Permittee Owned Operations: increased street sweeping frequency of all municipal owned streets and parking lots to a schedule determined by the permittee to target areas with potential for high pollutant loads. This may include, but is not limited to, increased street sweeping frequency in commercial areas and high-density residential areas, or drainage areas with a large amount of impervious area. Prioritize inspection and maintenance for catch basins to ensure that no sump shall be more than 50 percent full. Clean catch basins more frequently if inspection and maintenance activities indicate excessive sediment or debris loadings. Each annual report shall include the street sweeping schedule determined by the permittee to target high pollutant loads.

3. Upon EPA or MassDEP notification that the permittee is discharging to a waterbody that is water quality limited due to solids, metals, and/or oil and grease, the permittee shall update their SWMP within 90 days to incorporate the requirements of Appendix H part V.1 and document the date of SWMP update. When notification occurs beyond the effective date of the permit, deadlines in Appendix H part V.1 shall be extended based on the date of the required SWMP update rather than the permit effective date.

3.4. At any time during the permit term the permittee may be relieved of additional requirements in Appendix H part V.2. applicable to it when in compliance with this part.

a. The permittee is relieved of its additional requirements as of the date when one of the following criteria are met:

- i. The receiving water is determined to be no longer impaired due to solids, metals, or oil and grease (hydrocarbons) by MassDEP and EPA concurs with such a determination.
 - ii. An EPA approved TMDL for the receiving water indicates that no additional stormwater controls are necessary for the control of solids, metals, or oil and grease (hydrocarbons) from the permittee's discharge based on wasteload allocations as part of the approved TMDL.
 - iii. The permittee's discharge is determined to ~~be below applicable water quality criteria~~ meet applicable water quality standards and EPA agrees with such a determination³. The permittee shall submit data to EPA that accurately characterizes the concentration of bacteria or pathogens in their discharge. The characterization shall include water quality and flow data sufficient to accurately assess the concentration of bacteria or pathogens in all seasons during storm events of multiple sizes and for the duration of the storm events including the first flush, peak storm flow and return to baseflow.
- b. In such a case, the permittee shall document the date of the determination, date of approved TMDL or date of EPA concurrence that the discharge meets water quality ~~criteria-standards~~ in its SWMP and is relieved of any additional requirements of Appendix H part V.2. as of that date and the permittee shall comply with the following:
- iv. The permittee shall identify in its SWMP all activities implemented in accordance with the requirements of Appendix H part V.2. to date to reduce solids, metals, or oil and grease (hydrocarbons) in its discharges, including implementation schedules for non-structural BMPs and any maintenance requirements for structural BMPs
 - v. The permittee shall continue to implement all requirements of Appendix H part V.3. required to be done by the date of determination date, date of approved TMDL, or date of EPA concurrence that the discharge meets water quality ~~criteria~~ standards, including ongoing implementation of identified non-structural BMPs and routine maintenance and replacement of all structural BMPs in accordance with manufacturer or design specifications

³ Applicable water quality ~~standards~~ ~~criteria~~ are the state standards that have been federally approved or promulgated as of the ~~issuance effective~~ date of this permit and ~~are may be~~ compiled by EPA at <http://www.epa.gov/waterscience/standards/wqslibrary/>