

RAYMARK
3.6
10953

RI99245F

FINAL
AREA I
REMEDIAL INVESTIGATION

VOLUME III OF III
APPENDICES

RAYMARK-FERRY CREEK-OPERABLE UNIT 3
STRATFORD, CONNECTICUT

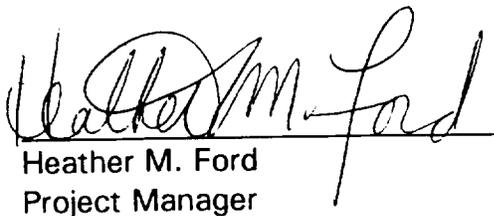
RESPONSE ACTION CONTRACT (RAC), REGION I

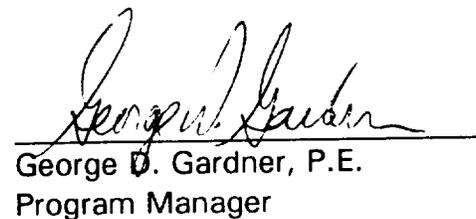
For
U.S. Environmental Protection Agency

By
Tetra Tech NUS, Inc.

EPA Contract No. 68-W6-0045
EPA Work Assignment No. 002-RICO-01H3
TtNUS Project No. N7491

October 1999


Heather M. Ford
Project Manager


George D. Gardner, P.E.
Program Manager

**TABLE OF CONTENTS
FINAL AREA I REMEDIAL INVESTIGATION
RAYMARK INDUSTRIES - OU3
STRATFORD, CONNECTICUT**

VOLUME I

<u>SECTION</u>	<u>PAGE</u>
1.0 INTRODUCTION	1-1
1.1 Purpose of Report.....	1-2
1.2 Report Organization	1-2
1.3 Study Area Background	1-4
1.3.1 History of Raymark Facility and Environs	1-4
1.3.2 Facility Operating History	1-7
1.3.3 Environmental Permits	1-11
1.3.4 Study Area Description and Setting.....	1-13
1.3.5 Other On-Going Activities	1-15
1.3.6 Previous Investigations	1-16
2.0 STUDY AREA INVESTIGATIONS.....	2-1
2.1 Surface Water and Sediment Investigations (1992-1994).....	2-2
2.1.1 Sediment at Raymark Facility and along Ferry Creek (1992 - 1995)	2-2
2.1.2 Surface Water at Raymark Facility (1993)	2-3
2.2 Soil Sampling (1993)	2-3
2.3 Expanded Site Inspection and Vertical Sampling Program (1993).....	2-3
2.4 Phase I Remedial Investigation (1993 - 1995)	2-5
2.4.1 Soil Borings, Test Pits, and Soil Sampling (1994).....	2-5
2.4.2 Surface Water and Sediment Sampling (1994-1995)	2-6
2.4.3 Salinity Survey (1994).....	2-6
2.4.4 Ground Penetrating Radar Survey (March 1994).....	2-7
2.4.5 Topographic Survey/Global Positioning Survey (1994).....	2-7
2.5 Comprehensive Site Investigation Sampling Program (1994-1995) ..	2-8
2.6 Removal Actions Post-Excavation Program (1994 - 1996)	2-9
2.7 Ecological Risk Assessment (1996 - 1998)	2-10
2.8 Phase II Site Investigation (1997)	2-10
2.8.1 Soil Borings and Soil Sampling	2-10
2.8.2 Sediment Sampling.....	2-11
2.9 Groundwater Discharge Study	2-12
3.0 PHYSICAL CHARACTERISTICS OF THE STUDY AREA	3-1
3.1 Surface Features and Land Use.....	3-1
3.2 Geology	3-2
3.2.1 Regional Geology	3-2
3.2.2 Site Geology.....	3-4

TABLE OF CONTENTS (Cont'd)
FINAL AREA I REMEDIAL INVESTIGATION
RAYMARK INDUSTRIES - OU3
STRATFORD, CONNECTICUT

<u>SECTION</u>	<u>PAGE</u>
3.3 Hydrogeology	3-10
3.3.1 Regional Hydrogeology	3-10
3.3.2 Study Area Hydrogeology	3-11
3.4 Surface Water Hydrogeology	3-13
3.5 Meteorology	3-14
4.0 NATURE AND EXTENT OF CONTAMINATION	4-1
4.1 Potential Sources of Contamination	4-1
4.1.1 Raymark Soil-Waste Materials Disposal	4-2
4.1.2 Raymark Wastewater Discharge	4-3
4.1.3 Groundwater Discharge	4-3
4.2 Overview of Chemical Compounds Detected	4-3
4.2.1 Volatile Organic Compounds (VOCs)	4-4
4.2.2 Semivolatile Organic Compounds (SVOCs)	4-4
4.2.3 Pesticides	4-5
4.2.4 Polychlorinated Biphenyls (PCBs)	4-5
4.2.5 Dioxins and Furans	4-5
4.2.6 Metals	4-6
4.2.7 Asbestos	4-6
4.2.8 Chemical Compounds Used or Handled at the Raymark Facility	4-7
4.2.9 Terminology for Evaluating Analytical Data	4-7
4.2.10 Evaluation of Usability of Field Screening Data	4-8
4.3 Background Concentrations	4-9
4.3.1 Sediment	4-10
4.3.2 Surface Water	4-10
4.3.3 Soil	4-11
4.4 Area A-1: Area A-1: Upper Ferry Creek (Morgan Francis Property) – Summary of Contamination	4-11
4.4.1 Sediment	4-12
4.4.2 Surface Water	4-14
4.4.3 Soil	4-15
4.5 Area A-2: Upper Ferry Creek (Commercial Property) Summary of Contamination	4-18
4.5.1 Soil	4-19

TABLE OF CONTENTS (Cont'd)
FINAL AREA I REMEDIAL INVESTIGATION
RAYMARK INDUSTRIES - OU3
STRATFORD, CONNECTICUT

<u>SECTION</u>	<u>PAGE</u>
4.6 Area A-3: Upper Ferry Creek (Wetlands)	
Summary of Contamination	4-22
4.6.1 Sediment.....	4-22
4.6.2 Surface Water	4-26
4.6.3 Soil.....	4-27
5.0 CONTAMINANT FATE AND TRANSPORT	5-1
5.1 Contaminant Sources and Releases	5-1
5.2 Contaminant Fate and Transport in the Area I Study Area	5-4
5.2.1 Soil.....	5-6
5.2.2 Sediment and Surface Water	5-7
6.0 BASELINE HUMAN HEALTH RISK EVALUATION.....	6-1
6.1 Introduction - Overview of Risk Assessment Process	6-1
6.2 Data Evaluation Methodology	6-3
6.2.1 Selection of Chemicals of Potential Concern.....	6-4
6.3 Toxicity Assessment	6-15
6.3.1 Carcinogenic Effects.....	6-17
6.3.2 Noncarcinogenic Effects	6-22
6.3.3 Toxicity Summaries for Major Chemicals of Concern.....	6-23
6.4 Exposure Assessment.....	6-27
6.4.1 Exposure Setting.....	6-27
6.4.2 Conceptual Site Model.....	6-28
6.4.3 Potential Routes of Exposure	6-31
6.4.4 Potential Receptors	6-33
6.4.5 Exposure Pathways	6-34
6.4.6 Quantification of Exposure	6-35
6.4.7 Exposure to Lead	6-43
6.5 Risk Characterization	6-44
6.5.1 Risk Characterization Methodology.....	6-44
6.6 Uncertainties Analysis	6-46
6.6.1 Uncertainty in Selection of Chemicals of Concern	6-48
6.6.2 Uncertainty in the Exposure Assessment	6-48
6.6.3 Uncertainty in the Toxicological Evaluation	6-49
6.7 Baseline Human Health Risk Assessment - Area A-1	
Morgan Francis Property	6-54
6.7.1 Overview of Area A-1, the Morgan Francis Property	6-54
6.7.2 Data Evaluation.....	6-55
6.7.3 Area A-1, Exposure Assessment.....	6-59

TABLE OF CONTENTS (Cont'd)
FINAL AREA I REMEDIAL INVESTIGATION
RAYMARK INDUSTRIES - OU3
STRATFORD, CONNECTICUT

<u>SECTION</u>	<u>PAGE</u>
6.7.4	Risk Characterization 6-65
6.7.5	Uncertainties 6-70
6.7.6	Summary of Human Health Risk Assessment 6-72
6.8	Baseline Human Health Risk Assessment - Area A-2 - Commercial Properties West of Ferry Creek 6-73
6.8.1	Overview of Area A-2, Commercial Properties West of Ferry Creek 6-74
6.8.2	Data Evaluation..... 6-74
6.8.3	Area A2, Exposure Assessment..... 6-77
6.8.4	Risk Characterization 6-82
6.8.5	Uncertainties 6-85
6.8.6	Summary of Human Health Risk Assessment 6-86
6.9	Baseline Human Health Risk Assessment - Area A-3 - Ferry Creek and Properties East of Ferry Creek..... 6-87
6.9.1	Overview of Area A-3, Ferry Creek and Properties East of Ferry Creek..... 6-87
6.9.2	Data Evaluation..... 6-88
6.9.3	Area A-3, Exposure Assessment..... 6-92
6.9.4	Risk Characterization 6-97
6.9.5	Uncertainties 6-100
6.9.6	Summary of Human Health Risk Assessment 6-101
6.10	Summary of Human Health Risk Assessment for Areas A-1, A-2, and A-3 6-103
6.10.1	Noncarcinogenic Risks 6-103
6.10.2	Carcinogenic Risks 6-104
6.10.3	Exposure to Lead 6-104
6.10.4	Exposure to Asbestos 6-106
7.0	ECOLOGICAL EVALUATION 7-1
7.1	Site Description and Potential Receptors..... 7-1
7.1.1	Study Area Description 7-2
7.1.2	Water and Sediment Quality..... 7-2
7.1.3	Habitats and Potentially Exposed Receptor Groups..... 7-4
7.2	Routes of Exposure 7-5
7.3	Identification of Contaminants of Concern 7-5
7.4	Selection of Ecological Endpoints 7-6
7.5	Selection of Indicator Species..... 7-6

**TABLE OF CONTENTS (Cont'd)
FINAL AREA I REMEDIAL INVESTIGATION
RAYMARK INDUSTRIES - OU3
STRATFORD, CONNECTICUT**

<u>SECTION</u>	<u>PAGE</u>
7.6 Ecological Effects	7-7
7.6.1 Chemistry	7-7
7.6.2 Contaminant Residue in Organisms	7-9
7.6.3 Effects on Wildlife	7-10
7.6.4 Toxicity Testing	7-11
7.6.5 Benthic Community Analysis	7-12
7.7 Summary and Conclusions	7-13
7.7.1 Uncertainties	7-14
8.0 SUMMARY AND CONCLUSIONS	8-1
8.1 Nature and Extent of Contamination Summary	8-2
8.1.1 Nature of the Contamination within Area I	8-2
8.1.2 Extent of Contamination within Area I	8-3
8.1.3 Volatile Organic Compounds (VOCs)	8-3
8.1.4 Semivolatile Organic Compounds (SVOCs)	8-4
8.1.5 Pesticides	8-5
8.1.6 Polychlorinated Biphenyls (PCBs)	8-6
8.1.7 Dioxins/Furans	8-6
8.1.8 Metals	8-7
8.1.9 Asbestos	8-8
8.2 Contaminant Fate and Transport Summary	8-9
8.3 Risk Assessment Summary	8-9
8.3.1 Human Health Risk Assessment	8-9
8.3.2 Ecological Risk Assessment	8-12
8.4 Conclusions	8-14

REFERENCES

VOLUME II

TABLES

NUMBER

1-1	History of Activities Associated with Raymark Facility and Environs
4-1	Chemical Contaminants Frequently Detected in OU3 Study Area
4-2	Chemical Compounds Used or Handled at the Raymark Facility
4-3	Summary of Background Concentrations in Sediment

TABLE OF CONTENTS (Cont'd)
FINAL AREA I REMEDIAL INVESTIGATION
RAYMARK INDUSTRIES - OU3
STRATFORD, CONNECTICUT

TABLES (Cont'd)

NUMBER

4-5	Summary of Background Concentrations in Soil
4-6	Area A-1: Samples Collected and Analyses Performed
4-7	Area A-1, Sediment Contaminants Exceeding Background
4-8	Area A-1, Surface Water Contaminants Exceeding Background
4-9	Area A-1, Soil Contaminants Exceeding Background
4-10	Area A-2: Samples Collected and Analyses Performed
4-11	Area A-2, Soil Contaminants Exceeding Background
4-12	Area A-3: Samples Collected and Analyses Performed
4-13	Area A-3, Sediment Contaminants Exceeding Background
4-14	Area A-3, Surface Water Contaminants Exceeding Background
4-15	Area A-3, Soil Contaminants Exceeding Background
6-1	Criteria Used to Evaluate Chemicals Detected in Soil/Sediment
6-2	Criteria Used to Evaluate Chemicals Detected in Surface Water Biota
6-3	Cancer Slope Factors for Chemicals of Concern
6-4	Estimated Orders of Potential Potency for Carcinogenic PAHs ⁽¹⁾
6-5	Dioxin and Furan Toxicity Equivalent Factors*
6-6A	Slope Factors for Aroclors ⁽¹⁾
6-6B	Toxicity Equivalence Factors for PCB Congeners
6-7	Reference Doses and Endpoints/Target Organs for Chemicals of Concern
6-8	Summary of Potential Receptors
6-9	Summary of Exposure Routes Evaluated Quantitatively
6-10A	Summary of Exposure Input Parameters - Sediment/Soil ⁽¹⁾
6-10B	Chemical Specific Dermal Absorption Factors for Soils/Sediments
6-11	Summary of Exposure Input Parameters - Surface Water ⁽¹⁾⁽²⁾
6-12	Selection of Chemicals of Potential Concern, Area A-1, Morgan Francis Properties, Surface Soil/Sediment
6-13	Selection of Chemicals of Potential Concern, Area A-1, Morgan Francis Properties, All Soil/Sediment (0-15')
6-14A	Comparison of Maximum Concentrations to Groundwater Protection Benchmarks, Area A-1, Morgan Francis Properties, Surface Soil/Sediment
6-14B	Comparison of Maximum Concentrations to Groundwater Protection Benchmarks, Area A-1, Morgan Francis Properties, All Soil/Sediment (0-15')
6-14C	Comparison of Leachate Concentrations to SPLP Criteria

TABLE OF CONTENTS (Cont'd)
FINAL AREA I REMEDIAL INVESTIGATION
RAYMARK INDUSTRIES - OU3
STRATFORD, CONNECTICUT

TABLES (Cont'd)

NUMBER

6-15	Selection of Chemicals of Potential Concern, Area A-1, Morgan Francis Properties, Surface Water
6-16	Selection of Receptors and Exposure Pathways Area A-1, Morgan Francis Properties
6-17	Exposure Point Concentrations, Area A-1, Morgan Francis Properties
6-18A	Summary of Cancer Risks and Hazard Indices Reasonable Maximum Exposure Scenario Area A-1, Morgan Francis Properties
6-18B	Summary of Cancer Risks and Hazard Indices Central Tendency Exposures Scenario Area A-1, Morgan Francis Properties
6-19	Summary of Remedial Investigations and Recommendations, Area A-1, Morgan Francis Properties
6-20	Selection of Chemicals of Potential Concern Area A-2, Spada Property, Surface Soil/Sediment
6-21	Selection of Chemicals of Potential Concern, Area A-2, Spada Property, All Soil/Sediment (0-15')
6-22A	Comparison of Maximum Concentrations to Groundwater Protection Benchmarks, Area A-2, Spada Property, Surface Soil/Sediment
6-22B	Comparison of Maximum Concentrations to Groundwater Protection Benchmarks, Area A-2, All Soil/Sediment (0-15')
6-23	Selection of Receptors and Exposure Pathways, Area A-2, Spada Property
6-24	Exposure Point Concentrations, Area A-2, Spada Property
6-25A	Summary of Cancer Risks and Hazard Indices Reasonable Maximum Exposure Scenario, Area A-2, Spada Property
6-25B	Summary of Cancer Risks and Hazard Indices Central Tendency Exposure Scenario, Area A-2, Spada Property
6-26	Summary of Remedial Investigations and Recommendations, Area A-2, Spada Property
6-27	Selection of Chemicals of Potential Concern, Area A-3, Residential Properties on Housatonic Avenue, Surface Soil/Sediment
6-28	Selection of Chemicals of Potential Concern, Area A-3, Residential Properties on Housatonic Avenue, All Soil Sediment (0-15')
6-29A	Comparison of Maximum Concentrations to Groundwater Protection Benchmarks, Area A-3, Residential Properties on Housatonic Avenue, Surface Soil/Sediment

TABLE OF CONTENTS (Cont'd)
FINAL AREA I REMEDIAL INVESTIGATION
RAYMARK INDUSTRIES - OU3
STRATFORD, CONNECTICUT

TABLES (Cont'd)

NUMBER

6-29B	Comparison of Maximum Concentrations to Groundwater Protection Benchmarks, Area A-3, Residential Properties on Housatonic Avenue, All Soil/Sediment (0-15')
6-29C	Comparison of Leachate Concentrations to TCLP/SPLP - Criteria Area A3, Residential Properties on Housatonic Avenue
6-30	Selection of Chemicals of Potential Concern, Area A-3, Residential Properties on Housatonic Avenue, Surface Water
6-31	Selection of Receptors and Exposure Pathways, Area A-3, Residential Properties on Housatonic Avenue
6-32	Exposure Point Concentrations, Area A-3, Residential Properties on Housatonic Avenue
6-33A	Summary of Cancer Risks and Hazard Indices Reasonable Maximum Exposure Scenario
6-33B	Summary of Cancer Risks and Hazard Indices Central Tendency Exposure Scenario Area A-3, Residential Properties on Housatonic Avenue
6-34	Summary of Remedial Investigations and Recommendations, Area A-3, Residential Properties on Housatonic Avenue
7-1	Total Organic Carbon Statistics – Surface Sediment Samples
7-2	Sediment AVS – SEM Statistics
7-3	Contaminants of Concern
7-4	Comparison of AWQC for CoCs with Measured Water Concentrations (ug/L)
7-5	Concentrations of Contaminants Detected in Sediment Samples (Dry Weight Basis)
7-6	Concentrations of Trace Metals, PCBs, DDTs and PAHs in Fish Tissues (Wet Weight)
7-7	Concentrations of Trace Metals, PCBs, DDTs, and PAHs in Crab Tissues (wet weight)
8-1	Summary of the Potential Risks That Could Result from Exposure to Raymark Soil-Waste.

TABLE OF CONTENTS (Cont'd)
FINAL AREA I REMEDIAL INVESTIGATION
RAYMARK INDUSTRIES - OU3
STRATFORD, CONNECTICUT

VOLUME II

FIGURES

NUMBER

1-1	Site Locus Map
1-2	Study Area
3-1	Area A-1: Estimated Thickness of Fill
3-2	Area A-2 and A-3: Estimated Thickness of Fill
3-3	Geologic Profiles
4-1	Area A-1: Sample Location Plan
4-2	Area A-1: Total Aroclors in Surface Sediment and Surface Soil
4-3	Area A-1: Total Aroclors in Subsurface Sediment and Subsurface Soil
4-4	Area A-1: Lead in Surface Sediment and Surface Soil
4-5	Area A-1: Lead in Subsurface Sediment and Subsurface Soil
4-6	Area A-1: Copper in Surface Sediment and Surface Soil
4-7	Area A-1: Copper in Subsurface Sediment and Subsurface Soil
4-8	Area A-1: Asbestos in Surface Sediment and Surface Soil
4-9	Area A-1: Asbestos in Subsurface Sediment and Subsurface Soil
4-10	Area A-2: Sample Location Plan
4-11	Area A-2: Total Aroclors in Surface Soil
4-12	Area A-2: Total Aroclors in Subsurface Soil
4-13	Area A-2: Lead in Surface Soil
4-14	Area A-2: Lead in Subsurface Soil
4-15	Area A-2: Copper in Surface Soil
4-16	Area A-2: Copper in Subsurface Soil
4-17	Area A-2: Asbestos in Surface Soil
4-18	Area A-2: Asbestos in Subsurface Soil
4-19	Area A-3: Sample Location Plan
4-20	Area A-3: Total Aroclors in Surface Sediment and Surface Soil
4-21	Area A-3: Total Aroclors in Subsurface Sediment and Subsurface Soil
4-22	Area A-3: Lead in Surface Sediment, Surface Water, and Surface Soil
4-23	Area A-3: Lead in Subsurface Sediment and Subsurface Soil
4-24	Area A-3: Copper in Surface Sediment, Surface Water, and Surface Soil
4-25	Area A-3: Copper in Subsurface Sediment and Subsurface Soil
4-26	Area A-3: Asbestos in Surface Sediment and Surface Soil
4-27	Area A-3: Asbestos in Subsurface Sediment and Subsurface Soil
6-1	Human Health Risk Receptors and Hot Spots
7-1	Primary Contaminant Pathways from the Raymark Industries Facility

**TABLE OF CONTENTS (Cont'd)
FINAL AREA I REMEDIAL INVESTIGATION
RAYMARK INDUSTRIES - OU3
STRATFORD, CONNECTICUT**

VOLUME III

APPENDICES

- Appendix A - Boring Logs
- Appendix B - Analytical Data - 1 Diskette
- Appendix C - Hydrologic and Hydraulic Analysis (ACOE)
- Appendix D - Ecological Risk Assessment (NOAA); Evaluation of Raymark Superfund Data for PRG Development (SAIC); Evaluation of Ecological Risk to Avian and Mammalian Receptors in the Vicinity of Upper and Middle Ferry Creek, Stratford, CT (SAIC)
- Appendix E - Ground Penetrating Radar Survey
- Appendix F - Human Health Risk Assessment Supporting Documentation
- Appendix G - Supplemental Evaluation of Nature and Extent of Contamination
- Appendix H - Supplemental Evaluation of Fate and Transport Processes

**APPENDIX A
BORING LOGS**

BORING LOG

BROWN & ROOT ENVIRONMENTAL

PROJECT NO: 0890 LOCATION: STRATFORD, CT DRILLED BY: PENN DRILLING CO. BORING NO: MF-MW101D
 DATE START: 04/04/1994 DEPTH TO WATER: 7.40 LOGGED BY: JM GROUND EL.: 8.50
 DATE COMPLETED: 04/07/1994 DATE & TIME: 05/16/1994 1505 CHECKED BY: _____ TOTAL DEPTH: 72.33

ELEV. IN FEET	DEPTH IN FEET	S A M P L E				REMARKS ON ADVANCE OF BORING	SOIL & ROCK DESCRIPTION	U.S.C.S.	
		TYPE-NO.	BLOWS PER 6"	PEN. in.	REC. in.				
	0.0	S-1	8 7 8 9	6 6 6 6	24	9	Interval= 0002' Screen for: Pb, Cu,PCB,Asbestos	S-1 (0-9in) SAND, trace silt, asphalt, root matter brown.	SM
	2.0	S-2	11 10 13 20	6 6 6 6	24	16	Interval= 0204' Screen for: Pb, Cu,PCB,Asbestos	S-2A (0-7in) SAND, similar to S-1. S-2B (7-16in) SILTY SAND, subrounded gravel up to 1-inch, lt. gray.	SM SM
	4.0	S-3	20 17 25 18	6 6 6 6	24	24	Interval= 0406' Screen for: Pb, Cu,PCB,Asbestos	S-3A (0-6in) SILTY SAND, asphalt, wood residue, brown. S-3B (6-24in) SILTY SAND, subangular gravel up to 1-inch, tan.	SM SM
	6.0	S-4	5 15 12 17	6 6 6 6	24	18	Sheen observed. Screen for: Pb, Cu,PCB,Asbestos	S-4A (0-14in) SILT, some fine-medium sand, some fine gravels, occasional roots. S-4B (14-18in) SAND, fine-medium sand, trace silt.	ML SP
	8.0	S-5	1 2 1	6 6 6	24	18	Interval= 0810' Screen for: Pb, Cu,PCB,Asbestos	S-5A (0-5in) SILTY SAND, fine-medium sand, some silt, brown. S-5B (5-18in) PEAT/ORGANIC SILT, organic matter, some silt.	SM Pt/MD
	10.0	S-6	2 2 4	6 6 6	24	7	Interval= 1012' Screen for: Pb, Cu,PCB,Asbestos	S-6 (7in) PEAT/ORGANIC SILT - Similar to S-5B.	Pt/MD
	12.0	S-7	1 2 3	6 6 6	24	0	NO RECOVERY. Spinning casing Spin & Wash.	S-7 (0in) NO RECOVERY.	
	14.0	S-8	3 2 2 3	6 6 6 6	24	24	Sheen observed. Screen for: Pb, Cu,PCB,ASbestos	S-8A (0-12in) ORGANIC SILT, silt w/ organic matter spread throughout the peat. S-8B (12-24in) SILT, brown. Sheen observed in this interval.	MD/Pt ML

LEGEND:

TYPE-NO. - Type of Sample
 C - Rock core sample
 S - Split barrel sample
 BLOWS PER 6" - 140 lb. hammer falling 30" to drive a split barrel sampler; coring time per foot of rock
 PEN - Penetration length of sampler
 REC - Length of sample recovered
 ∅ - Natural groundwater table

NOTES:

Advanced boring w/8.25in ID HSA to 12ft bgs. Spin 6in casing 12-72ft. Use spin&wash method 12'-EOB. Continuous sampling every 2ft 0-66ft. Advance 3in split-barrel samplers w/140lb hammer 0-66';70';72'. Bedrock @ 72'. Screen above rock. Screen samples for:Pb,Cu,PCB,Asbestos. NM/NR=Not recorded/measured.

BORING LOG

BROWN & ROOT ENVIRONMENTAL

PROJECT NO: <u>0890</u>	LOCATION: <u>STRATFORD, CT</u>	DRILLED BY: <u>PENN DRILLING CO.</u>	BORING NO: <u>MF-MW101D</u>
DATE START: <u>04/04/1994</u>	DEPTH TO WATER: <u>7.40</u>	LOGGED BY: <u>JM</u>	GROUND EL.: <u>8.50</u>
DATE COMPLETED: <u>04/07/1994</u>	DATE & TIME: <u>05/16/1994 1505</u>	CHECKED BY: _____	TOTAL DEPTH: <u>72.33</u>

ELEV. IN FEET	DEPTH IN FEET	S A M P L E				REMARKS ON ADVANCE OF BORING	SOIL & ROCK DESCRIPTION	U.S.C.S.
		TYPE-NO.	BLOWS PER 6"	PEN. in.	REC. in.			
16.0		S-9	2	6	24	Interval= 1618' Screen for: Pb, Cu,PCB,Asbestos	S-9A (0-13in) SILT, similar to S-8B. S-9B (13-18in) SILTY SAND, fine-medium graded sand, some silt, brown.	ML SM
			4	6				
			7	6				
18.0		S-10	16	6		Interval= 1820' Screen for: Pb, Cu,PCB,Asbestos	S-10 (12in) SILTY SAND, well graded sand, some silt, coarse piece of gravel, gray.	SM
			17	6	24			
			22	6				
20.0		S-11	25	6		Interval= 2022' Screen for: Pb, Cu,PCB,Asbestos	S-11 (18in) SILTY SAND, fine-medium graded sand, some silt, subangular gravel, lt. brown.	SM
			17	6	24			
			20	6				
22.0		S-12	22	6		Interval= 2224' Screen for: Pb, Cu,PCB,Asbestos	S-12 (22in) SAND, fine-medium sand, trace silt, piece of subangular gravel, lt. brown.	SP
			10	6	24			
			12	6				
24.0		S-13	17	6		Interval= 2426' Screen for: Pb, Cu,PCB,Asbestos	S-13 (20in) SAND, fine-medium sand, subrounded and subangular gravels, trace silt, lt. brown.	SP
			26	6	24			
			24	6				
26.0		S-14	32	6		Interval= 2628' Screen for: Pb, Cu,PCB,Asbestos	S-14 (0in) NO RECOVERY.	
			26	6	24			
			35	6				
28.0		S-15	42	6		Interval= 2830'	S-15 (22in) SAND - fine sand, trace silt, lt brown	SP
			15	6	24			
			16	6				
30.0		S-16	23	6		Interval= 3032'	S-16 (4in) SAND, similar to S-15.	SP
			21	6				
			15	6	24			
			25	6				
			32	6				
			20	6				

LEGEND:

TYPE-NO. - Type of Sample
 C - Rock core sample
 S - Split barrel sample
 BLOWS PER 6" - 140 lb. hammer falling 30" to drive a split barrel sampler; coring time per foot of rock
 PEN - Penetration length of sampler
 REC - Length of sample recovered
 Z - Natural groundwater table

NOTES:

Advanced boring w/8.25in ID HSA to 12ft bgs. Spin 6in casing 12-72ft. Use spin&wash method 12'-E0B. Continuous sampling every 2ft 0-66ft. Advance 3in split-barrel samplers w/140lb hammer 0-66';70',72'. Bedrock @ 72'. Screen above rock. Screen samples for:Pb,Cu,PCB,Asbestos. NM/NR=Not recorded/measured.

BORING LOG

BROWN & ROOT ENVIRONMENTAL

PROJECT NO: 0890	LOCATION: STRATFORD, CT	DRILLED BY: PENN DRILLING CO.	BORING NO: MF-MW101D
DATE START: 04/04/1994	DEPTH TO WATER: 7.40	LOGGED BY: JM	GROUND EL.: 8.50
DATE COMPLETED: 04/07/1994	DATE & TIME: 05/16/1994 1505	CHECKED BY:	TOTAL DEPTH: 72.33

ELEV. IN FEET	DEPTH IN FEET	S A M P L E				REMARKS ON ADVANCE OF BORING	SOIL & ROCK DESCRIPTION	U.S.C.S.	
		TYPE-NO.	BLOWS PER 6"	PEN. in.	REC. in.				
	32.0	S-17	26 34 45 49	6 6 6 6	24	24	Interval= 3234'	S-17 (24in) SAND, fine-medium sand, trace of coarse sand, lt. brown.	SP
	34.0	S-18	25 20 22 30	6 6 6 6	24	20	Interval= 3436'	S-18 (20in) SAND, similar to S-17.	SP
	36.0	S-19	5 7 13 17	6 6 6 6	24	14	Interval= 3638'	S-19 (14in) SAND, fine-coarse sand, trace silt, trace of fine gravels, lt. brown.	SP
	38.0	S-20	9 15 24 25	6 6 6 6	24	20	Interval= 3840'	S-20 (20in) SAND, fine-coarse sand, trace silt, trace fine gravels.	SW
	40.0	S-21	17 20 22 24	6 6 6 6	24	17	Interval= 4042'	S-21 (17in) SAND, similar to S-20.	SW
	42.0	S-22	12 17 25 24	6 6 6 6	24	18	Interval= 4244'	S-22 (18in) SILTY SAND, fine-medium sand, some silt, light brown/tan.	SM
	44.0	S-23	14 22 33 45	6 6 6 6	24	22	Interval= 4446'	S-23 (22in) SAND, poorly sorted sand, trace silt, lt brown.	SP
	46.0	S-24	49 32 46 50	6 6 6 6	24	24	Interval= 4648'	S-24 (24in) SAND, trace silt, lt brown.	SW

LEGEND:
 TYPE-NO. - Type of Sample
 C - Rock core sample
 S - Split barrel sample
 BLOWS PER 6" - 140 lb. hammer falling 30" to drive a split barrel sampler; coring time per foot of rock
 PEN - Penetration length of sampler
 REC - Length of sample recovered
 ♻ - Natural groundwater table

NOTES:
 Advanced boring w/8.25in ID HSA to 12ft bgs. Spin 6in casing 12-72ft. Use spin&wash method 12'-EDB. Continuous sampling every 2ft 0-66ft. Advance 3in split-barrel samplers w/140lb hammer 0-66';70',72'. Bedrock @ 72'. Screen above rock. Screen samples for: Pb,Cu,PCB,Asbestos. NM/NR=Not recorded/measured.

ACAD NAME: RAYMARK\BORINGS_ALTERED\MW101D_C.DWG (8/25/99) PAGE 3 OF 5

BORING LOG

BROWN & ROOT ENVIRONMENTAL

PROJECT NO: <u>0890</u>	LOCATION: <u>STRATFORD, CT</u>	DRILLED BY: <u>PENN DRILLING CO</u>	BORING NO: <u>MF-MW101D</u>
DATE START: <u>04/04/1994</u>	DEPTH TO WATER: <u>7.40</u>	LOGGED BY: <u>JM</u>	GROUND EL.: <u>8.50</u>
DATE COMPLETED: <u>04/07/1994</u>	DATE & TIME: <u>05/16/1994 / 1505</u>	CHECKED BY: _____	TOTAL DEPTH: <u>72.33</u>

ELEV. IN FEET	DEPTH IN FEET	S A M P L E				REMARKS ON ADVANCE OF BORING	SOIL & ROCK DESCRIPTION	U.S.C.S.	
		TYPE-NO.	BLOWS PER 6"	PEN. in.	REC. in.				
	48.0	S-25	12	6	24	22	Interval= 4850'	S-25 (22in) SAND, trace silt, lt brown.	
			23	6					
			33	6					
			37	6					
	50.0	S-26	27	6	24	0	Interval= 5052' NO RECOVERY	S-26 (0in) NO RECOVERY.	
			32	6					
			25	6					
			28	6					
	52.0	S-27	26	6	24	0	No Recovery. 1' mat. in casing Switch baskets.	S-27 (0in) NO RECOVERY. Advance to next interval.	
			22	6					
			30	6					
			29	6					
	54.0	S-28	10	6	24	8	Interval= 5456'	S-28 (8in) SAND, fine-medium sand, trace coarse sand, light brown.	SP
			12	6					
			25	6					
			33	6					
	56.0	S-29	15	6	24	7	Interval= 5658'	S-29 (7in) SAND, trace silt, trace gravel, lt brown.	SP
			24	6					
			25	6					
			25	6					
	58.0	S-30	16	6	24	18	Interval= 5860'	S-30 (18in) SAND, similar to S-29.	SP
			18	6					
			20	6					
			18	6					
	60.0	S-31	7	6	24	24	Interval= 6062'	S-31 (24in) SAND, similar to S-30.	SP
			10	6					
			12	6					
			13	6					
	62.0	S-32	8	6	24	16	Interval= 6264'	S-32 (16in) SAND, trace silt, trace fine gravels, lt. brown.	SW
			10	6					
			20	6					
			23	6					

LEGEND:

TYPE-NO. - Type of Sample
 C - Rock core sample
 S - Split barrel sample
 BLOWS PER 6" - 140 lb. hammer falling 30" to drive a split barrel sampler; casing time per foot of rock
 PEN - Penetration length of sampler
 REC - Length of sample recovered
 ∇ - Natural groundwater table

NOTES:

Advanced boring w/8.25in ID HSA to 12ft bgs. Spin 6in casing 12-72ft. Use spin&wash method 12'-EOB. Continuous sampling every 2ft 0-66ft. Advance 3in split-barrel samplers w/140lb hammer 0-66';70';72'. Bedrock @ 72'. Screen above rock. Screen samples for: Pb,Cu,PCB,Asbestos. NM/NR=Not recorded/measured.

BORING LOG

BROWN & ROOT ENVIRONMENTAL

PROJECT NO: <u>0890</u>	LOCATION: <u>STRATFORD, CT</u>	DRILLED BY: <u>PENN DRILLING CO.</u>	BORING NO: <u>MF-MW101D</u>
DATE START: <u>04/04/1994</u>	DEPTH TO WATER: <u>7.40</u>	LOGGED BY: <u>JM</u>	GROUND EL.: <u>8.50</u>
DATE COMPLETED: <u>04/07/1994</u>	DATE & TIME: <u>05/16/1994 1505</u>	CHECKED BY: _____	TOTAL DEPTH: <u>72.33</u>

ELEV IN FEET	DEPTH IN FEET	S A M P L E				REMARKS ON ADVANCE OF BORING	SOIL & ROCK DESCRIPTION	U.S.C.S.
		TYPE- NO.	BLOWS PER 6"	PEN. in.	REC. in.			
	64.0	S-33	7	6	24	18	Interval= 64-66' S-33 (18in) SAND, trace coarse sand, trace silt, trace gravel, lt. brown.	SP
			10	6				
			14	6				
			12	6				
	66.0	S-34	100	5	5	0	Interval= 66 to 66.4ft. Spin casing to 70ft. S-34 (0in) NO RECOVERY. POSSIBLY HIT BEDROCK.	
	70.0	S-35	200	3	3	3	Interval= 70 to 70.25ft. Casing advanced to 72' S-35 (3in) GRAVEL, trace sand, trace silt, weathering evident, pieces are plate-like.	
	72.0	S-36	100	4	4	4	Interval= 72 to 72ft 4in. Confirm bedrock S-36 (4in) BEDROCK. Used a split-barrel to penetrate and confirm top of rock. EOB @ 72ft 4in lgs. Set monitoring well MF-MW101D. See well construction log for details.	

LEGEND:

TYPE-NO. - Type of Sample
 C - Rock core sample
 S - Split barrel sample
 BLOWS PER 6" - 140 lb. hammer falling 30" to drive a split barrel sampler; coring time per foot of rock
 PEN - Penetration length of sampler
 REC - Length of sample recovered
 ∇ - Natural groundwater table

NOTES:

Advanced boring w/8.25in ID HSA to 12ft lgs. Spin 6in casing 12-72ft. Use spin&wash method 12'-EOB. Continuous sampling every 2ft 0-66ft. Advance 3in split-barrel samplers w/140lb hammer 0-66';70',72'. Bedrock @ 72'. Screen above rock. Screen samples for:Pb,Cu,PCB,Asbestos. NM/NR=Not recorded/measured.

BORING LOG

BROWN & ROOT ENVIRONMENTAL

PROJECT NO: <u>0890</u>	LOCATION: <u>STRATFORD, CT</u>	DRILLED BY: <u>PENN DRILLING CO.</u> BORING NO: <u>MF-MW101M</u>
DATE START: <u>04/12/1994</u>	DEPTH TO WATER: <u>8.05</u>	LOGGED BY: <u>DM</u> GROUND EL.: <u>9.10</u>
DATE COMPLETED: <u>04/12/1994</u>	DATE & TIME: <u>05/16/1994/1505</u>	CHECKED BY: _____ TOTAL DEPTH: <u>27.08</u>

ELEV. IN FEET	DEPTH IN FEET	S A M P L E				REMARKS ON ADVANCE OF BORING	SOIL & ROCK DESCRIPTION	U.S.C.S.
		TYPE- NO.	BLOWS PER 6"	PEN. in.	REC. in.			
	0.0	A				Auger to 10'. Readvance w/10' casing.	FOR SOIL AND ROCK DESCRIPTIONS SEE BORING LOG FOR MF-MW101D.	
	10.0	B				Telescope 6in casing @ 10'. Spin & Wash.		

<p>LEGEND:</p> <p>TYPE-NO. - Type of Sample C - Rock core sample S - Split barrel sample BLOWS PER 6" - 140 lb. hammer falling 30" to drive a split barrel sampler; coring time per foot of rock PEN - Penetration length of sampler REC - Length of sample recovered ☼ - Natural groundwater table</p>	<p>NOTES:</p> <p>MW101M REPRESENTS ONE OF THREE WELLS IN A CLUSTER. SOIL AND ROCK DESCRIPTIONS WERE RECORDED FROM THE DEEPEST BORING IN EACH CLUSTER. SEE BORING LOG MF-MW101D FOR SOIL AND/OR ROCK DESCRIPTIONS.</p> <p>ACAD NAME: A:\MW101M_A.DWG</p> <p style="text-align: right;">PAGE <u>1</u> OF <u>2</u></p>
--	--

BORING LOG

BROWN & ROOT ENVIRONMENTAL

PROJECT NO: <u>0890</u>	LOCATION: <u>STRATFORD, CT</u>	DRILLED BY: <u>PENN DRILLING CO.</u> BORING NO: <u>MF-MW101M</u>
DATE START: <u>04/12/1994</u>	DEPTH TO WATER: <u>8.05</u>	LOGGED BY: <u>DM</u> GROUND EL.: <u>9.10</u>
DATE COMPLETED: <u>04/12/1994</u>	DATE & TIME: <u>05/16/1994/1505</u>	CHECKED BY: _____ TOTAL DEPTH: <u>27.08</u>

ELEV. IN FEET	DEPTH IN FEET	S A M P L E				REMARKS ON ADVANCE OF BORING	SOIL & ROCK DESCRIPTION	U.S.C.S.
		TYPE- NO.	BLOWS PER 6"	PEN. in.	REC. in.			
-27.0		C				EOB AT 27FT 1IN. WELL INSTALLED. SEE CONSTRUCTION LOG FOR MF-MW101M.		

LEGEND:
 TYPE-NO. - Type of Sample
 C - Rock core sample
 S - Split barrel sample
 BLOWS PER 6" - 140 lb. hammer falling 30" to drive a split barrel sampler; coring time per foot of rock
 PEN - Penetration length of sampler
 REC - Length of sample recovered
 ☒ - Natural groundwater table

NOTES:
 MW101M REPRESENTS ONE OF THREE WELLS IN A CLUSTER. SOIL AND ROCK DESCRIPTIONS WERE RECORDED FROM THE DEEPEST BORING IN EACH CLUSTER. SEE BORING LOG MF-MW101D FOR SOIL AND/OR ROCK DESCRIPTIONS.

ACAD NAME: A:\MW101M_B.DWG

PAGE 2 OF 2

BORING LOG

BROWN & ROOT ENVIRONMENTAL

PROJECT NO: <u>0890</u>	LOCATION: <u>STRATFORD, CT</u>	DRILLED BY: <u>PENN DRILLING CO</u>	BORING NO: <u>MF-MW101S</u>
DATE START: <u>04/12/1994</u>	DEPTH TO WATER: <u>6.39</u>	LOGGED BY: <u>DM</u>	GROUND EL.: <u>8.60</u>
DATE COMPLETED: <u>04/12/1994</u>	DATE & TIME: <u>05/16/1994 1505</u>	CHECKED BY: _____	TOTAL DEPTH: <u>15.40</u>

ELEV. IN FEET	DEPTH IN FEET	S A M P L E				REMARKS ON ADVANCE OF BORING	SOIL & ROCK DESCRIPTION	U.S.C.S.
		TYPE-NO.	BLOWS PER 6"	PEN. in.	REC. in.			
	0.0	A				Auger borehole Readvance w/10 in casing 0-10'	FOR SOIL AND ROCK DESCRIPTIONS SEE BORING LOG FOR MF-MW101D.	
	10.0	B				Telescope 6in casing; Spin & Wash technique.		
	15.0	C					EOB @ 15.4FT. INSTALLED WELL, SEE CONSTRUCTION LOG FOR MF-MW101S.	

LEGEND:
 TYPE-NO. - Type of Sample
 C - Rock core sample
 S - Split barrel sample
 BLOWS PER 6" - 140 lb. hammer falling 30" to drive a split barrel sampler; coring time per foot of rock
 PEN - Penetration length of sampler
 REC - Length of sample recovered
 ∇ - Natural groundwater table

NOTES:
 MW101S REPRESENTS ONE OF THREE WELLS IN A CLUSTER. SOIL AND ROCK DESCRIPTIONS WERE RECORDED FROM THE DEEPEST BORING IN EACH CLUSTER. SEE BORING LOG MF-MW101D FOR SOIL AND/OR ROCK DESCRIPTIONS.

ACAD NAME: A:\MW101S_A.DWG

PAGE 1 OF 1

BORING LOG

BROWN & ROOT ENVIRONMENTAL

PROJECT NO: 0890 LOCATION: STRATFORD, CT DRILLED BY: PENN DRILLING CO BORING NO: MF-MW102D
 DATE START: 04/04/1994 DEPTH TO WATER: 8.20 LOGGED BY: MS,BW GROUND EL.: 9.70
 DATE COMPLETED: 04/19/1994 DATE & TIME: 05/16/1994/1510 CHECKED BY: TOTAL DEPTH: 115.00

ELEV. IN FEET	DEPTH IN FEET	SAMPLE				REMARKS ON ADVANCE OF BORING	SOIL & ROCK DESCRIPTION	U.S.C.S.	
		TYPE-NO.	BLOWS PER 6"	PEN. in.	REC. in.				
0.0		S-1	2 7 12 48	6 6 6 6	24	11	Interval=0002 Screen for: Pb, Cu,PCB,Asbestos	S-1(1in) SILTY SAND - silty sand with very angular black chlps, gravel piece up to 3/4in. brown.	
2.0		S-2	16 8 8 8	6 6 6 6	24	18	Interval=0204. Screen for: Pb, Cu,PCB,Asbestos	S-2A(0-6in) SILTY SAND - Similar to S-1. S-2B(6-12in) SANDY SILT - sandy silt, brown, with fibers present throughout. S-2C(12in-18in) SILTY SAND - fine sand, silt, dark gray.	
4.0		S-3	2 3 5 8	6 6 6 6	24	24	Interval=0406. Screen for: Pb, Cu,PCB,Asb.,Org	S-3A(0-6in) SANDY SILT, some organics, light brown S-3B(6-12in) SILTY SAND, fine gravel up to 1/2in, light gray. S-3C(12-18in) SANDY SILT - Similar to S-3A. S-3D(18-24in) SILTY SAND, fine sand, silt, sub-rounded gravel up to 1/2in, light gray.	
6.0		S-4	9 3 4 7	6 6 6 6	24	18	Water observed. Screen for: Pb, Cu,PCB,Asbestos	S-4A(0-6in) SANDY SILT interspersed with pink fibrous material. HS reading 3.0ppm. S-4B(6-18in) SILTY SAND with subrounded gravel up to 1 in, light gray. No HS reading.	
8.0		S-5	2 2 3 6	6 6 6 6	24	24	Interval=8-10ft Screen for: Pb, Cu,PCB,Asbestos	S-5(24in) SILT - silt, some sand, 2-inch thick interval of fine sand at 2in-4in, light gray. asbestos fibers, iron and copper staining.	ML
10.0		S-6	2 2 4	6 6 6	24	14	End HSA drill. Screen for: Pb, Cu,PCB,Asbestos	S-6(14in) SANDY SILT, organics, roots, brown.	OL
12.0		S-7	1 3 7 9	6 6 6 6	24	24	Start D&W drill Screen for: Pb, Cu,PCB,Asbestos	S-7(24in) SANDY SILT with organics, roots, dark brown. Nose of split barrel has approximately 2in of medium sand in it.	OL
14.0		S-8						NOTE: According to the boring log, there is no sample description for the 14-16ft interval. This interval should have been S-8.	

LEGEND:

TYPE-NO. - Type of Sample
 C - Rock core sample
 S - Split barrel sample
 BLOWS PER 6" - 140 lb. hammer falling 30" to drive a split barrel sampler; coring time per foot of rock
 PEN - Penetration length of sampler
 REC - Length of sample recovered
 ☒ - Natural groundwater table

NOTES:

Advanced boring w/8in HSA,10'lbs. Pull augers & readvance w/ casing using spin&wash tech. Perform cont. sampling w/3in (0-52') & 2in (52-115') split-barrel samplers advanced w/140lb hammer. Sampled in 5-6' increments below 82'. Rock likely @ approx. 114'lbs. Well screen 111.5-101.5'. See boring log
 REined to redrill after well installed.

BORING LOG

BROWN & ROOT ENVIRONMENTAL

PROJECT NO: 0890	LOCATION: STRATFORD, CT	DRILLED BY: PENN DRILLING CO BORING NO: MF-MW102D
DATE START: 04/04/1994	DEPTH TO WATER: 8.20	LOGGED BY: MS,BW GROUND EL.: 9.70
DATE COMPLETED: 04/19/1994	DATE & TIME: 05/16/1994/1510	CHECKED BY: TOTAL DEPTH: 115.00

ELEV. IN FEET	DEPTH IN FEET	S A M P L E				REMARKS ON ADVANCE OF BORING	SOIL & ROCK DESCRIPTION	S. C. D.	
		TYPE- NO.	BLOWS PER 6"	PEN. in.	REC. in.				
	16.0	S-8	3 7 2 4	6 6 6 6	24	8	Interval=16-18. Screen for: Pb, Cu,PCB,Asbestos	S-8 (8in) SANDY SILT, organics, dark brown.	OL
	18.0	S-9	7 1 6	6 6 6	24	9	Interval=18-20. Screen: Pb,Cu, PCB,Asbestos	S-9 (9in) SILTY SAND, fine to medium grains, some angular gravel, subrounded gravel up to 1/2in, black.	SM
	20.0	S-10	6 7 12 49	6 6 6 6	24	10	Interval=20-22. Screen: Pb,Cu, PCB,Asbestos	S-10 (10in) SILTY SAND, fine to medium sand, trace coarse sand, trace gravel.	SM
	22.0	S-11	20 22 36 47	6 6 6 6	24	15	Interval=22-24. Screen: Pb,Cu, PCB,Asbestos	S-11 (15in) SAND, medium to coarse sand, rounded gravels from 1/4 to 3in interspersed, well graded, orange.	SW
	24.0	S-12	27 39 47 67	6 6 6 6	24	9	Interval=24-26. Screen: Pb,Cu, PCB,Asbestos	S-12 (9in) SANDY GRAVEL, well graded gravel from 1/4 to >3in with medium to coarse sand.	GW
	26.0	S-13	36 47 56 29	6 6 6 6	24	10	Interval=26-28 Screen: Pb,Cu, PCB,Asbestos	S-13 (10in) SANDY GRAVEL - Similar to S-12.	GW
	28.0	S-14	33 33 27 36	6 6 6 6	24	16	Interval=28-30 Screen: Pb,Cu, PCB,Asbestos	S-14A (0-6in) SANDY GRAVEL, similar to S-13. S-14B (6-16in) SAND, fine to medium, light brown.	
	30.0	S-15	5 6 7 11	6 6 6 6	24	24	Interval=30-32 Screen: Pb,Cu, PCB,Asbestos	S-15 (24in) gravelly SAND, fine to medium sand, trace coarse sand, light brown, some rounded gravel up to 1/4in.	SW

<p>LEGEND:</p> <p>TYPE-NO. - Type of Sample C - Rock core sample S - Split barrel sample BLOWS PER 6" - 140 lb. hammer falling 30" to drive a split barrel sampler: coring time per foot of rock PEN - Penetration length of sampler REC - Length of sample recovered ☒ - Natural groundwater table</p>	<p>NOTES:</p> <p>Advanced boring w/8in HSA,10'lbs. Pull augers & readvance w/ casing using spin&wash tech. Perform cont. sampling w/3in (0-52') & 2in (52-115') split-barrel samplers advanced w/140lb hammer. Sampled in 5-6' increments below 82'. Rock likely @ approx. 114'lbs. Well screen 111.5-101.5'. See boring log RE:need to redrill after well installed.</p> <p>ACAD NAME: RAYMARK\BORINGS_ALTERED\MW102D_B.DWG (8/25/99)</p> <p style="text-align: right;">PAGE <u>2</u> OF <u>8</u></p>
---	---

BORING LOG

BROWN & ROOT ENVIRONMENTAL

PROJECT NO: 0890 LOCATION: STRATFORD, CT DRILLED BY: PENN DRILLING CO BORING NO: MF-MW102D
 DATE START: 04/04/1994 DEPTH TO WATER: 8.20 LOGGED BY: MS,BW GROUND EL.: 9.70
 DATE COMPLETED: 04/19/1994 DATE & TIME: 05/16/1994/1510 CHECKED BY: TOTAL DEPTH: 115.00

ELEV. IN FEET	DEPTH IN FEET	S A M P L E				REMARKS ON ADVANCE OF BORING	SOIL & ROCK DESCRIPTION	U.S.C.S.	
		TYPE-NO.	BLOWS PER 6"	PEN. in.	REC. in.				
	32.0	S-16	57 100	6 4	10	0	NO RECOVERY	S-16 (0in) NO RECOVERY.	
	34.0	S-17	65 78 87 98	6 6 6 6	24	24	Interval=34-36' Screen for: Pb, Cu,PCB,Asbestos	S-17 (24in) SAND, well graded, light brown, some gravel from 1/4in to 1.5in.	
	36.0	S-18	7 13 14 28	6 6 6 6	24	24	Interval=36-38' Screen for: Pb, Cu,PCB,Asbestos	S-18 (24in) SAND, fine grained, poorly graded, light brown.	SP
	38.0	S-19	7 9 12 22	6 6 6 6	24	6	Interval=38-40' Screen for: Pb, Cu,PCB,Asbestos	S-19 (6in) SAND - fine sand, poorly graded, rounded gravel >3in in nose of split-barrel.	SP
	40.0	S-20	16 19 22 27	6 6 6 6	24	24	Interval=40-42' Screen for: Pb, Cu,PCB,Asbestos	S-20 (24in) SILTY SAND - fine sand, some silt, light brown.	SM
	42.0	S-21	14 14 14 28	6 6 6 6	24	18	Interval=42-44' Screen for: Pb, Cu,PCB,Asbestos	S-21 (18in) SILTY SAND - fine sand, some silt, light brown.	SM
	44.0	S-22	5 11 14 17	6 6 6 6	24	15	Interval=44-46' Screen for: Pb, Cu,PCB,Asbestos	S-22 (15in) SILTY SAND - fine sand, silt, light brown.	
	46.0	S-23	11 15 22 24	6 6 6 6	24	24	Interval=46-48' Screen for: Pb, Cu,PCB,Asbestos	S-23 (24in) SANDY SILT - silt, fine sand, light brown.	

LEGEND:
 TYPE-NO. - Type of Sample
 C - Rock core sample
 S - Split barrel sample
 BLOWS PER 6" - 140 lb. hammer falling 30" to drive a split barrel sampler;
 coring time per foot of rock
 PEN - Penetration length of sampler
 REC - Length of sample recovered
 ☒ - Natural groundwater table

NOTES:
 Advanced boring w/8in HSA,10'logs. Pull augers & readvance w/ casing using spin&wash tech. Perform cont. sampling w/3in (0-52') & 2in (52-115') split-barrel samplers advanced w/140lb hammer. Sampled in 5-6' increments below 82'. Rock likely @ approx. 114'logs. Well screen@115-101.5'. See boring log RE need to redrill after well installed.

ACAD NAME: RAYMARK\BORINGS_ALTERED\MW102D_C.DWG (8/25/99) PAGE 3 OF 8

BORING LOG

BROWN & ROOT ENVIRONMENTAL

PROJECT NO: <u>0890</u>	LOCATION: <u>STRATFORD, CT</u>	DRILLED BY: <u>PENN DRILLING CO.</u>	BORING NO: <u>MF-MW102D</u>
DATE START: <u>04/04/1994</u>	DEPTH TO WATER: <u>8.20</u>	LOGGED BY: <u>MS,BW</u>	GROUND EL.: <u>9.70</u>
DATE COMPLETED: <u>04/19/1994</u>	DATE & TIME: <u>05/16/1994/1510</u>	CHECKED BY: _____	TOTAL DEPTH: <u>115.00</u>

ELEV. IN FEET	DEPTH IN FEET	S A M P L E				REMARKS ON ADVANCE OF BORING	SOIL & ROCK DESCRIPTION	U.S.C.S.	
		TYPE-NO.	BLOWS PER 6"	PEN. in.	REC. in.				
48.0		S-24	15 7 9 13	6 6 6 6	24	4	Interval=48-50' Screen for: Pb, Cu,PCB,Asbestos	S-24 (4in) SANDY SILT.	
50.0		S-25	6 9 16 20	6 6 6 6	24	24	Interval=50-52' Screen for: Pb, Cu,PCB,Asbestos	S-25 (24in) SANDY SILT - silt, fine sand, light brown, lin thick interval of fine sand above thin (2in) clay layer near bottom.	
52.0		S-26	8 9 11 10	6 6 6 6	24	12	2in barrel used Screen for: Pb, Cu,PCB,Asbestos	S-26 (12in) SILTY SAND - fine to medium sand, silt light brown.	
54.0		S-27	15 17 23 28	6 6 6 6	24	24	2in barrel used Screen for: Pb, Cu,PCB,Asbestos	S-27 (24in) SILTY SAND - Similar to S-27.	
56.0		S-28	5 7 11 13	6 6 6 6	24	10	2in barrel used Screen for: Pb, Cu,PCB,Asbestos	S-28 (10in) SAND - fine sand, light brown.	
58.0		S-29	8 7 16 18	6 6 6 6	24	15	2in barrel used Screen for: Pb, Cu,PCB,Asbestos	S-29 (15in) SILTY SAND - fine to medium sand, silt light brown.	
60.0		S-30	4 7 11 14	6 6 14 6	24	16	2in barrel used Screen for: Pb, Cu,PCB,Asbestos	S-30 (10in) SAND - medium sand with some fines, light brown.	
62.0		S-31	11 12 13 17	6 6 6 6	24	24	2in barrel used Screen for: Pb, Cu,PCB,Asbestos	S-31 (24in) SAND - fine to medium sand, light brown.	

LEGEND:

TYPE-NO. - Type of Sample
 C - Rock core sample
 S - Split barrel sample
 BLOWS PER 6" - 140 lb. hammer falling 30" to drive a split barrel sampler; coring time per foot of rock
 PEN - Penetration length of sampler
 REC - Length of sample recovered
 ∇ - Natural groundwater table

NOTES:

Advanced boring w/8in HSA,10'lbs. Pull augers & readvance w/ casing using spin&wash tech. Perform cont. sampling w/3in (0-52') & 2in (52-115') split-barrel samplers advanced w/140lb hammer. Sampled in 5-6' increments below 82'. Rock likely @ approx. 114'lbs. Well screen 111.5-101.5'. See boring log RE need to redrill after well installed.

BORING LOG

BROWN & ROOT ENVIRONMENTAL

PROJECT NO: 0890	LOCATION: STRATFORD, CT	DRILLED BY: PENN DRILLING CO.	BORING NO: MF-MW102D
DATE START: 04/04/1994	DEPTH TO WATER: 8.20	LOGGED BY: MS,BW	GROUND EL.: 9.70
DATE COMPLETED: 04/19/1994	DATE & TIME: 05/16/1994/1510	CHECKED BY:	TOTAL DEPTH: 115.00

ELEV. IN FEET	DEPTH IN FEET	S A M P L E				REMARKS ON ADVANCE OF BORING	SOIL & ROCK DESCRIPTION	U.S.C.S.	
		TYPE-NO.	BLOWS PER 6"	PEN. in.	REC. in.				
64.0		S-32	12 4 10 13	6 6 6 6	24	24	2in barrel used Screen for: Pb, Cu,PCB,Asbestos	S-32 (24in) SAND - mostly fine to medium sand, some coarse sand, light brown.	
66.0		S-33	9 12 13 17	6 6 6 6	24	24	2in barrel used Screen for: Pb, Cu,PCB,Asbestos	S-33 (24in) SAND - fine to medium sand, some coarse sand, light brown. No coarse sand in bottom 3'.	
68.0		S-34	8 7 8 11	6 6 6 6	24	19	2in barrel used Screen for: Pb, Cu,PCB,Asbestos	S-34 (19in) SAND - fine to medium sand, light brown.	
70.0		S-35	6 7 10 15	6 6 6 6	24	18	2in barrel used Screen for: Pb, Cu,PCB,Asbestos	S-35 (18in) SAND - fine to medium sand, some coarse sand, light brown.	
72.0		S-36	5 7 10 15	6 6 6 6	24	0	NO RECOVERY	S-36 (0in) NO RECOVERY.	
74.0		S-37	4 7 10 11	6 6 6 6	24	10	2in barrel used Screen for: Pb, Cu,PCB,Asbestos	S-37 (10in) SAND - fine to medium sand, light brown.	
76.0		S-38	15 10 11 15	6 6 6 6	24	18	2in barrel used Screen for: Pb, Cu,PCB,Asbestos	S-38(18in) SAND - fine to coarse sand, well graded, light brown. Thin gray layer approx. 2in from bottom of barrel.	
78.0		S-39	14 17 25 10	6 6 6 6	24	24	2in barrel used Screen for: Pb, Cu,PCB,Asbestos	S-39 (24in) gravelly SAND - mostly fine to coarse sand, well graded, some fine gravel, light brown.	

LEGEND:
 TYPE-NO. - Type of Sample
 C - Rock core sample
 S - Split barrel sample
 BLOWS PER 6" - 140 lb. hammer falling 30" to drive a split barrel sampler;
 PEN - Penetration length of sampler
 REC - Length of sample recovered
 ∇ - Natural groundwater table

NOTES:
 Advanced boring w/8in HSA,10'lbs. Pull augers & readvance w/ casing using spin&wash tech. Perform cont. sampling w/3in (0-52') & 2in (52-115') split-barrel samplers advanced w/140lb hammer. Sampled in 5-6' increments below 82'. Rock likely @ approx. 114'lbs. Well screen:111.5-101.5'. See boring log RE-need to redrill after well installed.

ACAD NAME: RAYMARK\BORINGS_ALTERED\MW102D_E.DWG (8/25/99) PAGE 5 OF 8

BORING LOG

BROWN & ROOT ENVIRONMENTAL

PROJECT NO: <u>0890</u>	LOCATION: <u>STRATFORD, CT</u>	DRILLED BY: <u>PENN DRILLING CO</u>	BORING NO: <u>MF-MW102D</u>
DATE START: <u>04/04/1994</u>	DEPTH TO WATER: <u>8.20</u>	LOGGED BY: <u>MS,BW</u>	GROUND EL.: <u>9.70</u>
DATE COMPLETED: <u>04/19/1994</u>	DATE & TIME: <u>05/16/1994/1510</u>	CHECKED BY: _____	TOTAL DEPTH: <u>115.00</u>

ELEV. IN FEET	DEPTH IN FEET	S A M P L E				REMARKS ON ADVANCE OF BORING	SOIL & ROCK DESCRIPTION	U.S.C.S.	
		TYPE-NO.	BLOWS PER 6"	PEN. in.	REC. in.				
	80.0	S-40	17 16 20 19	6 6 6 6	24	18	2in barrel used Screen for: Pb, Cu,PCB,Asbestos	S-40 (18in) gravelly SAND - fine to medium sand, trace silt, brown, coarse angular gravel of various color in last 3inches of barrel. Large fragment of white quartz at bottom.	
	82.5	S-41					Confirming if top of bedrock encountered.	S-41 - NOT BEDROCK. Able to drive a 2in barrel through rock layer. Encountered sand beneath the layer of rock.	
	87.0	S-42	37 100	6 5	24	8	Driller reports problem. Casing slips to 87ft.	S-42 (8in) SAND - coarse sand, poorly graded, brown.	
	93.0	S-43	100	5	5	5	Advanced boring 6 ft from prev. interval.	S-43 (5in) SAND - fine to medium sand, poorly graded, trace micaceous silt, brown.	SP

LEGEND:
 TYPE-NO. - Type of Sample
 C - Rock core sample
 S - Split barrel sample
 BLOWS PER 6" - 140 lb. hammer falling 30" to drive a split barrel sampler; coring time per foot of rock
 PEN - Penetration length of sampler
 REC - Length of sample recovered
 ☒ - Natural groundwater table

NOTES:
 Advanced boring w/8in HSA,10'lbs. Pull augers & readvance w/ casing using spin&wash tech. Perform cont. sampling w/3in (0-52') & 2in (52-115') split-barrel samplers advanced w/140lb hammer. Sampled in 5-6' increments below 82'. Rack likely @ approx. 114'lbs. Well screen@111.5-101.5'. See boring log REneed to redrill after well installed.

ACAD NAME: RAYMARK\BORINGS_ALTERED\MW102D_F.DWG (8/25/99) PAGE 6 OF 8

BORING LOG

BROWN & ROOT ENVIRONMENTAL

PROJECT NO: <u>0890</u>	LOCATION: <u>STRATFORD, CT</u>	DRILLED BY: <u>PENN DRILLING CO.</u>	BORING NO: <u>MF-MW102D</u>
DATE START: <u>04/04/1994</u>	DEPTH TO WATER: <u>8.20</u>	LOGGED BY: <u>MS,BW</u>	GROUND EL.: <u>9.70</u>
DATE COMPLETED: <u>04/19/1994</u>	DATE & TIME: <u>05/16/1994/1510</u>	CHECKED BY: _____	TOTAL DEPTH: <u>115.00</u>

ELEV. IN FEET	DEPTH IN FEET	S A M P L E				REMARKS ON ADVANCE OF BORING	SOIL & ROCK DESCRIPTION	U.S.C.S.
		TYPE-NO.	BLOWS PER 6"	PEN. in.	REC. in.			
	98.0	S-44	17	6	24	Advanced boring 5 ft from prev interval.	S-45 - SAND - fine to medium sand, trace silt, tan to orange in color. Orange colored sand coarser than tan.	
			49	6				
			63	6				
			82	6				
	103.0	S-45	17	6	24	Advanced boring 5 ft from prev interval.	S-45A(18in) SAND - medium grained, tan. S-45B(5.5in) SAND - coarser than S-46A. S-46C(0.5in) clayey SAND - medium grained.	
			38	6				
			38	6				
			52	6				
	108.0	S-46	30	6	24	Advanced boring 5 ft from prev interval.	S-46 (9in) clayey SAND - fine to medium grained sand, slightly clayey, gray, 3in piece of quartzite in end of barrel.	
			33	6				
			32	6				
			32	6				

LEGEND:
 TYPE-NO. - Type of Sample
 S - Rock core sample
 S - Split barrel sample
 BLOWS PER 6" - 140 lb. hammer falling 30" to drive a split barrel sampler; coring time per foot of rock
 PEN - Penetration length of sampler
 REC - Length of sample recovered
 ☒ - Natural groundwater table

NOTES:
 Advanced boring w/8in HSA,10' bgs. Pull augers & readvance w/ casing using spin&wash tech. Perform cont. sampling w/3in (0-52') & 2in (52-115') split-barrel samplers advanced w/140lb hammer. Sampled in 5-6' increments below 82'. Rock likely @ approx. 114' bgs. Well screen: 111.5-101.5'. See boring log RE: need to redrill after well installed.

ACAD NAME: RAYMARK\BORINGS_ALTERED\MW102D_G.DWG (8/25/99) PAGE 7 OF 8

BORING LOG

BROWN & ROOT ENVIRONMENTAL

PROJECT NO: <u>0890</u>	LOCATION: <u>STRATFORD, CT</u>	DRILLED BY: <u>PENN DRILLING CO.</u> BORING NO: <u>MF-MW102D</u>
DATE START: <u>04/04/1994</u>	DEPTH TO WATER: <u>8.20</u>	LOGGED BY: <u>MS,BW</u> GROUND EL.: <u>9.70</u>
DATE COMPLETED: <u>04/19/1994</u>	DATE & TIME: <u>05/16/1994/1510</u>	CHECKED BY: _____ TOTAL DEPTH: <u>115.00</u>

ELEV. IN FEET	DEPTH IN FEET	S A M P L E				REMARKS ON ADVANCE OF BORING	SOIL & ROCK DESCRIPTION	U.S.C.S.
		TYPE-NO.	BLOWS PER 6"	PEN. in.	REC. in.			
	113.0		23	6	24	12	Advanced boring 5 ft from prev interval.	S-47 (12in) SAND - medium grained sand, angular pieces of gray to black schist. May be indicative of top of altered bedrock surface.
		S-47	25	6				
			25	6				
	114.0		34	6			Casing grinding @ 114ft bgs. REFUSAL @ 114.25'	S-48 (3in) SCHIST FRAGMENTS. POTENTIAL BEDROCK SURFACE @ 114.25 FT BGS.
		S-48	100	3	3	3		
							End of boring @ 114.25 ft bgs. Monitoring well MF-MW102D installed. See well log. Found break in well after installation. Readvanced original bore-hole; ground-out PVC; install well 2 @ same depth.	

<p>LEGEND:</p> <p>TYPE-NO. - Type of Sample C - Rock core sample S - Split barrel sample BLOWS PER 6" - 140 lb. hammer falling 30" to drive a split barrel sampler; coring time per foot of rock PEN - Penetration length of sampler REC - Length of sample recovered ∇ - Natural groundwater table</p>	<p>NOTES:</p> <p>Advanced boring w/8in HSA,10'bgs. Pull augers & readvance w/ casing using spin&wash tech. Perform cont. sampling w/3in (0-52') & 2in (52-115') split-barrel samplers advanced w/140lb hammer. Sampled in 5-6' increments below 82'. Rock likely @ approx. 114'bgs. Well screen 111.5-101.5'. See boring log RE: need to redrill after well installed.</p> <p>ACAD NAME: RAYMARK\BORINGS_ALTERED\MW102D_H.DWG (8/25/99)</p>
<p>PAGE <u>8</u> OF <u>8</u></p>	

BORING LOG

BROWN & ROOT ENVIRONMENTAL

PROJECT NO: <u>0890</u>	LOCATION: <u>STRATFORD, CT</u>	DRILLED BY: <u>PENN DRILLING CO.</u>	BORING NO: <u>MF-MW102M</u>
DATE START: <u>04/28/1994</u>	DEPTH TO WATER: <u>6.65</u>	LOGGED BY: <u>BW</u>	GROUND EL.: <u>9.60</u>
DATE COMPLETED: <u>04/28/1994</u>	DATE & TIME: <u>05/16/1994/1510</u>	CHECKED BY: _____	TOTAL DEPTH: <u>32.00</u>

ELEV. IN FEET	DEPTH IN FEET	S A M P L E				REMARKS ON ADVANCE OF BORING	SOIL & ROCK DESCRIPTION	U.S.C.S.
		TYPE-NO.	BLOWS PER 6"	PEN. in.	REC. in.			
	-0.0	A					FOR SOIL AND ROCK DESCRIPTIONS SEE BORING LOG FOR MF-MW102D.	
	10.0	B				Telescope 6' Casing; Spin & Wash Technique		

LEGEND:
 TYPE-NO. - Type of Sample
 C - Rack core sample
 S - Split barrel sample
 BLOWS PER 6" - 140 lb. hammer falling 30" to drive a split barrel sampler; coring time per foot of rock
 PEN - Penetration length of sampler
 REC - Length of sample recovered
 ∇ - Natural groundwater table

NOTES:
 MW102M REPRESENTS ONE OF THREE WELLS IN A CLUSTER. SOIL AND ROCK DESCRIPTIONS WERE RECORDED FROM THE DEEPEST BORING IN EACH CLUSTER. SEE BORING LOG MF-MW102D FOR SOIL AND/OR ROCK DESCRIPTIONS.

ACAD NAME: A:\MW102M.DWG

PAGE 1 OF 2

BORING LOG

BROWN & ROOT ENVIRONMENTAL

PROJECT NO: <u>0890</u>	LOCATION: <u>STRATFORD, CT</u>	DRILLED BY: <u>PENN DRILLING CO.</u>	BORING NO: <u>MF-MW102S</u>
DATE START: <u>04/28/1994</u>	DEPTH TO WATER: <u>6.31</u>	LOGGED BY: <u>BW</u>	GROUND EL.: <u>9.60</u>
DATE COMPLETED: <u>04/28/1994</u>	DATE & TIME: <u>05/16/1994/1510</u>	CHECKED BY: _____	TOTAL DEPTH: <u>15.40</u>

ELEV. IN FEET	DEPTH IN FEET	S A M P L E				REMARKS ON ADVANCE OF BORING	SOIL & ROCK DESCRIPTION	U.S.C.S.
		TYPE- NO.	BLOWS PER 6"	PEN. in.	REC. in.			
	0.0	A				Auger borehole Readvance w/10 in casing 0-10'	FOR SOIL AND ROCK DESCRIPTIONS SEE BORING LOG FOR MF-MW101D.	
	10.0	B				Telescope 6in casing; Spin & Wash technique.	EOB @ 15.4FT. INSTALLED WELL, SEE CONSTRUCTION LOG FOR MF-MW101S.	

LEGEND:
 TYPE-NO. - Type of Sample
 C - Rock core sample
 S - Split barrel sample
 BLOWS PER 6" - 140 lb. hammer
 falling 30" to drive
 a split barrel sampler;
 coring time per foot of rock
 PEN - Penetration length of sampler
 REC - Length of sample recovered
 Z - Natural groundwater table

NOTES:
 MW102S REPRESENTS ONE OF THREE WELLS IN A CLUSTER. SOIL AND
 ROCK DESCRIPTIONS WERE RECORDED FROM THE DEEPEST BORING IN
 EACH CLUSTER. SEE BORING LOG MF-MW102D FOR SOIL AND/OR ROCK
 DESCRIPTIONS.

ACAD NAME: RAYMARK\BORINGS_ALTERED\MW102S.DWG (8/25/99) PAGE 1 OF 1

BORING LOG

BROWN & ROOT ENVIRONMENTAL

PROJECT NO: 0890 LOCATION: STRATFORD, CT DRILLED BY: PENN DRILLING CO. BORING NO: MF-MW103D
 DATE START: 04/13/1994 DEPTH TO WATER: 12.32 LOGGED BY: MH,MS,KJ GROUND EL.: 13.00
 DATE COMPLETED: 04/21/1994 DATE & TIME: 05/16/1994 1515 CHECKED BY: _____ TOTAL DEPTH: 108.00

ELEV. IN FEET	DEPTH IN FEET	S A M P L E				REMARKS ON ADVANCE OF BORING	SOIL & ROCK DESCRIPTION	U.S.C.S	
		TYPE-NO.	BLOWS PER 6"	PEN. in.	REC. in.				
	0.0	S-1	11	6	24	12	Interval= 0002'	S-1 (12in) SAND, widely graded, some gravel, trace silt, one pocket med sand.	SW
			21	6					
			11	6					
			11	6					
	-2.0	S-2	6	6	24	18	Interval= 0204'	S-2 (18in) SAND, similar to S-1 except silt pockets.	SW
			7	6					
			9	6					
			11	6					
	-4.0	S-3	12	6	9	3	Interval= 4 to 4.75ft. 6in cobble.	S-3 (3in) SILTY SAND, widely graded sand, some fine gravel, some silt.	SW/SM
			50	3					
	-6.0	S-4	9	6	24	18	Interval= 0608'	S-4 (18in) SILTY SAND, apparent asbestos fibers, some red tile.	SM/SP
			7	6					
			8	6					
			7	6					
	-8.0	S-5	2	6	24	24	Interval= 0810'	S-5 (24in) SILTY SAND, similar to S-4 with apparent asbestos.	SM/SP
			2	6					
			2	6					
			5	6					
	-10.0	S-6	1	6	24	16	Interval= 1012'	S-6 (16in) SILTY SAND, similar to S-4 except with silt and fibrous waste (asbestos) and piece of red slag, wet.	SM/SP
			1	6					
			1	6					
			4	6					
	-12.0	S-7	1	6	24	3	Interval= 1214'	S-7 (3in) SILTY SAND, asbestos fibers.	
			2	6					
			2	6					
			1	6					
	-14.0	S-8	1	6	24	24	Interval= 1416'	S-8 (24in) PEAT, roots and rootlets, some organic silt, slightly plastic.	Pt/ML
			1	6					
			2	6					
			4	6					

LEGEND:
 TYPE-NO. - Type of Sample
 C - Rock core sample
 S - Split barrel sample
 BLOWS PER 6" - 140 lb. hammer falling 30" to drive a split barrel sampler; coring time per foot of rock
 PEN - Penetration length of sampler
 REC - Length of sample recovered
 Z - Natural groundwater table

NOTES:
 Advanced boring with 6in casing. Spin&Wash to 88ft. Perform continuous sampling in 2ft increments w/3in barrel & 140lb hammer to 60ft. Sampling every 5ft approx. From 63-88ft using 3in barrel and 140lb hammer. Top of rock @ 88ft. Cored 20ft. Perform packer test. Backfill to 83ft and set well. Samples screened for Pb,Cu,PCB,Asbestos. NR,NM=not recorded/measured

ACAD NAME: RAYMARK\BORINGS_ALTERED\MW103D_A.DWG (8/25/99) PAGE 1 OF 6

BORING LOG

BROWN & ROOT ENVIRONMENTAL

PROJECT NO: 0890	LOCATION: STRATFORD, CT	DRILLED BY: PENN DRILLING CO.	BORING NO: MF-MW103D
DATE START: 04/13/1994	DEPTH TO WATER: 12.32	LOGGED BY: MH,MS,KJ	GROUND EL.: 13.00
DATE COMPLETED: 04/21/1994	DATE & TIME: 05/16/1994 1515	CHECKED BY:	TOTAL DEPTH: 108.00

ELEV. IN FEET	DEPTH IN FEET	S A M P L E				REMARKS ON ADVANCE OF BORING	SOIL & ROCK DESCRIPTION	U.S.C.S.	
		TYPE - NO.	BLOWS PER 6"	PEN. in.	REC. in.				
	16.0	S-9	2	6	24	12	Interval= 1618'	S-9 (12in) PEAT, similar to S-8, except some fine gravel.	Pt
			3	6					
			5	6					
	18.0	S-10	3	6	24	24	Interval= 1820'	S-10 (24in) PEAT, similar to S-8 except fewer roots and rootlets, more silt.	Pt/ML
			4	6					
			5	6					
	20.0	S-11	3	6	24	17	Interval= 2022'	S-11 (17in) SILT, fibers, slight layering roots and rootlets.	ML/Pt
			4	6					
			5	6					
	22.0	S-12	3	6	24	24	Interval= 2224'	S-12 (24in) SILT, similar to S-11.	ML/Pt
			5	6					
			8	6					
	24.0	S-13	5	6	24	18	Interval= 2426'	S-13 (24in) SAND and PEATY SILT, stratified, widely graded sand with trace silt and silt with some peat layers.	SW Pt/ML
			17	6					
			15	6					
	26.0	S-14	19	6	24	20	Interval= 2628'	S-14 (20in) SAND, widely graded & stratified, some gravel, 3in peat, fine sand layers to lin thick.	SW Pt
			21	6					
			22	6					
	28.0	S-15	23	6	24	14	Interval= 2830'	S-15 (14in) sandy GRAVEL, trace silt, brown.	GW
			14	6					
			17	6					
	30.0	S-16	43	6	24	13	Interval= 3032'	S-16 (13in) sandy GRAVEL, similar to S-16.	GW
			33	6					
			22	6					

LEGEND:
 TYPE-NO. - Type of Sample
 C - Rock core sample
 S - Split barrel sample
 BLOWS PER 6" - 140 lb. hammer falling 30" to drive a split barrel sampler:
 PEN - Penetration length of sampler
 REC - Length of sample recovered
 ▽ - Natural groundwater table

NOTES:
 Advanced boring with 6in casing. Spin&Wash to 88ft. Perform continuous sampling in 2ft increments w/3in barrel & 140lb hammer to 60ft. Sampling every 5ft approx. from 63-88ft using 3in barrel and 140lb hammer. Top of rock @ 88ft. Cored 20ft. Perform packer test. Backfill to 83ft and set well. Samples screened for Pb,Cu,PCB,Asbestos. NR,NM=not recorded/measured

ACAD NAME: A:\MW103D_B.DWG

PAGE 2 OF 6

BORING LOG

BROWN & ROOT ENVIRONMENTAL

PROJECT NO: <u>0890</u>	LOCATION: <u>STRATFORD, CT</u>	DRILLED BY: <u>PENN DRILLING CO.</u>	BORING NO: <u>MF-MW103D</u>
DATE START: <u>04/13/1994</u>	DEPTH TO WATER: <u>12.32</u>	LOGGED BY: <u>MH,MS,KJ</u>	GROUND EL.: <u>13.00</u>
DATE COMPLETED: <u>04/21/1994</u>	DATE & TIME: <u>05/16/1994 1515</u>	CHECKED BY: _____	TOTAL DEPTH: <u>108.00</u>

ELEV. IN FEET	DEPTH IN FEET	S A M P L E				REMARKS ON ADVANCE OF BORING	SOIL & ROCK DESCRIPTION	U.S.C.S.	
		TYPE-NO.	BLOWS PER 6"	PEN. in.	REC. in.				
	32.0	S-17	23	6	24	16	Interval= 3234'	S-17 (16in) SAND, some fine gravel, trace silt, trace coarse gravel to 1-inch.	SW
			25	6					
			24	6					
			20	6					
	34.0	S-18	12	6	24	18	Interval= 3436'	S-18 (18in) SAND, some gravel to lin, trace silt, layered.	SP
			16	6					
			8	6					
			11	6					
	36.0	S-19	10	6	24	0	Interval= 3638'	S-19 (0in) NO RECOVERY.	
			7	6					
			5	6					
			13	6					
	38.0	S-20	26	6	24	1	Interval= 3840'	S-20 (1in) SAND, trace silt.	SW
			30	6					
			35	6					
			42	6					
	40.0	S-21	30	6	24	9	Interval= 4042'	S-21 (9in) SAND, well graded sand, some subrounded gravel to 2-inch, trace silt.	
			15	6					
			26	6					
			35	6					
	42.0	S-22	33	6	24	15	Interval= 4244'	S-22 (15in) well graded sand, trace silt, gravel rounded to angular up to 2-inches.	
			26	6					
			20	6					
			30	6					
	44.0	S-23	33	6	24	10	Interval= 4446'	S-23 (10in) gravelly SAND, similar to S-27, 4in long rock.	
			35	6					
			26	6					
			36	6					
	46.0	S-24	24	6	24	18	Interval= 4648'	S-24 (18in) SAND, medium-coarse sand, some fines, some well roundd gravel to 1.5-inches.	
			20	6					
			20	6					
			18	6					

LEGEND:

TYPE-NO. - Type of Sample
 C - Rock core sample
 S - Split barrel sample
 BLOWS PER 6" - 140 lb. hammer falling 30" to drive a split barrel sampler; coring time per foot of rock
 PEN - Penetration length of sampler
 REC - Length of sample recovered
 ∇ - Natural groundwater table

NOTES:

Advanced boring with 6in casing. Spin&Wash to 88ft. Perform continuous sampling in 2ft increments w/3in barrel & 140lb hammer to 60ft. Sampling every 5ft approx. from 63-88ft using 3in barrel and 140lb hammer. Top of rock @ 88ft. Cored 20ft. Perform packer test. Backfill to 83ft and set well. Samples screened for Pb,Cu,PCB,Asbestos. NR,NM=not recorded/measured

BORING LOG

BROWN & ROOT ENVIRONMENTAL

PROJECT NO: 0890	LOCATION: STRATFORD, CT	DRILLED BY: PENN DRILLING CO	BORING NO: MF-MW103D
DATE START: 04/13/1994	DEPTH TO WATER: 12.32	LOGGED BY: MH,MS,KJ	GROUND EL.: 13.00
DATE COMPLETED: 04/21/1994	DATE & TIME: 05/16/1994 1515	CHECKED BY:	TOTAL DEPTH: 108.00

ELEV. IN FEET	DEPTH IN FEET	S A M P L E				REMARKS ON ADVANCE OF BORING	SOIL & ROCK DESCRIPTION	U.S.C.S.	
		TYPE-NO.	BLOWS PER 6"	PEN. in.	REC. in.				
48.0		S-25	24 18 19 20	6 6 6 6	24	5	Interval= 4850'	S-25 (5in) SAND, well graded.	
50.0		S-26	14 16 17 20	6 6 6 6	24	9	Interval= 5052'	S-26A (0-4in) SAND, similar to S-25. S-26B (4-9in) SAND, coarse, and fine GRAVEL, trace fine sand.	
52.0		S-27	25 27 20 18	6 6 6 6	24	12	Interval= 5254'	S-27 (12in) GRAVELLY SAND, widely graded to 2in.	
54.0		S-28	16 17 17 21	6 6 6 6	24	12	Interval= 5456'	S-28 (12in) GRAVELLY SAND, trace silt, widely graded, gravels to 2in.	
56.0		S-29	17 12 17 14	6 6 6 6	24	15	Interval= 5658'	S-29 (15in) GRAVELLY SAND, widely graded, cobbles to 2in.	
58.0		S-30	20 24 28 25	6 6 6 6	24	0	Interval= 5860' Hard advance. GRAVELS.	S-30 (0in) NO RECOVERY, pushed a rock.	
63.0		S-31	74 86 25 32	6 6 6 6	24	0	Hard advance. Cobbles. Lost 500gals.	S-31 (0in) NO RECOVERY. Possibly a cobble or large gravel zone.	

<p>LEGEND:</p> <p>TYPE-NO. - Type of Sample C - Rock core sample S - Split barrel sample BLOWS PER 6" - 140 lb. hammer falling 30" to drive a split barrel sampler; coring time per foot of rock PEN - Penetration length of sampler REC - Length of sample recovered ▽ - Natural groundwater table</p>	<p>NOTES:</p> <p>Advanced boring with 6in casing. Spin&Wash to 88ft. Perform continuous sampling in 2ft increments w/3in barrel & 140lb hammer to 60ft. Sampling every 5ft approx. from 63-88ft using 3in barrel and 140lb hammer. Top of rock @ 88ft. Cored 20ft. Perform packer test. Backfill to 83ft and set well. Samples screened for Pb,Cu,PCB,Asbestos. NR,NM=not recorded/measured</p> <p>ACAD NAME: A:\MW103D_D.DWG</p>
--	--

BORING LOG

BROWN & ROOT ENVIRONMENTAL

PROJECT NO: 0890 LOCATION: STRATFORD, CT DRILLED BY: PENN DRILLING CO BORING NO: MF-MW103D
 DATE START: 04/13/1994 DEPTH TO WATER: 12.32 LOGGED BY: MH,MS,KJ GROUND EL.: 13.00
 DATE COMPLETED: 04/21/1994 DATE & TIME: 05/16/1994 1515 CHECKED BY: TOTAL DEPTH: 108.00

ELEV. IN FEET	DEPTH IN FEET	S A M P L E				REMARKS ON ADVANCE OF BORING	SOIL & ROCK DESCRIPTION	U.S.C.S.	
		TYPE-NO.	BLOWS PER 6"	PEN. in.	REC. in.				
	63.0	S-31	74 86 25 32	6 6 6 6	24	0	Hard advance. Cobbles. Lost 500gals.	S-31 (0in) NO RECOVERY. Possibly a cobble or large gravel zone.	
	68.0	S-32	33 25 27 30	6 6 6 6	24	10	Hard advance. Lost another 500 gals.	S-32 (10in) sandy GRAVEL, trace silt, fine-coarse sand, well graded, coarse gravel up to 1.5' in length, 2 cobble size 3" gravels, cobbles brown.	GW
	73.0	S-33	20 9 8 13	6 6 6 6	24	7	Hard advance. Cobble/gravel zone	S-33 (7in) sandy GRAVEL, trace silt, similar to S-32.	GW
	78.0	S-34	10 11 19 16	6 6 6 6	24	8	Interval = 7880'	S-34 (8in) sandy GRAVEL, trace silt, similar to S-33.	GW

LEGEND:
 TYPE-NO. - Type of Sample
 C - Rock core sample
 S - Split barrel sample
 BLOWS PER 6" - 140 lb. hammer falling 30" to drive a split barrel sampler;
 caring time per foot of rock
 PEN - Penetration length of sampler
 REC - Length of sample recovered
 ∇ - Natural groundwater table

NOTES:
 Advanced boring with 6in casing. Spin&Wash to 88ft. Perform continuous sampling in 2ft increments w/3in barrel & 140lb hammer to 60ft. Sampling every 5ft approx. from 63-88ft using 3in barrel and 140lb hammer. Top of rock @ 88ft. Cored 20ft. Perform packer test. Backfill to 83ft and set well. Samples screened for Pb,Cu,PCB,Asbestos. NR,NM=not recorded/measured

ACAD NAME: RAYMARK\BORINGS_ALTERED\MW103D_E.DWG (8/25/99) PAGE 5 OF 6

BORING LOG

BROWN & ROOT ENVIRONMENTAL

PROJECT NO: <u>0890</u>	LOCATION: <u>STRATFORD, CT</u>	DRILLED BY: <u>PENN DRILLING CO.</u>	BORING NO: <u>MF-MW103D</u>
DATE START: <u>04/13/1994</u>	DEPTH TO WATER: <u>12.32</u>	LOGGED BY: <u>MH,MS,KJ</u>	GROUND EL.: <u>13.00</u>
DATE COMPLETED: <u>04/21/1994</u>	DATE & TIME: <u>05/16/1994 1515</u>	CHECKED BY: _____	TOTAL DEPTH: <u>108.00</u>

ELEV. IN FEET	DEPTH IN FEET	S A M P L E				REMARKS ON ADVANCE OF BORING	SOIL & ROCK DESCRIPTION	U.S.C.S.		
		TYPE-NO.	BLOWS PER 6"	PEN. in.	REC. in.					
	83.0	S-35	200	1	1	0	Casing grinding 6in cobble.	S-35 (0in) NO RECOVERY. Broken rock at end of split-barrel. Rollerbit broke through cobble.		
	83.5	S-36	12	18	6	24	0	Broke boulder. 2in barrel used. No basket in SB	S-36 (0in) NO RECOVERY. Advance to 88ft. Grinding terribly. No water return.	
	88.0	S-37	200	15	1	0	0	2in barrel. Boring flushed. Top of bedrock	S-37 (0in) NO RECOVERY. Metamorphic rock chips in sampler. Refusal @ 88ft. Bedrock.	
	90.5	C-39				84	84	Run 2:05-97.5 Run time: 14min No jams.	C-39 Chlorite mica schist. Foliated, med. grained dk green coloration, 45 degree angle schistosity in middle of run, garnets (?), RGD= 50%	

LEGEND:

TYPE-NO. - Type of Sample
 C - Rock core sample
 S - Split barrel sample
 BLOWS PER 6" - 140 lb. hammer falling 30" to drive a split barrel sampler: coring time per foot of rock
 PEN - Penetration length of sampler
 REC - Length of sample recovered
 ∅ - Natural groundwater table

NOTES:

Advanced boring with 6in casing. Spin&Wash to 88ft. Perform continuous sampling in 2ft increments w/3in barrel & 140lb hammer to 60ft. Sampling every 5ft approx. from 63-88ft using 3in barrel and 140lb hammer. Top of rock @ 88ft. Cored 20ft. Perform packer test. Backfill to 83ft and set well. Samples screened for Pb,Cu,PCB,Asbestos. NR,NM=not recorded/measured

BORING LOG

BROWN & ROOT ENVIRONMENTAL

PROJECT NO: 0890 LOCATION: STRATFORD, CT DRILLED BY: PENN DRILLING CO. BORING NO: MF-MW103M
 DATE START: 04/27/1994 DEPTH TO WATER: 11.88 LOGGED BY: JM GROUND EL.: 12.60
 DATE COMPLETED: 04/28/1994 DATE & TIME: 05/16/1994 1515 CHECKED BY: _____ TOTAL DEPTH: 40.00

ELEV. IN FEET	DEPTH IN FEET	S A M P L E				REMARKS ON ADVANCE OF BORING	SOIL & ROCK DESCRIPTION	U.S.C.S
		TYPE- NO.	BLOWS PER 6"	PEN. in.	REC. in.			
	0.0	A				4.25in ID auger Smooth advance Grass/gravel	SAND, poorly graded, little gravel, organic matter branch debris, dry, dk brown to light brown.	SP
	12.0	B				Possible H2O table. Wet soil off HSA flights	silty SAND, poorly graded, mod plasticity, some silt, little subrounded gravel, tree branch stuck in the bit.	
	14.5	C				Pull augers. Adv.w/10in cas. Telesc. 6in cas	Spin & Wash 6in casing below 14.5ft. PEAT & SILT, organic debris. Water is dk brown w/ floating organic debris.	

<p>LEGEND:</p> <p>TYPE-NO. - Type of Sample C - Rock core sample S - Split barrel sample BLOWS PER 6" - 140 lb. hammer falling 30" to drive a split barrel sampler; coring time per foot of rock PEN - Penetration length of sampler REC - Length of sample recovered ☒ - Natural groundwater table</p>	<p>NOTES:</p> <p>MW103M REPRESENTS ONE OF TWO WELLS IN A CLUSTER. SOIL AND ROCK DESCRIPTIONS WERE RECORDED FROM THE DEEPEST BORING IN EACH CLUSTER. SEE BORING LOG MF-MW103D FOR COMPLETE SOIL AND ROCK DESCRIPTIONS. OBSERVATIONS ON THIS LOG WERE REPORTED FROM THE ADVANCE OF THE AUGERS OR FROM SOIL CUTTINGS AS CASING WAS ADVANCED.</p> <p>ACAD NAME: RAYMARK\BORINGS_ALTERED\MW103M_A.DWG (8/25/99)</p>
---	---

BORING LOG

BROWN & ROOT ENVIRONMENTAL

PROJECT NO: <u>0890</u>	LOCATION: <u>STRATFORD, CT</u>	DRILLED BY: <u>PENN DRILLING CO.</u> BORING NO: <u>MF-MW103M</u>
DATE START: <u>04/27/1994</u>	DEPTH TO WATER: <u>11.88</u>	LOGGED BY: <u>JM</u> GROUND EL.: <u>12.60</u>
DATE COMPLETED: <u>04/28/1994</u>	DATE & TIME: <u>05/16/1994 1515</u>	CHECKED BY: _____ TOTAL DEPTH: <u>40.00</u>

ELEV. IN FEET	DEPTH IN FEET	S A M P L E				REMARKS ON ADVANCE OF BORING	SOIL & ROCK DESCRIPTION	U.S.C.S.
		TYPE- NO.	BLOWS PER 6"	PEN. in.	REC. in.			
-20.0		D					PEAT AND SILT	
-27.0		E					SAND, poorly graded, fine to medium sand.	SP

<p>LEGEND:</p> <p>TYPE-NO. - Type of Sample C - Rock core sample S - Split barrel sample BLOWS PER 6" - 140 lb. hammer falling 30" to drive a split barrel sampler; coring time per foot of rock PEN - Penetration length of sampler REC - Length of sample recovered ☒ - Natural groundwater table</p>	<p>NOTES:</p> <p>MW103M REPRESENTS ONE OF TWO WELLS IN A CLUSTER. SOIL AND ROCK DESCRIPTIONS WERE RECORDED FROM THE DEEPEST BORING IN EACH CLUSTER. SEE BORING LOG MF-MW103D FOR COMPLETE SOIL AND ROCK DESCRIPTIONS. OBSERVATIONS ON THIS LOG WERE REPORTED FROM THE ADVANCE OF THE AUGERS OR FROM SOIL CUTTINGS AS CASING WAS ADVANCED.</p> <p style="text-align: right;">PAGE <u>2</u> OF <u>3</u></p>
--	--

BORING LOG

BROWN & ROOT ENVIRONMENTAL

PROJECT NO: <u>0890</u>	LOCATION: <u>STRATFORD, CT</u>	DRILLED BY: <u>PENN DRILLING CO.</u>	BORING NO: <u>MF-MW103M</u>
DATE START: <u>04/27/1994</u>	DEPTH TO WATER: <u>11.88</u>	LOGGED BY: <u>JM</u>	GROUND EL.: <u>12.60</u>
DATE COMPLETED: <u>04/28/1994</u>	DATE & TIME: <u>05/16/1994 1515</u>	CHECKED BY: _____	TOTAL DEPTH: <u>40.00</u>

ELEV. IN FEET	DEPTH IN FEET	S A M P L E				REMARKS ON ADVANCE OF BORING	SOIL & ROCK DESCRIPTION	U.S.C.S.
		TYPE- NO.	BLOWS PER 6"	PEN. in.	REC. in.			
	40.0	F				EOB @ 40 ft. Set well.		

<p>LEGEND:</p> <p>TYPE-NO. - Type of Sample C - Rock core sample S - Split barrel sample BLOWS PER 6" - 140 lb. hammer falling 30" to drive a split barrel sampler; coring time per foot of rock PEN - Penetration length of sampler REC - Length of sample recovered ☒ - Natural groundwater table</p>	<p>NOTES:</p> <p>MW103M REPRESENTS ONE OF TWO WELLS IN A CLUSTER. SOIL AND ROCK DESCRIPTIONS WERE RECORDED FROM THE DEEPEST BORING IN EACH CLUSTER. SEE BORING LOG MF-MW103D FOR COMPLETE SOIL AND ROCK DESCRIPTIONS. OBSERVATIONS ON THIS LOG WERE REPORTED FROM THE ADVANCE OF THE AUGERS OR FROM SOIL CUTTINGS AS CASING WAS ADVANCED.</p> <p style="text-align: center;">ACAD NAME: A:\MW103M_D.DWG</p>
--	--

BORING LOG

BROWN & ROOT ENVIRONMENTAL

PROJECT NO: 0890 LOCATION: STRATFORD, CT DRILLED BY: PENN DRILLING CO. BORING NO: MF-MW104D
 DATE START: 04/07/1994 DEPTH TO WATER: 8.46 LOGGED BY: JM GROUND EL.: 8.80
 DATE COMPLETED: 04/14/1994 DATE & TIME: 05/16/1994/1525 CHECKED BY: _____ TOTAL DEPTH: 80.90

ELEV. IN FEET	DEPTH IN FEET	S A M P L E				REMARKS ON ADVANCE OF BORING	SOIL & ROCK DESCRIPTION	U.S.C.S.	
		TYPE-NO.	BLOWS PER 6"	PEN. in.	REC. in.				
	0.0	S-1	2 3 6 11	6 6 6 6	24	17	Interval= 0002' Fill material. 10.25in HSA	S-1 (0-17in) silty SAND, little gravel, poorly graded, asphalt, grass roots, red-brown.	
	2.0	S-2	3 10 25 27	6 6 6 6	24	21	Interval= 0204' Fill material. HSA drill tech.	S-2A (0-9in) silty SAND, poorly graded sand, little gravel, grass roots, damp, lt brown. S-2B (9-21in) silty SAND, little gravel, little asphalt, trace brick.	
	4.0	S-3	16 13 9 9	6 6 6 6	24	18	Interval= 0406' Fill material. HSA drill tech.	S-3A (0-6in) silty SAND, some silt, little gravel, grass roots, damp, lt brown. S-3B (6-18in) silty SAND, little gravel, asphalt, organic fibrous material, brick, wood chips, damp, black.	
	6.0	S-4	9 15 15 37	6 6 6 6	24	15	Interval= 0608' Fill material. HSA. Rig Noisy.	S-4A (0-5in) silty SAND, grass roots (may have fallen into hole), lt brown. S-4B (5-15in) silty SAND, well graded, some gravel trace asphalt, concrete, wood pieces, wet. Note: At 7ft, a rubber shoe sole came off auger fit	
	8.0	S-5	4 4 7 9	6 6 6 6	24	6	Interval= 0810' Top natural. 8in casing @9ft	S-5A (0-2in) silty SAND, grass roots, lt brown. S-5B (2-6in) silty SAND, well graded, trace gravel trace clay, wet, dk gray. Note: Measured water table @ 8.5ft logs.	
	10.0	S-6	15 6 6 7	6 6 6 6	24	13	Interval= 1012' Natural.	S-6A (0-5in) SAND and SILT, fine-coarse sand, little gravel, trace, clay, well graded, wet. S-6B (5-8in) silty SAND, poorly graded, little gravel, trace roots, damp, lt brown. S-6C (8-13in) Peat, little gravel, little silt, little fine sand.	SM
	12.0	S-7	2 3 3 2	6 6 6 6	24	20	Interval= 1214' Natural.	S-7 (0-20in) Peat, trace gravel, white roots, organic debris, dry, dk brown.	
	14.0	S-8	5 2 2 3	6 6 6 6	24	4	Interval= 1416' Natural.	S-8 (0-4in) Silt, med plasticity, some peat, damp, black.	

LEGEND:

TYPE-NO. - Type of Sample
 C - Rock core sample
 S - Split barrel sample
 BLOWS PER 6" - 140 lb. hammer falling 30" to drive a split barrel sampler; coring time per foot of rock
 PEN - Penetration length of sampler
 REC - Length of sample recovered
 ☒ - Natural groundwater table

NOTES:

Advanced soil boring with 10.25in ID HSA, 0-9ft; 8in casing to 29ft; telescoped 6in casing and advanced from 29ft to EOB. Performed continuous sampling w/2in & 3in ID split-barrel samplers to top of rock at approx. 81ft. Possible natural material @ 8-10ft interval. Possible top of water @ 8.5ft. Screen samples. Well screen @ 79-69ft. NM/NR=Not meas./rec.

BORING LOG

BROWN & ROOT ENVIRONMENTAL

PROJECT NO: 0890	LOCATION: STRATFORD, CT	DRILLED BY: PENN DRILLING CO.	BORING NO: MF-MW104D
DATE START: 04/07/1994	DEPTH TO WATER: 8.46	LOGGED BY: JM	GROUND EL.: 8.80
DATE COMPLETED: 04/14/1994	DATE & TIME: 05/16/1994/1525	CHECKED BY:	TOTAL DEPTH: 80.90

ELEV. IN FEET	DEPTH IN FEET	S A M P L E				REMARKS ON ADVANCE OF BORING	SOIL & ROCK DESCRIPTION	U.S.C.S.	
		TYPE-NO.	BLOWS PER 6"	PEN. in.	REC. in.				
	16.0	S-9	3 2 2	6 6 6	24	22	Interval= 1618' Natural.	S-9 (0-22in) Similar to above w/ fine fibrous material in soil that may or may not be organic.	OL
	18.0	S-10	2 3 3	6 6 6	24	24	Interval= 1820' Natural.	S-10 (0-24in) Peat, fibrous root and stems, damp, brown.	Pt
	20.0	S-11	4 4 4	6 6 6	24	24	Interval= 2022' Natural.	S-11 (0-24in) Similar to above, trace wood chips, damp. (Note: Water Table measured at 8.5' bgs)	Pt
	22.0	S-12	2 3 5 11	6 6 6 6	24	17	Interval= 2224' Natural. PID hit (A)=220	S-12A (0-9in) Similar to above, little fine sand. S-12B (9-17in) SAND, poorly graded, trace gravel, trace silt, trace organic debris, damp, dk brown gray.	
	24.0	S-13	8 10 10 13	6 6 6 6	24	14	Interval= 2426' Natural.	S-13A (0-7in) SAND, fine w/little med to coarse, sand, bedded 2in layers, little peat, little fine gravel, damp, gray.	
	26.0	S-14	4 5 7 11	6 6 6 6	24	15	Interval= 2628' Natural.	S-14 (0-15in) silty fine SAND, poorly graded, trace gravel, trace clay, 1/2in to 1/8in thick bedding throughout sample.	
	28.0	S-15	26 22 20 20	6 6 6 6	24	15	Interval= 2830' Telescope 6in casing @ 29ft.	S-15 (0-15in) SAND and gravel, well graded, fine-course sand, subangular-subrounded gravel, wet, red-brown.	GP
	30.0	S-16	20 27 19 22	6 6 6 6	24	11	Interval= 3032' Natural nat.	S-16 (0-11in) SAND and Gravel, poorly graded, little fines, trace fibrous organic matter, wet, dk gray.	GP

LEGEND:

TYPE-NO. - Type of Sample
 C - Rock core sample
 S - Split barrel sample
 BLOWS PER 6" - 140 lb. hammer falling 30" to drive a split barrel sampler; coring time per foot of rock
 PEN - Penetration length of sampler
 REC - Length of sample recovered
 ☒ - Natural groundwater table

NOTES:

Advanced soil boring with 10.25in ID HSA, 0-9ft; 8in casing to 29ft; telescoped 6in casing and advanced from 29ft to EOB. Performed continuous sampling w/2in & 3in OD split-barrel samplers to top of rock at approx. 81ft. Possible natural material @ 8-10ft interval. Possible top of water @ 8.5ft. Screen samples. Well screen @ 79-69ft. NM/NR=Not meas./rec.

BORING LOG

BROWN & ROOT ENVIRONMENTAL

PROJECT NO: 0890 LOCATION: STRATFORD, CT DRILLED BY: PENN DRILLING CO BORING NO: MF-MW104D
 DATE START: 04/07/1994 DEPTH TO WATER: 8.46 LOGGED BY: JM GROUND EL.: 8.80
 DATE COMPLETED: 04/14/1994 DATE & TIME: 05/16/1994/1525 CHECKED BY: TOTAL DEPTH: 80.90

ELEV. IN FEET	DEPTH IN FEET	S A M P L E				REMARKS ON ADVANCE OF BORING	SOIL & ROCK DESCRIPTION	U.S.C.S.	
		TYPE-NO.	BLOWS PER 6"	PEN. in.	REC. in.				
	32.0	S-17	38 30 38 30	6 6 6 6	24	13	Interval= 3234' Natural mat.	S-17 (0-13in) SAND and Gravel, trace silt, apparent bedding, moist, dk gray to red-brown.	GP
	34.0	S-18	32 26 28 20	6 6 6 6	24	6	Interval= 3436' Natural mat.	S-18A (0-4in) GRAVEL, subrounded-subangular, poorly sorted, trace coarse sand. S-18B (4-6in) Silt and Gravel, trace sand, dk gray	GP GM
	36.0	S-19	5 10 19 22	6 6 6 6	24	11	Interval= 3638' Used 2in barrel	S-19A (0-5in) Silt, some gravel, little sand, fine to coarse, gray. S-19B (5-11in) Sand, well graded, some gravel, trace silt, red-brown.	ML SW
	38.0	S-20	24 19 23 9	6 6 6 6	24	7	Interval= 3840' Natural mat.	S-20 (0-7in) Sand and gravel, well graded, trace fines, lt brown.	SW/GW
	40.0	S-21	40 21 20 23	6 6 6 6	24	12	Interval= 4042' Natural mat.	S-21A (0-3in) Gravel, one piece. S-21B (3-12in) SAND, poorly graded, trace gravel, light brown.	SP
	42.0	S-22	40 48 28 17	6 6 6 6	24	7	Interval= 4244' Natural mat.	S-22A (0-6in) SAND, similar to S-21A&B. S-22B (6-7in) SAND, and fine gravel, similar to S-22A.	SP SP
	44.0	S-23	13 11 13 10	6 6 6 6	24	8	Interval= 4446' Natural mat.	S-23A (0-2in) Gravel, poorly graded. S-23B (2-8in) SAND, well graded, trace gravel, lt brown.	GP SW
	46.0	S-24	6 36 44 24	6 6 6 6	24	8	Interval= 4648'	S-24A (0-6.5in) Silt, mod to high plasticity, little sand, dk gray. S-24B (6.5-8.5in) SAND, poorly graded, trace silt, lt brown.	MH SP

LEGEND:
 TYPE-NO. - Type of Sample
 C - Rock core sample
 S - Split barrel sample
 BLOWS PER 6" - 140 lb. hammer falling 30" to drive a split barrel sampler; coring time per foot of rock
 PEN - Penetration length of sampler
 REC - Length of sample recovered
 ∞ - Natural groundwater table

NOTES:
 Advanced soil boring with 10.25in ID HSA, 0-9ft; 8in casing to 29ft; telescoped 6in casing and advanced from 29ft to EOB
 Performed continuous sampling w/2in & 3in ID split-barrel samplers to top of rock at approx. 81ft. Possible natural material @ 8-10ft interval. Possible top of water @ 8.5ft.
 Screen samples. Well screen @ 79-69ft. NM/NR=Not meas./rec.

ACAD NAME: RAYMARK\BORINGS_ALTERED\MW104D_C.DWG (8/25/99) PAGE 3 OF 6

BORING LOG

BROWN & ROOT ENVIRONMENTAL

PROJECT NO: 0890	LOCATION: STRATFORD, CT	DRILLED BY: PENN DRILLING CO	BORING NO: MF-MW104D
DATE START: 04/07/1994	DEPTH TO WATER: 8.46	LOGGED BY: JM	GROUND EL.: 8.80
DATE COMPLETED: 04/14/1994	DATE & TIME: 05/16/1994/1525	CHECKED BY:	TOTAL DEPTH: 80.90

ELEV. IN FEET	DEPTH IN FEET	S A M P L E				REMARKS ON ADVANCE OF BORING	SOIL & ROCK DESCRIPTION	U.S.C.S.	
		TYPE-NO.	BLOWS PER 6"	PEN. in.	REC. in.				
48.0		S-25	22 42 23 20	6 6 6 6	24	0	NO RECOVERY	S-25 (0in) NO RECOVERY.	
50.0		S-26	38 27 26 16	6 6 6 6	24	10	Interval= 5052'	S-26A (0-3in) SAND, and Gravel, well graded. S-26B (3-7in) Gravel, trace silt, lt brown.	GW/SW GW
52.0		S-27	42 52 53 47	6 6 6 6	24	13	Interval= 5254'	S-27A (0-2in) Gravel, one 2in piece. S-27B (2-13in) SAND and Gravel, well graded, trace silt, red color patches.	SW
54.0		S-28	25 67 44 35	6 6 6 6	24	15	Interval= 5456'	S-28A (0-5.5in) Gravel, poorly graded, little silt S-28B (5.5-15in) SAND and Gravel, well graded, trace silt.	GP SW
56.0		S-29	40 57 32 26	6 6 6 6	24	13	Interval= 5658'	S-29 (0-13in) SAND and Gravel, well graded, trace silt.	GW
58.0		S-30	50 40 47 28	6 6 6 6	24	11	Interval= 5860'	S-30 (0-11in) SAND and Gravel, well graded, 1/2in layer of highly plastic silt below sand.	SW/GW
60.0		S-31	60 70 50 39	6 6 6 6	24	13	Interval= 6062'	S-31 (0-13in) SAND and Gravel, well graded, trace silt.	SW
62.0		S-32	30 40 50 50	6 6 6 6	24	12	Interval= 6264'	S-32 (0-12in) SAND and Gravel, similar to S-31 w/ more gravel.	GW

<p>LEGEND:</p> <p>TYPE-NO. - Type of Sample C - Rock core sample S - Split barrel sample BLOWS PER 6" - 140 lb. hammer falling 30" to drive a split barrel sampler; coring time per foot of rock PEN - Penetration length of sampler REC - Length of sample recovered ∇ - Natural groundwater table</p>	<p>NOTES:</p> <p>Advanced soil boring with 10.25in ID HSA, 0-9ft; 8in casing to 29ft; telescoped 6in casing and advanced from 29ft to EOB. Performed continuous sampling w/2in & 3in ID split-barrel samplers to top of rock at approx. 81ft. Possible natural material @ 8-10ft interval. Possible top of water @ 8.5ft. Screen samples. Well screen @ 79-69ft. NM/NR=Not meas./rec.</p> <p>ACAD NAME: RAYMARK\BDRINGS_ALTERED\MW104D_0.DWG (8/25/99)</p>
<p>PAGE <u>4</u> OF <u>6</u></p>	

BORING LOG

BROWN & ROOT ENVIRONMENTAL

PROJECT NO: 0890 LOCATION: STRATFORD, CT DRILLED BY: PENN DRILLING CO. BORING NO: MF-MW104D
 DATE START: 04/07/1994 DEPTH TO WATER: 8.46 LOGGED BY: JM GROUND EL.: 8.80
 DATE COMPLETED: 04/14/1994 DATE & TIME: 05/16/1994/1525 CHECKED BY: TOTAL DEPTH: 80.90

ELEV. IN FEET	DEPTH IN FEET	S A M P L E				REMARKS ON ADVANCE OF BORING	SOIL & ROCK DESCRIPTION	U.S.C.S.	
		TYPE-NO.	BLOWS PER 6"	PEN. in.	REC. in.				
64.0		S-33	30 50 54 35	6 6 6 6	24	13	Interval= 6466'	S-33 (0-13in) SAND and Gravel, similar to S-32.	GW
66.0		S-34	10 12 29 34	6 6 6 6	24	12	Interval= 6668' 2in barrel used	S-34 (0-12in) SAND and GRAVEL, well graded, little silt.	SW
68.0		S-35	15 20 21 39	6 6 6 6	24	10	Interval= 6870' 2in barrel used	S-35 (0-10in) SAND and GRAVEL, similar to S-34.	SW
70.0		S-36	35 90 60 53	6 6 6 6	24	11	Interval= 7072' 3in barrel used	S-36 (0-11in) GRAVEL, well graded, some sand, some silt (2in thick layer, mod. plastic), mottled color.	GW
72.0		S-37	40 50 40 42	6 6 6 6	24	11	Interval= 7274' Water not flowing into fm.	S-37 (0-11in) SAND and GRAVEL, well graded, little silt, mottled. Note: Water not escaping from the bottom of the casing, non-permeable geology.	SW/GW
74.0		S-38	30 29 30 29	6 6 6 6	24	8	Interval= 7476' Water is not escaping casing	S-38 (0-8.5in) SAND and GRAVEL, similar to S-37.	SW/GW
76.0		S-39	12 33 55 89	6 6 6 6	24	10	Interval= 7678' Water escaping. Rock in spoon.	S-39 (0-10.5in) SAND and GRAVEL, similar to S-38. Note: Water is not flowing out of the 6in casing into the formation at the noted depth.	SW/GW
78.0		S-40	23 49 55 63	6 6 6 6	24	5	Interval= 7880' Rig chattering 2in barrel.	S-40 (0-5in) SAND and Gravel, well graded gravel, poorly graded sand, some silt, gray.	GW

LEGEND:
 TYPE-NO. - Type of Sample
 C - Rock core sample
 S - Split barrel sample
 BLOWS PER 6" - 140 lb. hammer falling 30" to drive a split barrel sampler; coring time per foot of rock
 PEN - Penetration length of sampler
 REC - Length of sample recovered
 ♁ - Natural groundwater table

NOTES:
 Advanced soil boring with 10.25in ID HSA, 0-9ft; 8in casing to 29ft; telescoped 6in casing and advanced from 29ft to EOB. Performed continuous sampling w/2in & 3in OD split-barrel samplers to top of rock at approx. 81ft. Possible natural material @ 8-10ft interval. Possible top of water @ 8.5ft. Screen samples. Well screen @ 79-69ft. NM/NR=Not meas./rec.

ACAD NAME: RAYMARK\BORINGS_ALTERED\MW104D_E.DWG (8/25/99) PAGE 5 OF 6

BORING LOG

BROWN & ROOT ENVIRONMENTAL

PROJECT NO: <u>0890</u>	LOCATION: <u>STRATFORD, CT</u>	DRILLED BY: <u>PENN DRILLING CO.</u> BORING NO: <u>MF-MW104D</u>
DATE START: <u>04/07/1994</u>	DEPTH TO WATER: <u>8.46</u>	LOGGED BY: <u>JM</u> GROUND EL.: <u>8.80</u>
DATE COMPLETED: <u>04/14/1994</u>	DATE & TIME: <u>05/16/1994/1525</u>	CHECKED BY: _____ TOTAL DEPTH: <u>80.90</u>

ELEV. IN FEET	DEPTH IN FEET	S A M P L E				REMARKS ON ADVANCE OF BORING	SOIL & ROCK DESCRIPTION	U.S.C.S.	
		TYPE-NO.	BLOWS PER 6"	PEN. in.	REC. in.				
	80.0		65 100	6 5	11	6	Inter.=80-80.9'	S-41 (0-6in) SAND and Gravel, well graded gravel, little silt, trace flaky gravel w/metallic luster.	SW/GW
	80.5	S-41	100	5	5	3	Rig chatter. Top of rock.	S-42 (3in) BEDROCK, broken up schistose bedrock. EOB @ 80ft 11in. Set well, see well log.	

<p>LEGEND:</p> <p>TYPE-NO. - Type of Sample C - Rock core sample S - Split barrel sample BLOWS PER 6" - 140 lb. hammer falling 30" to drive a split barrel sampler: caring time per foot of rock PEN - Penetration length of sampler REC - Length of sample recovered ♻ - Natural groundwater table</p>	<p>NOTES:</p> <p>Advanced soil boring with 10.25in ID HSA,0-9ft; 8in casing to 29ft; telescoped 6in casing and advanced from 29ft to EOB. Performed continuous sampling w/2in & 3in OD split-barrel samplers to top of rock at approx. 81ft. Possible natural material @ 8-10ft interval. Possible top of water @ 8.5ft. Screen samples. Well screen @ 79-69ft. NM/NR=Not meas./rec.</p> <p>ACAD NAME: RAYMARK\BORINGS_ALTERED\MW104D_F.DWG (8/25/99)</p>
PAGE <u>6</u> OF <u>6</u>	

BORING LOG

BROWN & ROOT ENVIRONMENTAL

PROJECT NO: 0890	LOCATION: STRATFORD, CT	DRILLED BY: PENN DRILLING CO.	BORING NO: MF-MW104M
DATE START: 04/19/1994	DEPTH TO WATER: 8.70	LOGGED BY: JM	GROUND EL.: 9.40
DATE COMPLETED: 04/19/1994	DATE & TIME: 05/16/1994 / 1525	CHECKED BY:	TOTAL DEPTH: 29.00

ELEV. IN FEET	DEPTH IN FEET	S A M P L E				REMARKS ON ADVANCE OF BORING	SOIL & ROCK DESCRIPTION	U.S.C.S.
		TYPE-NO.	BLOWS PER 6"	PEN. in.	REC. in.			
	0.0	A				8.25in ID auger Fill material.	Grass, tan silt, some sand.	
	2.0	B				Material from auger flights	Silt, sand, gravel, trace concrete evident to 7ft.	
	4.0	C				Rig chatter to 7ft.		
	7.0	D				Auger flights empty. Chatter mechanical.		
	9.0	E				Pull augers. Re- advan. 8in cas. Telsc. 6in & adv	Wash water is dk gray to black.	
	15.0	F				Poss. artesian conditions. Tub gains H2O.		

<p>LEGEND:</p> <p>TYPE-NO. - Type of Sample C - Rock core sample S - Split barrel sample BLOWS PER 6" - 140 lb. hammer falling 30" to drive a split barrel sampler; coring time per foot of rock PEN - Penetration length of sampler REC - Length of sample recovered ∇ - Natural groundwater table</p>	<p>NOTES:</p> <p>MW104M REPRESENTS ONE OF THREE WELLS IN A CLUSTER. SOIL AND ROCK DESCRIPTIONS WERE RECORDED FROM THE DEEPEST BORING IN EACH CLUSTER. SEE BORING LOG MF-MW104D FOR COMPLETE SOIL AND ROCK DESCRIPTIONS. OBSERVATIONS ON THIS LOG WERE REPORTED FROM THE ADVANCE OF THE AUGERS OR FROM SOIL CUTTINGS AS CASING WAS ADVANCED.</p> <p>ACAD NAME: A:\MW104M_A.DWG</p> <p style="text-align: right;">PAGE <u>1</u> OF <u>2</u></p>
--	--

BORING LOG

BROWN & ROOT ENVIRONMENTAL

PROJECT NO: 0890	LOCATION: STRATFORD, CT	DRILLED BY: PENN DRILLING CO.	BORING NO: MF-MW104M
DATE START: 04/19/1994	DEPTH TO WATER: 8.70	LOGGED BY: JM	GROUND EL.: 9.40
DATE COMPLETED: 04/19/1994	DATE & TIME: 05/16/1994/1525	CHECKED BY:	TOTAL DEPTH: 29.00

ELEV. IN FEET	DEPTH IN FEET	S A M P L E				REMARKS ON ADVANCE OF BORING	SOIL & ROCK DESCRIPTION	U.S.C.S.
		TYPE-NO.	BLOWS PER 6"	PEN. in.	REC. in.			
	15.0	F				Poss. artesian conditions. Tub gains H2O.		
	19.5	G				Wash water dk brown, milky brown.		
	23.5	H				Sit screech frm rig. Rig chatter periodic.	Formation seems to be taking water (slightly).	
	29.0	I				EOB @ 29ft. Set well.		

<p>LEGEND:</p> <p>TYPE-NO. - Type of Sample C - Rock core sample S - Split barrel sample BLOWS PER 6" - 140 lb. hammer falling 30" to drive a split barrel sampler; coring time per foot of rock PEN - Penetration length of sampler REC - Length of sample recovered ∇ - Natural groundwater table</p>	<p>NOTES:</p> <p>MW104M REPRESENTS ONE OF THREE WELLS IN A CLUSTER. SOIL AND ROCK DESCRIPTIONS WERE RECORDED FROM THE DEEPEST BORING IN EACH CLUSTER. SEE BORING LOG MF-MW104D FOR COMPLETE SOIL AND ROCK DESCRIPTIONS. OBSERVATIONS ON THIS LOG WERE REPORTED FROM THE ADVANCE OF THE AUGERS OR FROM SOIL CUTTINGS AS CASING WAS ADVANCED.</p> <p>ACAD NAME: A:\MW104M_B.DWG</p>
--	--

BORING LOG

BROWN & ROOT ENVIRONMENTAL

PROJECT NO: <u>0890</u>	LOCATION: <u>STRATFORD, CT</u>	DRILLED BY: <u>PENN DRILLING CO.</u>	BORING NO: <u>MF-MW104M</u>
DATE START: <u>04/19/1994</u>	DEPTH TO WATER: <u>8.70</u>	LOGGED BY: <u>JM</u>	GROUND EL.: <u>9.40</u>
DATE COMPLETED: <u>04/19/1994</u>	DATE & TIME: <u>05/16/1994/1525</u>	CHECKED BY: _____	TOTAL DEPTH: <u>29.00</u>

ELEV. IN FEET	DEPTH IN FEET	S A M P L E				REMARKS ON ADVANCE OF BORING	SOIL & ROCK DESCRIPTION	U.S.C.S.
		TYPE- NO.	BLOWS PER 6"	PEN. in.	REC. in.			

BORING LOG

BROWN & ROOT ENVIRONMENTAL

PROJECT NO: <u>0890</u>	LOCATION: <u>STRATFORD, CT</u>	DRILLED BY: <u>PENN DRILLING CO.</u>	BORING NO: <u>MF-MW104S</u>
DATE START: <u>04/20/1994</u>	DEPTH TO WATER: <u>6.67</u>	LOGGED BY: <u>JM</u>	GROUND EL.: <u>8.70</u>
DATE COMPLETED: <u>04/20/1994</u>	DATE & TIME: <u>05/16/1994 1525</u>	CHECKED BY: _____	TOTAL DEPTH: <u>11.00</u>

ELEV. IN FEET	DEPTH IN FEET	S A M P L E				REMARKS ON ADVANCE OF BORING	SOIL & ROCK DESCRIPTION	U.S.C.S.
		TYPE-NO.	BLOWS PER 6"	PEN. in.	REC. in.			
	0.0					8.25in ID augers Fill material.	Grassy rubble.	
	1.0	A				Fill material.	Dk brown sand and gravel cuttings, trace brick,	
	2.0	B				Rig chatter.	trace metal rods (alloy, 3mm thick in diameter).	
	3.0	C				Rig chatter and screeching.		
	3.5	D				Wet soil.		
	4.5	E						
		F				Pull augers. Re-advance w/6in casing. Spn/Wsh	Washwater is milky gray.	
	6.5	G				Rig screeching.	Wash water is dk brown w/ plant debris (floating).	
	8.5	H					White speckles floating in washwater.	
	11.0	K					EOB @ 11ft. Set well.	

<p>LEGEND:</p> <p>TYPE-NO. - Type of Sample C - Rock core sample S - Split barrel sample BLOWS PER 6" - 140 lb. hammer falling 30" to drive a split barrel sampler; coring time per foot of rock PEN - Penetration length of sampler REC - Length of sample recovered ∅ - Natural groundwater table</p>	<p>NOTES:</p> <p>MW104S REPRESENTS ONE OF THREE WELLS IN A CLUSTER. SOIL AND ROCK DESCRIPTIONS WERE RECORDED FROM THE DEEPEST BORING IN EACH CLUSTER. SEE BORING LOG MF-MW104D FOR COMPLETE SOIL AND ROCK DESCRIPTIONS. OBSERVATIONS ON THIS LOG WERE REPORTED FROM THE ADVANCE OF THE AUGERS OR FROM SOIL CUTTINGS AS CASING WAS ADVANCED.</p> <p>ACAD NAME: A:\MW104S.DWG</p> <p style="text-align: right;">PAGE <u>1</u> OF <u>1</u></p>
--	--

BORING LOG

BROWN & ROOT ENVIRONMENTAL

PROJECT NO: 0890 LOCATION: STRATFORD, CT DRILLED BY: PENN DRILLING CO. BORING NO: MF-SBI
 DATE START: 03/30/1994 DEPTH TO WATER: -- LOGGED BY: DM,MS,JM GROUND EL.: 9.60
 DATE COMPLETED: 03/30/1994 DATE & TIME: --/--/19-- CHECKED BY: TOTAL DEPTH: 18.00

ELEV. IN FEET	DEPTH IN FEET	S A M P L E				REMARKS ON ADVANCE OF BORING	SOIL & ROCK DESCRIPTION	U.S.C.S.	
		TYPE-NO.	BLOWS PER 6"	PEN. in.	REC. in.				
	0.0		2	6	24	12	MF-SO-SBI-0002 Screen for: Pb, Cu, PCB, Asbestos	S-1A(0-2in) Humus - Organic, leaves, sticks, black S-1B(2-12in) Silty Sand - Fine to medium sand, some organic material, rounded pebbles up to 1.5in diameter, light brown to olive drab.	SP
	2.0		16	6	24	13	MF-SO-SBI-0204 Screen for: Pb, Cu, PCB, Asbestos	S-2A (0-6in) Silty Sand - Fine to medium sand, poorly sorted, 1/8 to 1/4in diameter rock chips, brick fragments, light brown. S-2B (6-13in) Sandy silt - alot of rock fragments, 1/8 to 1/4in cinders(?), light gray. Possibly fill due to the cinder fragments.	SM SM
	4.0		37	6	24	3	MF-SO-SBI-0406 Used 3in barrel Not screened	S-3 (0in) No recovery. A 3-in cobble blocked end of sample barrel.	
	6.0		5	6	24	24	MF-SO-SBI-0608 3in barrel. Pb, Cu, PCB, Asbestos	S-4A(0-14in) Sandy silt, some organic material, lin rock fragments, dark grey. S-4B(14-24in) Silty Sand, rock fragments to 2in.	
	8.0		5	6	24	24	MF-SO-SBI-0810 3in barrel. Pb, Cu, PCB, Asbestos	S-5A(0-16in) Silty Sand, rock fragments up to 2in dark gray. S-5B(16-24in) Sand, fine to medium grained, dark gray.	
	10.0		7	6	24	11	MF-SO-SBI-1012 3in barrel. Pb, Cu, PCB, Asbestos	S-6 (0-11in) Silty Sand - Fine to medium sand, angular rock fragments up to 3/4in diameter, dark gray.	SM
	12.0		5	6	24	20	MF-SO-SBI-1214 3in barrel. Pb, Cu, PCB, Asbestos	S-7A(0-12in) Silty Sand - fine to medium sand, some silt, trace gravel, dark gray, wet. PID deflection on sample = 0ppm. S-7B(12-20in) Peat, plant debris up to 70 percent. PID deflection up to 25 ppm on sample.	SM Pt
	14.0		4	6	24	24	MF-SO-SBI-1416 3in barrel. Pb, Cu, PCB, Asbestos	S-8A(0-8in) Peat, brown. S-8B(8-16in) Sand, fine to medium. S-8C(16-24in) Peat, brown.	Pt SP Pt

LEGEND:

TYPE-NO. - Type of Sample
 C - Rock core sample
 S - Split barrel sample
 BLOWS PER 6" - 140 lb. hammer falling 30" to drive a split barrel sampler; coring time per foot of rock
 PEN - Penetration length of sampler
 REC - Length of sample recovered
 ▽ - Natural groundwater table

NOTES:

Advanced soil boring with 6.25in ID HSA. Advanced 2in and 3in split-barrel samplers with a 140lb hammer. Performed continuous soil sampling in 2-foot increments.

ACAD NAME: A:\MF-SBI_A.DWG

BORING LOG

BROWN & ROOT ENVIRONMENTAL

PROJECT NO: <u>0890</u>	LOCATION: <u>STRATFORD, CT</u>	DRILLED BY: <u>PENN DRILLING CO</u>	BORING NO: <u>MF-SBI</u>
DATE START: <u>03/30/1994</u>	DEPTH TO WATER: <u>--</u>	LOGGED BY: <u>DM,MS,JM</u>	GROUND EL.: <u>9.60</u>
DATE COMPLETED: <u>03/30/1994</u>	DATE & TIME: <u>--/--/19--</u>	CHECKED BY: <u></u>	TOTAL DEPTH: <u>18.00</u>

ELEV. IN FEET	DEPTH IN FEET	S A M P L E				REMARKS ON ADVANCE OF BORING	SOIL & ROCK DESCRIPTION	U.S.C.S.
		TYPE-NO.	BLOWS PER 6"	PEN. in.	REC. in.			
	16.0	S-9	4	6	24		S-9(0-22in) Peat - approximately 70 percent plant debris, damp, brown. PID deflection on sample up to 25ppm. End of Boring @ 18ft bgs. No well installed. Borehole collapsed as augers were removed. Void space from 0 to 4 ft bgs filled with cement.	Pt
			4	6				
			3	6				
			4	6				
	18.0							

<p>LEGEND:</p> <p>TYPE-NO. - Type of Sample C - Rock core sample S - Split barrel sample BLOWS PER 6" - 140 lb. hammer falling 30" to drive a split barrel sampler; coring time per foot of rock PEN - Penetration length of sampler REC - Length of sample recovered Z - Natural groundwater table</p>	<p>NOTES:</p> <p style="text-align: center;">Advanced soil boring with 6.25in ID HSA. Advanced 2in and 3in split-barrel samplers with a 140lb hammer. Performed continuous soil sampling in 2-foot increments.</p> <p style="text-align: center;">ACAD NAME: RAYMARK\BORINGS_ALTERED\MF-SBI_B.DWG (8/25/99)</p> <p style="text-align: right;">PAGE <u>2</u> OF <u>2</u></p>
--	--

Boring Logs
from 3/30/94 to 4/11/94
(pages 54-106)
are available
in a separate file (size: 4 MB).

[Click here to view.](#)

Boring Logs
from 4/11/94 to 7/23/97
(pages 107-165)
are available
in a separate file (size: 4 MB).

[Click here to view.](#)

Appendices B & C
(pages 166-182)
are available
in a separate file (size: 1 MB).

[Click here to view.](#)