

NEIL ABERCROMBIE  
GOVERNOR OF HAWAII



LINDA ROSEN, M.D., M.P.H.  
DIRECTOR OF HEALTH

STATE OF HAWAII  
DEPARTMENT OF HEALTH  
P. O. BOX 3378  
HONOLULU, HI 96801-3378

In reply, please refer to:  
File:

14-486M&A CAB

June 26, 2014

Meredith Kurpius, Ph.D.  
Manager  
Air Quality Analysis Office (AIR-7)  
U.S. EPA, Region IX  
75 Hawthorne Street  
San Francisco, California 94105

Dear Dr. Kurpius:

SUBJECT: 2014 Air Monitoring Network Plan

Pursuant to 40 Code of Federal Regulations Part 58, Subpart B, we are submitting the *2014 Air Monitoring Network Plan*. As required, the annual network plan was made available for public inspection from May 20 to June 20, 2014, during which time no comments were received.

If there are any questions concerning these documents, please contact Ms. Lisa Young of my staff at (808) 586-4200.

Sincerely,

NOLAN S. HIRAI  
Manager, Clean Air Branch

SK:nn

Attachments

c: Dena Vallano, Ph.D., Air Quality Analysis Office (AIR-7), U.S. EPA, Region 9







# **State of Hawaii 2014 Air Monitoring Network Plan**

*Submitted to the U.S. EPA Region 9*  
**July 1, 2014**

*Prepared by:*  
State of Hawaii  
Department of Health

Environmental Management Division  
Clean Air Branch  
and

State Laboratories Division  
Air Surveillance and Analysis Section

Document Control Number  
HDOH – AMNP – 2014 - 001

# Table of Contents

<b>List of Tables</b> .....	<b>2</b>
<b>List of Figures</b> .....	<b>2</b>
<b>Acronyms and Definitions</b> .....	<b>3</b>
<b>Introduction</b> .....	<b>4</b>
<b>Appendix A</b> .....	<b>56</b>
<b>1.0 Network Purpose and Design</b> .....	<b>5</b>
1.1 Overview .....	5
1.1.1 SLAMS .....	5
1.1.2 SPMS .....	5
1.2 Network Design and Review Process .....	6
1.2.1 Monitoring Objectives and Site Types .....	6
1.2.2 PM <sub>2.5</sub> Network Changes .....	7
1.3 Organizational Structure and Responsibilities .....	7
<b>2.0 Network Evaluation</b> .....	<b>8</b>
2.1 PM <sub>10</sub> Network .....	8
2.2 PM <sub>2.5</sub> Network .....	10
2.3 O <sub>3</sub> Network .....	13
2.4 Pb Network.....	15
2.5 CO Network.....	16
2.6 NO <sub>2</sub> Network .....	17
2.7 SO <sub>2</sub> Network.....	18
2.8 NCore .....	20
2.9 H <sub>2</sub> S Network.....	20
2.10 Site Closures .....	20
2.11 Site Additions .....	20
2.12 Site Modifications .....	21
2.13 Summary of Network and Changes.....	22
<b>3.0 Detailed Site Descriptions</b> .....	<b>24</b>
(DH) HONOLULU.....	25
(KA) KAPOLEI SLAMS and NCORE.....	27
(PC) PEARL CITY.....	33
(SI) SAND ISLAND .....	35
(KH) KIHEI .....	37
(PI) PAIA .....	39
(NI) NIUMALU .....	41
(HL) HILO.....	43
(KN) KONA .....	45
(MV) MOUNTAIN VIEW .....	47
(OV) OCEAN VIEW.....	49
(PA) PAHALA.....	51
(PE) PUNA E.....	53

## List of Tables

Table 2-1	PM <sub>10</sub> Network and Concentrations for the Honolulu MSA .....	8
Table 2-2	PM <sub>10</sub> Minimum Monitoring Requirements for Each MSA.....	8
Table 2-3	PM <sub>2.5</sub> Network and Concentrations for Each MSA .....	10
Table 2-4	PM <sub>2.5</sub> Minimum Monitoring Requirements for Each MSA .....	10
Table 2-5	PM <sub>2.5</sub> Co-located Network .....	11
Table 2-6	O <sub>3</sub> Design Values for the Honolulu MSA .....	13
Table 2-7	O <sub>3</sub> Minimum Monitoring Requirements for Each MSA.....	13
Table 2-8	Minimum Pb Monitoring Requirement at NCore .....	15
Table 2-9	Minimum Near-Road NO <sub>2</sub> Monitoring Requirements for the MSA.....	17
Table 2-10	Minimum SO <sub>2</sub> Monitoring Requirements .....	18
Table 2-11	Number of Monitors by Pollutant or Program .....	22
Table 2-12	Summary of Network Changes.....	23
Table 3-1	State of Hawaii Ambient Air Monitoring Network .....	24

## List of Figures

Figure 2-1	PM <sub>10</sub> Network .....	9
Figure 2-2	PM <sub>2.5</sub> Network .....	12
Figure 2-3	O <sub>3</sub> Network .....	14
Figure 2-4	Pb Monitoring Station .....	15
Figure 2-5	CO Network.....	16
Figure 2-6	NO <sub>2</sub> Network .....	17
Figure 2-7	SO <sub>2</sub> Network.....	19
Figure 2-8	New Maui SPMS General Site Location.....	21

## Acronyms and Definitions

AQI	Air Quality Index
ASAS	State of Hawaii Department of Health Air Surveillance and Analysis Section
BAM	Beta-Attenuation Mass Monitor
CAB	State of Hawaii Department of Health Clean Air Branch
CBSA	Core-Based Statistical Areas
CFR	Code of Federal Regulations
CO	Carbon Monoxide
DOH	Hawaii State Department of Health
DOT	Hawaii State Department of Transportation
ECA	(North American) Emissions Control Area (Maritime)
EPA	United States Environmental Protection Agency
FEM	Federal Equivalent Method
FRM	Federal Reference Method
H <sub>2</sub> S	Hydrogen Sulfide
IMPROVE	Integrated Monitoring of Protected Visual Environments
MSA	Metropolitan Statistical Area
MSL	Mean Sea Level
MWC	Municipal Waste Combustor
NAAQS	National Ambient Air Quality Standards
NCore	National Core Multi-pollutant Monitoring Stations
NEI	National Emissions Inventory
NO <sub>2</sub>	Nitrogen Dioxide
O <sub>3</sub>	Ozone
Pb	Lead
PM <sub>2.5</sub>	Particulate matter less than or equal to 2.5 microns in aerodynamic diameter
PM <sub>10</sub>	Particulate matter less than or equal to 10 microns in aerodynamic diameter
PQAO	Primary Quality Assurance Organization
PPM	Parts per million
PSD	Prevention of Significant Deterioration
PWEI	Population Weighted Emissions Index
QC	Quality Control
SLAMS	State and Local Air Monitoring Stations
SO <sub>2</sub>	Sulfur Dioxide
SPMS	Special Purpose Monitoring Stations
STN	Speciation Trends Network
TPY	Tons per Year
TSP	Total suspended particulates
VOG	Haze due to volcanic emissions
WD	Wind direction
WS	Wind speed
µg/m <sup>3</sup>	micrograms per cubic meter of air

## Introduction

The State of Hawaii Department of Health (DOH) plans, operates and maintains the statewide ambient air quality monitoring network. Monitoring data is used for a variety of reasons including determining compliance with National Ambient Air Quality Standards (NAAQS), timely reporting of the U.S. Environmental Protection Agency's (EPA) Air Quality Index (AQI), tracking and characterizing air quality trends, evaluating emission control strategies, and supporting health studies.

The DOH manages all of the State and Local Air Monitoring Stations (SLAMS), Special Purpose Monitoring Stations (SPMS), and the National Core Monitoring Station (NCORE). Additionally, Hawaii has two Interagency Monitoring of Protected Visual Environments stations (IMPROVE) located at Haleakala National Park on Maui and Volcanoes National Park on the island of Hawaii. The IMPROVE stations are operated and maintained by the National Park Service through their federal land management agency.

This annual review evaluates the state's existing ambient air monitoring network to determine adequacy in meeting monitoring objectives, optimizes the network by closing, moving or adding stations, and ensures that air quality issues important to the state are being addressed. The review ensures that the network is providing adequate, quality assured and useful data to meet the needs of stakeholders. This plan encompasses the 18-month period from July 1, 2014 through December 31, 2015, however unplanned modifications may occur due to funding reductions, unanticipated site changes, or changes in EPA monitoring requirements. This plan is being submitted to the EPA Region IX according to the Code of Federal Regulations (CFR), Title 40, Part 58, Section 58.10.

Notification of the plan availability for public inspection was provided through public notices published on May 20, 2014 in the daily newspapers of all counties. The plan was available for review at all county District Health offices as well as on the Clean Air Branch website, <http://health.hawaii.gov/cab>, for 30 days from May 20, 2014 to June 20, 2014. Documentation of public notification is provided in **Appendix A**. No comments were received.

# 1.0 Network Purpose and Design

## 1.1 Overview

EPA established NAAQS for the following criteria pollutants: carbon monoxide (CO), lead (Pb), nitrogen dioxide (NO<sub>2</sub>), ozone (O<sub>3</sub>), sulfur dioxide (SO<sub>2</sub>), particulate matter 10 microns or less in aerodynamic diameter (PM<sub>10</sub>), and particulate matter 2.5 microns or less in aerodynamic diameter (PM<sub>2.5</sub>). Additionally, there is a state standard for hydrogen sulfide (H<sub>2</sub>S) that was established primarily to monitor the ambient air effects of geothermal energy production activities on the island of Hawaii. In 2011 the state established the National Core multi-pollutant monitoring station (NCore) as required by 40 CFR 58. The NCore station monitors for PM<sub>2.5</sub>, speciated PM<sub>2.5</sub>, PM<sub>10-2.5</sub>, O<sub>3</sub>, SO<sub>2</sub>, CO, Pb, nitrogen oxides (NO/NO<sub>2</sub>/NO<sub>y</sub>) and the meteorological parameters wind speed, wind direction, ambient temperature and relative humidity. Hawaii's air quality surveillance network consists of compliance stations monitoring for criteria pollutants as well as the NCore station and special purpose monitoring stations.

The annual review ensures that the state meets monitoring and siting requirements, the three basic monitoring objectives, addresses the six site types in 40 CFR 58 Appendix D, provides information for non-regulatory data goals and the requirements of 40 CFR 58 appendices A, C, D, and E as follows:

- *Appendix A: Quality Assurance Requirements for SLAMS, SPMSs and PSD Air Monitoring;*
- *Appendix C: Ambient Air Quality Monitoring Methodology*
- *Appendix D: Network Design Criteria for Ambient Air Quality Monitoring*
- *Appendix E: Probe and Monitoring Path Siting Criteria for Ambient Air Quality Monitoring*

### 1.1.1 SLAMS

SLAMS are established primarily to demonstrate compliance with the NAAQS and to meet minimum monitoring requirements as required in 40 CFR 58 Appendix D. All SLAMS must meet quality assurance, methodology, and siting requirements of 40 CFR 58 Appendix A, C and E respectively. All data is submitted to EPA's Air Quality System (AQS) within 90 days at the end of each calendar quarter, as required in 40 CFR 58.16.

EPA mandated that each state establish a minimum of one National Core multi-pollutant monitoring station to support tracking of long-term trends of criteria and non-criteria pollutants, model evaluation, long-term health and ecosystem assessments, and other scientific and technological studies. Hawaii's NCore station became fully operational on January 1, 2011. The SLAMS network excludes SPMS but includes NCore and other stations that have not been specifically designated as SPMS.

### 1.1.2 SPMS

SPMS are operated for specific areas of interest to the state and do not count in meeting minimum monitoring requirements. Hawaii's SPM network is established

primarily to monitor air quality impacts of emissions from the ongoing Kilauea volcano eruption; hydrogen sulfide (H<sub>2</sub>S) emissions from geothermal energy production; and impacts from cruise ships on the island of Kauai and cane burning on the island of Maui. The DOH utilizes FRM or FEM analyzers for all criteria SPMS, meets the quality assurance requirements of 40 CFR 58 Appendix A, and submits criteria pollutant data to AQS. All data from SPMS which have operated for more than 24 months is eligible for comparison to relevant NAAQS.

## **1.2 Network Design and Review Process**

The network review determines if: modifications are needed to reduce or eliminate redundancy and low value monitoring; new NAAQS monitoring requirements or programs are met; sufficient data is being collected using the best technology and schedule that resources allow; and corrective actions are needed to ensure compliance with all siting and quality assurance requirements.

Modification decisions are made using a variety of tools including but not limited to: data trend analyses; performance and technical systems audits; regular site inspections; cost and value analyses; assessment of unfavorable site changes such as loss of lease or construction that adversely affect data collection; and, the need to address special studies or new regulatory as well as non-regulatory monitoring objectives.

### **1.2.1 Monitoring Objectives and Site Types**

Ambient air monitoring networks must be designed to meet three basic objectives as stated in 40 CFR 58 Appendix D:

- 1) Provide air pollution data to the general public in a timely manner;
- 2) Support compliance with NAAQS and emissions strategy development; and
- 3) Support air pollution research studies.

The state's ambient air monitoring network achieves all three objectives as follows:

- 1) Air pollution data from all SLAMS and SPMS are exhibited near real-time on the DOH public web-site, additionally continuous PM<sub>2.5</sub> and O<sub>3</sub> data is provided to EPA's AIRNow website for use in calculating the AQI;
- 2) Data from SLAMS are used to demonstrate compliance with the NAAQS and in development and tracking of emissions control strategies. Similarly, data from the NCore station is used to demonstrate compliance with the NAAQS and to track long-term trends of criteria and non-criteria pollutants as well as support emissions control strategies;
- 3) All SLAMS, SPMS, and NCore monitoring provide valuable information in support of air pollution, health, and other scientific studies.

In order for the network to support the three basic objectives outlined above, it must be designed with a variety of monitoring site types. The six general site types are:

- 1) Determine the highest pollutant concentrations expected in the network;
- 2) Measure typical concentrations in areas of high population density;
- 3) Determine the impact of significant sources or source categories on air quality;
- 4) Determine general background concentrations;
- 5) Determine the extent of regional pollutant transport between populated areas;

- 6) Measure pollution impacts on visibility, vegetation, crops, animals and buildings.

The site type for each station in the network is included in its detailed description in Section 3.0 of this document.

### **1.2.2 PM<sub>2.5</sub> Network Changes**

According to 40 CFR 58.10 (c), this network plan must document how the state will provide for a review of changes to a PM<sub>2.5</sub> monitoring network that impact the location of a violating PM<sub>2.5</sub> monitor or the creation or change to a community monitoring zone, including a description of the proposed use of spatial averaging for purposes of making comparisons to the annual PM<sub>2.5</sub> NAAQS as set forth in Part 50 Appendix N. The agency must also document the process for obtaining public comment and include any comments received through the public notification process within the submitted plan.

The state does not have, nor is intending to create any community monitoring zones and does not utilize spatial averaging for comparison to the PM<sub>2.5</sub> NAAQS. The state has in place a public notification procedure which includes posting notice in the newspapers of all counties and on the agency web site allowing for public viewing and comments of the changes that are in the annual network plan document.

## **1.3 Organizational Structure and Responsibilities**

The DOH Air Surveillance and Analysis Section (ASAS) serves as the Primary Quality Assurance Organization (PQAO), operating and maintaining the stations and providing quality assured data to AQS. The ASAS also provides laboratory support for chemical and mass analyses of special or research air toxics monitoring as needed and PM<sub>2.5</sub> co-located and Pb TSP filter samples.

The DOH Clean Air Branch (CAB) is the state agency responsible for planning, management, and regulatory activities associated with the state's air program. As an organizationally separate entity, the CAB conducts independent internal performance audits of the monitoring network and provides oversight of the PQAO.

## 2.0 Network Evaluation

There are minimum monitoring requirements for PM<sub>10</sub>, PM<sub>2.5</sub>, O<sub>3</sub>, SO<sub>2</sub>, and Pb for each Metropolitan Statistical Area (MSA) in the state as described in 40 CFR 58 Appendix D. In 2013, the U.S. Office of Management and Budget designated two MSAs in the State of Hawaii, Urban Honolulu and Kahului-Wailuku-Lahaina (Maui County, excluding Kalawao County). The 2010 census population was 953,207 for the Urban Honolulu MSA (hereafter called Honolulu) and 154,834 for the Kahului-Wailuku-Lahaina MSA (hereafter called Maui). There are five counties in the state: Kauai (islands of Niihau and Kauai); City & County of Honolulu (island of Oahu); Maui (islands of Maui, Molokai, Lanai, Kahoolawe, excluding Kalawao County), Kalawao (Kalaupapa Settlement on Molokai), and Hawaii (island of Hawaii).

### 2.1 PM<sub>10</sub> Network

The minimum number of required PM<sub>10</sub> monitoring stations for the MSA is dependent upon population and concentration measurements. High concentration areas are those for which the ambient PM<sub>10</sub> data show concentrations exceeding the PM<sub>10</sub> NAAQS by 20 percent or more. Medium concentration areas are those for which ambient PM<sub>10</sub> data show concentrations exceeding 80 percent of the NAAQS. Low concentration areas are those for which ambient PM<sub>10</sub> data show concentrations less than 80 percent of the NAAQS.

PM<sub>10</sub> data for 2013 showed the Honolulu MSA to be a low concentration area (Table 2-1) and therefore is required to have one to two PM<sub>10</sub> monitors (Table 2-2). In the absence of a PM<sub>10</sub> design value for the newly designated Maui MSA and with a population <250,000, no PM<sub>10</sub> monitoring is required in that MSA. The state meets the minimum PM<sub>10</sub> monitoring requirements with three PM<sub>10</sub> stations in the Honolulu MSA.

**Table 2-1. PM<sub>10</sub> Network and Concentrations for the Honolulu MSA<sup>1</sup>**

Site Name	AQS No.	2013 Maximum 24-Hr Value (µg/m <sup>3</sup> )	Percent of 24-Hr NAAQS	Sampling Frequency
Honolulu	150031001	35	23	Continuous
Kapolei	150030010	39	26	Continuous
Pearl City	150032004	38	25	Continuous

<sup>1</sup> There is currently no PM<sub>10</sub> monitor operating in the Maui MSA


**Table 2-2. PM<sub>10</sub> Minimum Monitoring Requirements for Each MSA**

MSA Population Category (2010 Census) (40 CFR 58 Appendix D Table D-4)		High Concentration ≥120% of NAAQS (≥180 µg/m <sup>3</sup> )	Medium Concentration >80% of NAAQS (>120 µg/m <sup>3</sup> )	Low Concentration <80% of NAAQS (<120 µg/m <sup>3</sup> ) <sup>1</sup>	
>1,000,000		6-10	4-8	2-4	
500,000-1,000,000		4-8	2-4	1-2	
250,000-500,000		3-4	1-2	0-1	
100,000-250,000		1-2	0-1	0	
MSA	2010 Census Population	Highest 24-hr Value (2013)	Required # of Monitors	# of Active Monitors In the MSA	# of Monitors Needed
Honolulu	953,207	39 µg/m <sup>3</sup>	1-2	3	0
Maui	154,834	No data available	0 <sup>1</sup>	0	0

<sup>1</sup> 40 CFR Part 58 Appendix D Section 4.6 Table D-4 states that in the absence of a design value, these minimum monitoring requirements apply.

Figure 2-1 is a map of the current PM<sub>10</sub> sites in the state. All of the PM<sub>10</sub> stations are in the Honolulu MSA.

**Figure 2-1. PM<sub>10</sub> Network**

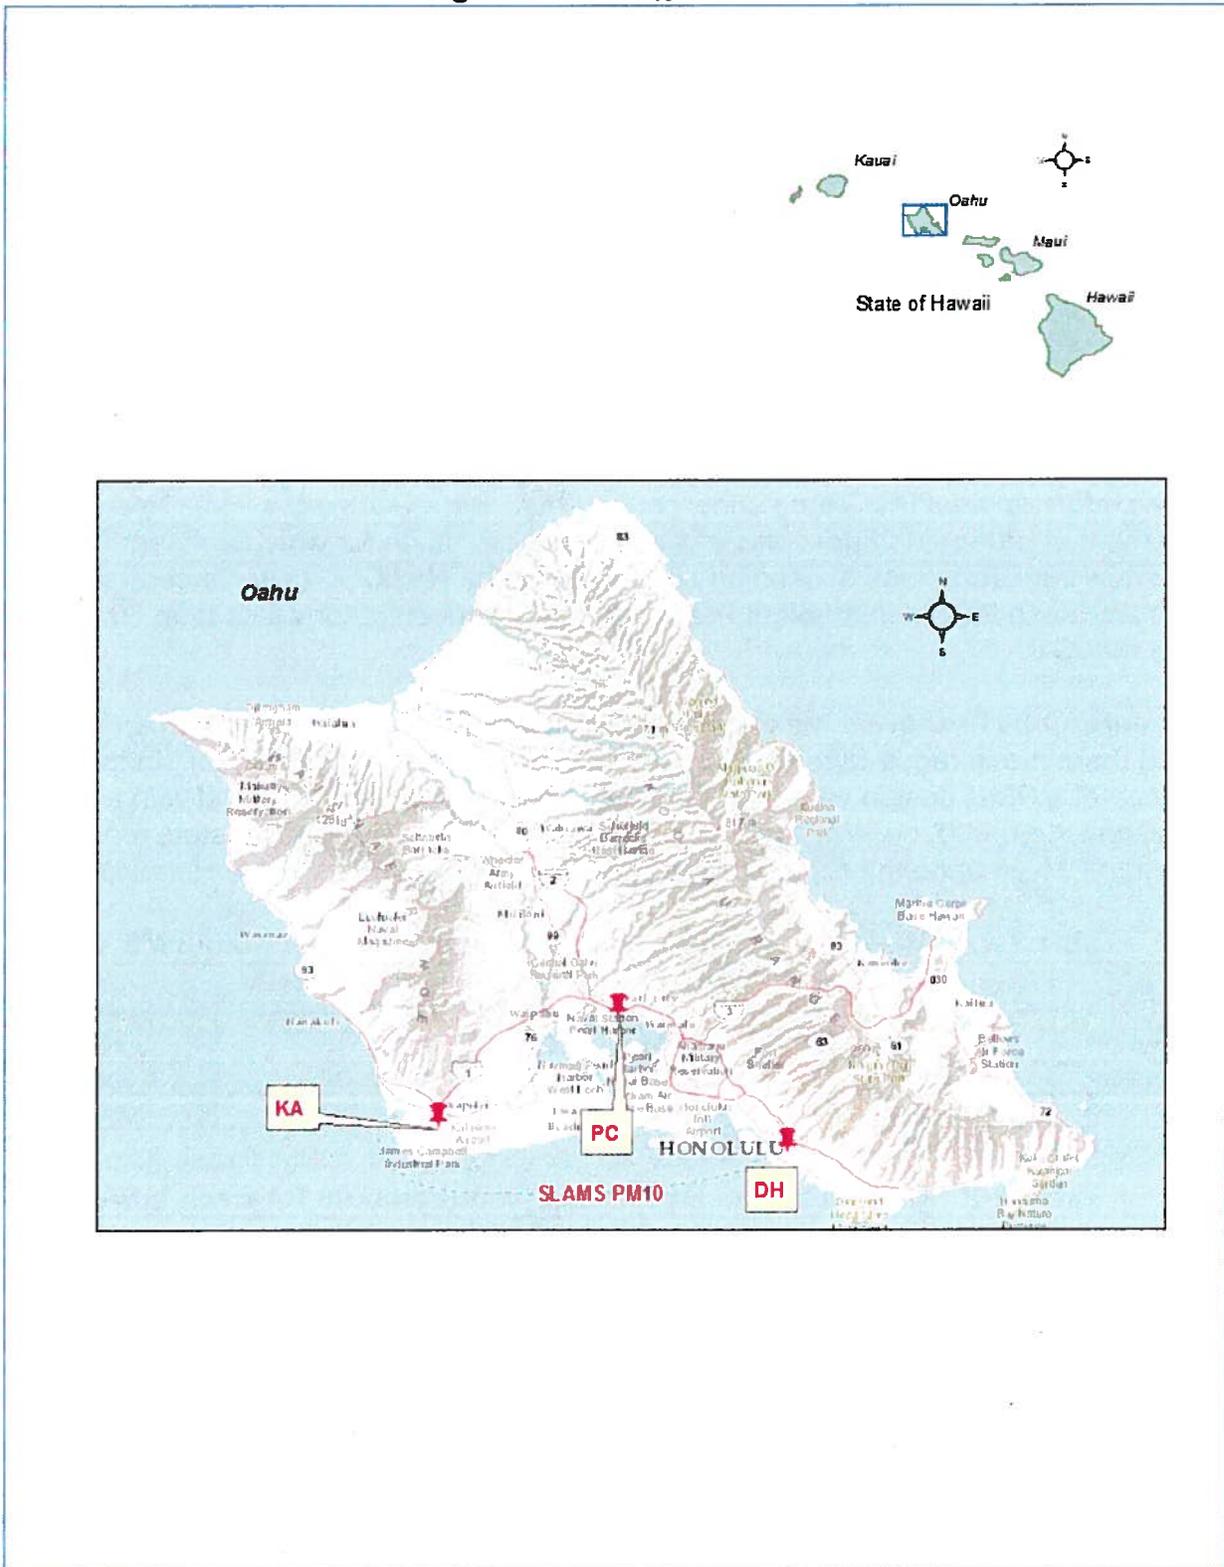

## 2.2 PM<sub>2.5</sub> Network

The state must operate a minimum number of required PM<sub>2.5</sub> monitors based on population and the most recent 3-year design value in each MSA. There are four PM<sub>2.5</sub> SLAMS in the Honolulu MSA and one SLAMS in the Maui MSA with complete design values. The design value for the annual PM<sub>2.5</sub> standard is the most current 3-year average annual mean for each site. The design value for the 24-hour PM<sub>2.5</sub> standard is the most current 3-year average of annual 98<sup>th</sup> percentile 24-hour values recorded at each monitoring site. Table 2-3 shows the annual and daily design values for complete data years 2011 to 2013.

The most recent 3-year design values in the Honolulu and Maui MSAs were less than 85% of any PM<sub>2.5</sub> NAAQS. Table 2-4 shows that the state operates more than the minimum monitoring requirements for PM<sub>2.5</sub> in each MSA. Additionally, in 2013, the state operated one SPMS in the Maui MSA for cane-burning, six SPMS on the island of Hawaii for volcanic emissions, and one SPMS on the island of Kauai to monitor cruise ship emissions. The IMPROVE monitoring station at Haleakala National Park operated by the National Park Service serves as the regional haze/background PM<sub>2.5</sub> site for the state's network. All primary PM<sub>2.5</sub> monitors operated by the state are continuous FEM. Figure 2-2 shows the map locations of all the PM<sub>2.5</sub> stations in the state, including SPMS and the IMPROVE monitor.

**Table 2-3. PM<sub>2.5</sub> Network and Concentrations for Each MSA**

Site	AQS No.	Sampling Frequency	Annual Design Value (µg/m <sup>3</sup> ) 2011 – 2013	Percent of Annual NAAQS (12µg/m <sup>3</sup> )	Daily Design Value (µg/m <sup>3</sup> ) 2011-2013	Percent of 24-Hour NAAQS (35 µg/m <sup>3</sup> )
<b>Honolulu MSA</b>						
Honolulu	150031001	Continuous	5.0		12	
Kapolei	150030010	Continuous	5.0		13	
Pearl City	150032004	Continuous	5.6		12	
Sand Island	150031004	Continuous	7.1	59	15	43
<b>Maui MSA</b>						
Kihei	150090006	Continuous	6.1	51	14	40

NOTE: Haleakala IMPROVE (150090101) is the PM<sub>2.5</sub> background site for Hawaii and is operated and maintained by the NPS

**Table 2-4. PM<sub>2.5</sub> Minimum Monitoring Requirements for Each MSA**


MSA Population Category (2010 Census) (40 CFR 58 Appendix D Table D-5)		Most recent 3-year Design Value ≥85% of any PM <sub>2.5</sub> NAAQS (≥29.75 µg/m <sup>3</sup> for 24-hr standard; ≥10.2 µg/m <sup>3</sup> for annual standard)		Most recent 3-year Design Value <85% of any PM <sub>2.5</sub> NAAQS (<29.75 µg/m <sup>3</sup> for 24-hour standard; <10.2 µg/m <sup>3</sup> for annual standard)		
>1,000,000		3		2		
500,000-1,000,000		2		1		
50,000-<500,000		1		0		
MSA	2010 Census Population	Highest Annual Design Value 2011 – 2013	Highest Daily Design Value 2011-2013	Required No. of Monitors	Number of Active Monitors in the MSA	Number of Monitors Needed
Honolulu	953,207	7.1	15	1	4	0
Maui	154,834	6.1	14	0	1 SLAMS/ 1 SPMS	0

Appendix A to 40 CFR 58 requires that 15 percent of each PM<sub>2.5</sub> monitoring method be co-located. The state currently operates four SLAMS, one NCore and seven SPMS FEM monitors (Waikoloa closed 3/31/14). With a total of 12 stations, two co-located monitors are required. One FRM co-located monitor is operating at the Kapolei NCore station. A PM<sub>2.5</sub> FEM was co-located at the Kona station with EPA Region 9 approval, and began operating 1/1/2014. Table 2-5 summarizes the PM<sub>2.5</sub> co-located network.

**Table 2-5. PM<sub>2.5</sub> Co-located Network**

<b>Method Code</b>	<b># Primary Monitors</b>	<b># Required Co-located</b>	<b># Active Co-located FRM</b>	<b># Active Co-located FEM (same method designation as primary)</b>
170	12	2	1	1

Figure 2-2. PM<sub>2.5</sub> Network

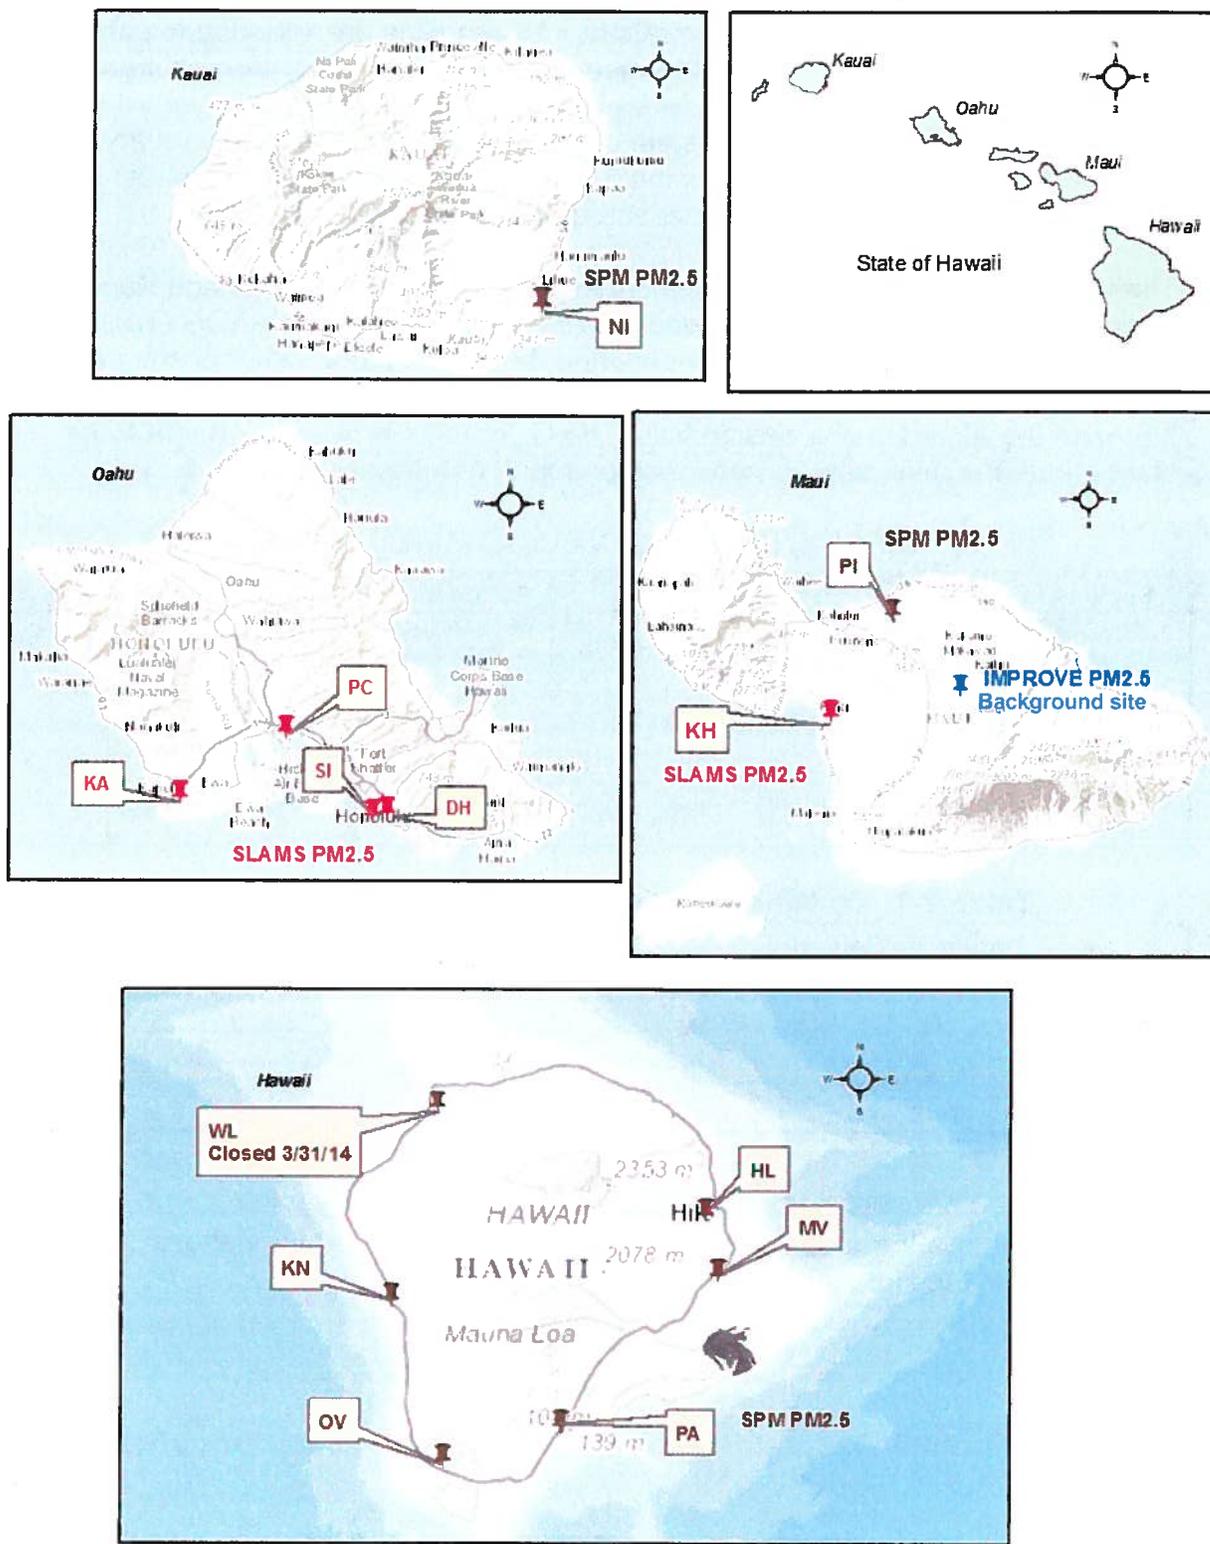

## 2.3 O<sub>3</sub> Network

The state must operate a minimum number of O<sub>3</sub> monitors depending upon MSA population and typical peak concentrations. NCore sites are intended to complement O<sub>3</sub> data collection but can be used to meet the minimum monitoring requirements.

The O<sub>3</sub> monitoring season for the state of Hawaii is 12-months from January to December. The O<sub>3</sub> design value is the 3-year average of the fourth-highest daily maximum 8-hour concentrations measured at each monitor.

The most recent O<sub>3</sub> design value concentrations at the Sand Island and Kapolei NCore stations in the Honolulu MSA showed less than 85% of the O<sub>3</sub> NAAQS (Table 2-6). The Maui MSA does not have any O<sub>3</sub> monitoring, however with a 2010 census population of 154,834, according to 40 CFR Part 58 Appendix D Table D-2 and as shown in Table 2-7 below, in the absence of a design value, no O<sub>3</sub> monitor is required in that MSA. The state meets the minimum O<sub>3</sub> network monitoring requirements.

**Table 2-6. O<sub>3</sub> Design Values for the Honolulu MSA**

Stations in the MSA	8-Hour Design Value 2011 – 2013	2010 MSA Census Population	Required # of Monitors	# of Active Monitors in the MSA	# of Monitors Needed
Sand Island (150031004)	0.045	953,207	1	2	0
Kapolei (150030010)	0.049				
There is no O <sub>3</sub> monitor in the Maui MSA		154,834	0	0	0


**Table 2-7. O<sub>3</sub> Minimum Monitoring Requirements for Each MSA**

MSA Population Category (40 CFR 58 Appendix D Table D-2)	Most recent 3-year design value ≥85% of any O <sub>3</sub> NAAQS (≥.064 ppm, 8-hr standard)	Most recent 3-year design value <85% of any O <sub>3</sub> NAAQS (<.064 ppm, 8-hr standard) <sup>1</sup>
>10 million	4	2
4-10 million	3	1
350,000-<4 million	2	1
50,000-<350,000	1	0

<sup>1</sup> According to 40 CFR part 58 Appendix D, Table D-2, these minimum monitoring requirements apply in the absence of a design value.

Figure 2-3 shows the map locations of the SLAM and NCore O<sub>3</sub> stations. Both stations are located in the Honolulu MSA.

Figure 2-3. O<sub>3</sub> Network

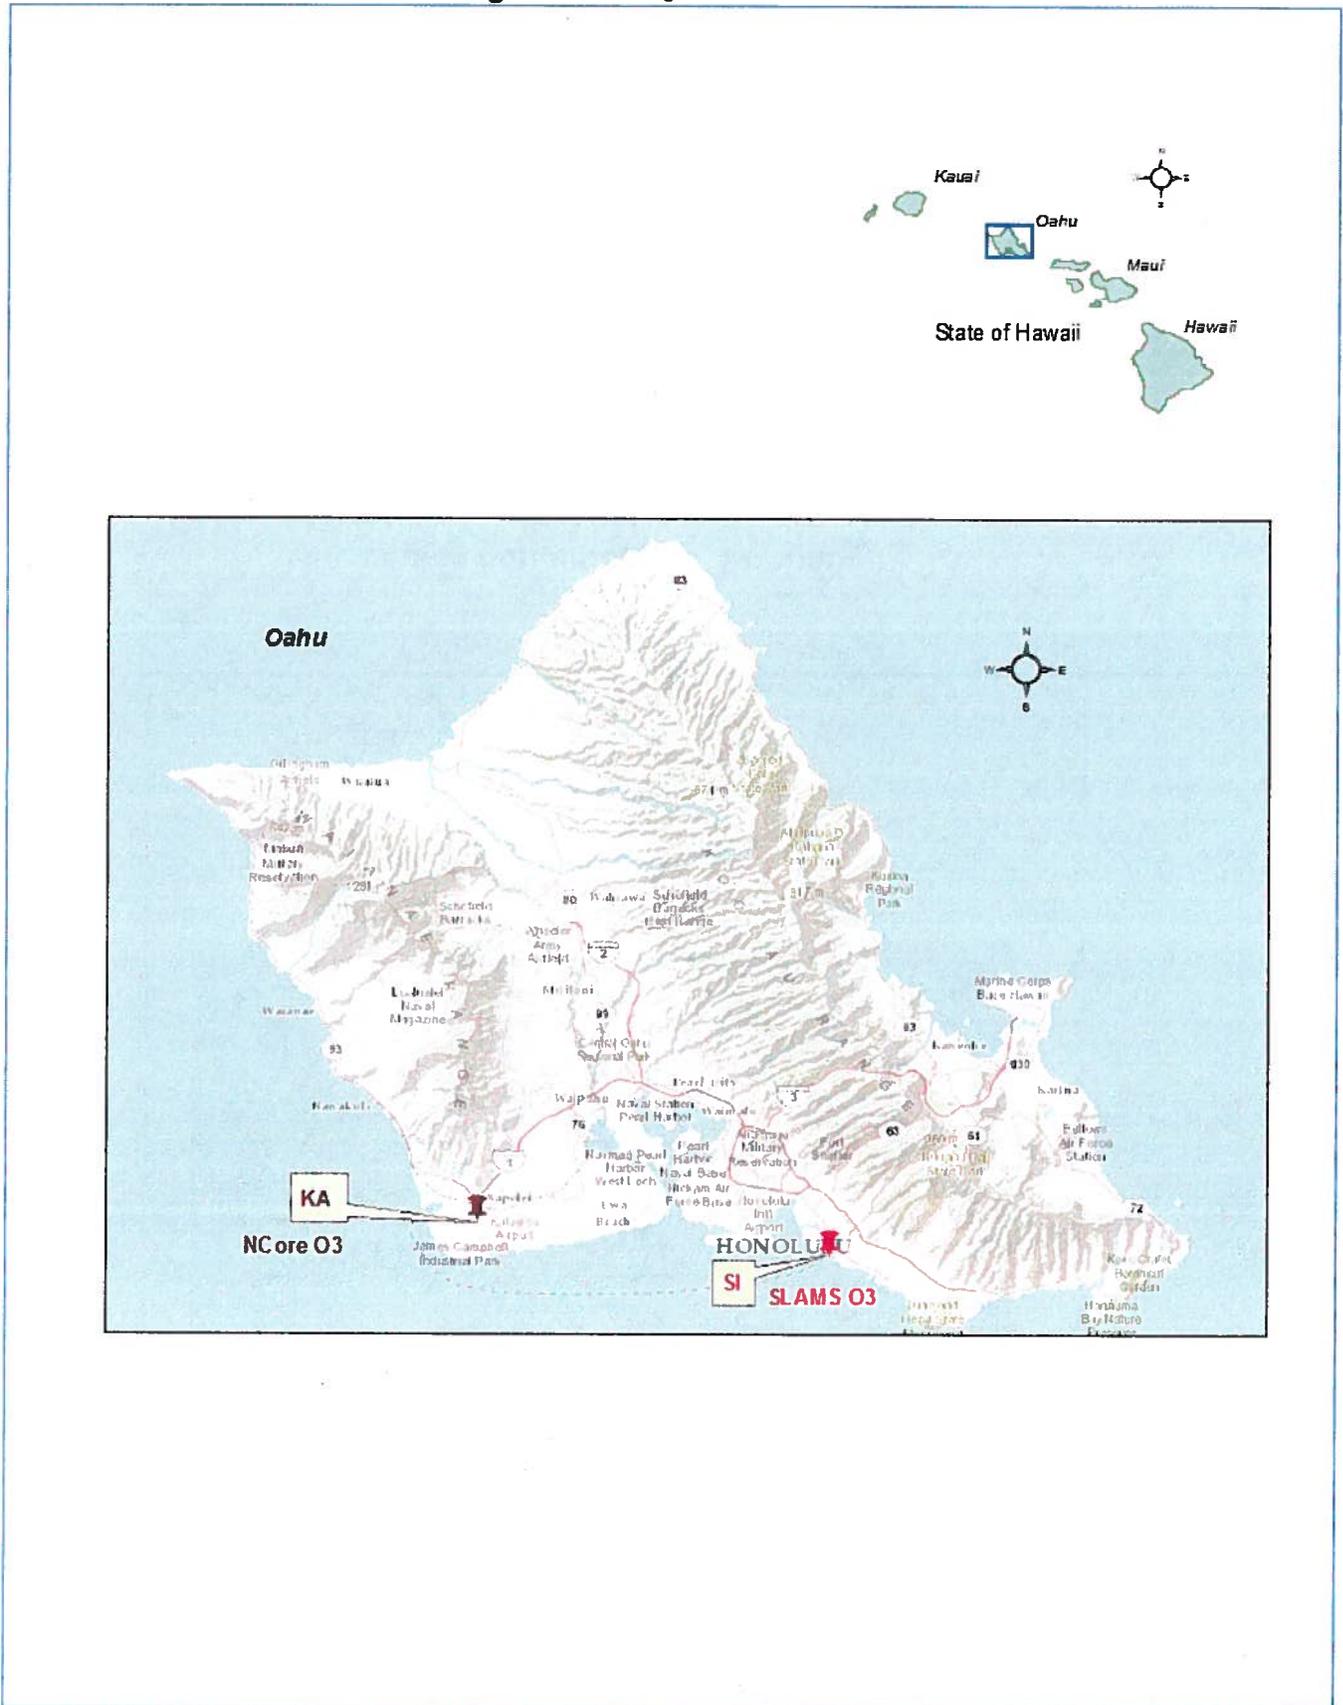


## 2.4 Pb Network

With a 2010 census population of 953,207 in the Honolulu MSA, the state is required to conduct non-source-oriented Pb monitoring at the Kapolei NCore site (Table 2-8). This NCore site began collecting Pb data on January 1, 2012. Figure 2-4 shows the location of the Pb monitoring site at the Kapolei NCore station. Appendix D to 40 CFR Part 58 also requires source-oriented Pb monitoring for sources emitting 0.50 or more tons per year (TPY) according to the most recent emissions inventory. There are no sources in the state emitting 0.5 or more TPY of Pb. No Pb monitoring is required in the Maui MSA.

**Table 2-8. Minimum Pb Monitoring Requirement at NCore**

NCore	AQS ID	CBSA	2010 Census Population	# Required Monitors	# Active Monitors	# Monitors Needed
KA	150030010	Honolulu	953,207	1	1	0


**Figure 2-4. Pb Monitoring Station**

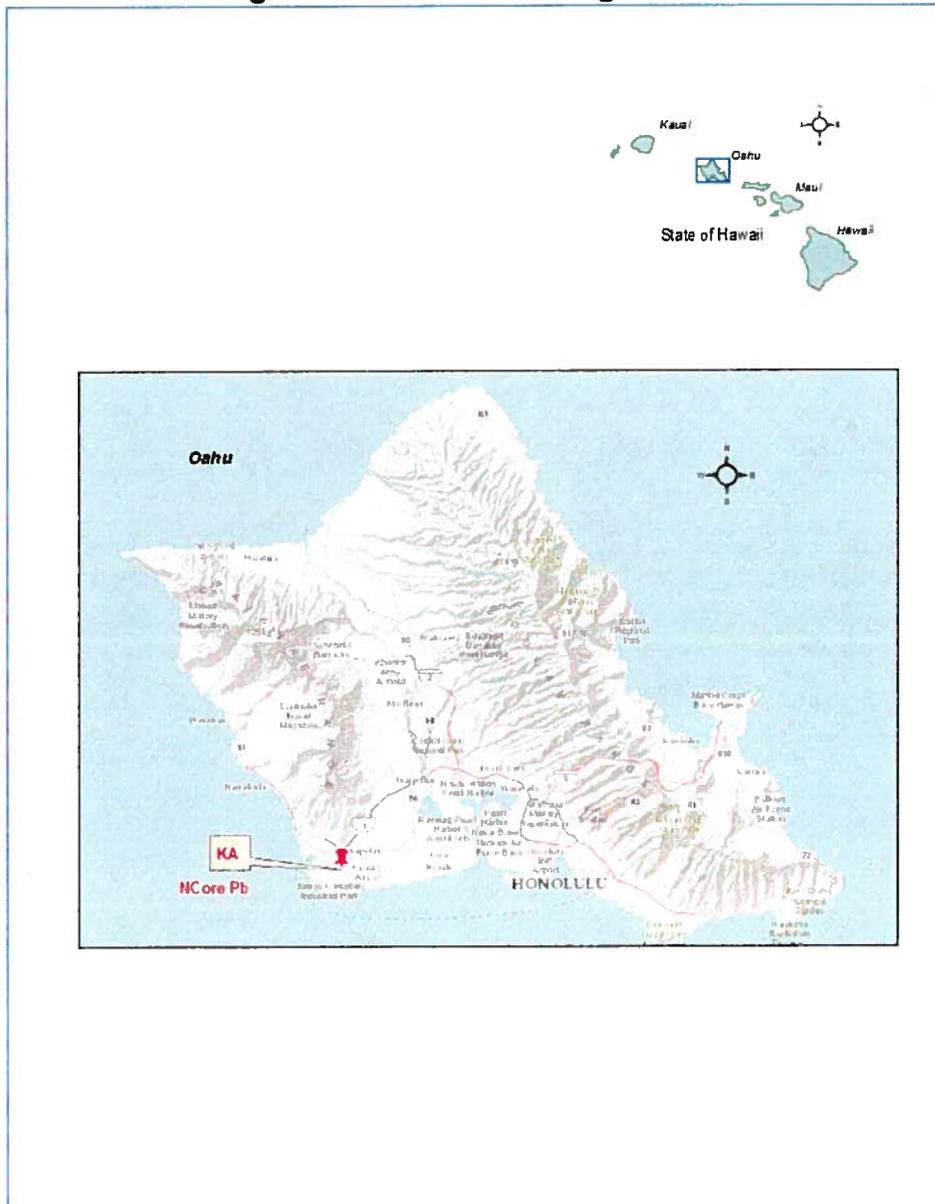

## 2.5 CO Network

The state operates two SLAMS and one SLAMS/NCORE CO monitors in the Honolulu MSA. Figure 2-5 shows the locations of the CO sites in the state. 40 CFR Part 58, Appendix D Section 4.2.2 requires one collocated CO monitor at near-road NO<sub>2</sub> sites in CBSAs with populations  $\geq 1,000,000$ . The Honolulu MSA had a 2010 census population of 953,207 and therefore is not currently required to co-locate a CO monitor. No CO monitoring is required in the Maui MSA.

Figure 2-5. CO Network

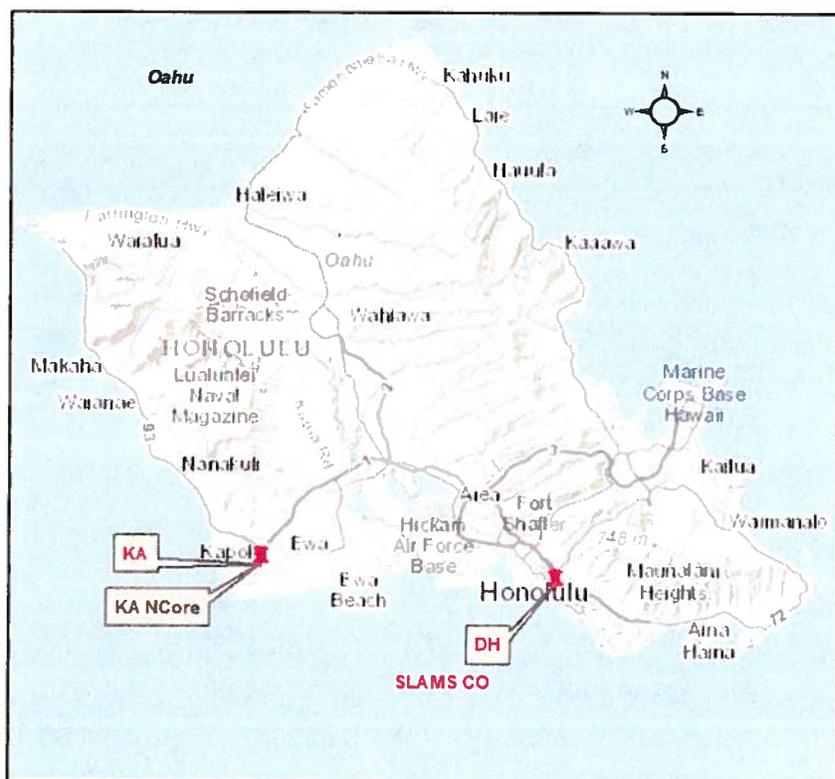

## 2.6 NO<sub>2</sub> Network


On March 7, 2013, EPA revised the near-road NO<sub>2</sub> monitoring requirement for CBSAs with a population of greater than 500,000 but less than one million. Near-road monitoring for these areas, which includes the Honolulu MSA, are now required to be operational by January 1, 2017 and included in the July 1, 2016 Network Plan. There are no other minimum NO<sub>2</sub> monitoring requirements. The state currently has one SLAMS NO<sub>2</sub> station in the MSA and one SPMS on the island of Kauai. No NO<sub>2</sub> monitoring is required in the Maui MSA.

**Table 2-9. Minimum Near-Road NO<sub>2</sub> Monitoring Requirements for the MSA**

CBSA	2010 Census Population	Max AADT Counts (2010) <sup>1</sup>	# Required Monitors	# Monitors to be operational by 1/1/2017
Honolulu	953,207	236,000	1	1

<sup>1</sup>2010 estimated average AADT provided by the State of Hawaii Department of Transportation

**Figure 2-6. NO<sub>2</sub> Network**

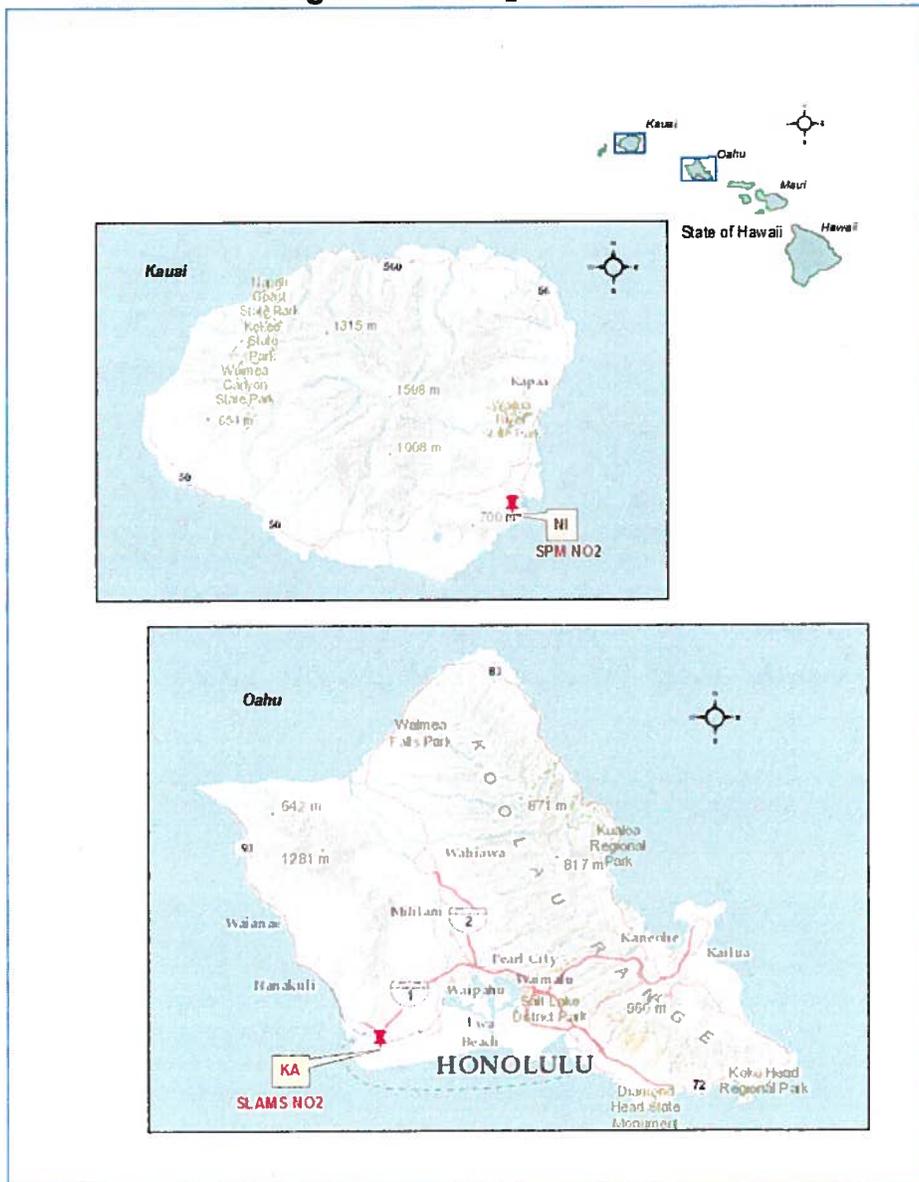

## 2.7 SO<sub>2</sub> Network

EPA has established the Population Weighted Emissions Index (PWEI) to determine required SO<sub>2</sub> monitoring. The PWEI is calculated by multiplying the population of each CBSA with the total amount of SO<sub>2</sub> in TPY emitted within the CBSA area and dividing the result by one million. According to this calculation, Hawaii is required to operate one SO<sub>2</sub> monitor in the Honolulu MSA and none in the Maui MSA (Table 2-10). The state currently operates two SLAMS SO<sub>2</sub> monitors in the Honolulu MSA, and one at the NCore station in Kapolei and therefore meets the minimum number of required SO<sub>2</sub> stations. There are no SO<sub>2</sub> monitors in the Maui MSA. Figure 2-7 shows the locations of the SLAMS and SPMS SO<sub>2</sub> sites.

SO<sub>2</sub> continues to be one of the pollutants of concern in communities on the island of Hawaii with the ongoing eruption of the Kilauea volcano. There are currently six stations monitoring for volcanic emissions, two of which are SLAM stations (Hilo and Kona). Three of the six SO<sub>2</sub> monitoring stations (Mt. View, Pahala and Ocean View) are SPMS that use FEM and follow all the requirements of 40 CFR 58 Appendices A, D, and E, have been operating for more than 24 months and therefore are subject to NAAQS comparison. One station (Waikoloa) was established as a SPMS in July 2012, but was discontinued on 3/31/14. One station (Puna E) was established primarily to monitor H<sub>2</sub>S emissions from geothermal energy production. The probe siting does not meet the requirements of 40 CFR 58 Appendix E and therefore is a non-regulatory SO<sub>2</sub> monitoring site.


The state also established a station to monitor for cruise ship emissions on the island of Kauai. This is a SPM station which includes FEM monitoring for SO<sub>2</sub>, follows all requirements of 40 CFR 58 Appendices A, D, and E, and as of April 2, 2013, has been operating for more than 24 months and is eligible for comparison with the NAAQS.

**Table 2-10. Minimum SO<sub>2</sub> Monitoring Requirements**

CBSA	County	2010 Census Population	Total SO <sub>2</sub> (tons/year) 2011 NEI	PWEI <sup>1</sup>	# Required Monitors	# Active Monitors	# Monitors Needed
Honolulu	City & County of Honolulu	953,207	18,600	17,730	1	2 SLAMS 1 SLAMS/ NCore	0
Maui	Maui	154,834	4,097	634	0	0	0

<sup>1</sup> According to 40 CFR 58 Appendix D, if the PWEI for a CBSA is ≥ 5,000 but < 100,000, a minimum of one SO<sub>2</sub> monitor is required.

**Figure 2-7. SO<sub>2</sub> Network**

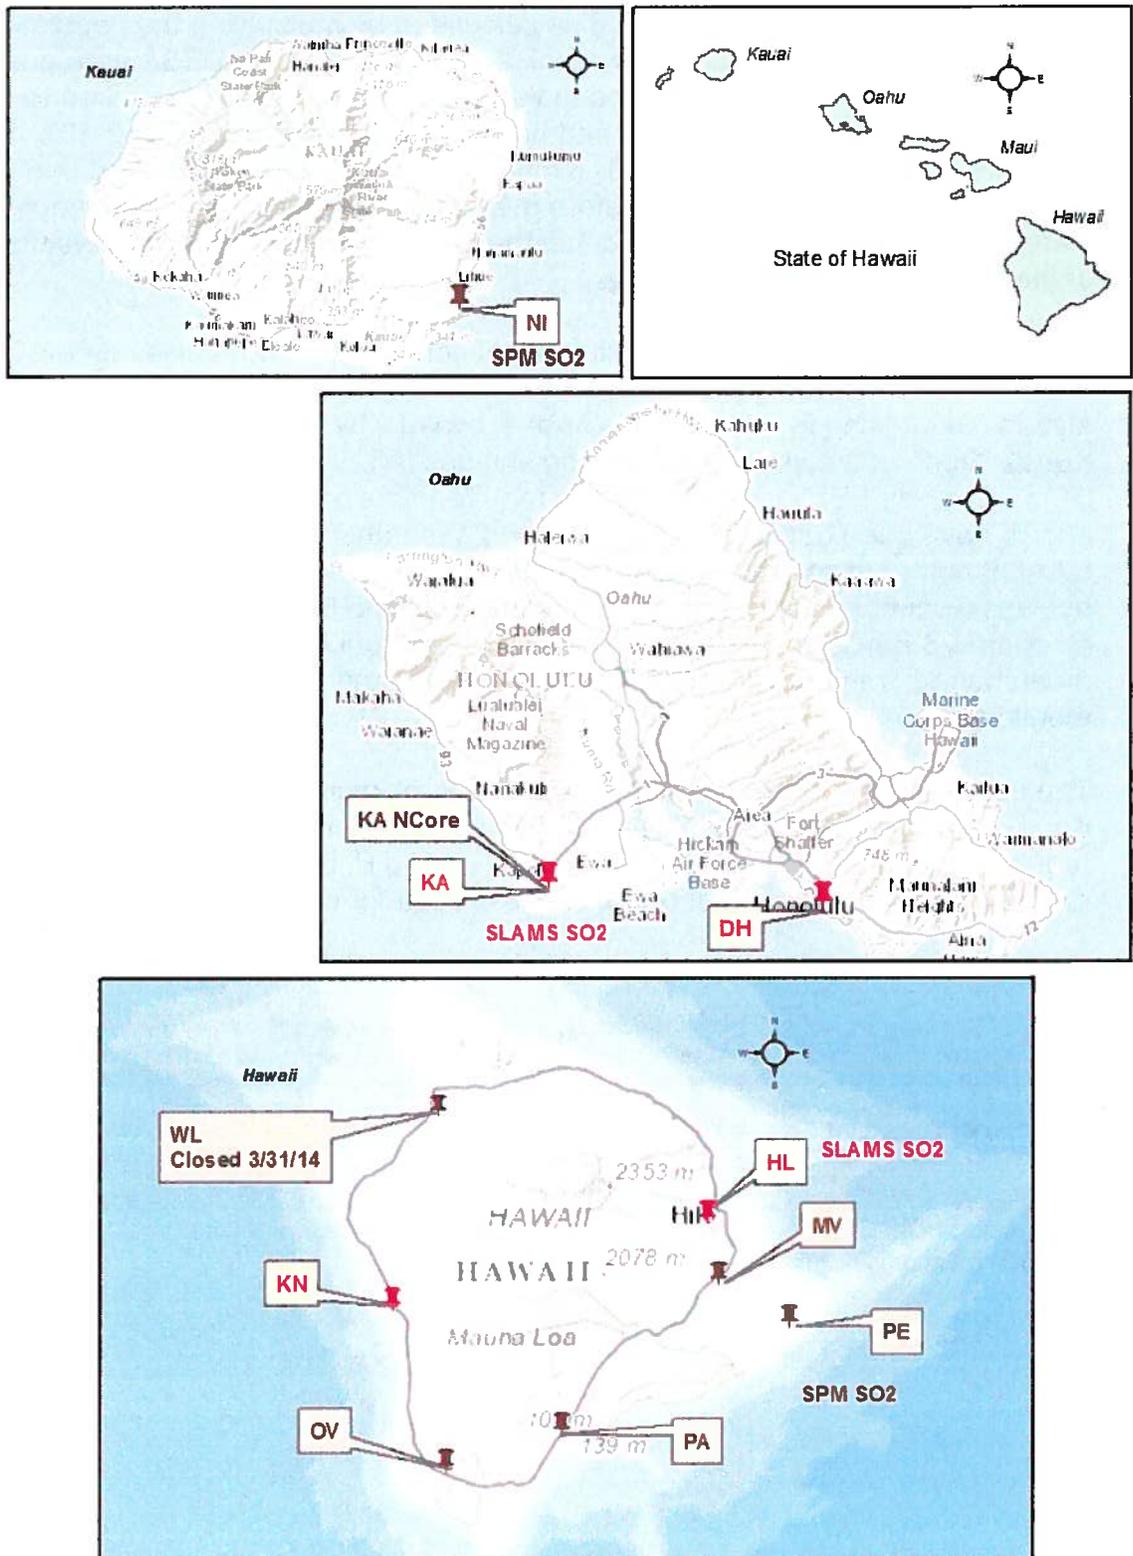

## **2.8 NCore**

The Kapolei NCore station is located in the rapidly-growing residential, commercial, and industrial community on the southwest side of Oahu. Kapolei is considered to be the “second city” next to Honolulu with county, state and federal agencies also establishing offices in the area. The NCore parameters are: NO/NO<sub>y</sub>, trace-level SO<sub>2</sub>, trace-level CO, O<sub>3</sub>, PM<sub>10-2.5</sub>, PM<sub>2.5</sub> speciation, Pb and the meteorological parameters wind speed, wind direction, temperature and relative humidity.

By correspondence dated October 30, 2009, EPA approved Kapolei as the NCore station and it became fully operational on January 1, 2011 with Pb-TSP collection beginning January 1, 2012 as required in 40 CFR 58 Appendix D, paragraph 3(b).

## **2.9 H<sub>2</sub>S Network**

The state has a one-hour H<sub>2</sub>S standard of 25 ppb established primarily to determine the effects of geothermal energy exploration and production on the island of Hawaii. Puna Geothermal Ventures (PGV) is a 41 MW geothermal power plant located in the lower east rift zone of the Kilauea volcano.

Although PGV is required by their non-covered source permit to maintain three air monitoring stations for H<sub>2</sub>S, the state established a monitoring station in the downwind community of Leilani Estates to monitor ambient effects of geothermal exploration and operations. Currently, the station also monitors for SO<sub>2</sub> well as H<sub>2</sub>S.

## **2.10 Site Closure**

### **Waikoloa, Hawaii SPM station (150012021)**

To address community concerns about volcanic emissions, the Waikoloa station on the island of Hawaii was established as a SPMS on July 1, 2012 to monitor primarily for SO<sub>2</sub>. However, in 21 months of operation, the maximum 1-hour SO<sub>2</sub> value monitored was 35.5 ppb with approximately 99% of all measured 1-hour values less than 10 ppb.

Because of the low SO<sub>2</sub> values, budgetary concerns, and the need to reallocate resources to other areas of concern, the DOH discontinued this station on 3/31/14.

## **2.11 Proposed Site Addition**

### **Kahului, Maui: SO<sub>2</sub>, NO<sub>2</sub>, CO and PM<sub>2.5</sub> SPM Station**

In 2013, the U.S. Office of Management and Budget declared Maui County (excluding Kalawao County) as a MSA. The 2010 census for the Kahului/Wailuku area was 41,650, 26,337 in Kahului alone with a population density of 1,823/square mile. As one of the main population centers in the state, the primary objective of this monitoring station would be to provide air pollution data to the general public measuring typical concentrations in areas of high population density. Additional community concerns of monitoring for pollution from cane-burning and vog would also be addressed.

The exact site location has not yet been determined but it will most likely be within the Kahului city center area. Figure 2-8 shows the general area of Kahului where the new station will be located. The goal is to have the station operating by mid to end-2015.

**Figure 2-8 New Maui SPMS General Site Location**



## **2.12 Site Modifications**

### **PM<sub>2.5</sub> co-located FEM monitor Kona, Hawaii station (150011012)**

Appendix A to 40 CFR 58 requires that 15 percent of each PM<sub>2.5</sub> monitoring method be co-located. The state currently operates four SLAMS, one NCore and seven SPMS FEM monitors (Waikoloa closed 3/31/14). With a total of 12 stations, two co-located monitors are required, one FRM and one using the same monitoring method as the primary monitors. All of the PM<sub>2.5</sub> monitors in the network are continuous Met-One BAMS 1020 (AQS method code 170). One FRM co-located monitor is operating at the Kapolei NCore station. A PM<sub>2.5</sub> FEM was co-located at the Kona station and began operating 1/1/2014. The selection of the Kona station as the location for the FEM co-located monitor was proposed in the 2013 Annual Network Plan submitted in July 2013 and was approved by EPA Region 9 in December 11, 2013.

### **Discontinuance of SPM SO<sub>2</sub> monitoring Puna E station (150012010)**

The Puna E station was established in 1991 to monitor the ambient air concentrations of H<sub>2</sub>S from the Puna Geothermal Ventures facility. In 2005, SO<sub>2</sub> monitoring was added to determine if the community was affected by emissions from the Kilauea volcano during non-prevalent wind conditions. The 2011-2013 1-hour SO<sub>2</sub> design value at this station was 12 ppb, 16% of the 1-hour standard of 75 ppb. Since the station was established

mainly for the monitoring of H<sub>2</sub>S, the probe is at breathing height, projecting out from the side of the shelter. The height of the probe does not meet siting requirements according to 40 CFR Part 58 Appendix E and is therefore a non-regulatory site for SO<sub>2</sub>. Due to the low data value and limited resources, the plan is to discontinue SO<sub>2</sub> monitoring at this station by the end of 2014.

### 2.13 Summary of Network and Changes

Table 2-11 summarizes the state's 2014 network monitors and planned changes. Since it has been determined that no criteria monitors are currently required in the Maui MSA, only monitors required for the Honolulu MSA are addressed in the table. Sections 2.10 to 2.12 detail station closures, additions and equipment or network modifications and summarized in Table 2-12.

As indicated in the table, the monitors used for all criteria pollutants are FRM or FEM and follow the requirements of 40 CFR 58 and Appendices A, C, D, E and G. Hawaii's air monitoring network meets or exceeds the minimum required monitoring for each parameter.

**Table 2-11. Number of Monitors by Pollutant or Program**

N/A = Not applicable

Pollutant/ Program	SLAMS Only	SPMS	SLAMS/NCORE	No. of Co- located	Total in MSA <sup>1,2</sup>	Total in State <sup>2</sup>	Total Required in MSA <sup>1</sup>	Meets EPA Required Minimum?	Planned Additions	Planned Closures
CO (FRM)	2	0	1	N/A	3	3	N/A	N/A	1 SPM	0
NO <sub>2</sub> (FRM)	1	1	—	N/A	1	2	N/A	YES	1 SPM	0
SO <sub>2</sub> (FEM)	4	5	1	N/A	3	10	1	YES	1 SPM	1 SPM
O <sub>3</sub> (FEM)	1	0	1	N/A	2	2	1	YES	0	0
NO/NO <sub>y</sub>	N/A	N/A	1 (NCORE)	N/A	1	1	1	YES	0	0
PM <sub>10</sub> (FEM)	2	0	1	N/A	3	3	1-2	YES	0	0
PM <sub>2.5</sub> (all are FEM)	4	7	1	1 FRM 1 FEM	4	12	1	YES	1 SPM	0
Pb (FRM)	0	0	1 (NCORE)	1	1	1	1 (NCORE)	YES	0	0
PM <sub>2.5</sub> Speciation	0	0	1 (NCORE/ Supplemental Speciation)	N/A	1	1	1 (NCORE)	YES	0	0
PM <sub>10-2.5</sub>	N/A	N/A	1 (NCORE)	N/A	1	1	1 (NCORE)	YES	0	0
H <sub>2</sub> S	N/A	1	N/A	N/A	0	1	N/A	N/A	0	0

<sup>1</sup> As promulgated in 40 CFR 58 Appendix D, the minimum monitoring requirements apply to Metropolitan Statistical Areas (MSA). Currently, only the Honolulu MSA has requirements for minimum criteria pollutant monitoring.

<sup>2</sup> Total refers to the number of primary monitors only and does not count co-located monitors

**Table 2-12. Summary of Network Changes**

Site	AQS ID	Site Type	Affected Parameters	Reason for Closure/Addition/Modification
<b>Hawaii County (Island of Hawaii)</b>				
Kona	150011012	SPMS	PM <sub>2.5</sub> co-located FEM	<b>Added PM<sub>2.5</sub> FEM co-located monitor:</b> To meet minimum co-location requirements, PM <sub>2.5</sub> FEM monitor began operating 1/1/2014. The Kona station was approved as the FEM co-located site on December 11, 2013 based on information provided in the 2013 Network Plan.
Waikoloa	150012021	SPMS	SO <sub>2</sub> , PM <sub>2.5</sub>	<b>Closed station:</b> Although established to monitor for volcanic emissions, SO <sub>2</sub> has not been detected at any significant levels. Because there are five other SO <sub>2</sub> monitors on the island and due to budget and resource constraints, the DOH discontinued this SPM station on March 31, 2014. This station began operating July 1, 2012.
Puna E	150012010	SPMS	SO <sub>2</sub>	<b>Discontinue monitor:</b> The SO <sub>2</sub> probe height at this station does not meet siting requirements (non-regulatory) and SO <sub>2</sub> has not been detected at significant levels, therefore monitoring will be discontinued by the end of 2014 so that resources can be re-allocated to other higher value sites.
<b>Maui County</b>				
Kahului	To be determined	SPMS	SO <sub>2</sub> , NO <sub>2</sub> , CO, PM <sub>2.5</sub>	<b>Station to be added:</b> In 2013, the U.S. Office of Management and Budget designated Kahului-Wailuku-Lahaina as a MSA. The main objectives of this station will be to monitor ambient air concentrations of pollutants in an area of high population density, as well as to monitor the possible effects of cane-burning and vog. The goal is to establish this station by middle to ending of 2015.

### 3.0 Detailed Site Descriptions

Following are descriptions and photos of each station in the state's current ambient air monitoring network. The descriptions include area location, traffic, probe siting, monitor information and adherence to quality assurance.

DOH Air Surveillance and Analysis Section of the State Laboratories Division (ASAS) is the collecting and reporting agency for all stations and monitors operating in the state.

**Table 3-1. State of Hawaii Ambient Air Monitoring Network**

ID	AQS No.	Site Name	Basic Monitoring Objective(s) <sup>1</sup>	Parameters
DH	150031001	Honolulu	1,2	PM <sub>2.5</sub> , PM <sub>10</sub> , SO <sub>2</sub>
KA SLAMS/NCORE	150030010	Kapolei	1,2,3	PM <sub>2.5</sub> , PM <sub>2.5</sub> co-located, (PM <sub>10-2.5</sub> ), PM <sub>10</sub> , trace SO <sub>2</sub> , SO <sub>2</sub> , NO <sub>2</sub> , NO/NO <sub>y</sub> , trace CO, CO, O <sub>3</sub> , Pb, Pb co-located, PM <sub>2.5</sub> speciation, WS, WD, RH, Ambient Temperature
PC	150032004	Pearl City	1,2	PM <sub>2.5</sub> , PM <sub>10</sub>
SI	150031004	Sand Island	1,2	PM <sub>2.5</sub> , O <sub>3</sub>
KH	150090006	Kihei	1,2,3	PM <sub>2.5</sub>
PI	150090024	Paia	1,3	PM <sub>2.5</sub>
NI	150070007	Niualu	1,2,3	PM <sub>2.5</sub> , SO <sub>2</sub> , NO <sub>2</sub>
HL SLAMS	150011006	Hilo	1,2,3	SO <sub>2</sub>
HL SPMS	150011006	Hilo	1,2,3	PM <sub>2.5</sub>
KN SLAMS	150011012	Kona	1,2,3	SO <sub>2</sub>
KN SPMS	150011012	Kona	1,2,3	PM <sub>2.5</sub> , PM <sub>2.5</sub> co-located FEM
MV	150012023	Mt. View	1,2,3	PM <sub>2.5</sub> , SO <sub>2</sub>
OV	150012020	Ocean View	1,2,3	PM <sub>2.5</sub> , SO <sub>2</sub>
PA	150012016	Pahala	1,2,3	PM <sub>2.5</sub> , SO <sub>2</sub>
PE	150012010	Puna E	1,3	SO <sub>2</sub> , H <sub>2</sub> S

<sup>1</sup> Basic Monitoring Objectives:

- 1) Public information
- 2) NAAQS compliance
- 3) Support research

<b>(DH) HONOLULU</b>			
AQS: 150031001	Type: SLAMS	County: Honolulu	MSA: Honolulu
Address: 1250 Punchbowl St., Honolulu, HI 96813			
Latitude: 21.30758		Longitude: -157.85542	Elevation: 20 m MSL
<b>Location Description:</b> This station is located on the roof of the state Department of Health building in downtown Honolulu. The surrounding streets are busy thoroughfares serving the downtown area. The area includes a major hospital (Queen's Medical Center), the state capitol, other state, county, commercial and business buildings as well as residential condominiums. This station has been operating since 1972.			



<b>DH TRAFFIC DESCRIPTION</b>			
Type of Roadway	Punchbowl	S. Beretania	Vineyard
Freeway			
Major Street or Highway	X	X	X
Distance from air intake (m)	30	122	610
Direction from air inlet	E	S	N
Composition of roadway	asphalt	asphalt	asphalt
Number of traffic lanes	5	6	6
Average daily traffic	35,844 <sup>1</sup>	53,046 <sup>1</sup>	48,445 <sup>1</sup>
Average vehicle speed (est. mph)	20	25	25
Traffic one way or two	2	1	2
Street parking?	No	No	No
<sup>1</sup> Source: State of Hawaii Department of Transportation 2006 count			

For "Site Representativeness" in the following table:

- <sup>1</sup>Site Types:
- 1) located to determine the highest concentrations;
  - 2) located to measure typical concentrations in areas of high population density;
  - 3) located to determine the impact of significant sources or source categories on air quality;
  - 4) located to determine general background concentration levels;
  - 5) located to determine extent of regional pollutant transport among populated areas and in support of secondary standards;
  - 6) located to measure air pollution impacts on visibility, vegetation damage, or other welfare-based impacts

- <sup>2</sup> Purposes:
- 1) Provide air pollution data to the general public in a timely manner;
  - 2) Support compliance with ambient air quality standards;
  - 3) Support emissions strategy development and track trends in air pollution abatement control measures;
  - 4) Support for air pollution research

## (DH) Honolulu continued

DH MONITOR INFORMATION (N/A = Not Applicable)				
	PM <sub>10</sub>	PM <sub>2.5</sub>	SO <sub>2</sub>	CO
POC/FRM or FEM	1/FEM	3/FEM	6/FEM	1/FRM
Type of Monitor	SLAMS	SLAMS	SLAMS	SLAMS
AQS parameter code	81102	88101	42401	42101
Manufacturer	Met One	Met One	TECO	TECO
Model No.	BAM1020	BAM 1020	43i	48i
AQS method code	122	170	060	054
Monitoring start date	7/1/2009	4/1/2009	10/16/1992	1/1/1972
Monitoring frequency	Continuous	Continuous	Continuous	Continuous
Probe material	N/A	N/A	Glass	Glass
Residence time (sec)	N/A	N/A	11.9	11.9
Distance between co-located monitors	N/A	N/A	N/A	N/A
Analytical laboratory	N/A	N/A	N/A	N/A
Location of probe	building roof	building roof	building roof	building roof
Building dimensions (H) (m)	12	12	12	12
Horizontal distance from supporting structure (m)	9	11	9	9
Vertical distance above supporting structure (m)	1.8	1.8	1.2	1.2
Height of probe above ground (m)	13.8	13.8	13.2	13.2
Distance (m) & direction from tree(s)	24 E	24 E	27 E	27 E
Horizontal distance from edge of nearest traffic lane (m)	27	27	30	30
Horizontal distance from nearest parking lot (m)	24	24	24	24
Distance (m) & direction from obstructions on roof	9 E	11 E	9 E	9 E
Distance (m) & direction from possible obstructions not on roof	N/A	N/A	N/A	N/A
Height of nearest possible obstruction (m)	2.7	2.7	2.7	2.7
Distance (m) & direction from furnace or incineration flues	234 S/SW	234 S/SW	238 S/SW	238 S/SW
Unrestricted airflow	360°	360°	360°	360°
Located in paved (P) or vegetative (V) ground?	P	P	P	P
<b>SITE REPRESENTATIVENESS</b>				
Spatial scale	Neighborhood	Neighborhood	Neighborhood	Middle
Applicable NAAQS averaging time(s)	24-hr	24-hr, annual	1-hr, 3-hr, 24-hr, annual	1-hr, 8-hr
Sampling season	12 months	12 months	12 months	12 months
Site type <sup>1</sup>	2	2	2	1
Purpose of Monitor <sup>2</sup>	1, 2	1, 2	1, 2	1, 2
Suitable for comparison against the annual PM <sub>2.5</sub> NAAQS?	N/A	Yes	N/A	N/A
<b>DATA QUALITY</b>				
Last PEP	N/A	12/11/13	N/A	N/A
Last NPAP	N/A	N/A	12/11/13	12/11/13
Date of last annual independent performance audit (CAB)	9/19/13	9/19/13	9/19/13	9/19/13
Frequency of flow rate verification (automated PM)	Monthly	Monthly	N/A	N/A
Frequency of flow rate verification (manual PM <sub>2.5</sub> )	N/A	N/A	N/A	N/A
Dates of last 2 semi-annual flow rate audits (PM)	5/16/13; 11/25/13	5/16/13; 11/25/13	N/A	N/A
Frequency of 1-point flow rate verification (Pb)	N/A	N/A	N/A	N/A
Dates of last 2 semi-annual flow rate audits (Pb)	N/A	N/A	N/A	N/A
Precision & accuracy submitted to AQS	Quarterly	Quarterly	Quarterly	Quarterly
Frequency of 1-pt. QC check (gases)	N/A	N/A	Weekly	Weekly
Frequency of multi-point gas calibration	N/A	N/A	60 days	60 days
Annual data certification submitted (anticipated submittal date in parentheses)	5/7/13 (5/30/14)	5/7/13 (5/30/14)	5/7/13 (5/30/14)	5/7/13 (5/30/14)
Changes in the next 18 months?	None	None	None	None


**(KA) KAPOLEI SLAMS and N CORE**

AQS: 150030010    Type: SLAMS    County: Honolulu    MSA: Honolulu  
 Address: 2052 Lauwiliwili St., Kapolei, HI 96707  
 Latitude: 21.32374    Longitude: -158.08861    Elevation: 17.9 m MSL

**Location Description:**

Located in the Kapolei Business Park, in the rapidly growing “second city” of Kapolei, the area is a mix of business, commercial, and government activities surrounded by an ever expanding residential community. The site is also approximately 1.25 km northeast (upwind) of the state’s largest industrial park on the southwest coast of the island of Oahu. The station has been operating as a SLAMS station since 2002.

On October 30, 2009, EPA approved the Kapolei station as the state’s NCore site and in addition to the SLAMS parameters, the station began collecting the required NCore parameters on January 1, 2011 and Pb on January 1, 2012.

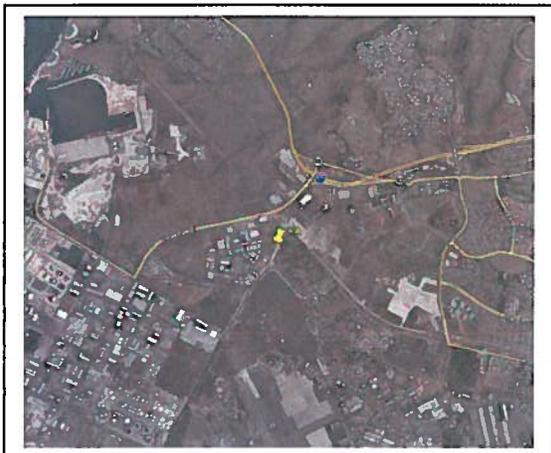

<b>KA TRAFFIC DESCRIPTION</b>		
<b>Type of Roadway</b>	<b>Kalaeloa Blvd.</b>	<b>Lauwiliwili St.</b>
Freeway		
Major Street or Highway	X	
Local Street or Road		X
Distance from air intake (m)	379	167
Direction from air inlet	NW	W
Composition of roadway	asphalt	asphalt
Number of traffic lanes	4	2
Average daily traffic	18,255 <sup>1</sup>	<sup>2</sup> Estimated: <5,000
Average vehicle speed (est. mph)	35	30
Traffic one way or two	2	2
Street parking?	No	Yes

<sup>1</sup> Source: State of Hawaii Department of Transportation    <sup>2</sup> Estimate only, no data available, local road

**For “Site Representativeness” in the following table:**

- <sup>1</sup>Site Types:
- 1) located to determine the highest concentrations;
  - 2) located to measure typical concentrations in areas of high population density;
  - 3) located to determine the impact of significant sources or source categories on air quality;
  - 4) located to determine general background concentration levels;
  - 5) located to determine extent of regional pollutant transport among populated areas and in support of secondary standards;
  - 6) located to measure air pollution impacts on visibility, vegetation damage, or other welfare-based impacts

- <sup>2</sup> Purposes:
- 1) Provide air pollution data to the general public in a timely manner;
  - 2) Support compliance with ambient air quality standards;
  - 3) Support emissions strategy development and track trends in air pollution abatement control measures;
  - 4) Support for air pollution research

## (KA) Kapolei SLAMS and NCore continued

<b>KA MONITOR INFORMATION (N/A = Not Applicable)</b>				
	<b>PM<sub>10</sub></b>	<b>PM<sub>2.5</sub></b>	<b>PM<sub>2.5</sub> Co-loc</b>	<b>PM<sub>10-2.5</sub></b>
POC/FRM or FEM	3/FEM	1/FEM	2/FRM	uses PM <sub>2.5</sub> /PM <sub>10</sub>
Type of Monitor	SLAMS/NCore	SLAMS/NCore	SLAMS/NCore	NCore
AQS parameter code	81102	88101	88101	86101
Manufacturer	Met One	Met One	Andersen	
Model No.	BAM1020	BAM 1020	RAAS2.5	
AQS method code	122	170	120	
Monitoring start date	12/18/2008	1/1/2009	1/1/2011	
Monitoring frequency	Continuous	Continuous	1/3 days	
Probe material	N/A	N/A	N/A	
Residence time (sec)	N/A	N/A	N/A	
Distance between co-located monitors	N/A	4 m	4 m	
Analytical laboratory	N/A	N/A	ASAS	
Location of probe	shelter roof	shelter roof	shelter roof	
Shelter dimensions (H x W x D) (m)	4 x 2.4 x 5	4 x 2.4 x 5	4 x 2.4 x 5	
Horizontal distance from supporting structure (m)	N/A	N/A	N/A	
Vertical distance above supporting structure (m)	1	1.7	1.7	
Height of probe above ground (m)	5	5.7	5.7	
Distance (m) & direction from tree(s)	17 N	17 N	13 N	
Horizontal distance from edge of nearest traffic lane (m)	167	165	169	
Horizontal distance from nearest parking lot (m)	87	83	87	
Distance (m) & direction from obstructions on roof	N/A	N/A	N/A	
Distance (m) & direction from possible obstructions not on roof	170 E	170 E	170 E	
Height of nearest possible obstruction (m)	9	9	9	
Distance (m) & direction from furnace or incineration flues	None	N/A	None	
Unrestricted airflow	360°	360°	360°	
Located in paved (P) or vegetative (V) ground?	V	V	V	
<b>SITE REPRESENTATIVENESS</b>				
Spatial scale	Neighborhood	Neighborhood	Neighborhood	Neighborhood
Applicable NAAQS averaging time(s)	24-hr	24-hr, annual	24-hr, annual	N/A
Sampling season	12 months	12 months	12 months	12 months
Site type <sup>1</sup>	2	2	QC	2
Purpose of Monitor <sup>2</sup>	1, 2	1, 2	QC	4
Suitable for comparison against the annual PM <sub>2.5</sub> NAAQS?	N/A	Yes	Yes	N/A
<b>DATA QUALITY</b>				
Last PEP	N/A	12/10/13	N/A	
Last NPAP	N/A	N/A	N/A	
Date of last annual independent performance audit (CAB)	8/27/13	8/27/13	8/27/13	
Frequency of flow rate verification (automated PM)	Monthly	Monthly	N/A	
Frequency of flow rate verification (manual PM <sub>2.5</sub> )	N/A	N/A	1/year	
Dates of last 2 semi-annual flow rate audits (PM)	5/21/13; 11/14/13	5/21/13; 11/14/13	5/21/13; 11/14/13	
Frequency of 1-point flow rate verification (Pb)	N/A	N/A	N/A	
Dates of last 2 semi-annual flow rate audits (Pb)	N/A	N/A	N/A	
Precision & accuracy submitted to AQS	Quarterly	Quarterly	Quarterly	
Frequency of 1-pt. QC check (gases)	N/A	N/A	N/A	
Frequency of multi-point gas calibration	N/A	N/A	N/A	
Annual data certification submitted (anticipated submittal date in parentheses)	5/7/13 (5/30/14)	5/7/13 (5/30/14)	5/7/13 (5/30/14)	
Changes in the next 18 months?	None	None	None	None

## (KA) Kapolei SLAMS and NCore continued

<b>KA MONITOR INFORMATION (N/A = Not Applicable)</b>				
	<b>CO</b>	<b>SO<sub>2</sub></b>	<b>NO<sub>2</sub></b>	<b>O<sub>3</sub></b>
POC/FRM or FEM	1/FRM	1/FEM	1/FRM	1/FRM
Type of Monitor	SLAMS	SLAMS	SLAMS	SLAMS/NCore
AQS parameter code	42101	42401	42602	44201
Manufacturer	TECO	TECO	TECO	TECO
Model No.	48C	43A	42C	49i
AQS method code	054	060	074	047
Monitoring start date	7/29/2002	7/29/2002	7/29/2002	1/1/2011
Monitoring frequency	Continuous	Continuous	Continuous	Continuous
Probe material	Glass	Glass	Glass	Glass
Residence time (sec)	13.8	13.8	13.8	12.3
Distance between co-located monitors	N/A	N/A	N/A	N/A
Analytical laboratory	N/A	N/A	N/A	N/A
Location of probe	shelter roof	shelter roof	shelter roof	shelter roof
Shelter dimensions (H x W x D) (m)	4 x 2.4 x 5	4 x 2.4 x 5	4 x 2.4 x 5	4 x 2.4 x 5
Horizontal distance from supporting structure (m)	N/A	N/A	N/A	N/A
Vertical distance above supporting structure (m)	1.1	1.1	1.1	1
Height of probe above ground (m)	5.1	5.1	5.1	5
Distance (m) & direction from tree(s)	19 N	19 N	19 N	12 N
Horizontal distance from edge of nearest traffic lane (m)	167	167	167	162
Horizontal distance from nearest parking lot (m)	87	87	87	82
Distance (m) & direction from obstructions on roof	None	None	None	None
Distance (m) & direction from possible obstructions not on roof	170 E	170 E	170 E	165 E
Height of nearest possible obstruction (m)	9	9	9	9
Distance (m) & direction from furnace or incineration flues	None	None	None	None
Unrestricted airflow	360°	360°	360°	360°
Located in paved (P) or vegetative (V) ground?	V	V	V	V
<b>SITE REPRESENTATIVENESS</b>				
Spatial scale	Neighborhood	Neighborhood	Neighborhood	Neighborhood
Applicable NAAQS averaging time(s)	1-hr; 8-hr	1-hr; 3-hr-24-hr; annual	1-hr, annual	8-hr
Sampling season	12 months	12 months	12 months	12 months
Site type <sup>1</sup>	2	2	2	2
Purpose of Monitor <sup>2</sup>	1, 2	1, 2	1, 2	1, 2
Suitable for comparison against the annual PM <sub>2.5</sub> NAAQS?	N/A	N/A	N/A	N/A
<b>DATA QUALITY</b>				
Last PEP	N/A	N/A	N/A	N/A
Last NPAP	12/5/12	12/5/12	12/5/12	12/5/12
Date of last annual independent performance audit (CAB)	8/29/13	8/29/13	8/29/13	8/29/13
Frequency of flow rate verification (automated PM)	N/A	N/A	N/A	N/A
Frequency of flow rate verification (manual PM <sub>2.5</sub> )	N/A	N/A	N/A	N/A
Dates of last 2 semi-annual flow rate audits (PM)	N/A	N/A	N/A	N/A
Frequency of 1-point flow rate verification (Pb)	N/A	N/A	N/A	N/A
Dates of last 2 semi-annual flow rate audits (Pb)	N/A	N/A	N/A	N/A
Precision & accuracy submitted to AQS	Quarterly	Quarterly	Quarterly	Quarterly
Frequency of 1-pt. QC check (gases)	Weekly	Weekly	Weekly	Weekly
Frequency of multi-point gas calibration	60 days	60 days	60 days	60 days
Annual data certification submitted (anticipated submittal date in parentheses)	5/7/13 (5/30/14)	5/7/13 (5/30/14)	5/7/13 (5/30/14)	5/7/13 (5/30/14)
Changes in the next 18 months?	None	None	None	New calibrator

## (KA) Kapolei SLAMS and NCore continued

<b>KA MONITOR INFORMATION (N/A = Not Applicable)</b>				
	<b>Trace CO</b>	<b>Trace SO<sub>2</sub></b>	<b>NO/NO<sub>y</sub></b>	<b>Pb-TSP</b>
POC/FRM or FEM	2/FRM	2/FEM	1/FRM	1FRM
Type of Monitor	SLAMS/NCore	SLAMS/NCore	NCore	NCore
AQS parameter code	42101	42401	42601/42600	14129
Manufacturer	API	API	Ecotech	Graseby
Model No.	M300EU	M100EU	9843	2376105
AQS method code	593	600	591	191
Monitoring start date	1/1/2011	1/1/2011	1/1/2011	1/1/2012
Monitoring frequency	Continuous	Continuous	Continuous	1/6 days
Probe material	Glass	Glass	Glass	N/A
Residence time (sec)	12.3	12.3	12.3	N/A
Distance between co-located monitors	N/A	N/A	N/A	4 m
Analytical laboratory	N/A	N/A	N/A	ASAS
Location of probe	shelter roof	shelter roof	shelter roof	shelter roof
Shelter dimensions (H x W x D) (m)	4 x 2.4 x 5	4 x 2.4 x 5	4 x 2.4 x 5	4 x 2.4 x 5
Horizontal distance from supporting structure (m)	N/A	N/A	N/A	N/A
Vertical distance above supporting structure (m)	1	1	1	1.7
Height of probe above ground (m)	5	5	5	5.7
Distance (m) & direction from tree(s)	12 N	12 N	12 N	15 N
Horizontal distance from edge of nearest traffic lane (m)	162	162	162	160
Horizontal distance from nearest parking lot (m)	82	82	82	80
Distance (m) & direction from obstructions on roof	N/A	N/A	N/A	N/A
Distance (m) & direction from possible obstructions not on roof	165 E	165 E	165 E	163 E
Height of nearest possible obstruction (m)	9	9	9	9
Distance (m) & direction from furnace or incineration flues	N/A	N/A	N/A	N/A
Unrestricted airflow	360°	360°	360°	360°
Located in paved (P) or vegetative (V) ground?	V	V	V	V
<b>SITE REPRESENTATIVENESS</b>				
Spatial scale	Neighborhood	Neighborhood	Neighborhood	Neighborhood
Applicable NAAQS averaging time(s)	1-hr; 8-hr	1-hr; 3-hr-24-hr; annual	N/A	3-month
Sampling season	12 months	12 months	12 months	12 months
Site type <sup>1</sup>	2	2	2	2
Purpose of Monitor <sup>2</sup>	1,2,4	1,2,4	4	2,4
Suitable for comparison against the annual PM <sub>2.5</sub> NAAQS?	N/A	N/A	N/A	N/A
<b>DATA QUALITY</b>				
Last PEP	N/A	N/A	N/A	N/A
Last NPAP	12/5/12	12/5/12	12/5/12	N/A
Date of last annual independent performance audit (CAB)	12/13/12	12/13/12	None	9/7/12
Frequency of flow rate verification (automated PM)	N/A	N/A	N/A	N/A
Frequency of flow rate verification (manual PM <sub>2.5</sub> )	N/A	N/A	N/A	N/A
Dates of last 2 semi-annual flow rate audits (manual PM <sub>2.5</sub> )	N/A	N/A	N/A	N/A
Frequency of 1-point flow rate verification (Pb)	N/A	N/A	N/A	1/3 months
Dates of last 2 semi-annual flow rate audits (Pb)	N/A	N/A	N/A	5/21/13; 11/14/13
Precision & accuracy submitted to AQS	Quarterly	Quarterly	Quarterly	Quarterly
Frequency of 1-pt. QC check (gases)	Weekly	Weekly	Weekly	N/A
Frequency of multi-point gas calibration	60 days	60 days	60 days	N/A
Annual data certification submitted (anticipated submittal date in parentheses)	5/7/13 (5/30/14)	5/7/13 (5/30/14)	5/7/13 (5/30/14)	5/7/13 (5/30/14)
Changes in the next 18 months?	None	None	None	None



## (KA) Kapolei SLAMS and NCore continued

<b>KA MONITOR INFORMATION (N/A = Not Applicable)</b>				
	<b>Pb-TSP Co-loc</b>	<b>PM<sub>2.5</sub> Spec.</b>	<b>RH</b>	<b>WS</b>
POC/FRM or FEM	2/FRM	N/A	POC 1	POC 1
Type of Monitor	NCore	NCore/Supp. Speciation	NCore	NCore
AQS parameter code	14129	Various	62201	61103
Manufacturer	Graseby	Met-One/URG	RM Young	RM Young
Model No.	2376105	SASS/300N	05103VP	05103VP
AQS method code	191	810/136	014	020
Monitoring start date	1/1/2012	10/1/2009	1/1/2011	1/1/2011
Monitoring frequency	1/6 days	1/3 days	Continuous	Continuous
Probe material	N/A	N/A	N/A	N/A
Residence time (sec)	N/A	N/A	N/A	N/A
Distance between co-located monitors	4 m	N/A	N/A	N/A
Analytical laboratory	ASAS	EPA contract	N/A	N/A
Location of probe	shelter roof	shelter roof	10m tower	10m tower
Shelter dimensions (H x W x D) (m)	4 x 2.4 x 5	4 x 2.4 x 5	4 x 2.4 x 5	4 x 2.4 x 5
Horizontal distance from supporting structure (m)	N/A	N/A	N/A	N/A
Vertical distance above supporting structure (m)	1.7	1.7/1.6	N/A	N/A
Height of probe above ground (m)	5.7	5.7/5.6	N/A	N/A
Distance (m) & direction from tree(s)	17 N	13N/11N	N/A	N/A
Horizontal distance from edge of nearest traffic lane (m)	160	165	N/A	N/A
Horizontal distance from nearest parking lot (m)	80	85	N/A	N/A
Distance (m) & direction from obstructions on roof	N/A	N/A	N/A	N/A
Distance (m) & direction from possible obstructions not on roof	163 E	168 E	N/A	N/A
Height of nearest possible obstruction (m)	9	9	N/A	N/A
Distance (m) & direction from furnace or incineration flues	N/A	N/A	N/A	N/A
Unrestricted airflow	360°	360°	360°	360°
Located in paved (P) or vegetative (V) ground?	V	V	V	V
<b>SITE REPRESENTATIVENESS</b>				
Spatial scale	Neighborhood	Neighborhood	N/A	N/A
Applicable NAAQS averaging time(s)	3-month	N/A	N/A	N/A
Sampling season	12 months	12 months	12 months	12 months
Site type <sup>1</sup>	QC	2	N/A	N/A
Purpose of Monitor <sup>2</sup>	QC	4	N/A	N/A
Suitable for comparison against the annual PM <sub>2.5</sub> NAAQS?	N/A	N/A	N/A	N/A
<b>DATA QUALITY</b>				
Last PEP	N/A	N/A	N/A	N/A
Last NPAP	N/A	N/A	N/A	N/A
Date of last annual independent performance audit (CAB)	9/7/12	12/13/13	12/13/13	12/13/13
Frequency of flow rate verification (automated PM)	N/A	N/A	N/A	N/A
Frequency of flow rate verification (manual PM <sub>2.5</sub> )	N/A	Monthly	N/A	N/A
Dates of last 2 semi-annual flow rate audits (manual PM <sub>2.5</sub> )	N/A	5/21/13; 11/14/13	N/A	N/A
Frequency of 1-point flow rate verification (Pb)	1/3 months	N/A	N/A	N/A
Dates of last 2 semi-annual flow rate audits (Pb)	5/21/13; 11/14/13	N/A	N/A	N/A
Precision & accuracy submitted to AQS	Quarterly	Quarterly	N/A	N/A
Frequency of 1-pt. QC check (gases)	N/A	N/A	N/A	N/A
Frequency of multi-point gas calibration	N/A	N/A	N/A	N/A
Annual data certification submitted (anticipated submittal date in parentheses)	5/7/13 (5/30/14)	5/7/13 (5/30/14)	5/7/13 (5/30/14)	5/7/13 (5/30/14)
Changes in the next 18 months?	None	None	None	None

## (KA) Kapolei SLAMS and NCore continued

KA MONITOR INFORMATION (N/A = Not Applicable)			
	WD	AT	
POC/FRM or FEM	POC 1	POC 1	
Type of Monitor	NCore	NCore	
AQS parameter code	61104	62101	
Manufacturer	RM Young	RM Young	
Model No.	05103VP	05103VP	
AQS method code	020	020	
Monitoring start date	1/1/2011	1/1/2011	
Monitoring frequency	Continuous	Continuous	
Probe material	N/A	N/A	
Residence time (sec)	N/A	N/A	
Distance between co-located monitors	N/A	N/A	
Analytical laboratory	N/A	N/A	
Location of probe	10m tower	10m tower	
Shelter dimensions	4 x 2.4 x 5	4 x 2.4 x 5	
Horizontal distance from supporting structure (m)	N/A	N/A	
Vertical distance above supporting structure (m)	N/A	N/A	
Height of probe above ground (m)	N/A	N/A	
Distance (m) & direction from tree(s)	N/A	N/A	
Horizontal distance from edge of nearest traffic lane (m)	N/A	N/A	
Horizontal distance from nearest parking lot (m)	N/A	N/A	
Distance (m) & direction from obstructions on roof	N/A	N/A	
Distance (m) & direction from possible obstructions not on roof	N/A	N/A	
Height of nearest possible obstruction (m)	N/A	N/A	
Distance (m) & direction from furnace or incineration flues	N/A	N/A	
Unrestricted airflow	360°	360°	
Located in paved (P) or vegetative (V) ground?	V	V	
<b>SITE REPRESENTATIVENESS</b>			
Spatial scale	N/A	N/A	
Applicable NAAQS averaging time(s)	N/A	N/A	
Sampling season	12 months	12 months	
Site type <sup>1</sup>	N/A	N/A	
Purpose of Monitor <sup>2</sup>	N/A	N/A	
Suitable for comparison against the annual PM <sub>2.5</sub> NAAQS?	N/A	N/A	
<b>DATA QUALITY</b>			
Last PEP	N/A	N/A	
Last NPAP	N/A	N/A	
Date of last annual independent performance audit (CAB)	12/13/13	12/13/13	
Frequency of flow rate verification (automated PM)	N/A	N/A	
Frequency of flow rate verification (manual PM <sub>2.5</sub> )	N/A	N/A	
Dates of last 2 semi-annual flow rate audits	N/A	N/A	
Frequency of 1-point flow rate verification (Pb)	N/A	N/A	
Dates of last 2 semi-annual flow rate audits (Pb)	N/A	N/A	
Precision & accuracy submitted to AQS	N/A	N/A	
Frequency of 1-pt. QC check (gases)	N/A	N/A	
Frequency of multi-point gas calibration	N/A	N/A	
Annual data certification submitted (anticipated submittal date in parentheses)	5/7/13 (5/30/14)	5/7/13 (5/30/14)	
Changes in the next 18 months?	None	None	

<b>(PC) PEARL CITY</b>			
AQS: 150032004	Type: SLAMS	County: Honolulu	MSA: Honolulu
Address: 860 4 <sup>th</sup> St., Pearl City, HI 96782			
Latitude: 21.39283		Longitude: -157.96913	Elevation: 23.1 m MSL
<b>Location Description:</b> This site is located on the roof of the Department of Health's Leeward Health Center in a commercial and highly populated residential area. The station is west of Hawaiian Electric Company's Wai'au Generating Station and is approximately 3 miles NW of the Pearl Harbor Naval Complex. This station has been operating since 1994.			

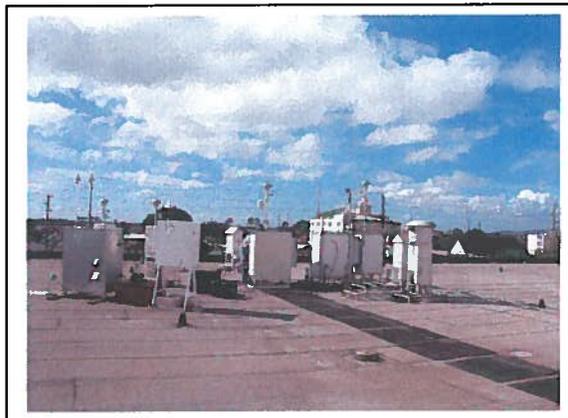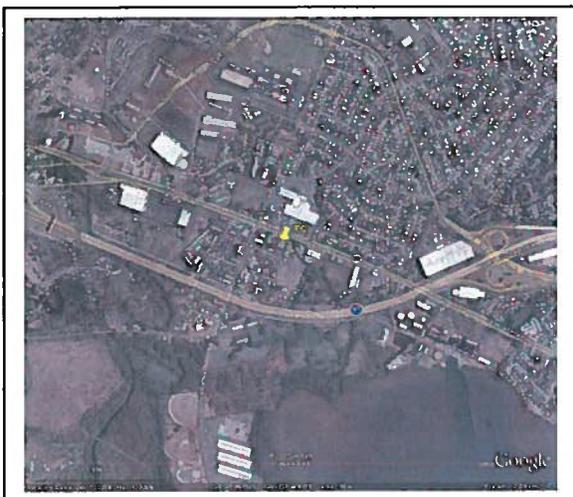

<b>PC TRAFFIC DESCRIPTION</b>			
Type of Roadway	4 <sup>th</sup> St.	Lehua Ave.	Kam. Hwy.
Freeway			
Major Street or Highway		X	X
Local Street or Road	X		
Distance from air intake (m)	50	138	58
Direction from air inlet	S	W	N
Composition of roadway	asphalt	asphalt	asphalt
Number of traffic lanes	2	4	6
Average daily traffic	<sup>2</sup> Estimated: <2,000	15,692 (2002) <sup>1</sup>	57,948 (2007) <sup>1</sup>
Average vehicle speed (est. mph)	20	30	35
Traffic one way or two	2	2	2
Street parking?	Yes	No	No
<sup>1</sup> Source: State of Hawaii Department of Transportation <sup>2</sup> Estimate only, no data available, small side street used by a few local businesses and residences			

For "Site Representativeness" in the following table:


- <sup>1</sup>Site Types:
- 1) located to determine the highest concentrations;
  - 2) located to measure typical concentrations in areas of high population density;
  - 3) located to determine the impact of significant sources or source categories on air quality;
  - 4) located to determine general background concentration levels;
  - 5) located to determine extent of regional pollutant transport among populated areas and in support of secondary standards;
  - 6) located to measure air pollution impacts on visibility, vegetation damage, or other welfare-based impacts

- <sup>2</sup> Purposes:
- 1) Provide air pollution data to the general public in a timely manner;
  - 2) Support compliance with ambient air quality standards;
  - 3) Support emissions strategy development and track trends in air pollution abatement control measures;
  - 4) Support for air pollution research

## (PC) Pearl City continued

<b>PC MONITOR INFORMATION (N/A = Not Applicable)</b>			
	<b>PM<sub>10</sub></b>	<b>PM<sub>2.5</sub></b>	
POC/FRM or FEM	3/FEM	4/FEM	
Type of Monitor	SLAMS	SLAMS	
AQS parameter code	81102	88101	
Manufacturer	Met One	Met One	
Model No.	BAM1020	BAM 1020	
AQS method code	122	170	
Monitoring start date	9/29/2007	1/10/2009	
Monitoring frequency	Continuous	Continuous	
Probe material	N/A	N/A	
Residence time (sec)	N/A	N/A	
Distance between co-located monitors	N/A	N/A	
Analytical laboratory	N/A	N/A	
Location of probe	building roof	building roof	
Building dimensions (H) (m)	12	12	
Horizontal distance from supporting structure (m)	14	14	
Vertical distance above supporting structure (m)	2	2	
Height of probe above ground (m)	14	14	
Distance (m) & direction from tree(s)	20 E	20 E	
Horizontal distance from edge of nearest traffic lane (m)	58	58	
Horizontal distance from nearest parking lot (m)	N/A	N/A	
Distance (m) & direction from obstructions on roof	14 S	14 S	
Distance (m) & direction from possible obstructions not on roof	N/A	N/A	
Height of nearest possible obstruction (m)	6	6	
Distance (m) & direction from furnace or incineration flues	N/A	N/A	
Unrestricted airflow	360°	360°	
Located in paved (P) or vegetative (V) ground?	P	P	
<b>SITE REPRESENTATIVENESS</b>			
Spatial scale	Neighborhood	Neighborhood	
Applicable NAAQS averaging time(s)	24-hr	24-hr, annual	
Sampling season	12 months	12 months	
Site type <sup>1</sup>	1	1	
Purpose of Monitor <sup>2</sup>	1, 2	1, 2	
Suitable for comparison against the annual PM <sub>2.5</sub> NAAQS?	N/A	Yes	
<b>DATA QUALITY</b>			
Last PEP	N/A	12/10/13	
Last NPAP	N/A	N/A	
Date of last annual independent performance audit (CAB)	9/18/13	9/18/13	
Frequency of flow rate verification (automated PM)	Monthly	Monthly	
Frequency of flow rate verification (manual PM <sub>2.5</sub> )	N/A	N/A	
Dates of last 2 semi-annual flow rate audits (PM)	5/20/13; 11/18/13	5/20/13; 11/18/13	
Frequency of 1-point flow rate verification (Pb)	N/A	N/A	
Dates of last 2 semi-annual flow rate audits (Pb)	N/A	N/A	
Precision & accuracy submitted to AQS	Quarterly	Quarterly	
Frequency of 1-pt. QC check (gases)	N/A	N/A	
Frequency of multi-point gas calibration	N/A	N/A	
Annual data certification submitted (anticipated submittal date in parentheses)	5/7/13 (5/30/14)	5/7/13 (5/30/14)	
Changes in the next 18 months?	None	None	

<b>(SI) SAND ISLAND</b>			
AQS: 150031004	Type: SLAMS	County: Honolulu	MSA: Honolulu
Address: 1039 Sand Island Parkway, Honolulu, HI 96819			
Latitude: 21.30384		Longitude: -157.87117	Elevation: 5.3 m MSL
<b>Location Description:</b> Station is located in the University of Hawaii's Anuenue Fisheries near the entrance to the Sand Island Recreational Area. Sand Island is downwind of downtown Honolulu, across from Honolulu Harbor. This station has been operating since 1980.			

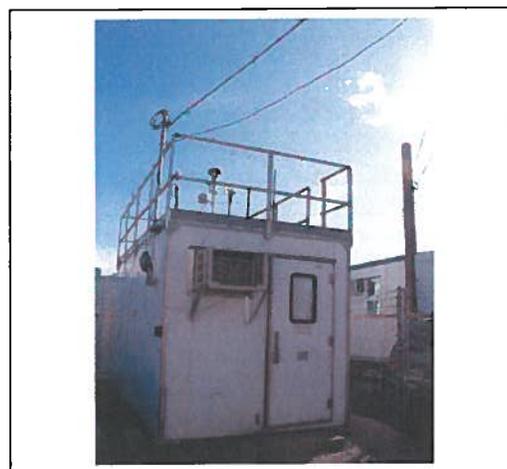

<b>SI TRAFFIC DESCRIPTION</b>	
Type of Roadway	Sand Island Parkway
Freeway	
Major Street or Highway	X
Local Street or Road	
Distance from air intake (m)	37
Direction from air inlet	W
Composition of roadway	asphalt
Number of traffic lanes	2
Average daily traffic	1610 (2007) <sup>1</sup>
Average vehicle speed (est. mph)	30
Traffic one way or two	2
Street parking?	No
<sup>1</sup> Source: State of Hawaii Department of Transportation	

For "Site Representativeness" in the following table:


- <sup>1</sup>Site Types:
- 1) located to determine the highest concentrations;
  - 2) located to measure typical concentrations in areas of high population density;
  - 3) located to determine the impact of significant sources or source categories on air quality;
  - 4) located to determine general background concentration levels;
  - 5) located to determine extent of regional pollutant transport among populated areas and in support of secondary standards;
  - 6) located to measure air pollution impacts on visibility, vegetation damage, or other welfare-based impacts

- <sup>2</sup> Purposes:
- 1) Provide air pollution data to the general public in a timely manner;
  - 2) Support compliance with ambient air quality standards;
  - 3) Support emissions strategy development and track trends in air pollution abatement control measures;
  - 4) Support for air pollution research

## (SI) Sand Island continued

<b>SI MONITOR INFORMATION (N/A = Not Applicable)</b>			
	<b>PM<sub>2.5</sub></b>	<b>O<sub>3</sub></b>	
POC/FRM or FEM	2/FEM	2/FRM	
Type of Monitor	SLAMS	SLAMS	
AQS parameter code	88101	44201	
Manufacturer	Met One	TECO	
Model No.	BAM1020	49C	
AQS method code	170	047	
Monitoring start date	1/1/2009	1/1/1980	
Monitoring frequency	Continuous	Continuous	
Probe material	N/A	Glass	
Residence time (sec)	N/A	17.96	
Distance between co-located monitors	N/A	N/A	
Analytical laboratory	N/A	N/A	
Location of probe	shelter roof	shelter roof	
Shelter dimensions (H x W x D) (m)	3x2x5	3x2x5	
Horizontal distance from supporting structure (m)	N/A	N/A	
Vertical distance above supporting structure (m)	1.1	2	
Height of probe above ground (m)	4.1	5	
Distance (m) & direction from tree(s)	20 E	20 E	
Horizontal distance from edge of nearest traffic lane (m)	37	37	
Horizontal distance from nearest parking lot (m)	40	40	
Distance (m) & direction from obstructions on roof	N/A	N/A	
Distance (m) & direction from possible obstructions not on roof	14 N	14 N	
Height of nearest possible obstruction (m)	5.5	5.5	
Distance (m) & direction from furnace or incineration flues	N/A	N/A	
Unrestricted airflow	360°	360°	
Located in paved (P) or vegetative (V) ground?	V	V	
<b>SITE REPRESENTATIVENESS</b>			
Spatial scale	Neighborhood	Neighborhood	
Applicable NAAQS averaging time(s)	24-hr, annual	8-hr	
Sampling season	12 months	12 months	
Site type <sup>1</sup>	5	1	
Purpose of Monitor <sup>2</sup>	1, 2	1, 2, 3	
Suitable for comparison against the annual PM <sub>2.5</sub> NAAQS?	Y	N/A	
<b>DATA QUALITY</b>			
Last PEP	6/21/13	N/A	
Last NPAP	N/A	12/11/13	
Date of last annual independent performance audit (CAB)	8/6/13	8/21/13	
Frequency of flow rate verification (automated PM)	Monthly	N/A	
Frequency of flow rate verification (manual PM <sub>2.5</sub> )	N/A	N/A	
Dates of last 2 semi-annual flow rate audits (PM)	5/7/13; 11/7/13	N/A	
Frequency of 1-point flow rate verification (Pb)	N/A	N/A	
Dates of last 2 semi-annual flow rate audits (Pb)	N/A	N/A	
Precision & accuracy submitted to AQS	Quarterly	Quarterly	
Frequency of 1-pt. QC check (gases)	N/A	Weekly	
Frequency of multi-point gas calibration	N/A	60 days	
Annual data certification submitted (anticipated submittal date in parentheses)	5/7/13 (5/30/14)	5/7/13 (5/30/14)	
Changes in the next 18 months?	None	None	

<b>(KH) KIHEI</b>			
AQS: 150090006	Type: SLAMS	County: Maui	MSA: Maui
Address: TMK 2-3-9-4:28 Hale Piilani Park, Kihei, HI 96753			
Latitude: 20.780997	Longitude: -156.44637	Elevation: 46.5 m MSL	
<b>Location Description:</b> This station is located in the Hale Piilani subdivision's park in upper Kihei and surrounded primarily by agricultural land. The station was established to monitor the effects of sugar cane burning. This station has been operating since 1999 monitoring for particulates.			

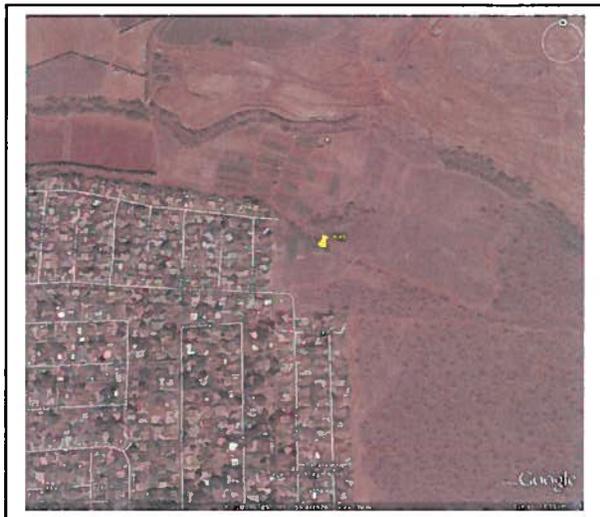

**For "Site Representativeness" in the following table:**

- <sup>1</sup>Site Types:
- 1) located to determine the highest concentrations;
  - 2) located to measure typical concentrations in areas of high population density;
  - 3) located to determine the impact of significant sources or source categories on air quality;
  - 4) located to determine general background concentration levels;
  - 5) located to determine extent of regional pollutant transport among populated areas and in support of secondary standards;
  - 6) located to measure air pollution impacts on visibility, vegetation damage, or other welfare-based impacts


- <sup>2</sup> Purposes:
- 1) Provide air pollution data to the general public in a timely manner;
  - 2) Support compliance with ambient air quality standards;
  - 3) Support emissions strategy development and track trends in air pollution abatement control measures;
  - 4) Support for air pollution research

## (KH) Kihei continued

<b>KH MONITOR INFORMATION</b> (N/A = Not Applicable)				
	<b>PM<sub>2.5</sub></b>			
POC/FRM or FEM	2/FEM			
Type of Monitor	SLAMS			
AQS parameter code	88101			
Manufacturer	Met One			
Model No.	BAM1020			
AQS method code	170			
Monitoring start date	12/1/2008			
Monitoring frequency	Continuous			
Probe material	N/A			
Residence time (sec)	N/A			
Distance between co-located monitors	N/A			
Analytical laboratory	N/A			
Location of probe	shelter roof			
Shelter dimensions (H x W x D) (m)	4 x 2 x 5			
Horizontal distance from supporting structure (m)	N/A			
Vertical distance above supporting structure (m)	1			
Height of probe above ground (m)	5			
Distance (m) & direction from tree(s)	19.2 N			
Horizontal distance from edge of nearest traffic lane (m)	154.5			
Horizontal distance from nearest parking lot (m)	105.2			
Distance (m) & direction from obstructions on roof	N/A			
Distance (m) & direction from possible obstructions not on roof	N/A			
Height of nearest possible obstruction (m)	N/A			
Distance (m) & direction from furnace or incineration flues	N/A			
Unrestricted airflow	360°			
Located in paved (P) or vegetative (V) ground?	V			
<b>SITE REPRESENTATIVENESS</b>				
Spatial scale	Neighborhood			
Applicable NAAQS averaging time(s)	24-hr, annual			
Sampling season	12 months			
Site type <sup>1</sup>	3			
Purpose of Monitor <sup>2</sup>	1, 2, 4			
Suitable for comparison against the annual PM <sub>2.5</sub> NAAQS?	Y			
<b>DATA QUALITY</b>				
Last PEP	5/19/13			
Last NPAP	N/A			
Date of last annual independent performance audit (CAB)	12/10/13			
Frequency of flow rate verification (automated PM)	Monthly			
Frequency of flow rate verification (manual PM <sub>2.5</sub> )	N/A			
Dates of last 2 semi-annual flow rate audits (PM)	5/10/13; 11/12/13			
Frequency of 1-point flow rate verification (Pb)	N/A			
Dates of last 2 semi-annual flow rate audits (Pb)	N/A			
Precision & accuracy submitted to AQS	Quarterly			
Frequency of 1-pt. QC check (gases)	N/A			
Frequency of multi-point gas calibration	N/A			
Annual data certification submitted (anticipated submittal date in parentheses)	5/7/13 (5/30/14)			
Changes in the next 18 months?	None			

(PI) PAIA

AQS: 150090024	Type: SPMS	County: Maui	MSA: Maui
Address: TMK 2-2-5-005-058			
Latitude: 20.902031	Longitude: -156.370344	Elevation: 80.8 m MSL	
Location Description: The monitor is located within a fenced area that contains a County of Maui water supply tank. The area is surrounded by residential and agricultural land with sugar cane fields north of the monitor.			

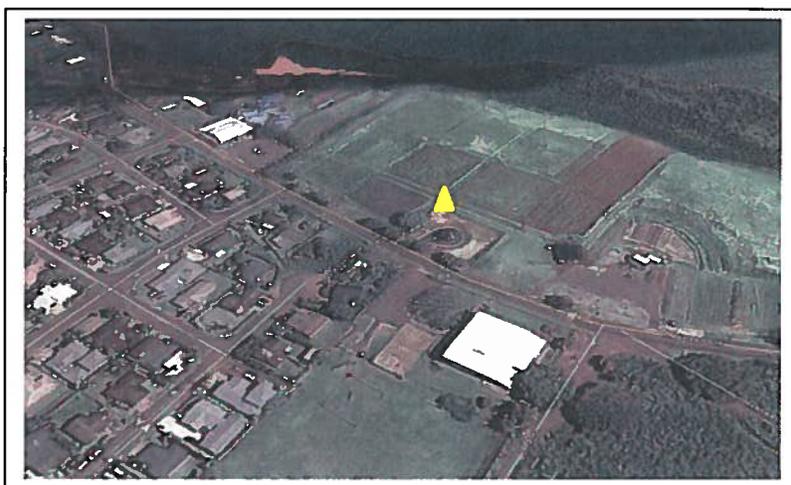

PI TRAFFIC DESCRIPTION	
Type of Roadway	Baldwin Ave.
Freeway	
Major Street or Highway	
Local Street or Road	X
Distance from air intake (m)	36
Direction from air inlet	WSW
Composition of roadway	Asphalt
Number of traffic lanes	2
Average daily traffic	6,662 <sup>1</sup>
Average vehicle speed (est. mph)	35
Traffic one way or two	2
Street parking?	No

<sup>1</sup> County of Maui Planning Dept. 2003 count

For "Site Representativeness" in the following table:


- <sup>1</sup>Site Types:
- 1) located to determine the highest concentrations;
  - 2) located to measure typical concentrations in areas of high population density;
  - 3) located to determine the impact of significant sources or source categories on air quality;
  - 4) located to determine general background concentration levels;
  - 5) located to determine extent of regional pollutant transport among populated areas and in support of secondary standards;
  - 6) located to measure air pollution impacts on visibility, vegetation damage, or other welfare-based impacts

- <sup>2</sup> Purposes:
- 1) Provide air pollution data to the general public in a timely manner;
  - 2) Support compliance with ambient air quality standards;
  - 3) Support emissions strategy development and track trends in air pollution abatement control measures;
  - 4) Support for air pollution research

## (PI) Paia continued

PI MONITOR INFORMATION		(N/A = Not Applicable)		
	<b>PM<sub>2.5</sub></b>			
POC/FRM or FEM	1/FEM			
Type of Monitor	SPMS			
AQS parameter code	88101			
Manufacturer	Met One			
Model No.	BAM1020			
AQS method code	170			
Monitoring start date	3/1/13			
Monitoring frequency	Continuous			
Probe material	N/A			
Residence time (sec)	N/A			
Distance between co-located monitors	N/A			
Analytical laboratory	N/A			
Location of probe	stand-alone PM shelter			
Shelter dimensions (H x W x D) (m)	1.8x1.1x0.6			
Horizontal distance from supporting structure (m)	N/A			
Vertical distance above supporting structure (m)	N/A			
Height of probe above ground (m)	2.5			
Distance (m) & direction from tree(s)	N/A (tree cut)			
Horizontal distance from edge of nearest traffic lane (m)	36			
Horizontal distance from nearest parking lot (m)	52.6			
Distance (m) & direction from obstructions on roof	N/A			
Distance (m) & direction from possible obstructions not on roof	18 N			
Height of nearest possible obstruction (m)	9			
Distance (m) & direction from furnace or incineration flues	N/A			
Unrestricted airflow	360°			
Located in paved (P) or vegetative (V) ground?	V			
<b>SITE REPRESENTATIVENESS</b>				
Spatial scale	Neighborhood			
Applicable NAAQS averaging time(s)	24-hr, annual			
Sampling season	12 months			
Site type <sup>1</sup>	3			
Purpose of Monitor <sup>2</sup>	1, 4			
Suitable for comparison against the annual PM <sub>2.5</sub> NAAQS?	N (<24 months)			
<b>DATA QUALITY</b>				
Last PEP	6/19/13			
Last NPAP	N/A			
Date of last annual independent performance audit (CAB)	12/10/13			
Frequency of flow rate verification (automated PM)	Monthly			
Frequency of flow rate verification (manual PM <sub>2.5</sub> )	N/A			
Dates of last 2 semi-annual flow rate audits (PM)	5/10/13; 11/12/13			
Frequency of 1-point flow rate verification (Pb)	N/A			
Dates of last 2 semi-annual flow rate audits (Pb)	N/A			
Precision & accuracy submitted to AQS	Quarterly			
Frequency of 1-pt. QC check (gases)	N/A			
Frequency of multi-point gas calibration	N/A			
Annual data certification submitted (anticipated submittal date in parentheses)	5/7/13 (5/30/14)			
Changes in the next 18 months?	None, tree near the station was cut to a stump on April 2014.			

<b>(NI) NIUMALU</b>			
AQS: 150070007	Type: SPMS	County: Kauai	MSA: Not in a MSA
Address: 2342 Hulemalu Rd., Lihue, HI 96766			
Latitude: 21.9495	Longitude: -159.365		Elevation: 11 m MSL
<b>Location Description:</b>			
Located on a private residential property approximately 1 mile downwind of Nawiliwili Harbor, this station was established to monitor the impact of cruise ship emissions on nearby communities. With the new lower ECA fuel sulfur requirements for cruise ships, this station provides information on the effects of lowered fuel sulfur on ambient SO <sub>2</sub> . This station began operating in April 2011.			

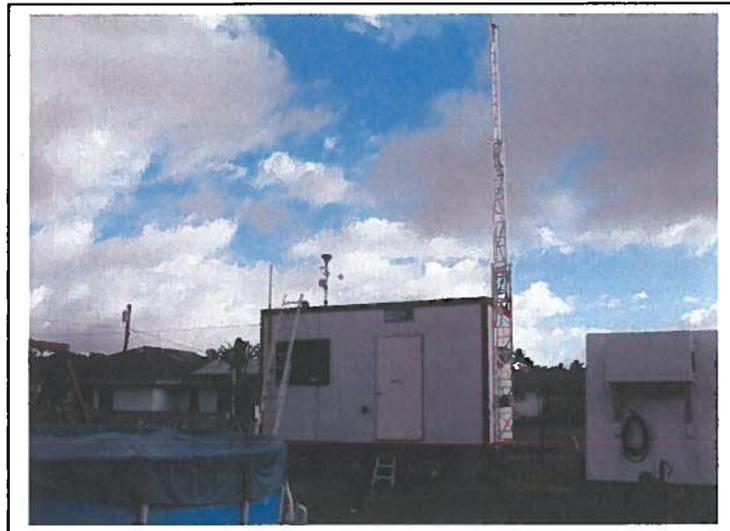

<b>NI TRAFFIC DESCRIPTION</b>		
Type of Roadway	Hulemalu Rd.	Niiumalu Rd.
Freeway		
Major Street or Highway		
Local Street or Road	X	X
Distance from air intake (m)	44.4	309.7
Direction from air inlet	NW	NE
Composition of roadway	asphalt	asphalt
Number of traffic lanes	2	1
Average daily traffic	100 <sup>1</sup>	30 <sup>1</sup>
Average vehicle speed (est. mph)	15	20
Traffic one way or two	2	2
Street parking?	No	No

<sup>1</sup> Estimated only, no data available, roads are for local residential access

For "Site Representativeness" in the following table:


- <sup>1</sup>Site Types:
- 1) located to determine the highest concentrations;
  - 2) located to measure typical concentrations in areas of high population density;
  - 3) located to determine the impact of significant sources or source categories on air quality;
  - 4) located to determine general background concentration levels;
  - 5) located to determine extent of regional pollutant transport among populated areas and in support of secondary standards;
  - 6) located to measure air pollution impacts on visibility, vegetation damage, or other welfare-based impacts

- <sup>2</sup> Purposes:
- 1) Provide air pollution data to the general public in a timely manner;
  - 2) Support compliance with ambient air quality standards;
  - 3) Support emissions strategy development and track trends in air pollution abatement control measures;
  - 4) Support for air pollution research

## (NI) Niimalu continued

<b>NI MONITOR INFORMATION (N/A = Not Applicable)</b>				
	<b>SO<sub>2</sub></b>	<b>NO<sub>2</sub></b>	<b>PM<sub>2.5</sub></b>	
POC/FRM or FEM	1/FEM	1/FRM	1/FEM	
Type of Monitor	SPMS	SPMS	SPMS	
AQS parameter code	42401	42602	88101	
Manufacturer	TECO	Teledyne API	Met One	
Model No.	43i	T200	BAM 1020	
AQS method code	060	099	170	
Monitoring start date	4/1/2011	4/1/2011	4/1/2011	
Monitoring frequency	Continuous	Continuous	Continuous	
Probe material	Glass	Glass	N/A	
Residence time (sec)	15.1	15.1	N/A	
Distance between co-located monitors	N/A	N/A	N/A	
Analytical laboratory	N/A	N/A	N/A	
Location of probe	shelter roof	shelter roof	shelter roof	
Shelter dimensions (H x W x D) (m)	3x5x2.4	3x5x2.4	3x5x2.4	
Horizontal distance from supporting structure (m)	N/A	N/A	N/A	
Vertical distance above supporting structure (m)	1	1	1	
Height of probe above ground (m)	4	4	4	
Distance (m) & direction from tree(s)	17.8 ESE	17.8 ESE	17.8 ESE	
Horizontal distance from edge of nearest traffic lane (m)	44.4	44.4	44.4	
Horizontal distance from nearest parking lot (m)	N/A	N/A	N/A	
Distance (m) & direction from obstructions on roof	N/A	N/A	N/A	
Distance (m) & direction from possible obstructions not on roof	14.6 W	14.6 W	14.6 W	
Height of nearest possible obstruction (m)	7.2	7.2	7.2	
Distance (m) & direction from furnace or incineration flues	N/A	N/A	N/A	
Unrestricted airflow	360°	360°	360°	
Located in paved (P) or vegetative (V) ground?	V	V	V	
<b>SITE REPRESENTATIVENESS</b>				
Spatial scale	Neighborhood	Neighborhood	Neighborhood	
Applicable NAAQS averaging time(s)	1-hr, 3-hr, 24-hr, annual	1-hr, annual	24-hr, annual	
Sampling season	12 months	12 months	12 months	
Site type <sup>1</sup>	3	3	3	
Purpose of Monitor <sup>2</sup>	1, 2, 4	1, 2, 4	1, 2, 4	
Suitable for comparison against the annual PM <sub>2.5</sub> NAAQS?	N/A	N/A	Y	
<b>DATA QUALITY</b>				
Last PEP	N/A	N/A	2/3/12	
Last NPAP	2/2/12	2/2/12	N/A	
Date of last annual independent performance audit (CAB)	10/29/13	10/29/13	10/29/13	
Frequency of flow rate verification (automated PM)	N/A	N/A	Monthly	
Frequency of flow rate verification (manual PM <sub>2.5</sub> )	N/A	N/A	N/A	
Dates of last 2 semi-annual flow rate audits (PM)	N/A	N/A	5/17/13; 11/22/13	
Frequency of 1-point flow rate verification (Pb)	N/A	N/A	N/A	
Dates of last 2 semi-annual flow rate audits (Pb)	N/A	N/A	N/A	
Precision & accuracy submitted to AQS	Quarterly	Quarterly	Quarterly	
Frequency of 1-pt. QC check (gases)	Weekly	Weekly	N/A	
Frequency of multi-point gas calibration	60 days	60 days	N/A	
Annual data certification submitted (anticipated submittal date in parentheses)	5/7/13 (5/30/14)	5/7/13 (5/30/14)	5/7/13 (5/30/14)	
Changes in the next 18 months?	None	None	None	

<b>(HL) HILO</b>			
AQS: 150011006	Type: SLAMS (SO <sub>2</sub> ); SPMS (PM <sub>2.5</sub> )	County: Hawaii	MSA: Not in a MSA
Address: 1099 Waianuenue Ave., Hilo, HI 96720			
Latitude: 19.71756		Longitude: -155.11053	Elevation: 136.8 m MSL
<b>Location Description:</b> Located on the grounds of the Adult Rehabilitation Center of Hilo, near the Hilo Medical Center, this site was originally established to monitor volcanic emissions during non-prevalent wind conditions. This station has been operating since 1997.			

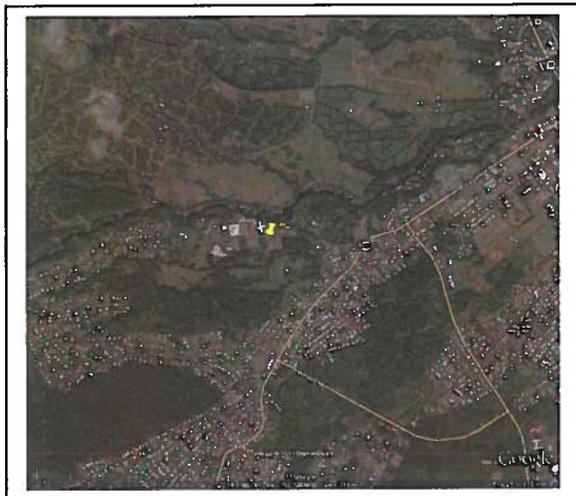

<b>HL TRAFFIC DESCRIPTION</b>	
<b>Type of Roadway</b>	Waianuenue Ave.
Freeway	
Major Street or Highway	X
Local Street or Road	
Distance from air intake (m)	20
Direction from air inlet	N
Composition of roadway	Asphalt
Number of traffic lanes	2
Average daily traffic	15,000 <sup>1</sup>
Average vehicle speed (est. mph)	35
Traffic one way or two	2
Street parking?	No
<sup>1</sup> Estimate only, no data available, based on observations	

For "Site Representativeness" in the following table:

- <sup>1</sup>Site Types:
- 1) located to determine the highest concentrations;
  - 2) located to measure typical concentrations in areas of high population density;
  - 3) located to determine the impact of significant sources or source categories on air quality;
  - 4) located to determine general background concentration levels;
  - 5) located to determine extent of regional pollutant transport among populated areas and in support of secondary standards;
  - 6) located to measure air pollution impacts on visibility, vegetation damage, or other welfare-based impacts

- <sup>2</sup> Purposes:
- 1) Provide air pollution data to the general public in a timely manner;
  - 2) Support compliance with ambient air quality standards;
  - 3) Support emissions strategy development and track trends in air pollution abatement control measures;
  - 4) Support for air pollution research

## (HL) Hilo continued

<b>HL MONITOR INFORMATION (N/A = Not Applicable)</b>			
	<b>PM<sub>2.5</sub></b>	<b>SO<sub>2</sub></b>	
POC/FRM or FEM	1/FEM	1/FEM	
Type of Monitor	SPMS	SLAMS	
AQS parameter code	88101	42401	
Manufacturer	Met-One	TECO	
Model No.	BAM 1020	43i	
AQS method code	170	060	
Monitoring start date	5/1/2008	1/1/1997	
Monitoring frequency	Continuous	Continuous	
Probe material	N/A	Glass	
Residence time (sec)	N/A	18.2	
Distance between co-located monitors	N/A	N/A	
Analytical laboratory	N/A	N/A	
Location of probe	shelter roof	shelter roof	
Shelter dimensions (H x W x D) (m)	3x2.4x5	3x2.4x5	
Horizontal distance from supporting structure (m)	N/A	N/A	
Vertical distance above supporting structure (m)	1.7	1	
Height of probe above ground (m)	4.7	4	
Distance (m) & direction from tree(s)	15 N	15 N	
Horizontal distance from edge of nearest traffic lane (m)	20	20	
Horizontal distance from nearest parking lot (m)	25	25	
Distance (m) & direction from obstructions on roof	N/A	N/A	
Distance (m) & direction from possible obstructions not on roof	N/A	N/A	
Height of nearest possible obstruction (m)	N/A	N/A	
Distance (m) & direction from furnace or incineration flues	29 NNW	29 NNW	
Unrestricted airflow	360°	360°	
Located in paved (P) or vegetative (V) ground?	V	V	
<b>SITE REPRESENTATIVENESS</b>			
Spatial scale	Neighborhood	Neighborhood	
Applicable NAAQS averaging time(s)	24-hr, annual	1-hr, 3-hr, 24-hr, annual	
Sampling season	12 months	12 months	
Site type <sup>1</sup>	3	3	
Purpose of Monitor <sup>2</sup>	1, 2, 4	1, 2, 4	
Suitable for comparison against the annual PM <sub>2.5</sub> NAAQS?	Y	N/A	
<b>DATA QUALITY</b>			
Last PEP	2/10/12	N/A	
Last NPAP	N/A	2/10/12	
Date of last annual independent performance audit (CAB)	7/19/13	7/19/13	
Frequency of flow rate verification (automated PM)	Monthly	N/A	
Frequency of flow rate verification (manual PM <sub>2.5</sub> )	N/A	N/A	
Dates of last 2 semi-annual flow rate audits (PM)	5/8/13; 11/6/13	N/A	
Frequency of 1-point flow rate verification (Pb)	N/A	N/A	
Dates of last 2 semi-annual flow rate audits (Pb)	N/A	N/A	
Precision & accuracy submitted to AQS	Quarterly	Quarterly	
Frequency of 1-pt. QC check (gases)	N/A	Weekly	
Frequency of multi-point gas calibration	N/A	60 days	
Annual data certification submitted (anticipated submittal date in parentheses)	5/7/13 (5/30/14)	5/7/13 (5/30/14)	
Changes in the next 18 months?	None	None	

<b>(KN) KONA</b>			
AQS: 150011012	Type: SLAMS (SO <sub>2</sub> ) SPMS (PM <sub>2.5</sub> )	County: Hawaii	MSA: Not in a MSA
Address: 81-1043 Konawaena School Rd., Kona, HI 96750			
Latitude: 19.50978		Longitude: -155.91342	Elevation: 517.2 m MSL
Location Description: This station is located on the upper campus of Konawaena High School. It was established to measure impacts from volcanic emissions. The station has been operating at this site since 2005.			



<b>KN TRAFFIC DESCRIPTION</b>		
Type of Roadway	Konawaena School Rd.	Mamalahoa Hwy.
Freeway		
Major Street or Highway		X
Local Street or Road	X	
Distance from air intake (m)	17	702
Direction from air inlet	N	W
Composition of roadway	asphalt	asphalt
Number of traffic lanes	1	2
Average daily traffic	500 <sup>2</sup>	15,503 (2006) <sup>1</sup>
Average vehicle speed (est. mph)	10	55
Traffic one way or two	2	2
Street parking?	No	No
<sup>1</sup> Source: State of Hawaii Department of Transportation		
<sup>2</sup> Estimated only, no data available. This is a road used for school access only and station is at the top of the road where there would be less ingress/egress.		

For "Site Representativeness" in the following table:

- <sup>1</sup> Site Types:
- 1) located to determine the highest concentrations;
  - 2) located to measure typical concentrations in areas of high population density;
  - 3) located to determine the impact of significant sources or source categories on air quality;
  - 4) located to determine general background concentration levels;
  - 5) located to determine extent of regional pollutant transport among populated areas and in support of secondary standards;
  - 6) located to measure air pollution impacts on visibility, vegetation damage, or other welfare-based impacts

- <sup>2</sup> Purposes:
- 1) Provide air pollution data to the general public in a timely manner;
  - 2) Support compliance with ambient air quality standards;
  - 3) Support emissions strategy development and track trends in air pollution abatement control measures;
  - 4) Support for air pollution research

## (KN) Kona continued

KN MONITOR INFORMATION (N/A = Not Applicable)				
	PM <sub>2.5</sub>	PM <sub>2.5</sub> Co-Lo	SO <sub>2</sub>	
POC/FRM or FEM	1/FEM	2/FEM	1/FEM	
Type of Monitor	SPMS	SPMS	SLAMS	
AQS parameter code	88101	88101	42401	
Manufacturer	Met-One	Met-One	TECO	
Model No.	BAM 1020	BAM 1020	43C	
AQS method code	170	170	060	
Monitoring start date	3/15/2008	1/1/2014	9/13/2005	
Monitoring frequency	Continuous	Continuous	Continuous	
Probe material	N/A	N/A	Glass	
Residence time (sec)	N/A	N/A	17.36	
Distance between co-located monitors (m)	4	4	N/A	
Analytical laboratory	N/A	N/A	N/A	
Location of probe	shelter roof	shelter roof	shelter roof	
Shelter dimensions (H x W x D) (m)	3x2.4x5	3x2.4x5	3x2.4x5	
Horizontal distance from supporting structure (m)	N/A	N/A	N/A	
Vertical distance above supporting structure (m)	1	1	1.1	
Height of probe above ground (m)	4	4	4.1	
Distance (m) & direction from tree(s)	38 NE	38 NE	38 NE	
Horizontal distance from edge of nearest traffic lane (m)	30	30	30	
Horizontal distance from nearest parking lot (m)	N/A	N/A	N/A	
Distance (m) & direction from obstructions on roof	N/A	N/A	N/A	
Distance (m) & direction from possible obstructions not on roof	21 SSW	21 SSW	21 SSW	
Height of nearest possible obstruction (m)	9	9	9	
Distance (m) & direction from furnace or incineration flues	N/A	N/A	N/A	
Unrestricted airflow	360°	360°	360°	
Located in paved (P) or vegetative (V) ground?	V	V	V	
<b>SITE REPRESENTATIVENESS</b>				
Spatial scale	Neighborhood	Neighborhood	Neighborhood	
Applicable NAAQS averaging time(s)	24-hr, annual	24-hr, annual	1-hr, 3-hr 24-hr, annual	
Sampling season	12 months	12 months	12 months	
Site type <sup>1</sup>	3	QC	3	
Purpose of Monitor <sup>2</sup>	1, 2, 4	1, 2, 4	1, 2, 4	
Suitable for comparison against the annual PM <sub>2.5</sub> NAAQS?	Y	Y	N/A	
<b>DATA QUALITY</b>				
Last PEP	3/17/11	N/A	N/A	
Last NPAP	N/A	N/A	3/17/11	
Date of last annual independent performance audit (CAB)	7/22/13	N/A	7/22/13	
Frequency of flow rate verification (automated PM)	Monthly	Monthly	N/A	
Frequency of flow rate verification (manual PM <sub>2.5</sub> )	N/A	N/A	N/A	
Dates of last 2 semi-annual flow rate audits (PM)	5/15/13; 11/5/13	N/A	N/A	
Frequency of 1-point flow rate verification (Pb)	N/A	N/A	N/A	
Dates of last 2 semi-annual flow rate audits (Pb)	N/A	N/A	N/A	
Precision & accuracy submitted to AQS	Quarterly	Quarterly	Quarterly	
Frequency of 1-pt. QC check (gases)	N/A	N/A	Weekly	
Frequency of multi-point gas calibration	N/A	N/A	60 days	
Annual data certification submitted (anticipated submittal date in parentheses)	5/7/13 (5/30/14)	5/7/13 (5/30/14)	5/7/13 (5/30/14)	
Changes in the next 18 months?	None	None	None	

<b>(MV) MOUNTAIN VIEW</b>			
AQS: 150012023	Type: SPMS	County: Hawaii	MSA: Not in a MSA
Address: 17-1235 Volcano Rd., Mt. View, HI 96771			
Latitude: 19.57002	Longitude: -155.08046	Elevation: 436.5 m MSL	
<b>Location Description:</b> This station is located on the grounds of the Mt. View Elementary School. The original Mt. View station, which began in December 2007, was moved at the ending of 2010 approximately 1.8 miles southwest to this current location. Due to the proximity of this community to the Kilauea volcano, it was established to monitor volcanic emissions during non-trade wind days.			



<b>MV TRAFFIC DESCRIPTION</b>	
<b>Type of Roadway</b>	<b>Volcano Rd.</b>
Freeway	
Major Street or Highway	X
Local Street or Road	
Distance from air intake (m)	30.5
Direction from air inlet	N
Composition of roadway	asphalt
Number of traffic lanes	2
Average daily traffic	5,207 <sup>1</sup> (2006)
Average vehicle speed (est. mph)	40
Traffic one way or two	2
Street parking?	No
<sup>1</sup> Source: State of Hawaii Department of Transportation	

For "Site Representativeness" in the following table:

- <sup>1</sup>Site Types:
- 1) located to determine the highest concentrations;
  - 2) located to measure typical concentrations in areas of high population density;
  - 3) located to determine the impact of significant sources or source categories on air quality;
  - 4) located to determine general background concentration levels;
  - 5) located to determine extent of regional pollutant transport among populated areas and in support of secondary standards;
  - 6) located to measure air pollution impacts on visibility, vegetation damage, or other welfare-based impacts


- <sup>2</sup> Purposes:
- 1) Provide air pollution data to the general public in a timely manner;
  - 2) Support compliance with ambient air quality standards;
  - 3) Support emissions strategy development and track trends in air pollution abatement control measures;
  - 4) Support for air pollution research

## (MV) Mt. View continued

<b>MV MONITOR INFORMATION (N/A = Not Applicable)</b>			
	<b>PM<sub>2.5</sub></b>	<b>SO<sub>2</sub></b>	
POC/FRM or FEM	1/FEM	1/FEM	
Type of Monitor	SPMS	SPMS	
AQS parameter code	88101	42401	
Manufacturer	Met-One	TECO	
Model No.	BAM 1020	43i	
AQS method code	170	060	
Monitoring start date	12/7/2010	12/8/2010	
Monitoring frequency	Continuous	Continuous	
Probe material	N/A	Glass	
Residence time (sec)	N/A	18.3	
Distance between co-located monitors	N/A	N/A	
Analytical laboratory	N/A	N/A	
Location of probe	shelter roof	shelter roof	
Shelter dimensions (H x W x D) (m)	3x2.4x5	3x2.4x5	
Horizontal distance from supporting structure (m)	N/A	N/A	
Vertical distance above supporting structure (m)	1	1	
Height of probe above ground (m)	4	4	
Distance (m) & direction from tree(s)	18 W	18 W	
Horizontal distance from edge of nearest traffic lane (m)	30.5	30.5	
Horizontal distance from nearest parking lot (m)	46.5	46.5	
Distance (m) & direction from obstructions on roof	N/A	N/A	
Distance (m) & direction from possible obstructions not on roof	N/A	N/A	
Height of nearest possible obstruction (m)	N/A	N/A	
Distance (m) & direction from furnace or incineration flues	N/A	N/A	
Unrestricted airflow	360°	360°	
Located in paved (P) or vegetative (V) ground?	V	V	
<b>SITE REPRESENTATIVENESS</b>			
Spatial scale	Neighborhood	Neighborhood	
Applicable NAAQS averaging time(s)	24-hr, annual	1-hr, 3-hr 24-hr, annual	
Sampling season	12 months	12 months	
Site type <sup>1</sup>	3	3	
Purpose of Monitor <sup>2</sup>	1, 2, 4	1, 2, 4	
Suitable for comparison against the annual PM <sub>2.5</sub> NAAQS?	Y	N/A	
<b>DATA QUALITY</b>			
Last PEP	2/7/12	N/A	
Last NPAP	N/A	2/13/12	
Date of last annual independent performance audit (CAB)	7/19/13	7/19/13	
Frequency of flow rate verification (automated PM)	Monthly	N/A	
Frequency of flow rate verification (manual PM <sub>2.5</sub> )	N/A	N/A	
Dates of last 2 semi-annual flow rate audits (PM)	5/8/13; 11/6/13	N/A	
Frequency of 1-point flow rate verification (Pb)	N/A	N/A	
Dates of last 2 semi-annual flow rate audits (Pb)	N/A	N/A	
Precision & accuracy submitted to AQS	Quarterly	Quarterly	
Frequency of 1-pt. QC check (gases)	N/A	Weekly	
Frequency of multi-point gas calibration	N/A	60 days	
Annual data certification submitted (anticipated submittal date in parentheses)	5/7/13 (5/30/14)	5/7/13 (5/30/14)	
Changes in the next 18 months?	None	None	

**(OV) OCEAN VIEW**

AQS: 150012020	Type: SPMS	County: Hawaii	MSA: Not in a MSA
Address: 92-6091 Orchid Mauka Circle, Ocean View, HI 96737			
Latitude: 19.11756	Longitude: -155.77814	Elevation: 862.6 m MSL	
<b>Location Description:</b> This station established in 2010 is located on the grounds of the Ocean View Fire Station. During normal trade-winds, volcanic emissions are carried into this residential/agricultural community.			

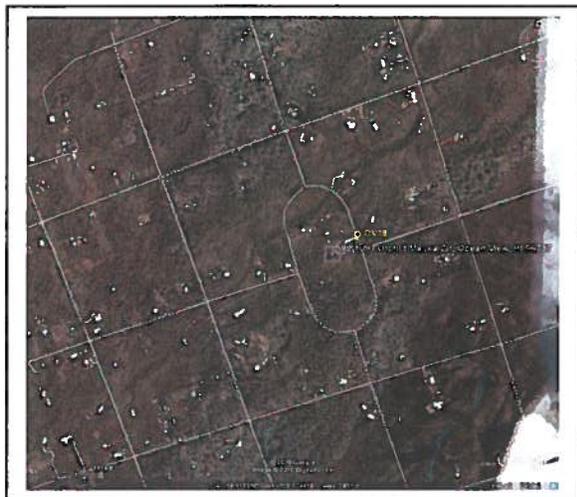

<b>OV TRAFFIC DESCRIPTION</b>	
<b>Type of Roadway</b>	<b>Orchid Mauka Circ.</b>
Freeway	
Major Street or Highway	
Local Street or Road	X
Distance from air intake (m)	13.6
Direction from air inlet	ENE
Composition of roadway	asphalt
Number of traffic lanes	2
Average daily traffic	< 3,000 <sup>1</sup>
Average vehicle speed (est. mph)	25
Traffic one way or two	2
Street parking?	No
<sup>1</sup> Estimated only, local residential street, no data available	

For "Site Representativeness" in the following table:

- <sup>1</sup>Site Types:
- 1) located to determine the highest concentrations;
  - 2) located to measure typical concentrations in areas of high population density;
  - 3) located to determine the impact of significant sources or source categories on air quality;
  - 4) located to determine general background concentration levels;
  - 5) located to determine extent of regional pollutant transport among populated areas and in support of secondary standards;
  - 6) located to measure air pollution impacts on visibility, vegetation damage, or other welfare-based impacts

- <sup>2</sup> Purposes:
- 1) Provide air pollution data to the general public in a timely manner;
  - 2) Support compliance with ambient air quality standards;
  - 3) Support emissions strategy development and track trends in air pollution abatement control measures;
  - 4) Support for air pollution research

## (OV) Ocean View continued

<b>OV MONITOR INFORMATION (N/A = Not Applicable)</b>			
	<b>PM<sub>2.5</sub></b>	<b>SO<sub>2</sub></b>	
POC/FRM or FEM	1/FEM	1/FEM	
Type of Monitor	SPMS	SPMS	
AQS parameter code	88101	42401	
Manufacturer	Met-One	TECO	
Model No.	BAM 1020	43i	
AQS method code	170	060	
Monitoring start date	4/1/2010	4/1/2010	
Monitoring frequency	Continuous	Continuous	
Probe material	N/A	Glass	
Residence time (sec)	N/A	18.3	
Distance between co-located monitors	N/A	N/A	
Analytical laboratory	N/A	N/A	
Location of probe	shelter roof	shelter roof	
Shelter dimensions (H x W x D) (m)	3x2.4x5	3x2.4x5	
Horizontal distance from supporting structure (m)	N/A	N/A	
Vertical distance above supporting structure (m)	1	1.1	
Height of probe above ground (m)	4	4.1	
Distance (m) & direction from tree(s)	N/A	N/A	
Horizontal distance from edge of nearest traffic lane (m)	13.6	13.6	
Horizontal distance from nearest parking lot (m)	6.4	6.4	
Distance (m) & direction from obstructions on roof	N/A	N/A	
Distance (m) & direction from possible obstructions not on roof	N/A	N/A	
Height of nearest possible obstruction (m)	N/A	N/A	
Distance (m) & direction from furnace or incineration flues	N/A	N/A	
Unrestricted airflow	360°	360°	
Located in paved (P) or vegetative (V) ground?	V	V	
<b>SITE REPRESENTATIVENESS</b>			
Spatial scale	Neighborhood	Neighborhood	
Applicable NAAQS averaging time(s)	24-hr, annual	1-hr, 3-hr 24-hr, annual	
Sampling season	12 months	12 months	
Site type <sup>1</sup>	3, 6	3, 6	
Purpose of Monitor <sup>2</sup>	1, 2, 4	1, 2, 4	
Suitable for comparison against the annual PM <sub>2.5</sub> NAAQS?	Y	N/A	
<b>DATA QUALITY</b>			
Last PEP	2/1912	N/A	
Last NPAP	N/A	2/9/12	
Date of last annual independent performance audit (CAB)	7/19/13	7/19/13	
Frequency of flow rate verification (automated PM)	Monthly	N/A	
Frequency of flow rate verification (manual PM <sub>2.5</sub> )	N/A	N/A	
Dates of last 2 semi-annual flow rate audits (PM)	5/8/13; 11/6/13	N/A	
Frequency of 1-point flow rate verification (Pb)	N/A	N/A	
Dates of last 2 semi-annual flow rate audits (Pb)	N/A	N/A	
Precision & accuracy submitted to AQS	Quarterly	Quarterly	
Frequency of 1-pt. QC check (gases)	N/A	Weekly	
Frequency of multi-point gas calibration	N/A	60 days	
Annual data certification submitted (anticipated submittal date in parentheses)	5/7/13 (5/30/14)	5/7/13 (5/30/14)	
Changes in the next 18 months?	None	None	

**(PA) PAHALA**

AQS: 150012016	Type: SPMS	County: Hawaii	MSA: Not in a MSA
Address: 96-3150 Pikake St., Pahala, HI 96777			
Latitude: 19.2039	Longitude: -155.48018	Elevation: 320 m MSL	

**Location Description:**  
This station is located on the grounds of the Ka'u High/Pahala Elementary School. During normal trade-winds, volcanic emissions are carried into this rural community. The station began operating in 2007.



**PA TRAFFIC DESCRIPTION**

Type of Roadway	Puahala	Pumeli
Freeway		
Major Street or Highway		
Local Street or Road	X	X
Distance from air intake (m)	226	61
Direction from air inlet	E	N
Composition of roadway	Asphalt	Asphalt
Number of traffic lanes	2	2
Average daily traffic	< 3,000 <sup>1</sup>	< 3,000 <sup>1</sup>
Average vehicle speed (est. mph)	25 mph	25 mph
Traffic one way or two	2	2
Street parking?	No	No

<sup>1</sup> Estimated only, no data available. Local roads for a community with a 2010 population of about 1,400

For "Site Representativeness" in the following table:

- <sup>1</sup>Site Types:
- 1) located to determine the highest concentrations;
  - 2) located to measure typical concentrations in areas of high population density;
  - 3) located to determine the impact of significant sources or source categories on air quality;
  - 4) located to determine general background concentration levels;
  - 5) located to determine extent of regional pollutant transport among populated areas and in support of secondary standards;
  - 6) located to measure air pollution impacts on visibility, vegetation damage, or other welfare-based impacts

- <sup>2</sup> Purposes:
- 1) Provide air pollution data to the general public in a timely manner;
  - 2) Support compliance with ambient air quality standards;
  - 3) Support emissions strategy development and track trends in air pollution abatement control measures;
  - 4) Support for air pollution research

## (PA) Pahala continued

<b>PA MONITOR INFORMATION (N/A = Not Applicable)</b>			
	<b>PM<sub>2.5</sub></b>	<b>SO<sub>2</sub></b>	
POC/FRM or FEM	1/FEM	1/FEM	
Type of Monitor	SPMS	SPMS	
AQS parameter code	88101	42401	
Manufacturer	Met-One	TECO	
Model No.	BAM 1020	43i	
AQS method code	170	060	
Monitoring start date	4/11/2008	8/10/2007	
Monitoring frequency	Continuous	Continuous	
Probe material	N/A	Glass	
Residence time (sec)	N/A	17.85	
Distance between co-located monitors	N/A	N/A	
Analytical laboratory	N/A	N/A	
Location of probe	shelter roof	shelter roof	
Shelter dimensions (H x W x D) (m)	2.4x2.4x6	2.4x2.4x6	
Horizontal distance from supporting structure (m)	N/A	N/A	
Vertical distance above supporting structure (m)	1	1	
Height of probe above ground (m)	3.4	3.4	
Distance (m) & direction from tree(s)	11 N	11 N	
Horizontal distance from edge of nearest traffic lane (m)	48	48	
Horizontal distance from nearest parking lot (m)	73	73	
Distance (m) & direction from obstructions on roof	N/A	N/A	
Distance (m) & direction from possible obstructions not on roof	N/A	N/A	
Height of nearest possible obstruction (m)	N/A	N/A	
Distance (m) & direction from furnace or incineration flues	N/A	N/A	
Unrestricted airflow	360°	360°	
Located in paved (P) or vegetative (V) ground?	V	V	
<b>SITE REPRESENTATIVENESS</b>			
Spatial scale	Neighborhood	Neighborhood	
Applicable NAAQS averaging time(s)	24-hr, annual	1-hr, 3-hr 24-hr, annual	
Sampling season	12 months	12 months	
Site type <sup>1</sup>	3	3	
Purpose of Monitor <sup>2</sup>	1, 2, 4	1, 2, 4	
Suitable for comparison against the annual PM <sub>2.5</sub> NAAQS?	Y	N/A	
<b>DATA QUALITY</b>			
Last PEP	3/17/11	N/A	
Last NPAP	N/A	7/29/08	
Date of last annual independent performance audit (CAB)	2/6/13	2/6/13	
Frequency of flow rate verification (automated PM)	Monthly	N/A	
Frequency of flow rate verification (manual PM <sub>2.5</sub> )	N/A	N/A	
Dates of last 2 semi-annual flow rate audits (PM)	5/15/13; 11/6/13	N/A	
Frequency of 1-point flow rate verification (Pb)	N/A	N/A	
Dates of last 2 semi-annual flow rate audits (Pb)	N/A	N/A	
Precision & accuracy submitted to AQS	Quarterly	Quarterly	
Frequency of 1-pt. QC check (gases)	N/A	Weekly	
Frequency of multi-point gas calibration	N/A	60 days	
Annual data certification submitted (anticipated submittal date in parentheses)	5/7/13 (5/30/14)	5/7/13 (5/30/14)	
Changes in the next 18 months?	None	None	

**(PE) PUNA E**

AQS: 150012010	Type: SPMS Non-regulatory	County: Hawaii	MSA: Not in a MSA
Address: 13-763 Leilani Ave., Paho, HI			
Latitude: 19.46399		Longitude: -154.89871	Elevation: 207.9 m MSL

**Location Description:**  
 Located on a residential property in Leilani Estates, this station is primarily to monitor emissions from the nearby geothermal energy facility. In 2005, an SO<sub>2</sub> monitor was added to measure any effects from volcanic emissions. However, since this is primarily an H<sub>2</sub>S site, the probe is at breathing height, below EPA requirements and is therefore non-regulatory for SO<sub>2</sub>.



<b>PE TRAFFIC DESCRIPTION</b>	
Type of Roadway	Leilani Blvd.
Freeway	
Major Street or Highway	
Local Street or Road	X
Distance from air intake (m)	25.6
Direction from air inlet	NE
Composition of roadway	asphalt
Number of traffic lanes	2
Average daily traffic	< 5,000 <sup>1</sup>
Average vehicle speed (est. mph)	25
Traffic one way or two	2
Street parking?	Yes
<sup>1</sup> Estimated, no data available, residential street	

For "Site Representativeness" in the following table:

- <sup>1</sup>Site Types:
- 1) located to determine the highest concentrations;
  - 2) located to measure typical concentrations in areas of high population density;
  - 3) located to determine the impact of significant sources or source categories on air quality;
  - 4) located to determine general background concentration levels;
  - 5) located to determine extent of regional pollutant transport among populated areas and in support of secondary standards;
  - 6) located to measure air pollution impacts on visibility, vegetation damage, or other welfare-based impacts

- <sup>2</sup> Purposes:
- 1) Provide air pollution data to the general public in a timely manner;
  - 2) Support compliance with ambient air quality standards;
  - 3) Support emissions strategy development and track trends in air pollution abatement control measures;
  - 4) Support for air pollution research

## (PE) Puna E continued

<b>PE MONITOR INFORMATION (N/A = Not Applicable)</b>			
	<b>SO<sub>2</sub></b>	<b>H<sub>2</sub>S</b>	
POC/FRM or FEM	1/FEM	N/A	
Type of Monitor	SPMS	SPMS	
AQS parameter code	42401	N/A	
Manufacturer	TECO	TECO	
Model No.	43C	43C	
AQS method code	060	N/A	
Monitoring start date	2/16/2005	3/1991	
Monitoring frequency	Continuous	Continuous	
Probe material	Teflon	Teflon	
Residence time (sec)	16.24	16.24	
Distance between co-located monitors	N/A	N/A	
Analytical laboratory	N/A	N/A	
Location of probe	shelter roof	shelter roof	
Shelter dimensions (H x W x D) (m)	3x2.4x5	3x2.4x5	
Horizontal distance from supporting structure (m)	1.2	1.2	
Vertical distance above supporting structure (m)	N/A, probe is on side of shelter		
Height of probe above ground (m)	1.8	1.8	
Distance (m) & direction from tree(s)	17 SW	17 SW	
Horizontal distance from edge of nearest traffic lane (m)	26	26	
Horizontal distance from nearest parking lot (m)	N/A	N/A	
Distance (m) & direction from obstructions on roof	N/A	N/A	
Distance (m) & direction from possible obstructions not on roof	1.2 NE from side of trailer		
Height of nearest possible obstruction (m)	N/A	N/A	
Distance (m) & direction from furnace or incineration flues	N/A	N/A	
Unrestricted airflow	180°	180°	
Located in paved (P) or vegetative (V) ground?	V	V	
<b>SITE REPRESENTATIVENESS</b>			
Spatial scale	Neighborhood	Neighborhood	
Applicable NAAQS averaging time(s)	Non-regulatory	1-hr state standard 25ppb	
Sampling season	12 months	12 months	
Site type <sup>1</sup>	3	3	
Purpose of Monitor <sup>2</sup>	1	1, 4	
Suitable for comparison against the annual PM <sub>2.5</sub> NAAQS?	N/A	N/A	
<b>DATA QUALITY</b>			
Last PEP	N/A	N/A	
Last NPAP	N/A	N/A	
Date of last annual independent performance audit (CAB)	7/23/13	7/23/13 & 7/30/13	
Frequency of flow rate verification (automated PM)	N/A	N/A	
Frequency of flow rate verification (manual PM <sub>2.5</sub> )	N/A	N/A	
Dates of last 2 semi-annual flow rate audits (PM)	N/A	N/A	
Frequency of 1-point flow rate verification (Pb)	N/A	N/A	
Dates of last 2 semi-annual flow rate audits (Pb)	N/A	N/A	
Precision & accuracy submitted to AQS	Quarterly	N/A	
Frequency of 1-pt. QC check (gases)	Weekly	Weekly	
Frequency of multi-point gas calibration	60 days	60 days	
Annual data certification submitted (anticipated submittal date in parentheses)	5/7/13 (5/30/14)	N/A	
Changes in the next 18 months?	Discontinue 12/14	None	

This page intentionally left blank

## **Appendix A**

### **Public Notice Documentation**

The 2014 Network Plan was made available for public viewing on the Clean Air Branch web site as well at the following Department of Health locations:

- Clean Air Branch, 919 Ala Moana Blvd., Rm. 203, Honolulu, Oahu
- Kauai District Health Office, Department of Health, 3040 Umi St., Lihue, Kauai
- Maui District Health Office, Department of Health, 54 High St., Rm. 300, Wailuku, Maui
- Hawaii District Health Office, Department of Health, 1582 Kamehameha Ave., Hilo, Hawaii
- Clean Air Branch-Kona, Keakealani Building, Department of Health, 79-1020 Haukapila St., Rm. 113, Kealahou, Hawaii

Public notification of the availability of the Plan for public inspection was published in the major newspapers on all counties. The public comment period was for 30 days from May 20 to June 20, 2014.

The public notice was published in the following newspapers for the following counties:

- Kauai County: The Garden Island
- City and County of Honolulu: The Star Advertiser
- Maui County: The Maui News
- Hawaii County: West Hawaii Today and Hawaii Tribune Herald (East Hawaii)

Documentations of the public notice are attached.

No comments to the plan were received.





Home (<http://health.hawaii.gov/cab/>) » Public Notices

## PUBLIC NOTICES

The following documents are being provided to inform the public of current environmental air matters. For permit applications that require a public comment period, the following documents are provided: draft Air Permit, draft Air Permit Review, and Public Notice. The Administrative Record for a permit application includes these three documents as well as other documents not provided here. To find out where you can view the complete Administrative Record for an application, please read the Public Notice.

- The Air Permit states the conditions under which a facility is allowed to operate.
- The Air Permit Review gives an assessment of the project, the regulatory requirements, and the proposed actions.
- The Public Notice provides information on the public comment period, the public hearing, if applicable, and other related topics. Copies of the notice may also appear in the statewide Honolulu Star Advertiser and other local newspapers. The "closing date" represents the due date for any comments that may be solicited by the notice.

Click on the document title to view the full text.

Draft Permit	Air Permit Review	Public Notice	Closing Date
Draft Permit 0442-02-C ( <a href="http://health.hawaii.gov/cab/files/2014/05/0442-08-permit.DRAFT_.pdf">http://health.hawaii.gov/cab/files/2014/05/0442-08-permit.DRAFT_.pdf</a> ) United Laundry Services Steam-Generating Boilers  2291 Alahao Place, Honolulu, Hawaii	Draft Permit Review 0442-02-C ( <a href="http://health.hawaii.gov/cab/files/2014/05/0442-08-review.DRAFT_.pdf">http://health.hawaii.gov/cab/files/2014/05/0442-08-review.DRAFT_.pdf</a> )	Request for Public Comments on Draft Air Permits  Docket No. 14-CA-PA-09 ( <a href="http://health.hawaii.gov/cab/files/2014/05/14-CA-PA-09.pdf">http://health.hawaii.gov/cab/files/2014/05/14-CA-PA-09.pdf</a> )	06/13/14

Click on the document title to view the full text.

Air Monitoring Document	Public Notice	Closing Date
State of Hawaii 2014 Air Monitoring Network Plan Air_Monitoring_Network_Plan_2014 ( <a href="http://health.hawaii.gov/cab/files/2013/05/Air_Monitoring_Network_Plan_2014.pdf">http://health.hawaii.gov/cab/files/2013/05/Air_Monitoring_Network_Plan_2014.pdf</a> )	Request for Public Comments	06/20/14

\*Click here to view a copy of the Hawaiian Commercial and Sugar Company, Puunene Mill, permit application (PDF, 7.6MB)  
([http://health.hawaii.gov/cab/files/2013/05/0054-05\\_permitapplication.pdf](http://health.hawaii.gov/cab/files/2013/05/0054-05_permitapplication.pdf))







AFFIDAVIT OF PUBLICATION

IN THE MATTER OF
Public Notice for Docket No. 14-CA-PA-11

STATE OF HAWAII
}
} SS.
City and County of Honolulu }

Doc. Date: MAY 20 2014 # Pages: 1
Notary Name: Patricia K. Reese First Judicial Circuit
Doc. Description: Affidavit of Publication
Notary Signature: [Signature] Date: MAY 20 2014
Notary Public Seal: PATRICIA K. REESE, NOTARY PUBLIC, Comm. No. 86-467, STATE OF HAWAII

Julie Clark being duly sworn, deposes and says that she is a clerk, duly authorized to execute this affidavit of Oahu Publications, Inc. publisher of The Honolulu Star-Advertiser and MidWeek, that said newspapers are newspapers of general circulation in the State of Hawaii, and that the attached notice is true notice as was published in the aforementioned newspapers as follows:

Honolulu Star-Advertiser 0 times on:

Midweek Wed. 0 times on:

THE GARDEN ISLAND 1 times on: 5-20-14

And that affiant is not a party to or in any way interested in the above entitled matter.

[Signature]
Julie Clark


Subscribed to and sworn before me this 20th day

of May A.D. 20 14

[Signature]
Patricia K. Reese, Notary Public of the First Judicial Circuit, State of Hawaii

My commission expires: Oct 07 2014

Ad # 0000629363

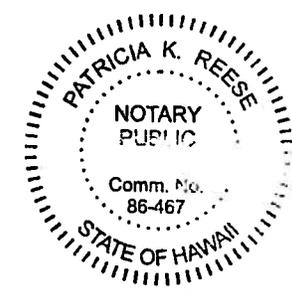

PUBLIC NOTICE

The Department of Health, State of Hawaii, is notifying all interested persons on the availability of the report, "2014 Air Monitoring Network Plan." This report, based on 40 CFR 58.10, describes Hawaii's ambient air monitoring network.

The report is available for public review during regular office hours, Monday through Friday, 7:45 a.m. to 4:15 p.m., at the following locations:

- Oahu:
• Clean Air Branch, Department of Health
919 Ala Moana Blvd., Room 203, Honolulu, Oahu 96814
Hawaii:
• Hawaii District Health Office, Department of Health
1582 Kamehameha Ave., Hilo, Hawaii
• Clean Air Branch - Kona, Keakealani Building, Department of Health
79-1020 Haukapila Street, Room 113, Kealahou, Hawaii
Kauai:
• Kauai District Health Office, Department of Health
3040 Umi St., Lihue, Kauai
Maui:
• Maui District Health Office, Department of Health
54 High St., Room 300, Walluku, Maui

The report is also available on the Clean Air Branch, Department of Health website at http://www.hawaii.gov/health/environmental/air/cab/index.html. Interested persons may submit written comments addressed to the Department of Health at the above address on Oahu, and must be postmarked or received by June 20, 2013. For additional information, contact Ms. Lisa Young of the Clean Air Branch in Honolulu at (808) 586-4200. (SA629363 5/20/14)

Jc



**AFFIDAVIT OF PUBLICATION**

State of Hawaii )

) SS:

County of Hawaii )

LEILANI K. R. HIGAKI

, being first

duly sworn, deposes and says:

1. That she is the BUSINESS MANAGER of HAWAII TRIBUNE-HERALD, a

newspaper published in the City of HILO, State of Hawaii.

2. That the " PUBLIC NOTICE..."2014 Air Monitoring Network Plan."  
...available for public review...etc.

of which a clipping from the newspaper as published is attached hereto, was published in said newspaper on the following date(s) \_\_\_\_\_

May 20, 2014

, (etc.).

187042

*Leilani KR Higaki*

Subscribed and sworn to before me


this 6th day of June, 2014

*Danette K. Koochi*

DANETTE K. KOOCHI

Notary Public, Third Circuit, State of Hawaii

My commission expires 3-23-18

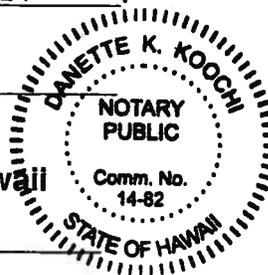



AFFIDAVIT OF PUBLICATION

State of Hawaii )
) SS:
County of Hawaii )

M. R. Chavez, being first duly sworn, deposes and says:


1. That she is the Classified Accountant of WEST HAWAII TODAY, a newspaper published in the City of Kailua-Kona, State of Hawaii.

2. That "PUBLIC NOTICE The Department of Health, State of Hawaii, is notifying all interested persons on the availability of the report "2014 Air Monitoring Network..." of which a clipping from the newspaper is attached hereto, was published in said newspaper on the following date(s) May 20, 2014 (etc.)

M. R. Chavez (handwritten signature)

Subscribed and sworn to before me
This 20th day of May, 2014

Henriann P. Kahananui (handwritten signature)
Notary Public, Third Circuit,
State of Hawaii

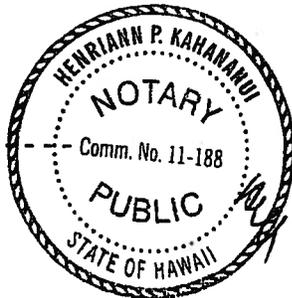

Henriann P. Kahananui

My Commission expires: June 6, 2015

# Page(s): 1

PUBLIC NOTICE
The Department of Health, State of Hawaii, is notifying all interested persons on the availability of the report, "2014 Air Monitoring Network Plan." This report, based on 40 CFR 58.10, describes Hawaii's ambient air monitoring network.
The report is available for public review during regular office hours, Monday through Friday, 7:45 a.m. to 4:15 p.m., at the following locations:
Oahu:
• Clean Air Branch, Department of Health
919 Ala Moana Blvd., Room 203, Honolulu, Oahu 96814
Hawaii:
• Hawaii District Health Office, Department of Health
1582 Kamehameha Ave., Hilo, Hawaii
• Clean Air Branch - Kona, Keakealani Building,
Department of Health 79-1020 Haukapila Street,
Room 113, Kealahou, Hawaii
Kauai:
• Kauai District Health Office, Department of Health
3040 Umi St., Lihue, Kauai
Maui:
• Maui District Health Office, Department of Health
54 High St., Room 300, Wailuku, Maui
The report is also available on the Clean Air Branch, Department of Health website at http://www.hawaii.gov/health/environmental/air/cab/index.html. Interested persons may submit written comments addressed to the Department of Health at the above address on Oahu, and must be postmarked or received by June 20, 2013. For additional information, contact Ms. Lisa Young of the Clean Air Branch in Honolulu at (808) 586-4200.
(No. 187738-West Hawaii Today: May 20, 2014)



**AFFIDAVIT OF PUBLICATION**

STATE OF HAWAII, }  
County of Maui. } ss.

Kamery A. Lee III being duly sworn  
deposes and says, that he is in Advertising Sales of  
the Maui Publishing Co., Ltd., publishers of THE MAUI NEWS, a  
newspaper published in Wailuku, County of Maui, State of Hawaii;  
that the ordered publication as to \_\_\_\_\_

**PUBLIC NOTICE**

of which the annexed is a true and correct printed notice, was  
published 1 times in THE MAUI NEWS, aforesaid, commencing  
on the 20th day of May, 2014, and ending  
on the 20th day of May, 2014, (both days  
inclusive), to-wit: on \_\_\_\_\_  
May 20, 2014

and that affiant is not a party to or in any way interested in the above  
entitled matter.

Kamery A. Lee III

This 1 page Public Notice, dated  
May 20, 2014,

was subscribed and sworn to before me this 20th day of  
May, 2014, in the Second Circuit of the State of Hawaii,

by Kamery A. Lee III

Betty E. Uehara  
Notary Public, Second Judicial  
Circuit, State of Hawaii

**BETTY E. UEHARA**  
My Commission expires 09-28-15

