

JACA - 49

THE ALMEGA CORPORATION

607 C Country Club Drive
Bensenville, Illinois 60106
Phone: (312) 595-0175

AP-42 Section 12.2
Reference
Report Sect. 4
Reference 127

Note: This is a reference cited in AP 42, *Compilation of Air Pollutant Emission Factors, Volume I Stationary Point and Area Sources*. AP42 is located on the EPA web site at www.epa.gov/ttn/chief/ap42/

The file name refers to the reference number, the AP42 chapter and section. The file name "ref02_c01s02.pdf" would mean the reference is from AP42 chapter 1 section 2. The reference may be from a previous version of the section and no longer cited. The primary source should always be checked.

PLANT 2: NO. 4 COKE CAR
PARTICULATE & VISIBLE EMISSIONS TESTING
JUNE 25, 26, 27 & 28, 1985
INLAND P.O. NO. 5NX 37288
TAC PROJECT I-5987: PROPOSAL #P85-140

PREPARED FOR:

Inland Steel Company
3210 Watling Street
East Chicago, Indiana 46312

THE ALMEGA CORPORATION

607 C Country Club Drive
Bensenville, Illinois 60106
Phone: (312) 595-0175

July 5, 1985

Inland Steel Company
3210 Watling Street
East Chicago, Indiana 46312

Attention: Mr. Mike Turner (8-140)

Subject: Plant 2: No. 4 Coke Car
Particulate and Visible Emissions Testing
June 25, 26, 27 & 28, 1985
Inland P.O. No. 5NX 37288
TAC Project I-5987: Proposal #P85-140

Gentlemen:

INTRODUCTION

Particulate emission testing and opacity observations were conducted on the No. 4 coke car at Plant 2 of Inland Steel in East Chicago, Indiana on June 25, 26, 27 and 28, 1985.

The purpose of this test series was to determine the degree of compliance of this new source with the applicable emission codes.

Stack emission test methods followed those detailed in Title 40, Code of Federal Regulations (40: CFR) (Ref. 1).

Emission testing was conducted by staff of The Almega Corporation using an Andersen Samplers, Inc., USEPA Method 5 sampling train.


The No. 4 coke car was operated normally by Inland Steel personnel who also recorded coke production rates.

Representatives of the USEPA Region V were present at times during the testing: Mr. Joseph V. Miceli of JACA Corporation, a contractor to USEPA, was also present during the test series.

This report summarizes the test methods, procedures and findings of this test series. Attached as appendices is a complete documentation of all procedures, field test and laboratory analysis data, calculation summaries and equipment calibrations and certifications.

SUMMARY OF TEST METHODS

Particulate emission testing and visible emissions observations were conducted on the new No. 4 coke car at Plant 2 of Inland Steel on June 25 through 28, 1985.



The ALMEGA CORPORATION

Inland Steel Company
Page Two

Particulate emission testing of this high pressure drop venturi scrubber exhaust associated with the No. 4 coke car was conducted using an Andersen Samplers, Inc., USEPA Method 5 sampling train following the procedural requirements as detailed in Title 40: Code of Federal Regulations (Ref. 1).

Visible emissions observations were made by a certified observer from either Almega or Inland throughout the test series.

Particulate emission testing was conducted using the three sampling ports set into the narrow side of this short tapered 58.5 x 29.5 in. I.D. rectangular stack exhaust of the venturi scrubber. The exhaust stack geometry was dictated by the minimal clearances available for this code car.

The test protocol requested included particulate sampling at 24 points, 8 points on each of three traverses. Sampling at each point was conducted for one complete coke push. This involved commencing particulate sampling as the push commenced and terminating particulate sampling as the coke car entered the quench tower.

The selection and location of the particulate sampling points for this exhaust test followed Method 1 (Ref. 1) included in Appendix A. Specifically, sampling was conducted at each of 24 points as detailed above for typical sampling times ranging from 2 to 3 minutes. Sampling times were recorded to the nearest second.

The gas velocity was determined using an S type pitot tube and followed Method 2 (Ref. 1) included in Appendix B. A 0 to 5 in. W.G. Magnehelix draft gauge was used.


Exhaust gas Orsat samples were taken following Method 3 (Ref. 1) included in Appendix C for determination of CO₂, O₂ and molecular weight.

The exhaust gas moisture was determined following Method 4 (Ref. 1) included in Appendix D.

Particulate concentration and emission rate was determined following Method 5 (Ref. 1) included in Appendix E. The gas velocity and moisture determination were conducted simultaneously with the particulate emission testing.

The particulate catch included nozzle, probe, cyclone and pre-filter washings and filter particulates as detailed in Method 5.

A stainless steel sampling probe and nominal 3/16 in. I.D. (0.185 in. I.D. actual) stainless steel sampling nozzle was used for each test repetition.



The ALMEGA CORPORATION

Inland Steel Company
Page Three

SUMMARY OF TEST FINDINGS


Findings of this test series for the Method 5 particulate emission testing are summarized in Table 1. The Method 9 opacity observations made by Almega are summarized in Tables 2 and 3 for the tests of June 27 and 28 respectively.

The Method 5 field test data, laboratory analyses and calculation summaries are included in Appendix F. The Method 9 field opacity observation data is included in Appendix G and equipment calibrations and certifications are included in Appendix H.

DISCUSSION OF TEST FINDINGS

Based upon this test series the following comments are made:

1. Particulate emission testing followed EPA Methods 1 through 5, the only exception being the sampling time at each sampling point. Of necessity the sampling time at each point covered the time interval from commencing the coke push to the time the car entered the coke quench tower.
2. The Method 5 train pumping rate (ΔH) was set using the initial velocity (ΔP) and stack gas temperature (T_s).
3. The first test repetition conducted on Tuesday 25th June was considered to be suspect due to an avalanche of hot coke burning through the umbilical sampling cord close to the sampling box: consequently it was decided to conduct three more test repetitions on June 26, 27 and 28.
4. This report documents particulate emission concentrations (grains/dscf) and emission rates (lbs/hr). Inland Steel will calculate emissions in lbs/ton coke based upon the coke production rates.
5. For the second test repetition there were three sampling points with zero velocity. Consequently sampling was not conducted at these points. Stack exhaust gas velocity and volume flow is based on a 24 point average: however calculation of the isokinetic rate is based upon the total time and average velocity for the 21 points actually sampled. Measurable velocities did however occur at all 24 points for test repetitions three and four.
6. Opacity observations were made on the hood of the gas cleaning car only as requested for the prior test series of June 4, 5, 6 and 7.



THE ALMEGA CORPORATION

Inland Steel Company
Page Four

7. Again it should be noticed there are a number of opacity observations which could not be made due to either:
- (1) observer location on the west side of this battery and the sun position or
 - (2) other obstructions or interferences

CONCLUSION

Particulate emission testing and opacity observations were conducted on the No. 4 coke car at Plant 2 of Inland Steel in East Chicago, Indiana on June 25, 26, 27 and 28, 1985.

Emission testing was conducted following the Title 40 Code of Federal Regulations (Ref. 1) and included protocol modifications as requested and conducted on other similar coke cars in the past.

Findings of this test series indicate the following particulate emission data:


<u>Test Repetition #</u>	<u>Date</u>	<u>Particulate Concentration grains/dscf</u>	<u>Particulate Emissions lbs/hr</u>
2	June 26, 1985	0.02539	8.321
3	June 27, 1985	0.04127	16.73
4	June 28, 1985	0.03059	12.60


This report summarizes the test methods, procedures and findings of this test series together with a discussion of certain salient items. Attached as Appendices is a comprehensive documentation of field test and laboratory analyses data, calculation summaries and equipment calibrations and certifications.


The Almega Corporation is pleased to have been of service to Inland Steel and wishes to thank those involved for their patience and assistance during the performance of these tests.

Respectfully submitted,

THE ALMEGA CORPORATION

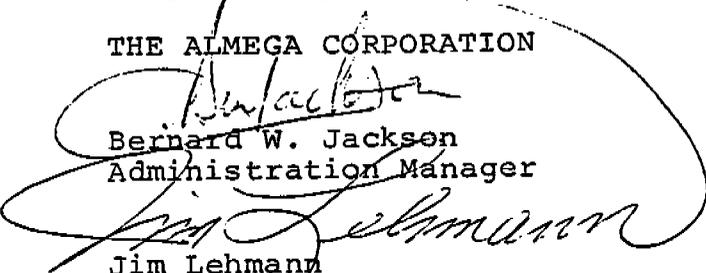

Bernard W. Jackson
Administration Manager

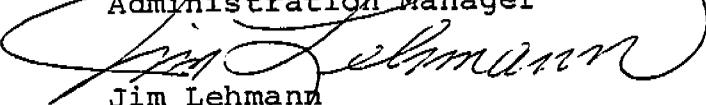
Jim Lehmann
Environmental Consultant

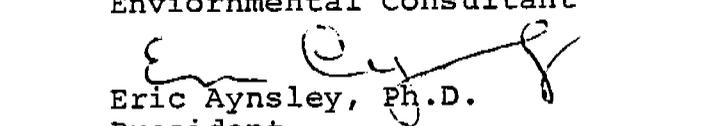
Eric Aynsley, Ph.D.
President

BWJ/JL/EA:dml


Enclosures



The ALMEGA CORPORATION

SUMMARY OF EMISSION TEST DATA

TABLE:	1		
PLANT:	Inland Steel, East Chicago, Indiana		
LOCATION:	Scrubber Stack: No. 4 Coke Car		
OPERATORS:	J. Lehmann, S. Trier and M. Anderson		
REPETITION #:	2	3	4
TEST DATE:	6/26/85	6/27/85	6/28/85
TEST TIME:	1:42-6:52PM	8:55-3:35PM	3:48-3:13PM
<u>STACK GAS</u>			
Temperature, average °F	152.3	146.2	142.7
Velocity average, fps	68.32	84.65	86.17
Volume flow x 10 ⁶ scfh db	2.293	2.836	2.883
acfm	49110	60850	61940
Moisture %	9.528	9.761	10.54
<u>PARTICULATE SAMPLE</u>			
Time, mins.	47.33	61.19	60.61
Volume scf db	31.961	41.777	45.954
Particulates collected, mg	52.6	111.75	91.1
Isokinetic Ratio, I%	99.27	92.74	101.3
<u>PARTICULATE</u>			
Concentration grains/scf db	0.02539	0.04127	0.03059
Emissions lbs/hr	8.321	16.73	12.60




The ALMEGA CORPORATION

REFERENCE

- 1 The Code of Federal Regulations: Title 40

APPENDICES


- A Method 1 -- Sample and Velocity Traverses for Stationary Sources
- B Method 2 -- Determination of Stack Gas Velocity and Volumetric Flow Rate (Type S Pitot Tube)
- C Method 3 -- Gas Analysis for Carbon Dioxide, Excess Air and Dry Molecular Weight
- D Method 4 -- Determination of Moisture in Stack Gases
- E Method 5 -- Determination of Particulate Emissions from Stationary Sources
- F Field Test Data, Calculation Summaries and Laboratory Analyses
- G Visible Emissions Observations
- H Equipment Calibrations and Certifications



The ALMEGA CORPORATION

APPENDIX A

SAMPLE AND VELOCITY TRAVERSES FOR STATIONARY SOURCES



**ENVIRONMENTAL PROTECTION
AGENCY**
40 CFR Part 60
(AD-FRL 2387-6)
**Standards of Performance for New
Stationary Sources; Appendix A:
Traverse Point Revisions to Method 1**
AGENCY: Environmental Protection
Agency (EPA).

ACTION: Final rule.

SUMMARY: This document revises method 1, "Sample and Velocity Traverses for Stationary Sources," of Appendix A of 40 CFR Part 60 to decrease the minimum number of required traverse points. This action is being taken because several studies have shown that the number of traverse points can be reduced from those now specified without sacrificing accuracy. The intended effect of this final rule is to have those sources subject to standards of performance specifying the use of Method 1 to use the revised method. This change would reduce the sampling time and possibly the cost of testing.

EFFECTIVE DATE: September 30, 1983. Under Section 307(b)(1) of the Clean Air Act, judicial review for the revisions is available only by the filing of a petition for review in the U.S. Court of Appeals for the District of Columbia Circuit within 60 days of today's publication of this rule. Under Section 307(b)(2) of the Clean Air Act, the requirements that are the subject of today's notice may not be challenged later in civil or criminal proceedings brought by EPA to enforce these requirements.

ADDRESS: *Docket.* A docket, number A-82-07, containing information considered by EPA in the development of the promulgated revisions, is available for public inspection between 8:00 a.m. and 4:00 p.m., Monday through Friday, at EPA's Central Docket Section (LE-131), West Tower Lobby, Gallery 1, 401 M Street, S.W., Washington, D.C. 20460. A reasonable fee may be charged for copying.

FOR FURTHER INFORMATION CONTACT: Roger T. Shigehara, Emission Measurement Branch, Emission Standards and Engineering Division (MD-19), U.S. Environmental Protection Agency, Research Triangle Park, North Carolina 27711, telephone (919) 451-2237.

SUPPLEMENTARY INFORMATION:
Revisions

Method 1, "Sample and Velocity Traverses for Stationary Sources," is being revised because several studies

have shown that the number of traverse points can be reduced from those now specified without sacrificing accuracy. This change would reduce the sampling time and possibly the cost of testing.

These revisions would apply to those sources subject to the standard of performance specifying the use of Method 5 for the measurement of particulate matter emissions or Method 2 for velocity measurements, including standards that have already been promulgated. This rulemaking would not impose any additional emission measurement requirements on any facilities. Rather, the rulemaking would simply revise a test method associated with emission measurement requirements that would apply irrespective of this rulemaking.

Public Participation

The revisions were proposed and published in the *Federal Register* on October 28, 1982 (47 FR 47867). Public comments were solicited for 60 days after proposal. A public hearing was offered to provide interested persons the opportunity for oral presentation of data, views, or arguments concerning the proposal, but no person requested to speak. Twelve comment letters were received.

**Significant Comments and Changes to
the Proposed Revisions**

All 12 commenters favored the proposed revisions, commenting that the proposed rule would simplify test protocol, reduce costs and times of tests, increase opportunities to obtain complete tests under environmental and process constraints, and reduce costs of installing ports for rectangular stacks. Three of the commenters, however, felt that the figures were difficult to read. One suggested using algebraic expressions, and the other two commenters suggested using step functions for the figures and addressing rectangular stacks.

EPA has reviewed the commenters' suggested equations and modifications to the figures and felt that the step functions would be simpler. In modifying the figures, EPA noticed a slight discrepancy between Figures 1-1 and 1-2; between 7 and 8 duck diameters (or equivalent diameters) downstream, the particulate traverse required less traverse points (12 points) the velocity traverse (16 points). Therefore, Figure 1-2 (velocity traverses) was altered to require 12 points. To simplify further this figure, the minimum number of points between 6 and 7 diameters was reduced from 16 to 12 for stack diameters (or equivalent diameters) greater than 0.61 m (24 in.).

EPA feels that this latter change would not affect significantly the accuracy of velocity measurements.

Docket

The docket is an organized and complete file of all the information considered by EPA in the development of this rulemaking. The docket is a dynamic file, since material is added throughout the rulemaking development. The docketing system is intended to allow members of the public and industries involved to identify readily and locate documents so that they can intelligently and effectively participate in the rulemaking process. Along with the statement of basis and purpose of the proposed and promulgated revisions and EPA responses to significant comments, the contents of the docket will serve as the record in case of judicial review (Section 307(d)(7)(A)).

Miscellaneous

Under Executive Order 12291, EPA must judge whether a regulation is "major" and, therefore, subject to the requirement of a regulatory impact analysis. This regulation is not major because it will not have an annual effect on the economy of \$100 million or more; it will not result in a major increase in costs or prices; and there will be no significant adverse effects on competition, employment, investment, productivity, innovation, or on the ability of U.S.-based enterprises to compete with foreign-based enterprises in domestic or export markets.

Pursuant to the provisions of 5 U.S.C. 605(b), I hereby certify that the attached rule will not have a significant economic impact on small entities, because the revisions do not impose any additional testing cost. In fact, in some cases, cost may be reduced.

List of Subjects in 40 CFR Part 60

Air pollution control, Aluminum, Ammonium sulfate plants, Asphalt, Cement industry, Coal, Copper, Electric power plants, Glass and glass products, Grains, Intergovernmental relations, Iron, Lead, Metals, Metallic Minerals, Motor vehicles, Nitric acid plants, Paper and paper products industry, Petroleum, Phosphate, Sewage disposal, Steel, Sulfuric acid plants, Waste treatment and disposal, Zinc, Tires, Incorporation by Reference, Can surface coating, Sulfuric acid plants.

Dated: September 22, 1983.
 William D. Ruckelshaus,
 Administrator.

PART 60—[AMENDED]

Appendix A of 40 CFR Part 60 is

amended by revising Method 1 as follows:

1. By revising Figure 1-1 and Figure 1-2 as shown:

2. By adding Citations 7 through 12 to Section 3 (Bibliography) as follows:

Appendix A—Reference Methods

Method 1. Sample and Velocity Traverses for Stationary Sources

3. * * *

7. Hanson, H.A., R.J. Davini, J.K. Morgan, and A.A. Iversen. Particulate Sampling Strategies for Large Power Plants Including Nonuniform Flow. U.S. Environmental Protection Agency, Research Triangle Park, N.C. Publication No. EPA-600/2-76-170. June 1976. 350 p.

8. Brooks, E.F., and R.L. Williams. Flow and Gas Sampling Manual. U.S. Environmental Protection Agency, Research Triangle Park, N.C. Publication No. EPA-600/2-76-203. July 1976. 83 p.

9. Entropy Environmentalists, Inc. Traverse Point Study. EPA Contract No. 68-02-3172. June 1977. 19 p.

10. Brown, J. and K. Yu. Test Report: Particulate Sampling Strategy in Circular Ducts. Emission Measurement Branch, Emission Standards and Engineering Division. U.S. Environmental Protection Agency, Research Triangle Park, N.C. 27711. July 31, 1980. 12 p.

11. Hawkeley, P.G.W., S. Badzioch, and J.H. Blackett. Measurement of Solids in Flue Gases. Leatherhead, England, The British Coal Utilisation Research Association, 1961. p. 129-133.

12. Knapp, K.T. The Number of Sampling Points Needed for Representative Source Sampling. In: Proceedings of the Fourth National Conference on Energy and the Environment, Theodore, L., et al. (ed.). Dayton, Dayton Section of the American Institute of Chemical Engineers. October 3-7, 1976. p. 563-568.

(Secs. 111, 114, and 301(a) of the Clean Air Act, as amended (42 U.S.C. 7411, 7414, and 7601(a)))

[FR Doc. 83-28377 Filed 9-29-83; 8:45 am]
 BILLING CODE 6560-50-M

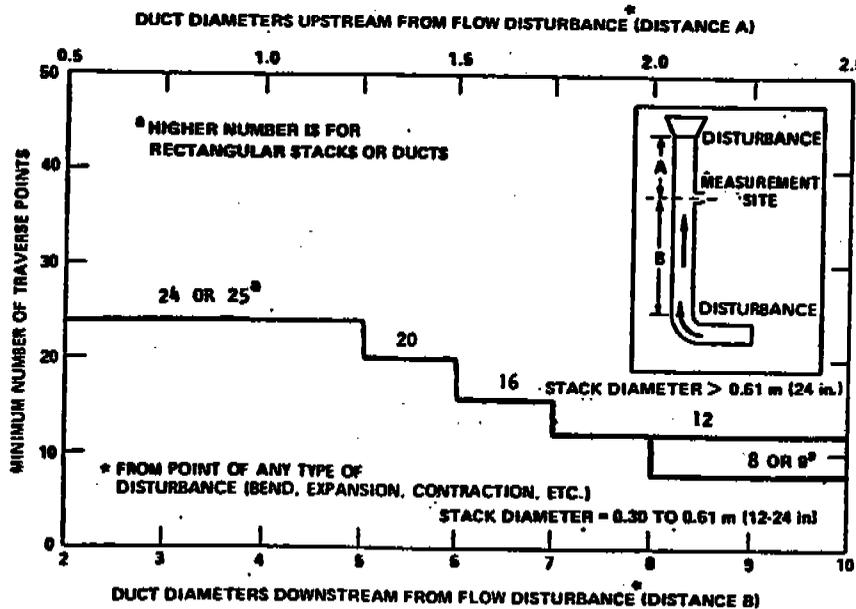


Figure 1-1. Minimum number of traverse points for particulate traverses.

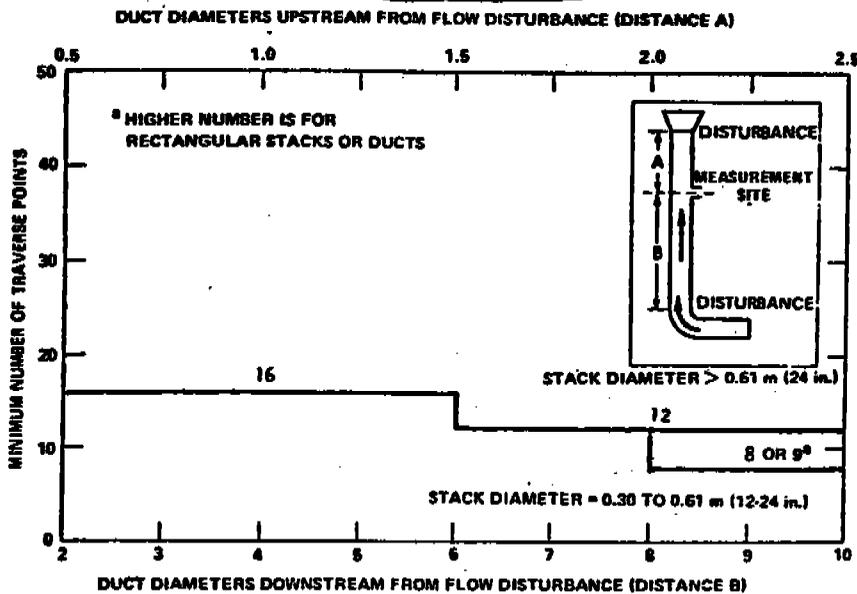


Figure 1-2. Minimum number of traverse points for velocity (nonparticulate) traverses.

The ALMEGA CORPORATION

1. Principle and Applicability

1.1 Principle. To aid in the representative measurement of pollutant emissions and/or total volumetric flow rate from a stationary source, a measurement site where the effluent stream is flowing in a known direction is selected, and the cross-section of the stack is divided into a number of equal areas. A traverse point is then located within each of these equal areas.

1.2 Applicability. This method is applicable to flowing gas streams in ducts, stacks, and flues. The method cannot be used when: (1) flow is cyclonic or swirling (see Section 2.4), (2) a stack is smaller than about 0.30 meter (12 in.) in diameter, or 0.071 m² (113 in.²) cross-sectional area, or (3) the measurement site is less than two stack or duct diameters downstream or less than a half diameter upstream from a flow disturbance.

The requirements of this method must be considered before construction of a new facility from which emissions will be measured; failure to do so may require subsequent alterations to the stack or deviation from the standard procedure. Cases involving variants are subject to approval by the Administrator, U.S. Environmental Protection Agency.

2. Procedure

2.1 Selection of Measurement Site. Sampling or velocity measurement is performed at a site located at least eight stack or duct diameters downstream and two diameters

upstream from any flow disturbance such as a bend, expansion, or contraction in the stack, or from a visible flame. If necessary, an alternative location may be selected, at a position at least two stack or duct diameters downstream and a half diameter upstream from any flow disturbance. For a rectangular cross section, an equivalent diameter (D_e) shall be calculated from the following equation, to determine the upstream and downstream distances:

$$D_e = \frac{2LW}{L+W}$$

where L = length and W = width.


2.2 Determining the Number of Traverse Points.

2.2.1 Particulate Traverses. When the eight- and two-diameter criterion can be met, the minimum number of traverse points shall be: (1) twelve, for circular or rectangular stacks with diameters (or equivalent diameters) greater than 0.61 meter (24 in.); (2) eight, for circular stacks with diameters between 0.30 and 0.61 meter (12-24 in.); (3) nine, for rectangular stacks with equivalent diameters between 0.30 and 0.61 meter (12-24 in.).

When the eight- and two-diameter criterion cannot be met, the minimum number of traverse points is determined from Figure 1-1. Before referring to the figure, however, determine the distances from the chosen measurement site to the nearest upstream and downstream disturbances, and divide each distance by the stack diameter or equivalent diameter, to determine the distance in terms of the number of duct diameters. Then, determine from Figure 1-1 the minimum number of traverse points that corresponds: (1) to the number of duct diameters upstream; and (2) to the number of diameters downstream. Select the higher of the two minimum numbers of traverse points, or a greater value, so that for circular stacks the number is a multiple of 4, and for rectangular stacks, the number is one of those shown in Table 1-1.

TABLE 1-1. Cross-section layout for rectangular stacks

Number of traverse points:	Matrix layout
9	3x3
12	4x3
16	4x4
20	5x4
25	5x5
30	6x5
36	6x6
42	7x6
49	7x7

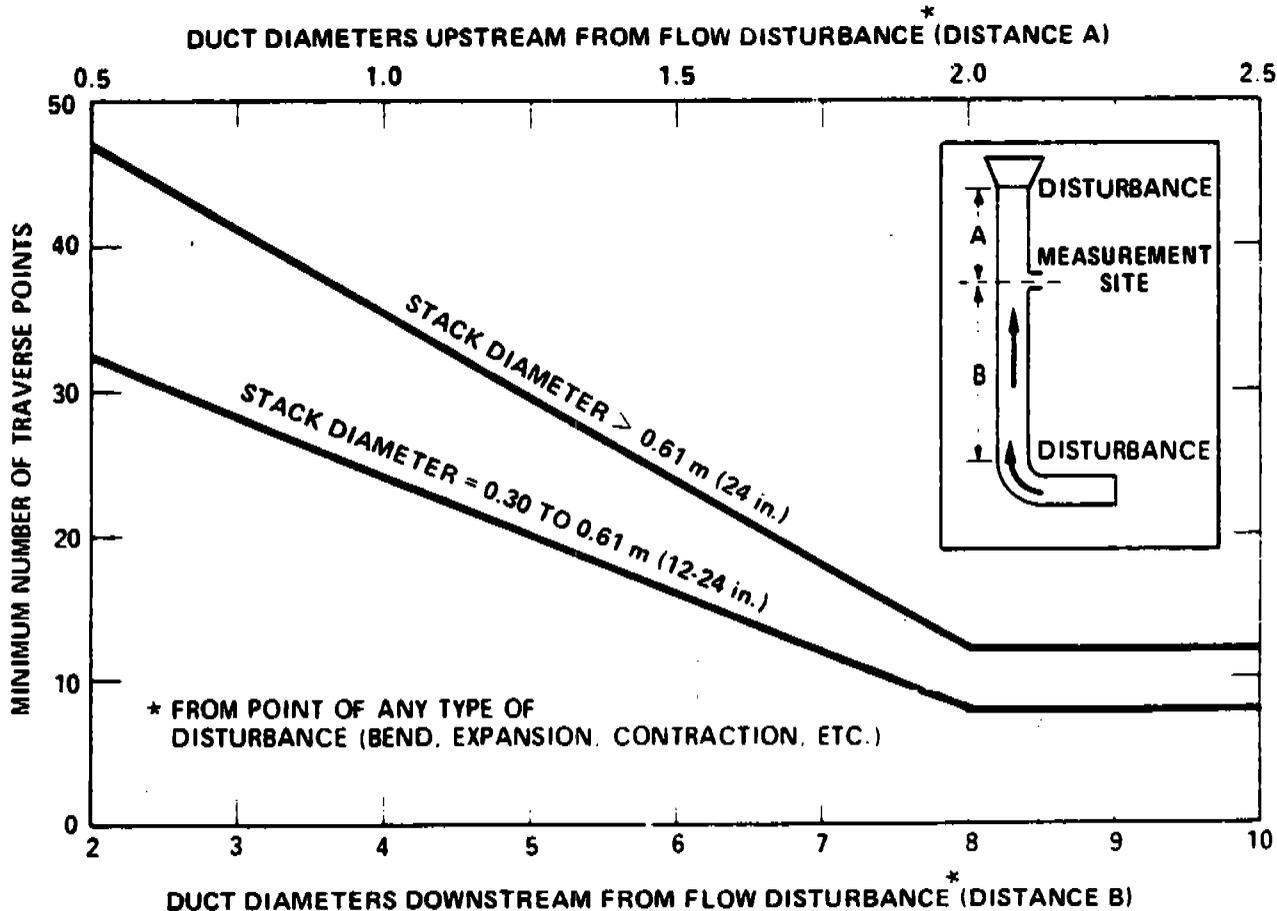

The ALMEGA CORPORATION

DUCT DIAMETERS UPSTREAM FROM FLOW DISTURBANCE (DISTANCE A)

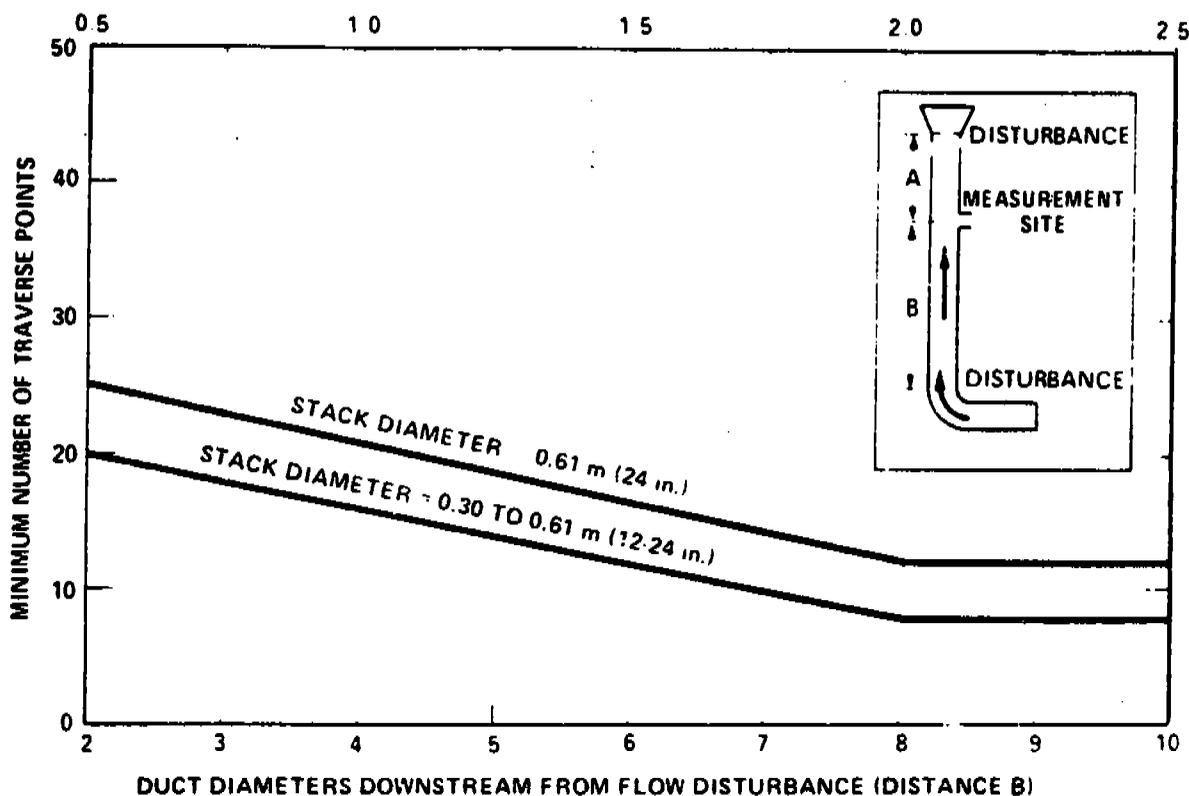


Figure 1-2. Minimum number of traverse points for velocity (nonparticulate) traverses

2.2.2 Velocity (Non-Particulate) Traverses. When velocity or volumetric flow rate is to be determined (but not particulate matter), the same procedure as that for particulate traverses (Section 2.2.1) is followed, except that Figure 1-2 may be used instead of Figure 1-1.

2.3 Cross-sectional Layout and Location of Traverse Points.

2.3.1 Circular Stacks. Locate the traverse points on two perpendicular diameters according to Table 1-2 and the example shown in Figure 1-3. Any equation (for examples, see Citations 2 and 3 in the Bibliography) that gives the same values as those in Table 1-2 may be used in lieu of Table 1-2.

For particulate traverses, one of the diameters must be in a plane containing the greatest expected concentration variation, e.g., after bends, one diameter shall be in the plane of the bend. This requirement becomes less critical as the distance from the disturbance increases; therefore, other diameter locations may be used, subject to approval of the Administrator.

In addition for stacks having diameters greater than 0.61 m (24 in.) no traverse points shall be located within 2.5 centimeters (1.00 in.) of the stack walls; and for stack diameters equal to or less than 0.61 m (24 in.), no traverse points shall be located within 1.3 cm (0.50 in.) of the stack walls. To meet these criteria, observe the procedures given below.

2.3.1.1 Stacks With Diameters Greater Than 0.61 m (24 in.). When any of the traverse points as located in Section 2.3.1 fall within 2.5 cm (1.00 in.) of the stack walls, relocate them away from the stack walls to: (1) a distance of 2.5 cm (1.00 in.); or (2) a distance equal to the nozzle inside diameter, whichever is larger. These relocated traverse points (on each end of a diameter) shall be the "adjusted" traverse points.

Whenever two successive traverse points are combined to form a single adjusted traverse point, treat the adjusted point as two separate traverse points, both in the sampling (or velocity measurement) procedure, and in recording the data.

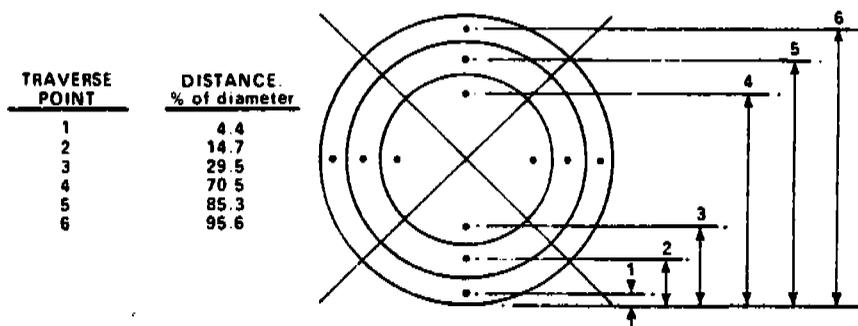


Figure 1-3. Example showing circular stack cross section divided into 12 equal areas, with location of traverse points indicated.

The ALMEGA CORPORATION

Table 1-2. LOCATION OF TRAVERSE POINTS IN CIRCULAR STACKS
(Percent of stack diameter from inside wall to traverse point)

Traverse point number on a diameter	Number of traverse points on a diameter											
	2	4	6	8	10	12	14	16	18	20	22	24
1	14.6	6.7	4.4	3.2	2.6	2.1	1.8	1.6	1.4	1.3	1.1	1.1
2	85.4	25.0	14.6	10.5	8.2	6.7	5.7	4.9	4.4	3.9	3.5	3.2
3		75.0	29.6	19.4	14.6	11.8	9.9	8.5	7.5	6.7	6.0	5.5
4		93.3	70.4	32.3	22.6	17.7	14.6	12.5	10.9	9.7	8.7	7.9
5			85.4	67.7	34.2	25.0	20.1	16.9	14.6	12.9	11.6	10.5
6			95.6	80.6	65.8	35.6	26.9	22.0	18.3	16.5	14.6	13.2
7				89.5	77.4	64.4	36.6	28.3	23.6	20.4	18.0	16.1
8				96.8	85.4	75.0	63.4	37.5	29.6	25.0	21.8	19.4
9					91.8	82.3	73.1	62.5	38.2	30.6	26.2	23.0
10					97.4	88.2	79.9	71.7	61.8	38.8	31.5	27.2
11						93.3	85.4	78.0	70.4	61.2	39.3	32.3
12						97.9	90.1	83.1	76.4	69.4	60.7	39.8
13							94.3	87.5	81.2	75.0	68.5	60.2
14							98.2	91.5	85.4	79.6	73.8	67.7
15								95.1	89.1	83.5	78.2	72.8
16								98.4	92.5	87.1	82.0	77.0
17									95.6	90.3	85.4	80.6
18									98.6	93.3	88.4	83.9
19										96.1	91.3	86.8
20										98.7	94.0	89.5
21											96.5	92.1
22											98.9	94.5
23												96.8
24												98.9

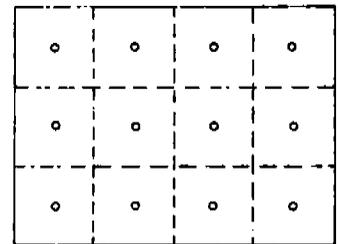


Figure 1 4. Example showing rectangular stack cross section divided into 12 equal areas, with a traverse point at centroid of each area.

that point. If the pitot reading is not zero at 0° reference, rotate the pitot tube (up to +90° yaw angle), until a null reading is obtained. Carefully determine and record the value of the rotation angle (α) to the nearest degree. After the null technique has been applied at each traverse point, calculate the average of the absolute values of α ; assign α values of 0° to those points for which no rotation was required, and include these in the overall average. If the average value of α is greater than 10°, the overall flow condition in the stack is unacceptable and alternative methodology, subject to the approval of the Administrator, must be used to perform accurate sample and velocity traverses.

3. Bibliography

1. Determining Dust Concentration in a Gas Stream. ASME. Performance Test Code No. 27. New York, 1957.
2. Devorkin, Howard, et al. Air Pollution Source Testing Manual. Air Pollution Control District. Los Angeles, CA. November 1963.
3. Methods for Determination of Velocity, Volume, Dust and Mist Content of Gases. Western Precipitation Division of Joy Manufacturing Co. Los Angeles, CA. Bulletin WP-50. 1968.
4. Standard Method for Sampling Stacks for Particulate Matter. In: 1971 Book of ASTM Standards, Part 23. ASTM Designation D-2928-71. Philadelphia, Pa. 1971.
5. Hanson, H. A., et al. Particulate Sampling Strategies for Large Power Plants Including Nonuniform Flow. USEPA. ORD, ESRL, Research Triangle Park, N.C. EPA-600/2-76-170, June 1976.
6. Entropy Environmentalists, Inc. Determination of the Optimum Number of Sampling Points: An Analysis of Method 1 Criteria. Environmental Protection Agency, Research Triangle Park, N.C. EPA Contract No. 68-01-3172, Task 7.

2.3.1.2 Stacks With Diameters Equal to or Less Than 0.61 m (24 in.). Follow the procedure in Section 2.3.1.1, noting only that any "adjusted" points should be relocated away from the stack walls to: (1) a distance of 1.3 cm (0.50 in.); or (2) a distance equal to the nozzle inside diameter, whichever is larger.

2.3.2 Rectangular Stacks. Determine the number of traverse points as explained in Sections 2.1 and 2.2 of this method. From Table 1-1, determine the grid configuration. Divide the stack cross-section into as many equal rectangular elemental areas as traverse points, and then locate a traverse point at the centroid of each equal area according to the example in Figure 1-4.

If the tester desires to use more than the minimum number of traverse points, expand the "minimum number of traverse points" matrix (see Table 1-1) by adding the extra traverse points along one or the other or both legs of the matrix; the final matrix need not be balanced. For example, if a 4x3 "minimum number of points; matrix were expanded to 36 points, the final matrix could be 9x4 or 12x3, and would not necessarily have to be 6x6. After constructing the final matrix, divide the stack cross-section into as many equal rectangular, elemental areas as traverse points, and locate a traverse point at the centroid of each equal area.

The situation of traverse points being too close to the stack walls is not expected to arise with rectangular stacks. If this problem should ever arise, the Administrator must be contacted for resolution of the matter.

2.4 Verification of Absence of Cyclonic Flow. In most stationary sources, the direction of stack gas flow is essentially parallel to the stack walls. However, cyclonic flow may exist (1) after such devices as cyclones and inertial demisters following venturi scrubbers, or (2) in stacks having tangential inlets or other duct configurations which tend to induce swirling; in these instances, the presence or absence of cyclonic flow at the sampling location must be determined. The following techniques are acceptable for this determination.


Level and zero the manometer. Connect a Type S pitot tube to the manometer. Position the Type S pitot tube at each traverse point, in succession, so that the planes of the face openings of the pitot tube are perpendicular to the stack cross-sectional plane; when the Type S pitot tube is in this position, it is at "0° reference." Note the differential pressure (Δp) reading at each traverse point. If a null (zero) pitot reading is obtained at 0° reference at a given traverse point, an acceptable flow condition exists at



The ALMEGA CORPORATION

APPENDIX B

**DETERMINATION OF STACK GAS VELOCITY AND
VOLUMETRIC FLOW RATE (TYPE S PITOT TUBE)**



The ALMEGA CORPORATION

1. Principle and Applicability

1.1 Principle. The average gas velocity in a stack is determined from the gas density and from measurement of the average velocity head with a Type S (Stausscheibe or reverse type) pitot tube.

1.2 Applicability. This method is applicable for measurement of the average velocity of a gas stream and for quantifying gas flow.


This procedure is not applicable at measurement sites which fail to meet the criteria of Method 1, Section 2.1. Also, the method cannot be used for direct measurement in cyclonic or swirling gas streams; Section 2.4 of Method 1 shows how to determine cyclonic or swirling flow conditions. When unacceptable conditions exist, alternative procedures, subject to the approval of the Administrator, U.S. Environmental Protection Agency, must be employed to make accurate flow rate determinations; examples of such alternative procedures are: (1) to install straightening vanes; (2) to calculate the total volumetric flow rate stoichiometrically, or (3) to move to another measurement site at which the flow is acceptable.

2. Apparatus

Specifications for the apparatus are given below. Any other apparatus that has been demonstrated (subject to approval of the Administrator) to be capable of meeting the specifications will be considered acceptable.

2.1 Type S Pitot Tube. The Type S pitot tube (Figure 2-1) shall be made of metal tubing (e.g. stainless steel). It is recommended that the external tubing diameter (dimension D_t , Figure 2-2b) be between 0.48 and 0.95 centimeters ($\frac{1}{4}$ and $\frac{3}{8}$ inch). There shall be an equal distance from the base of each leg of the pitot tube to its face-opening plane (dimensions P_A and P_B , Figure 2-2b); it is recommended that this distance be between 1.05 and 1.50 times the external tubing diameter. The face openings of the pitot tube shall, preferably, be aligned as shown in Figure 2-2; however, slight misalignments of the openings are permissible (see Figure 2-3).

The Type S pitot tube shall have a known coefficient, determined as outlined in Section 4, an identification number shall be assigned to the pitot tube; this number shall be permanently marked or engraved on the body of the tube.

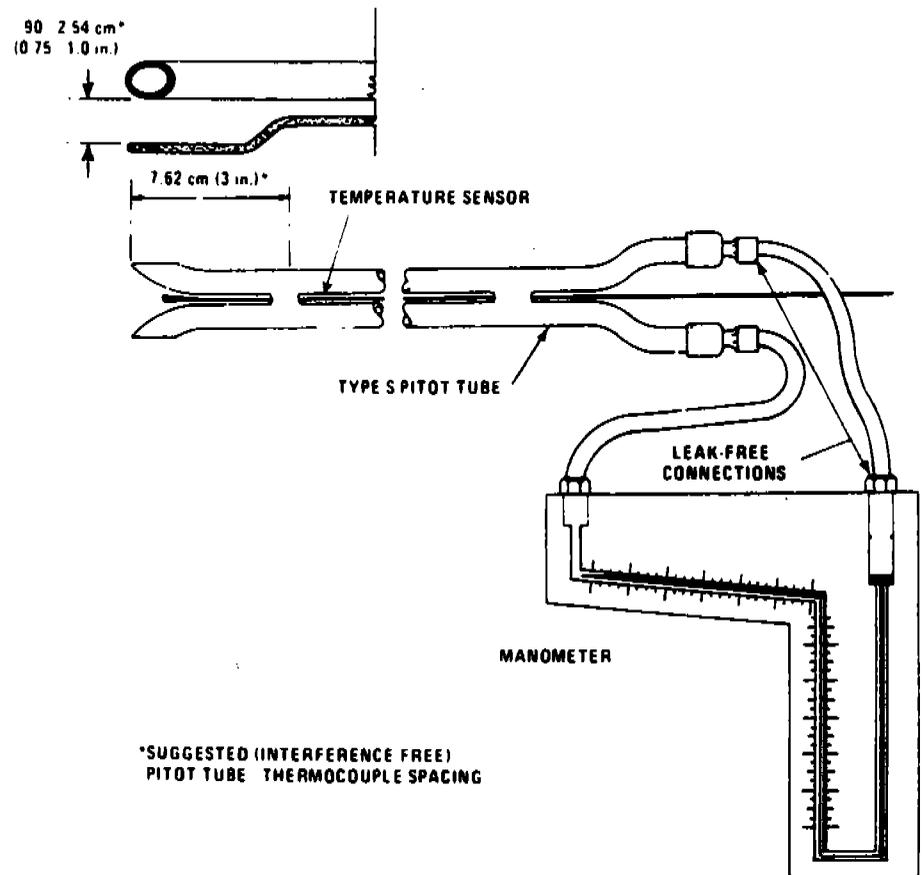

*SUGGESTED (INTERFERENCE FREE) PITOT TUBE THERMOCOUPLE SPACING

Figure 2-1. Type S pitot tube manometer assembly.

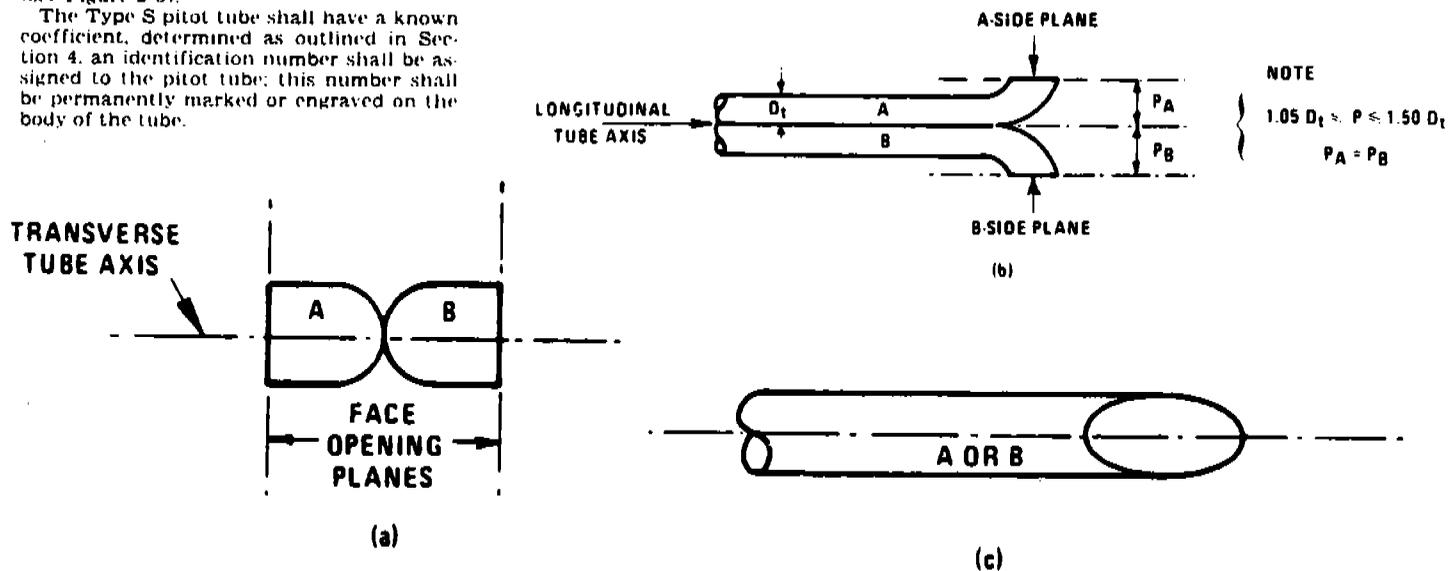


Figure 2-2 Properly constructed Type S pitot tube, shown in (a) end view, face opening planes perpendicular to transverse axis; (b) top view, face opening planes parallel to longitudinal axis; (c) side view, both legs of equal length and centerlines coincident when viewed from both sides. Baseline coefficient values of 0.84 may be assigned to pitot tubes constructed this way.

THE ALMEGA CORPORATION

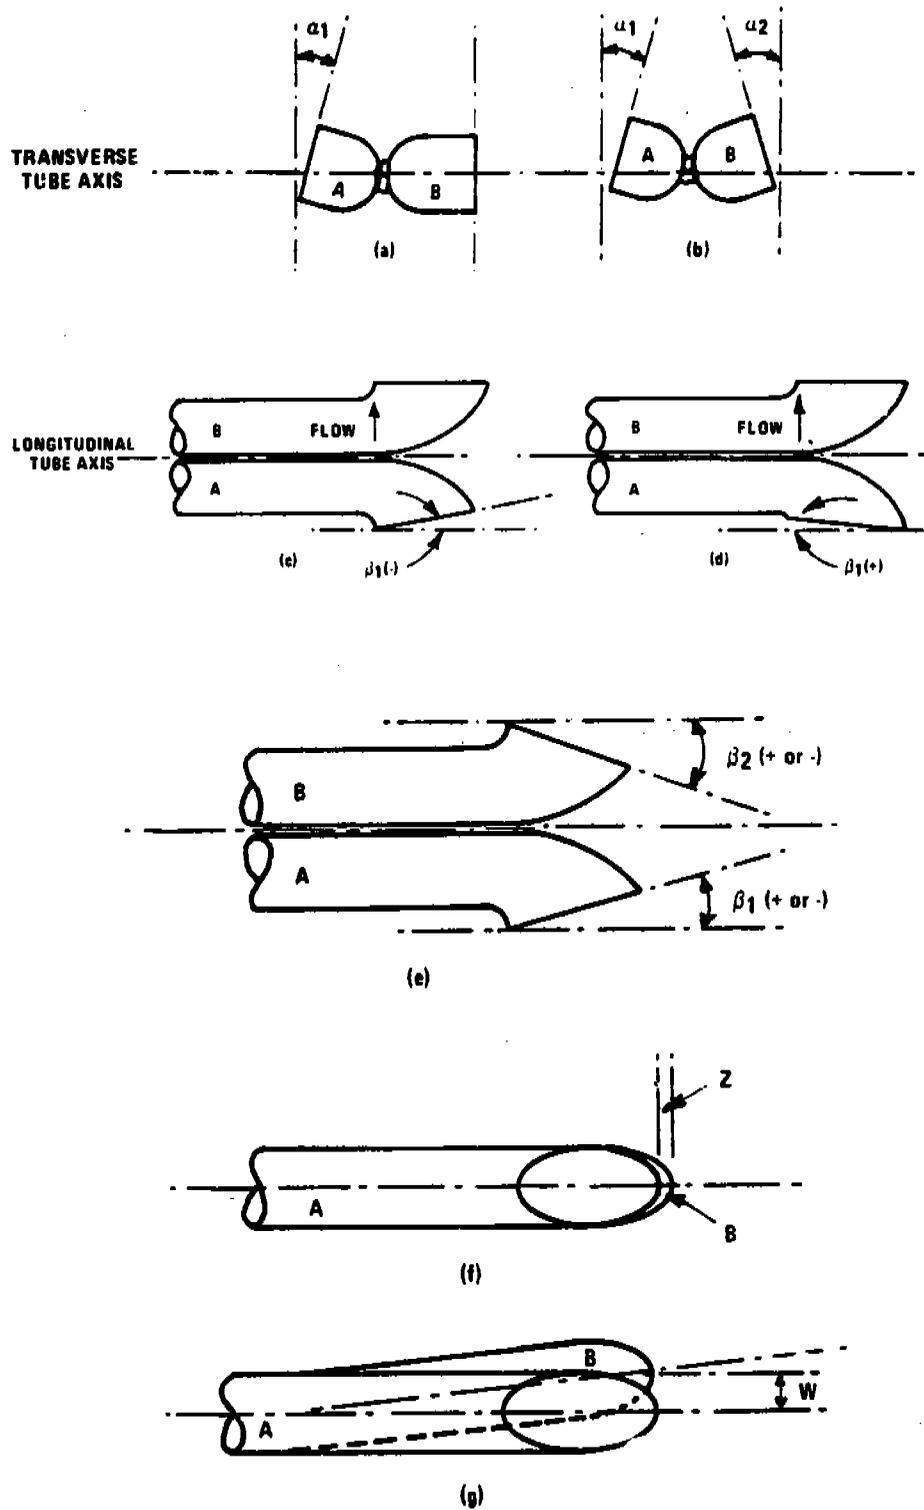


Figure 2-3. Types of face-opening misalignment that can result from field use or improper construction of Type S pitot tubes. These will not affect the baseline value of $C_p(s)$ so long as α_1 and $\alpha_2 < 10^\circ$, β_1 and $\beta_2 < 5^\circ$, $z < 0.32$ cm (1/8 in.) and $w < 0.08$ cm (1/32 in.) (citation 11 in Section 6).

The ALMEGA CORPORATION

A standard pitot tube may be used instead of a Type S, provided that it meets the specifications of Sections 2.7 and 4.2; note, however, that the static and impact pressure holes of standard pitot tubes are susceptible to plugging in particulate-laden gas streams. Therefore, whenever a standard pitot tube is used to perform a traverse, adequate proof must be furnished that the openings of the pitot tube have not plugged up during the traverse period; this can be done by taking a velocity head (Δp) reading at the final traverse point, cleaning out the impact and static holes of the standard pitot tube by "back-purging" with pressurized air, and then taking another Δp reading. If the Δp readings made before and after the air purge are the same (± 5 percent), the traverse is acceptable. Otherwise, reject the run. Note that if Δp at the final traverse point is unsuitably low, another point may be selected. If "back-purging" at regular intervals is part of the procedure, then comparative Δp readings shall be taken, as above, for the last two back purges at which suitably high Δp readings are observed.

2.2 Differential Pressure Gauge. An inclined manometer or equivalent device is used. Most sampling trains are equipped with a 10-in. (water column) inclined-vertical manometer, having 0.01-in. H₂O divisions on the 0-to 1-in. inclined scale, and 0.1-in. H₂O divisions on the 1- to 10-in. vertical scale. This type of manometer (or other gauge of equivalent sensitivity) is satisfactory for the measurement of Δp values as low as 1.3 mm (0.05 in.) H₂O. However, a differential pressure gauge of greater sensitivity shall be used (subject to the approval of the Administrator), if any of the following is found to be true: (1) the arithmetic average of all Δp readings at the traverse points in the stack is less than 1.3 mm (0.05 in.) H₂O; (2) for traverses of 12 or more points, more than 10 percent of the individual Δp readings are below 1.3 mm (0.05 in.) H₂O; (3) for traverses of fewer than 12 points, more than one Δp reading is below 1.3 mm (0.05 in.) H₂O. Citation 18 in Section 6 describes commercially available instrumentation for the measurement of low-range gas velocities.

As an alternative to criteria (1) through (3) above, the following calculation may be performed to determine the necessity of using a more sensitive differential pressure gauge:

$$T = \frac{\sum_{i=1}^n \sqrt{\Delta p_i}}{\sum_{i=1}^n \Delta p_i} K$$

where:

Δp : Individual velocity head reading at a traverse point, mm H₂O (in. H₂O).

n : Total number of traverse points.

K : 0.13 mm H₂O when metric units are used and 0.005 in. H₂O when English units are used.

If T is greater than 1.05, the velocity head data are unacceptable and a more sensitive differential pressure gauge must be used.

NOTE.—If differential pressure gauges other than inclined manometers are used (e.g., magnehelic gauges), their calibration must be checked after each test series. To check the calibration of a differential pressure gauge, compare Δp readings of the gauge with those of a gauge-oil manometer at a minimum of three points, approximately representing the range of Δp values in the stack. If, at each point, the values of Δp as read by the differential pressure gauge and gauge-oil manometer agree to within 5 percent, the differential pressure gauge shall be considered to be in proper calibration. Otherwise, the test series shall either be voided, or procedures to adjust the measured Δp values and final results shall be used subject to the approval of the Administrator.

2.3 Temperature Gauge. A thermocouple, liquid-filled bulb thermometer, bimetallic thermometer, mercury-in-glass thermometer, or other gauge, capable of measuring temperature to within 1.5 percent of the minimum absolute stack temperature shall be used. The temperature gauge shall be attached to the pitot tube such that the sensor tip does not touch any metal; the gauge shall be in an interference-free arrangement with respect to the pitot tube face openings (see Figure 2-1 and also Figure 2-7 in Section 4). Alternate positions may be used if the pitot tube-temperature gauge system is calibrated according to the procedure of Section 4. Provided that a difference of not more than 1 percent in the average velocity measurement is introduced, the temperature gauge need not be attached to the pitot tube; this alternative is subject to the approval of the Administrator.

2.4 Pressure Probe and Gauge. A piezometer tube and mercury- or water-filled U-tube manometer capable of measuring stack pressure to within 2.5 mm (0.1 in.) Hg is used. The static tap of a standard type pitot tube or one leg of a Type S pitot tube with the face opening planes positioned parallel to the gas flow may also be used as the pressure probe.

2.5 Barometer. A mercury, aneroid, or other barometer capable of measuring atmospheric pressure to within 2.5 mm Hg (0.1 in. Hg) may be used. In many cases, the barometric reading may be obtained from a nearby national weather service station, in which case the station value (which is the

absolute barometric pressure) shall be requested and an adjustment for elevation differences between the weather station and the sampling point shall be applied at a rate of minus 2.5 mm (0.1 in.) Hg per 30-meter (100 foot) elevation increase or vice-versa for elevation decrease.

2.6 Gas Density Determination Equipment. Method 3 equipment, if needed (see Section 3.6), to determine the stack gas dry molecular weight, and Reference Method 4 or Method 5 equipment for moisture content determination; other methods may be used subject to approval of the Administrator.

2.7 Calibration Pitot Tube. When calibration of the Type S pitot tube is necessary (see Section 4), a standard pitot tube is used as a reference. The standard pitot tube shall, preferably, have a known coefficient, obtained either (1) directly from the National Bureau of Standards, Route 270, Quince Orchard Road, Gaithersburg, Maryland, or (2) by calibration against another standard pitot tube with an NBS-traceable coefficient. Alternatively, a standard pitot tube designed according to the criteria given in 2.7.1 through 2.7.5 below and illustrated in Figure 2-4 (see also Citations 7, 8, and 17 in Section 6) may be used. Pitot tubes designed according to these specifications will have baseline coefficients of about 0.99 \pm 0.01.

2.7.1 Hemispherical (shown in Figure 2-4), ellipsoidal, or conical tip.

2.7.2 A minimum of six diameters straight run (based upon D , the external diameter of the tube) between the tip and the static pressure holes.

2.7.3 A minimum of eight diameters straight run between the static pressure holes and the centerline of the external tube, following the 90 degree bend.

2.7.4 Static pressure holes of equal size (approximately 0.1 D), equally spaced in a piezometer ring configuration.

2.7.5 Ninety degree bend, with curved or mitered junction.

2.8 Differential Pressure Gauge for Type S Pitot Tube Calibration. An inclined manometer or equivalent is used. If the single-velocity calibration technique is employed (see Section 4.1.2.3), the calibration differential pressure gauge shall be readable to the nearest 0.13 mm H₂O (0.005 in. H₂O). For multivelocity calibrations, the gauge shall be readable to the nearest 0.13 mm H₂O (0.005 in. H₂O) for Δp values between 1.3 and 25 mm H₂O (0.05 and 1.0 in. H₂O), and to the nearest 1.3 mm H₂O (0.05 in. H₂O) for Δp values above 25 mm H₂O (1.0 in. H₂O). A special, more sensitive gauge will be required to read Δp values below 1.3 mm H₂O (0.05 in. H₂O) (see Citation 18 in Section 6).

THE ALMEGA CORPORATION

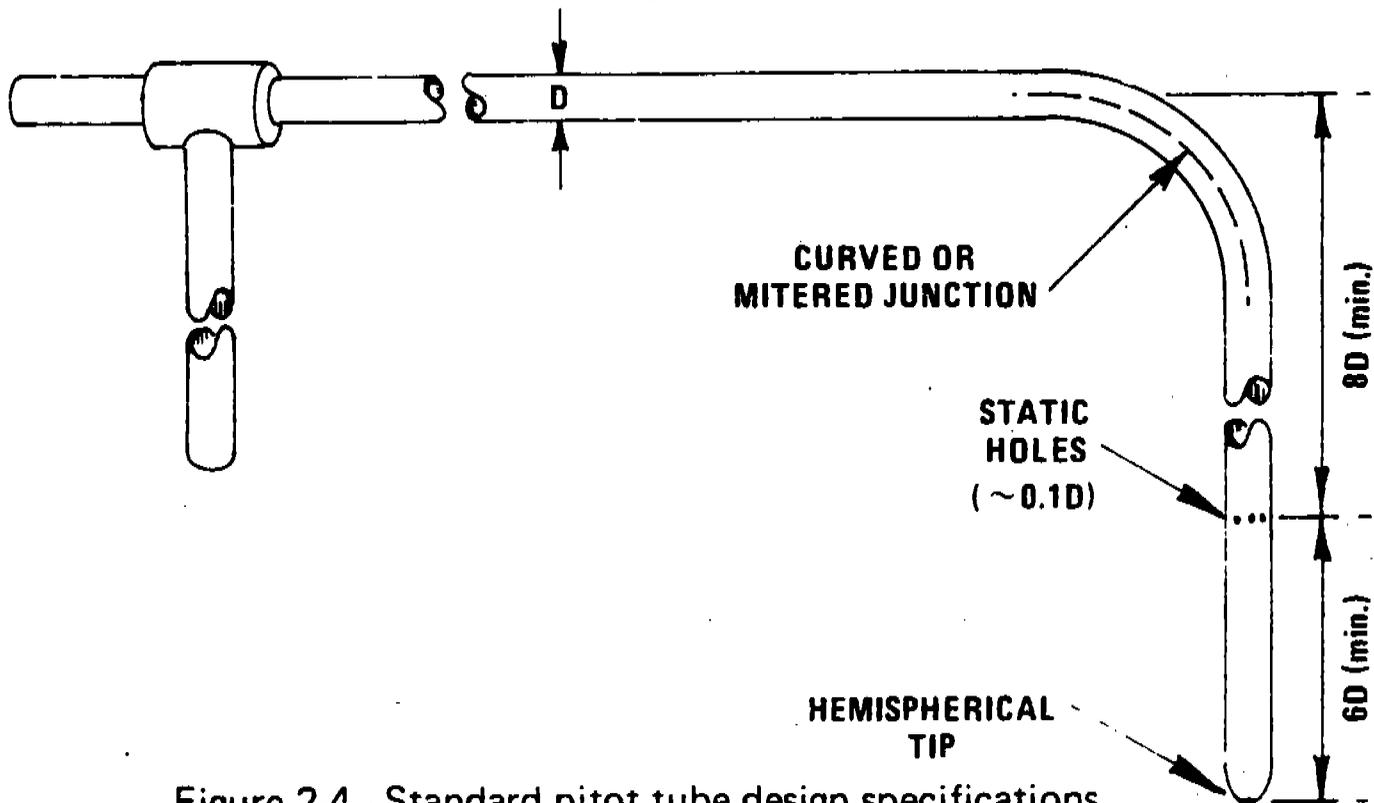


Figure 2-4. Standard pitot tube design specifications.

3. Procedure

3.1 Set up the apparatus as shown in Figure 2-1. Capillary tubing or surge tanks installed between the manometer and pitot tube may be used to dampen Δp fluctuations. It is recommended, but not required, that a pretest leak-check be conducted, as follows: (1) blow through the pitot impact opening until at least 7.6 cm (3 in.) H₂O velocity pressure registers on the manometer; then, close off the impact opening. The pressure shall remain stable for at least 15 seconds; (2) do the same for the static pressure side, except using suction to obtain the minimum of 7.6 cm (3 in.) H₂O. Other leak-check procedures, subject to the approval of the Administrator may be used.

3.2 Level and zero the manometer. Because the manometer level and zero may drift due to vibrations and temperature changes, make periodic checks during the traverse. Record all necessary data as shown in the example data sheet (Figure 2-5).

3.3 Measure the velocity head and temperature at the traverse points specified by Method 1. Ensure that the proper differential pressure gauge is being used for the range of Δp values encountered (see Section 2.2). If it is necessary to change to a more sensitive gauge, do so, and remeasure the Δp and temperature readings at each traverse point. Conduct a post-test leak-check (mandatory), as described in Section 3.1 above, to validate the traverse run.

3.4 Measure the static pressure in the stack. One reading is usually adequate.

3.5 Determine the atmospheric pressure.

3.6 Determine the stack gas dry molecular weight. For combustion processes or processes that emit essentially CO₂, O₂, CO, and N₂, use Method 3. For processes emitting essentially air, an analysis need not be con-

ducted; use a dry molecular weight of 29.0. For other processes, other methods, subject to the approval of the Administrator, must be used.

3.7 Obtain the moisture content from Reference Method 4 (or equivalent) or from Method 5.

3.8 Determine the cross-sectional area of the stack or duct at the sampling location. Whenever possible, physically measure the stack dimensions rather than using blueprints.

4. Calibration

4.1 Type S Pitot Tube. Before its initial use, carefully examine the Type S pitot tube in top, side, and end views to verify that the face openings of the tube are aligned within the specifications illustrated in Figure 2-2 or 2-3. The pitot tube shall not be used if it fails to meet these alignment specifications.

After verifying the face opening alignment, measure and record the following dimensions of the pitot tube: (a) the external tubing diameter (dimension D , Figure 2-2b); and (b) the base-to-opening plane distances (dimensions P_1 and P_2 , Figure 2-2b). If D is between 0.48 and 0.95 cm ($\frac{3}{16}$ and $\frac{3}{8}$ in.) and if P_1 and P_2 are equal and between 1.05 and 1.50 D , there are two possible options: (1) the pitot tube may be calibrated according to the procedure outlined in Sections 4.1.2 through 4.1.5 below, or (2) a baseline (isolated tube) coefficient value of 0.84 may be assigned to the pitot tube. Note, however, that if the pitot tube is part of an assembly, calibration may still be required, despite knowledge of the baseline coefficient value (see Section 4.1.1).


If D , P_1 , and P_2 are outside the specified limits, the pitot tube must be calibrated as outlined in 4.1.2 through 4.1.5 below.

4.1.1 Type S Pitot Tube Assemblies. During sample and velocity traverses, the isolated Type S pitot tube is not always used; in many instances, the pitot tube is used in combination with other source-sampling components (thermocouple, sampling probe, nozzle) as part of an "assembly." The presence of other sampling components can sometimes affect the baseline value of the Type S pitot tube coefficient (Citation 9 in Section 6); therefore an assigned (or otherwise known) baseline coefficient value may or may not be valid for a given assembly. The baseline and assembly coefficient values will be identical only when the relative placement of the components in the assembly is such that aerodynamic interference effects are eliminated. Figures 2-6 through 2-8 illustrate interference-free component arrangements for Type S pitot tubes having external tubing diameters between 0.48 and 0.95 cm ($\frac{3}{16}$ and $\frac{3}{8}$ in.). Type S pitot tube assemblies that fail to meet any or all of the specifications of Figures 2-6 through 2-8 shall be calibrated according to the procedure outlined in Sections 4.1.2 through 4.1.5 below, and prior to calibration, the values of the intercomponent spacings (pitot-nozzle, pitot-thermocouple, pitot-probe sheath) shall be measured and recorded.


NOTE.—Do not use any Type S pitot tube assembly which is constructed such that the impact pressure opening plane of the pitot tube is below the entry plane of the nozzle (see Figure 2-6b).

4.1.2 Calibration Setup. If the Type S pitot tube is to be calibrated, one leg of the tube shall be permanently marked A, and the other, B. Calibration shall be done in a flow system having the following essential design features:

The ALMEGA CORPORATION

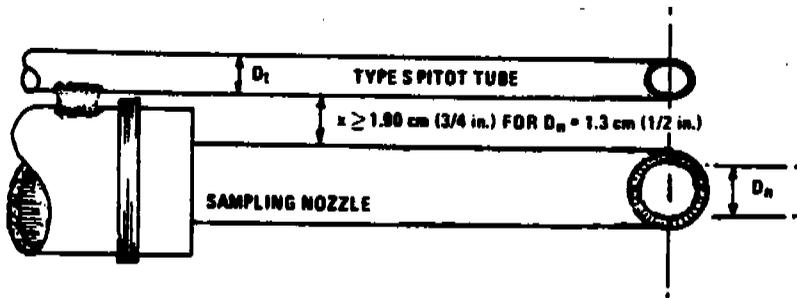

A. BOTTOM VIEW; SHOWING MINIMUM PITOT-NOZZLE SEPARATION.

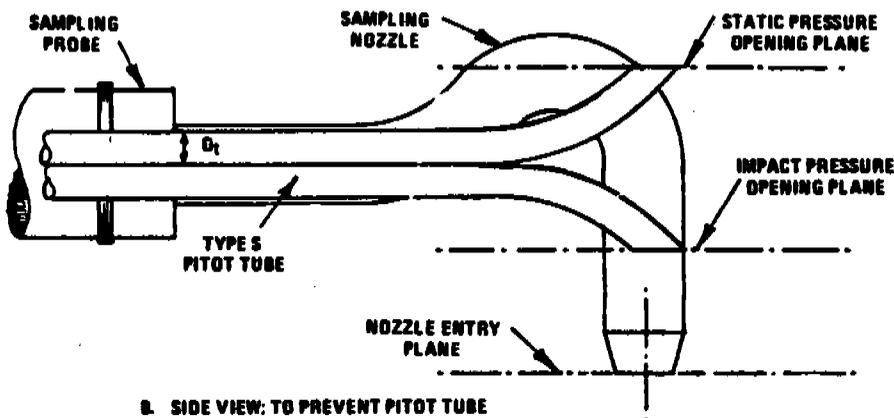

B. SIDE VIEW; TO PREVENT PITOT TUBE FROM INTERFERING WITH GAS FLOW STREAMLINES APPROACHING THE NOZZLE, THE IMPACT PRESSURE OPENING PLANE OF THE PITOT TUBE SHALL BE EVEN WITH OR ABOVE THE NOZZLE ENTRY PLANE.

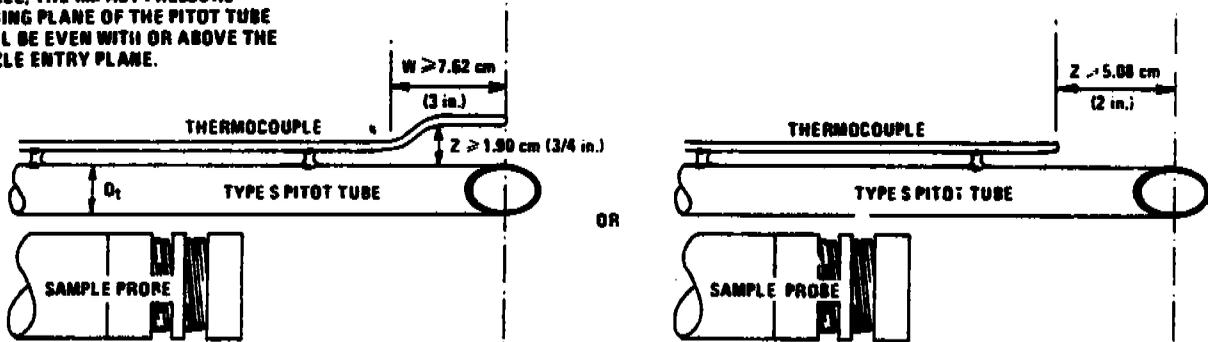


Figure 2-7. Proper thermocouple placement to prevent interference; D_t between 0.48 and 0.95 cm (3/16 and 3/8 in.).

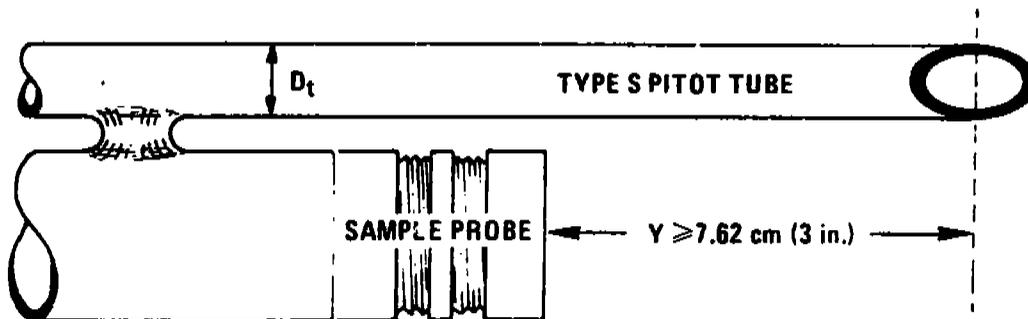


Figure 2-8. Minimum pitot-sample probe separation needed to prevent interference; D_t between 0.48 and 0.95 cm (3/16 and 3/8 in.).

The ALMEGA CORPORATION

4.1.2.1 The flowing gas stream must be confined to a duct of definite cross-sectional area, either circular or rectangular. For circular cross-sections, the minimum duct diameter shall be 30.5 cm (12 in.); for rectangular cross-sections, the width (shorter side) shall be at least 25.4 cm (10 in.).

4.1.2.2 The cross-sectional area of the calibration duct must be constant over a distance of 10 or more duct diameters. For a rectangular cross-section, use an equivalent diameter, calculated from the following equation, to determine the number of duct diameters:

$$D_e = \frac{2LW}{L+W}$$

Equation 2-1

where:

D_e = Equivalent diameter
 L = Length
 W = Width

To ensure the presence of stable, fully developed flow patterns at the calibration site, or "test section," the site must be located at least eight diameters downstream and two diameters upstream from the nearest disturbances.

Note.—The eight- and two-diameter criteria are not absolute; other test section locations may be used (subject to approval of the Administrator), provided that the flow at the test site is stable and demonstrably parallel to the duct axis.

4.1.2.3 The flow system shall have the capacity to generate a test-section velocity around 915 m/min (3,000 ft/min). This velocity must be constant with time to guarantee steady flow during calibration. Note that Type S pitot tube coefficients obtained by single-velocity calibration at 915 m/min (3,000 ft/min) will generally be valid to within ± 3 percent for the measurement of velocities above 305 m/min (1,000 ft/min) and to within ± 5 to 6 percent for the measurement of velocities between 180 and 305 m/min (600 and 1,000 ft/min). If a more precise correlation between C_p and velocity is desired, the flow system shall have the capacity to generate at least four distinct, time-invariant test-section velocities covering the velocity range from 180 to 1,525 m/min (600 to 5,000 ft/min), and calibration data shall be taken at regular velocity intervals over this range (see Citations 9 and 14 in Section 6 for details).

4.1.2.4 Two entry ports, one each for the standard and Type S pitot tubes, shall be cut in the test section; the standard pitot entry port shall be located slightly downstream of the Type S port, so that the standard and Type S impact openings will lie in the same cross-sectional plane during calibration. To facilitate alignment of the pitot tubes during calibration, it is advisable that the test section be constructed of plexiglas or some other transparent material.

4.1.3 Calibration Procedure. Note that this procedure is a general one and must not be used without first referring to the special considerations presented in Section 4.1.5. Note also that this procedure applies only to single-velocity calibration. To obtain calibration data for the A and B sides of the Type S pitot tube, proceed as follows:

4.1.3.1 Make sure that the manometer is properly filled and that the oil is free from contamination and is of the proper density. Inspect and leak-check all pitot lines; repair or replace if necessary.

4.1.3.2 Level and zero the manometer. Turn on the fan and allow the flow to stabilize. Seal the Type S entry port.

4.1.3.3 Ensure that the manometer is level and zeroed. Position the standard pitot tube at the calibration point (determined as outlined in Section 4.1.5.1), and align the tube so that its tip is pointed directly into the flow. Particular care should be taken in aligning the tube to avoid yaw and pitch angles. Make sure that the entry port surrounding the tube is properly sealed.

4.1.3.4 Read ΔP_{std} and record its value in a data table similar to the one shown in Figure 2-9. Remove the standard pitot tube from the duct and disconnect it from the manometer. Seal the standard entry port.

4.1.3.5 Connect the Type S pitot tube to the manometer. Open the Type S entry port. Check the manometer level and zero. Insert and align the Type S pitot tube so that its A side impact opening is at the same

point as was the standard pitot tube and is pointed directly into the flow. Make sure that the entry port surrounding the tube is properly sealed.

4.1.3.6 Read Δp , and enter its value in the data table. Remove the Type S pitot tube from the duct and disconnect it from the manometer.

4.1.3.7 Repeat steps 4.1.3.3 through 4.1.3.6 above until three pairs of Δp readings have been obtained.

4.1.3.8 Repeat steps 4.1.3.3 through 4.1.3.7 above for the B side of the Type S pitot tube.

4.1.3.9 Perform calculations, as described in Section 4.1.4 below.

4.1.4 Calculations.

4.1.4.1 For each of the six pairs of Δp readings (i.e., three from side A and three from side B) obtained in Section 4.1.3 above, calculate the value of the Type S pitot tube coefficient as follows:

PITOT TUBE IDENTIFICATION NUMBER: _____ DATE: _____

CALIBRATED BY: _____

"A" SIDE CALIBRATION				
RUN NO.	ΔP_{std} cm H ₂ O (in. H ₂ O)	$\Delta P(s)$ cm H ₂ O (in. H ₂ O)	$C_p(s)$	DEVIATION $C_p(s) - \bar{C}_p(A)$
1				
2				
3				
			\bar{C}_p (SIDE A)	

"B" SIDE CALIBRATION				
RUN NO.	ΔP_{std} cm H ₂ O (in. H ₂ O)	$\Delta P(s)$ cm H ₂ O (in. H ₂ O)	$C_p(s)$	DEVIATION $C_p(s) - \bar{C}_p(B)$
1				
2				
3				
			\bar{C}_p (SIDE B)	

$$\text{AVERAGE DEVIATION} = \sigma(A \text{ OR } B) = \frac{\sum_{s=1}^3 |C_p(s) - \bar{C}_p(A \text{ OR } B)|}{3} \quad \leftarrow \text{MUST BE } \leq 0.01$$

$$|\bar{C}_p(\text{SIDE A}) - \bar{C}_p(\text{SIDE B})| \quad \leftarrow \text{MUST BE } \leq 0.01$$

Figure 2-9. Pitot tube calibration data.

THE ALMEGA CORPORATION

$$C_{p(a)} = C_{p(Std)} \sqrt{\frac{\Delta p_{Std}}{\Delta p_s}}$$

Equation 2-2

where:

$C_{p(a)}$ = Type S pitot tube coefficient

$C_{p(Std)}$ = Standard pitot tube coefficient; use 0.99 if the coefficient is unknown and the tube is designed according to the criteria of Sections 2.7.1 to 2.7.5 of this method.

Δp_{Std} = Velocity head measured by the standard pitot tube, cm H₂O (in. H₂O)

Δp_s = Velocity head measured by the Type S pitot tube, cm H₂O (in. H₂O)

4.1.4.2 Calculate C_p (side A), the mean A-side coefficient, and C_p (side B), the mean B-side coefficient; calculate the difference between these two average values.

4.1.4.3 Calculate the deviation of each of the three A-side values of $C_{p(a)}$ from C_p (side A), and the deviation of each B-side value of $C_{p(a)}$ from C_p (side B). Use the following equation:

$$\text{Deviation} = C_{p(a)} - \bar{C}_p(A \text{ or } B)$$

Equation 2-3

4.1.4.4 Calculate δ , the average deviation from the mean, for both the A and B sides of the pitot tube. Use the following equation:

$$\sigma(\text{side A or B}) = \frac{\sum_1^3 |C_{p(a)} - \bar{C}_p(A \text{ or } B)|}{3}$$

Equation 2-4

4.1.4.5 Use the Type S pitot tube only if the values of δ (side A) and δ (side B) are less than or equal to 0.01 and if the absolute value of the difference between C_p (A) and C_p (B) is 0.01 or less.

4.1.5 Special considerations.


4.1.5.1 Selection of calibration point.

4.1.5.1.1 When an isolated Type S pitot tube is calibrated, select a calibration point at or near the center of the duct, and follow the procedures outlined in Sections 4.1.3 and 4.1.4 above. The Type S pitot coefficients so obtained, i.e., C_p (side A) and C_p (side B), will be valid, so long as either: (1) the isolated pitot tube is used; or (2) the

pitot tube is used with other components (nozzle, thermocouple, sample probe) in an arrangement that is free from aerodynamic interference effects (see Figures 2-6 through 2-8).

4.1.5.1.2 For Type S pitot tube-thermocouple combinations (without sample probe), select a calibration point at or near the center of the duct, and follow the procedures outlined in Sections 4.1.3 and 4.1.4 above. The coefficients so obtained will be valid so long as the pitot tube-thermocouple combination is used by itself or with other components in an interference-free arrangement (Figures 2-6, and 2-8).

4.1.5.1.3 For assemblies with sample probes, the calibration point should be located at or near the center of the duct; however, insertion of a probe sheath into a small duct may cause significant cross-sectional area blockage and yield incorrect coefficient values (Citation 9 in Section 6). Therefore, to minimize the blockage effect, the calibration point may be a few inches off-center if necessary. The actual blockage effect will be negligible when the theoretical blockage, as determined by a projected-area model of the probe sheath, is 2 percent or less of the duct cross-sectional area for assemblies without external sheaths (Figure 2-10a), and 3 percent or less for assemblies with external sheaths (Figure 2-10b).

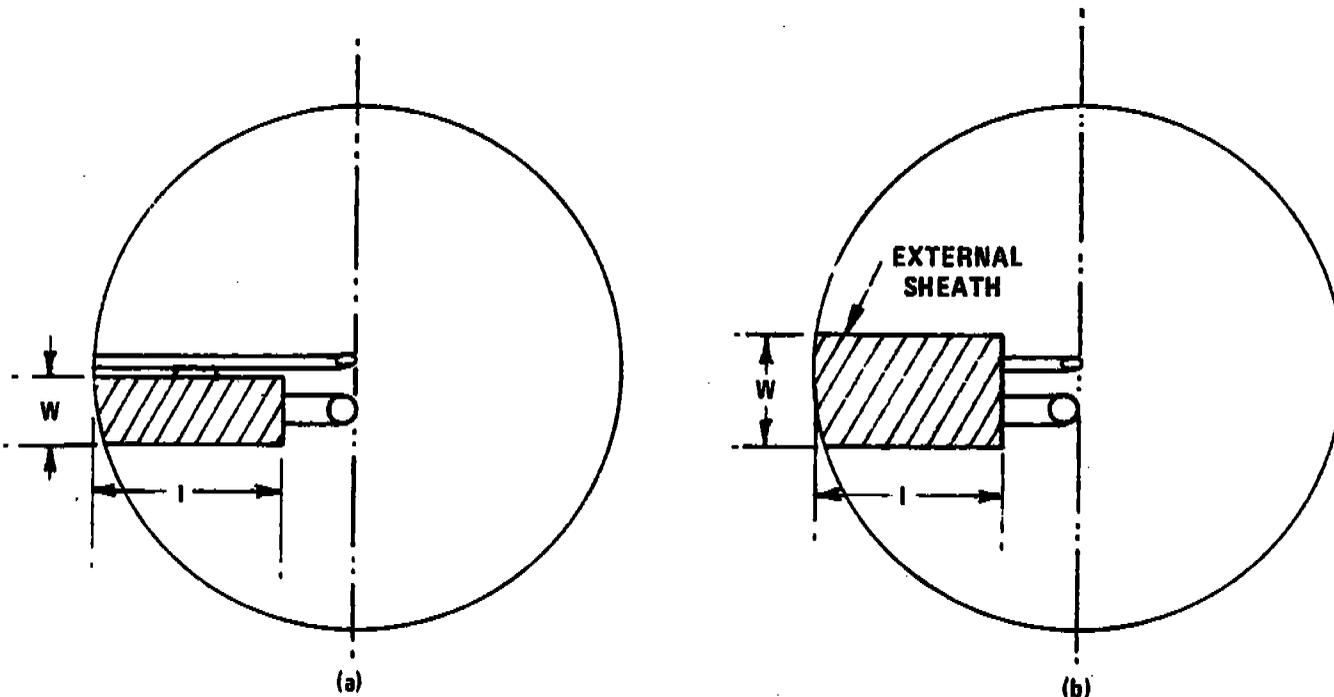

$$\text{ESTIMATED SHEATH BLOCKAGE (\%)} = \left[\frac{L \times W}{\text{DUCT AREA}} \right] \times 100$$

Figure 2-10. Projected-area models for typical pitot tube assemblies.

The ALMEGA CORPORATION

4.1.5.2 For those probe assemblies in which pitot tube-nozzle interference is a factor (i.e., those in which the pitot-nozzle separation distance fails to meet the specification illustrated in Figure 2-6a), the value of C_{pit} depends upon the amount of free-space between the tube and nozzle, and therefore is a function of nozzle size. In these instances, separate calibrations shall be performed with each of the commonly used nozzle sizes in place. Note that the single-velocity calibration technique is acceptable for this purpose, even though the larger nozzle sizes (>0.635 cm or 1/4 in.) are not ordinarily used for isokinetic sampling at velocities around 915 m/min (3,000 ft/min), which is the calibration velocity; note also that it is not necessary to draw an isokinetic sample during calibration (see Citation 19 in Section 6).

4.1.5.3 For a probe assembly constructed such that its pitot tube is always used in the same orientation, only one side of the pitot tube need be calibrated (the side which will face the flow). The pitot tube must still meet the alignment specifications of Figure 2-2 or 2-3, however, and must have an average deviation (δ) value of 0.01 or less (see Section 4.1.4.4).

Figure 2-10. Projected-area models for typical pitot tube assemblies.

4.1.6 Field Use and Recalibration.

4.1.6.1 Field Use.

4.1.6.1.1 When a Type S pitot tube (isolated tube or assembly) is used in the field, the appropriate coefficient value (whether assigned or obtained by calibration) shall be used to perform velocity calculations. For calibrated Type S pitot tubes, the A side coefficient shall be used when the A side of the tube faces the flow, and the B side coefficient shall be used when the B side faces the flow; alternatively, the arithmetic average of the A and B side coefficient values may be used, irrespective of which side faces the flow.

4.1.6.1.2 When a probe assembly is used to sample a small duct (12 to 36 in. in diameter), the probe sheath sometimes blocks a significant part of the duct cross-section, causing a reduction in the effective value of C_{pit} . Consult Citation 9 in Section 6 for details. Conventional pitot-sampling probe assemblies are not recommended for use in ducts having inside diameters smaller than 12 inches (Citation 16 in Section 6).

4.1.6.2 Recalibration.

4.1.6.2.1 Isolated Pitot Tubes. After each field use, the pitot tube shall be carefully reexamined in top, side, and end views. If the pitot face openings are still aligned within the specifications illustrated in Figure 2-2 or 2-3, it can be assumed that the baseline coefficient of the pitot tube has not changed. If, however, the tube has been damaged to the extent that it no longer meets the specifications of Figure 2-2 or 2-3, the damage shall either be repaired to restore proper alignment of the face openings or the tube shall be discarded.

4.1.6.2.2 Pitot Tube Assemblies. After each field use, check the face opening alignment of the pitot tube, as in Section 4.1.6.2.1; also, remeasure the intercompon-

ent spacings of the assembly. If the intercomponent spacings have not changed and the face opening alignment is acceptable, it can be assumed that the coefficient of the assembly has not changed. If the face opening alignment is no longer within the specifications of Figures 2-2 or 2-3, either repair the damage or replace the pitot tube (calibrating the new assembly, if necessary). If the intercomponent spacings have changed, restore the original spacings or recalibrate the assembly.

4.2 Standard pitot tube (if applicable). If a standard pitot tube is used for the velocity traverse, the tube shall be constructed according to the criteria of Section 2.7 and shall be assigned a baseline coefficient value of 0.99. If the standard pitot tube is used as part of an assembly, the tube shall be in an interference-free arrangement (subject to the approval of the Administrator).

4.3 Temperature Gauges. After each field use, calibrate dial thermometers, liquid-filled bulb thermometers, thermocouple-potentiometer systems, and other gauges at a temperature within 10 percent of the average absolute stack temperature. For temperatures up to 405° C (761° F), use an ASTM mercury-in-glass reference thermometer, or equivalent, as a reference; alternatively, either a reference thermocouple and potentiometer (calibrated by NBS) or thermometric fixed points, e.g., ice bath and boiling water (corrected for barometric pressure) may be used. For temperatures above 405° C (761° F), use an NBS-calibrated reference thermocouple-potentiometer system or an alternate reference, subject to the approval of the Administrator.

If, during calibration, the absolute temperatures measured with the gauge being calibrated and the reference gauge agree within 1.5 percent, the temperature data taken in the field shall be considered valid. Otherwise, the pollutant emission test shall either be considered invalid or adjustments (if appropriate) of the test results shall be made, subject to the approval of the Administrator.

4.4 Barometer. Calibrate the barometer used against a mercury barometer.

5. Calculations

Carry out calculations, retaining at least one extra decimal figure beyond that of the acquired data. Round off figures after final calculation.

5.1 Nomenclature.

- A = Cross-sectional area of stack, m² (ft²).
 B_{vs} = Water vapor in the gas stream (from Method 5 or Reference Method 4), proportion by volume.
 C_p = Pitot tube coefficient, dimensionless.
 K_p = Pitot tube constant.

$$34.97 \frac{m}{sec} \left[\frac{(g/g\text{-mole})(mm\ Hg)}{(^{\circ}K)(mm\ H_2O)} \right]^{1/2}$$

for the metric system and

$$85.49 \frac{ft}{sec} \left[\frac{(lb\ lb\text{-mole})(in.\ Hg)}{(^{\circ}R)(in.\ H_2O)} \right]^{1/2}$$

for the English system.

- M_d = Molecular weight of stack gas, dry basis (see Section 3.6) g/g-mole (lb/lb-mole).
 M_w = Molecular weight of stack gas, wet basis, g/g-mole (lb/lb-mole).

$$= M_d(1 - B_{vs}) + 18.0 B_{vs}$$

Equation 2-5

P_{bar} = Barometric pressure at measurement site, mm Hg (in. Hg).

P_s = Stack static pressure, mm Hg (in. Hg).

P_t = Absolute stack gas pressure, mm Hg (in. Hg).

$$= P_{bar} + P_s$$

Equation 2-6

P_{std} = Standard absolute pressure, 760 mm Hg (29.92 in. Hg).

Q_{std} = Dry volumetric stack gas flow rate corrected to standard conditions, dscm/hr (dscf/hr).

t = Stack temperature, °C (°F).

T = Absolute stack temperature, °K (°R).

$$273 + t \text{ for metric}$$

Equation 2-7

$$460 + t \text{ for English}$$

Equation 2-8

T_{std} = Standard absolute temperature, 293 °K (528° R)

v_s = Average stack gas velocity, m/sec (ft/sec).

Δ_p = Velocity head of stack gas, mm H₂O (in. H₂O).

3,600 = Conversion factor, sec/hr.

18.0 = Molecular weight of water, g/g-mole (lb/lb-mole).

5.2 Average stack gas velocity.

$$v_s = K_p C_p (\sqrt{\Delta p})_{avg} \sqrt{\frac{T_{std}}{P_s M_d}}$$

Equation 2-9

5.3 Average stack gas dry volumetric flow rate.

$$Q_{std} = 3,600 (1 - B_{vs}) v_s A \left(\frac{T_{std}}{T_{(s+e)}} \right) \left(\frac{P_s}{P_{std}} \right)$$

Equation 2-10

6. Bibliography

1. Mark, L. S. Mechanical Engineers' Handbook. New York, McGraw-Hill Book Co., Inc. 1951.
2. Perry, J. H. Chemical Engineers' Handbook. New York, McGraw-Hill Book Co., Inc. 1960.
3. Shigehara, R. T., W. F. Todd, and W. S. Smith. Significance of Errors in Stack Sampling Measurements. U.S. Environmental Protection Agency, Research Triangle Park, N.C. (Presented at the Annual Meeting of the Air Pollution Control Association, St. Louis, Mo., June 14-19, 1970.)
4. Standard Method for Sampling Stacks for Particulate Matter. In: 1971 Book of ASTM Standards, Part 23. Philadelphia, Pa. 1971. ASTM Designation D-2928-71.


The ALMEGA CORPORATION

5. Vennard, J. K. Elementary Fluid Mechanics. New York. John Wiley and Sons, Inc. 1947.
6. Fluid Meters--Their Theory and Application. American Society of Mechanical Engineers, New York, N.Y. 1959.
7. ASHRAE Handbook of Fundamentals. 1972. p. 208.
8. Annual Book of ASTM Standards, Part 26. 1974. p. 648.
9. Vollaro, R. F. Guidelines for Type S Pitot Tube Calibration. U.S. Environmental Protection Agency, Research Triangle Park, N.C. (Presented at 1st Annual Meeting, Source Evaluation Society, Dayton, Ohio, September 18, 1975.)
10. Vollaro, R. F. A Type S Pitot Tube Calibration Study. U.S. Environmental Protection Agency, Emission Measurement Branch, Research Triangle Park, N.C. July 1974.
11. Vollaro, R. F. The Effects of Impact Opening Misalignment on the Value of the Type S Pitot Tube Coefficient. U.S. Environmental Protection Agency, Emission Measurement Branch, Research Triangle Park, N.C. October 1976.
12. Vollaro, R. F. Establishment of a Baseline Coefficient Value for Properly Constructed Type S Pitot Tubes. U.S. Environmental Protection Agency, Emission Measurement Branch, Research Triangle Park N.C. November 1976.
13. Vollaro, R. F. An Evaluation of Single-Velocity Calibration Technique as a Means of Determining Type S Pitot Tubes Coefficient. U.S. Environmental Protection Agency, Emission Measurement Branch, Research Triangle Park N.C. August 1975.
14. Vollaro, R. F. The Use of Type S Pitot Tubes for the Measurement of Low Velocities. U.S. Environmental Protection Agency, Emission Measurement Branch, Research Triangle Park N.C. November 1976.
15. Smith, Marvin L. Velocity Calibration of EPA Type Source Sampling Probe. United Technologies Corporation, Pratt and Whitney Aircraft Division, East Hartford, Conn. 1975.
16. Vollaro, R. F. Recommended Procedure for Sample Traverses in Ducts Smaller than 12 Inches in Diameter. U.S. Environmental Protection Agency, Emission Measurement Branch, Research Triangle Park N.C. November 1976.
17. Ower, E. and R. C. Pankhurst. The Measurement of Air Flow, 4th Ed., London, Pergamon Press. 1966.
18. Vollaro, R. F. A Survey of Commercially Available Instrumentation for the Measurement of Low-Range Gas Velocities. U.S. Environmental Protection Agency, Emission Measurement Branch, Research Triangle Park N.C. November 1976. (Unpublished Paper)
19. Gnyp, A. W., C. C. St. Pierre, D. S. Smith, D. Mozzon, and J. Steiner. An Experimental Investigation of the Effect of Pitot Tube-Sampling Probe Configurations on the Magnitude of the S Type Pitot Tube Coefficient for Commercially Available Source Sampling Probes. Prepared by the University of Windsor for the Ministry of the Environment, Toronto, Canada. February 1975.

The ALMEGA CORPORATION

APPENDIX C

GAS ANALYSIS FOR CARBON DIOXIDE,
EXCESS AIR AND DRY MOLECULAR WEIGHT



The ALMEGA CORPORATION

1. Principle and Applicability

1.1 Principle. A gas sample is extracted from a stack, by one of the following methods: (1) single-point, grab sampling; (2) single-point, integrated sampling; or (3) multi-point, integrated sampling. The gas sample is analyzed for percent carbon dioxide (CO₂), percent oxygen (O₂), and, if necessary, percent carbon monoxide (CO). If a dry molecular weight determination is to be made, either an Orsat or a Fyrite analyzer may be used for the analysis; for excess air or emission rate correction factor determination, an Orsat analyzer must be used.

1.2 Applicability. This method is applicable for determining CO₂ and O₂ concentrations, excess air, and dry molecular weight of a sample from a gas stream of a fossil-fuel combustion process. The method may also be applicable to other processes where it has been determined that compounds other than CO₂, O₂, CO, and nitrogen (N₂) are not present in concentrations sufficient to affect the results.

Other methods, as well as modifications to the procedure described herein, are also applicable for some or all of the above determinations. Examples of specific methods and modifications include: (1) a multi-point sampling method using an Orsat analyzer to analyze individual grab samples obtained at each point; (2) a method using CO₂ or O₂ and stoichiometric calculations to determine dry molecular weight and excess air; (3) assigning a value of 30.0 for dry molecular weight, in lieu of actual measurements, for processes burning natural gas, coal, or oil. These methods and modifications may be used, but are subject to the approval of the Administrator, U.S. Environmental Protection Agency.

2. Apparatus

As an alternative to the sampling apparatus and systems described herein, other sampling systems (e.g., liquid displacement) may be used provided such systems are capable of obtaining a representative sample and maintaining a constant sampling rate, and are otherwise capable of yielding acceptable results. Use of such systems is subject to the approval of the Administrator.

2.1 Grab Sampling (Figure 3-1).

2.1.1 Probe. The probe should be made of stainless steel or borosilicate glass tubing and should be equipped with an in-stack or out-stack filter to remove particulate matter (a plug of glass wool is satisfactory for this purpose). Any other materials inert to O₂, CO₂, CO, and N₂ and resistant to temperature at sampling conditions may be used for the probe; examples of such material are aluminum, copper, quartz glass and Teflon.

2.1.2 Pump. A one-way squeeze bulb, or equivalent, is used to transport the gas sample to the analyzer.

2.2 Integrated Sampling (Figure 3-2).

2.2.1 Probe. A probe such as that described in Section 2.1.1 is suitable.

2.2.2 Condenser. An air-cooled or water-cooled condenser, or other condenser that will not remove O₂, CO₂, CO, and N₂, may be used to remove excess moisture which would interfere with the operation of the pump and flow meter.

2.2.3 Valve. A needle valve is used to adjust sample gas flow rate.

2.2.4 Pump. A leak-free, diaphragm-type pump, or equivalent, is used to transport sample gas to the flexible bag. Install a small surge tank between the pump and rate meter to eliminate the pulsation effect of the diaphragm pump on the rotameter.

2.2.5 Rate Meter. The rotameter, or equivalent rate meter, used should be capable of measuring flow rate to within ± 2 percent of the selected flow rate. A flow rate range of 500 to 1000 cm³/min is suggested.

2.2.6 Flexible Bag. Any leak-free plastic (e.g., Tedlar, Mylar, Teflon) or plastic-coated aluminum (e.g., aluminized Mylar) bag, or equivalent, having a capacity consistent with the selected flow rate and time

length of the test run, may be used. A capacity in the range of 55 to 90 liters is suggested.

To leak-check the bag, connect it to a water manometer and pressurize the bag to 5 to 10 cm H₂O (2 to 4 in. H₂O). Allow to stand for 10 minutes. Any displacement in the water manometer indicates a leak. An alternative leak-check method is to pressurize the bag to 5 to 10 cm H₂O (2 to 4 in. H₂O) and allow to stand overnight. A deflated bag indicates a leak.

2.2.7 Pressure Gauge. A water-filled U-tube manometer, or equivalent, of about 28 cm (12 in.) is used for the flexible bag leak-check.

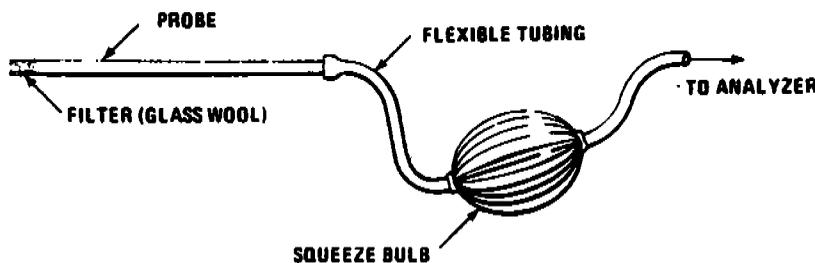


Figure 3-1. Grab sampling train.

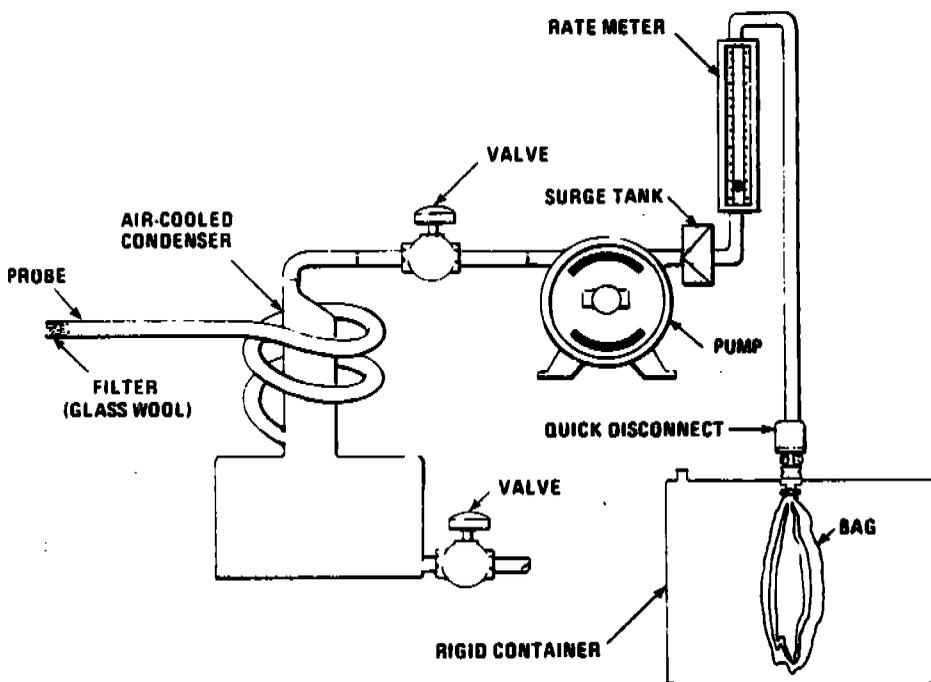


Figure 3-2. Integrated gas-sampling train.

Mention of trade names or specific products does not constitute endorsement by the Environmental Protection Agency.

The ALMEGA CORPORATION

2.2.8 Vacuum Gauge. A mercury manometer, or equivalent, of at least 760 mm Hg (30 in. Hg) is used for the sampling train leak-check.

2.3 Analysis. For Orsat and Fyrite analyzer maintenance and operation procedures, follow the instructions recommended by the manufacturer, unless otherwise specified herein.

2.3.1 Dry Molecular Weight Determination. An Orsat analyzer or Fyrite type combustion gas analyzer may be used.

2.3.2 Emission Rate Correction Factor or Excess Air Determination. An Orsat analyzer must be used. For low CO₂ (less than 4.0 percent) or high O₂ (greater than 15.0 percent) concentrations, the measuring burette of the Orsat must have at least 0.1 percent subdivisions.

3. Dry Molecular Weight Determination

Any of the three sampling and analytical procedures described below may be used for determining the dry molecular weight.

3.1 Single-Point, Grab Sampling and Analytical Procedure.

3.1.1 The sampling point in the duct shall either be at the centroid of the cross section or at a point no closer to the walls than 1.00 m (3.3 ft), unless otherwise specified by the Administrator.

3.1.2 Set up the equipment as shown in Figure 3-1, making sure all connections ahead of the analyzer are tight and leak-free. If an Orsat analyzer is used, it is recommended that the analyzer be leak-checked by following the procedure in Section 5; however, the leak-check is optional.

3.1.3 Place the probe in the stack, with the tip of the probe positioned at the sampling point; purge the sampling line. Draw a sample into the analyzer and immediately analyze it for percent CO₂ and percent O₂. Determine the percentage of the gas that is N₂ and CO by subtracting the sum of the percent CO₂ and percent O₂ from 100 percent. Calculate the dry molecular weight as indicated in Section 6.3.

3.1.4 Repeat the sampling, analysis, and calculation procedures, until the dry molecular weights of any three grab samples differ from their mean by no more than 0.3 g/g-mole (0.3 lb/lb-mole). Average these three molecular weights, and report the results to the nearest 0.1 g/g-mole (lb/lb-mole).

3.2 Single-Point, Integrated Sampling and Analytical Procedure.

3.2.1 The sampling point in the duct shall be located as specified in Section 3.1.1.

3.2.2 Leak-check (optional) the flexible bag as in Section 2.2.6. Set up the equipment as shown in Figure 3-2. Just prior to sampling, leak-check (optional) the train by placing a vacuum gauge at the condenser inlet, pulling a vacuum of at least 250 mm Hg (10 in. Hg), plugging the outlet at the quick disconnect, and then turning off the pump. The vacuum should remain stable for at least 0.5 minute. Evacuate the flexible bag. Connect the probe and place it in the stack, with the tip of the probe positioned at the sampling point; purge the sampling line. Next, connect the bag and make sure that all connections are tight and leak free.

3.2.3 Sample at a constant rate. The sampling run should be simultaneous with, and for the same total length of time as, the pollutant emission rate determination. Collection of at least 30 liters (1.00 ft³) of sample gas is recommended; however, smaller volumes may be collected, if desired.

3.2.4 Obtain one integrated flue gas sample during each pollutant emission rate determination. Within 8 hours after the sample is taken, analyze it for percent CO₂ and percent O₂, using either an Orsat analyzer or a Fyrite-type combustion gas analyzer. If an Orsat analyzer is used, it is recommended that the Orsat leak-check described in Section 5 be performed before this determination; however, the check is optional. Determine the percentage of the gas that is N₂ and CO by subtracting the sum of the percent CO₂ and percent O₂ from 100 percent. Calculate the dry molecular weight as indicated in Section 6.3.

3.2.5 Repeat the analysis and calculation procedures until the individual dry molecular weights for any three analyses differ from their mean by no more than 0.3 g/g-mole (0.3 lb/lb-mole). Average these three molecular weights, and report the results to the nearest 0.1 g/g-mole (0.1 lb/lb-mole).

3.3 Multi-Point, Integrated Sampling and Analytical Procedure.

3.3.1 Unless otherwise specified by the Administrator, a minimum of eight traverse points shall be used for circular stacks having diameters less than 0.61 m (24 in.), a minimum of nine shall be used for rectangular stacks having equivalent diameters less than 0.61 m (24 in.), and a minimum of twelve traverse points shall be used for all other cases. The traverse points shall be located according to Method 1. The use of fewer points is subject to approval of the Administrator.

3.3.2 Follow the procedures outlined in sections 3.2.2 through 3.2.5, except for the following: traverse all sampling points and sample at each point for an equal length of time. Record sampling data as shown in Figure 3-3.

4. Emission Rate Correction Factor or Excess Air Determination

NOTE.—A Fyrite-type combustion gas analyzer is not acceptable for excess air or emission rate correction factor determination, unless approved by the Administrator. If both percent CO₂ and percent O₂ are measured, the analytical results of any of the three procedures given below may also be used for calculating the dry molecular weight.

Each of the three procedures below shall be used only when specified in an applicable subpart of the standards. The use of these procedures for other purposes must have specific prior approval of the Administrator.

4.1 Single-Point, Grab Sampling and Analytical Procedure.

4.1.1 The sampling point in the duct shall either be at the centroid of the cross-section or at a point no closer to the walls than 1.00 m (3.3 ft), unless otherwise specified by the Administrator.

4.1.2 Set up the equipment as shown in Figure 3-1, making sure all connections ahead of the analyzer are tight and leak-free. Leak-check the Orsat analyzer according to the procedure described in Section 5. This leak-check is mandatory.

4.1.3 Place the probe in the stack, with the tip of the probe positioned at the sampling point; purge the sampling line. Draw a sample into the analyzer. For emission rate correction factor determination, immediately analyze the sample, as outlined in Sections 4.1.4 and 4.1.5, for percent CO₂ or percent O₂. If excess air is desired, proceed as follows: (1) immediately analyze the sample, as in Sections 4.1.4 and 4.1.5, for percent CO₂, O₂, and CO; (2) determine the percentage of the gas that is N₂ by subtracting the sum of the percent CO₂, percent O₂, and percent CO from 100 percent; and (3) calculate percent excess air as outlined in Section 6.2.

TIME	TRAVERSE PT.	Q 1pm	% DEV. ^a
AVERAGE			

$$^a \% \text{ DEV} = \left(\frac{Q - Q_{\text{avg}}}{Q_{\text{avg}}} \right) 100 \quad (\text{MUST BE } \leq 10\%)$$

Figure 3-3. Sampling rate data.

The ALMEGA CORPORATION

4.1.4 To insure complete absorption of the CO₂, O₂, or if applicable, CO, make repeated passes through each absorbing solution until two consecutive readings are the same. Several passes (three or four) should be made between readings. (If constant readings cannot be obtained after three consecutive readings, replace the absorbing solution.)

4.1.5 After the analysis is completed, leak-check (mandatory) the Orsat analyzer once again, as described in Section 5. For the results of the analysis to be valid, the Orsat analyzer must pass this leak test before and after the analysis. *NOTE*.—Since this single-point, grab sampling and analytical procedure is normally conducted in conjunction with a single-point, grab sampling and analytical procedure for a pollutant, only one analysis is ordinarily conducted. Therefore, great care must be taken to obtain a valid sample and analysis. Although in most cases only CO₂ or O₂ is required, it is recommended that both CO₂ and O₂ be measured, and that Citation 5 in the Bibliography be used to validate the analytical data.

4.2 Single-Point, Integrated Sampling and Analytical Procedure.

4.2.1 The sampling point in the duct shall be located as specified in Section 4.1.1.

4.2.2 Leak-check (mandatory) the flexible bag as in Section 2.2.6. Set up the equipment as shown in Figure 3-2. Just prior to sampling, leak-check (mandatory) the train by placing a vacuum gauge at the condenser inlet, pulling a vacuum of at least 250 mm Hg (10 in. Hg), plugging the outlet at the quick disconnect, and then turning off the pump. The vacuum shall remain stable for at least 0.5 minute. Evacuate the flexible bag. Connect the probe and place it in the stack, with the tip of the probe positioned at the sampling point; purge the sampling line. Next, connect the bag and make sure that all connections are tight and leak free.

4.2.3 Sample at a constant rate, or as specified by the Administrator. The sampling run must be simultaneous with, and for the same total length of time as, the pollutant emission rate determination. Collect at least 30 liters (1.00 ft³) of sample gas. Smaller volumes may be collected, subject to approval of the Administrator.

4.2.4 Obtain one integrated flue gas sample during each pollutant emission rate determination. For emission rate correction factor determination, analyze the sample within 4 hours after it is taken for percent CO₂ or percent O₂ (as outlined in Sections 4.2.5 through 4.2.7). The Orsat analyzer must be leak-checked (see Section 5) before the analysis. If excess air is desired, proceed as follows: (1) within 4 hours after the sample is taken, analyze it (as in Sections 4.2.5 through 4.2.7) for percent CO₂, O₂, and CO; (2) determine the percentage of the gas that is N₂ by subtracting the sum of the percent CO₂, percent O₂, and percent CO from 100 percent; (3) calculate percent excess air, as outlined in Section 6.2.

4.2.5 To insure complete absorption of the CO₂, O₂, or if applicable, CO, make repeated passes through each absorbing solution until two consecutive readings are the same. Several passes (three or four) should be made between readings. (If constant readings cannot be obtained after three consecutive readings, replace the absorbing solution.)

4.2.6 Repeat the analysis until the following criteria are met:

4.2.6.1 For percent CO₂, repeat the analytical procedure until the results of any three analyses differ by no more than (a) 0.3 percent by volume when CO₂ is greater than 4.0 percent or (b) 0.2 percent by volume when CO₂ is less than or equal to 4.0 percent. Average the three acceptable values of percent CO₂ and report the results to the nearest 0.1 percent.

4.2.6.2 For percent O₂, repeat the analytical procedure until the results of any three analyses differ by no more than (a) 0.3 percent by volume when O₂ is less than 15.0 percent or (b) 0.2 percent by volume when O₂ is greater than or equal to 15.0 percent. Average the three acceptable values of percent O₂ and report the results to the nearest 0.1 percent.

4.2.6.3 For percent CO, repeat the analytical procedure until the results of any three analyses differ by no more than 0.3 percent. Average the three acceptable values of percent CO and report the results to the nearest 0.1 percent.

4.2.7 After the analysis is completed, leak-check (mandatory) the Orsat analyzer once again, as described in Section 5. For the results of the analysis to be valid, the Orsat analyzer must pass this leak test before an after the analysis. *NOTE*: Although in most instances only CO₂ or O₂ is required, it is recommended that both CO₂ and O₂ be measured, and that Citation 5 in the Bibliography be used to validate the analytical data.

4.3 Multi-Point, Integrated Sampling and Analytical Procedure.

4.3.1 Both the minimum number of sampling points and the sampling point location shall be as specified in Section 3.3.1 of this method. The use of fewer points than specified is subject to the approval of the Administrator.

4.3.2 Follow the procedures outlined in Sections 4.2.2 through 4.2.7, except for the following: Traverse all sampling points and sample at each point for an equal length of time. Record sampling data as shown in Figure 3-3.

5. Leak-Check Procedure for Orsat Analyzers

Moving an Orsat analyzer frequently causes it to leak. Therefore, an Orsat analyzer should be thoroughly leak-checked on site before the flue gas sample is introduced into it. The procedure for leak-checking an Orsat analyzer is:

5.1.1 Bring the liquid level in each pipette up to the reference mark on the capillary tubing and then close the pipette stopcock.

5.1.2 Raise the leveling bulb sufficiently to bring the confining liquid meniscus into the graduated portion of the burette and then close the manifold stopcock.

5.1.3 Record the meniscus position.

5.1.4 Observe the meniscus in the burette and the liquid level in the pipette for movement over the next 4 minutes.

5.1.5 For the Orsat analyzer to pass the leak-check, two conditions must be met.

5.1.5.1 The liquid level in each pipette must not fall below the bottom of the capillary tubing during this 4-minute interval.

5.1.5.2 The meniscus in the burette must not change by more than 0.2 ml during this 4-minute interval.

5.1.6 If the analyzer fails the leak-check procedure, all rubber connections and stopcocks should be checked until the cause of the leak is identified. Leaking stopcocks must be disassembled, cleaned, and re-

greased. Leaking rubber connections must be replaced. After the analyzer is reassembled, the leak-check procedure must be repeated.

6. Calculations

6.1 Nomenclature.

M_d = Dry molecular weight, g/g-mole (lb/lb-mole).

%EA = Percent excess air.

%CO₂ = Percent CO₂ by volume (dry basis).

%O₂ = Percent O₂ by volume (dry basis).

%CO = Percent CO by volume (dry basis).

%N₂ = Percent N₂ by volume (dry basis).

0.264 = Ratio of O₂ to N₂ in air, v/v.

0.280 = Molecular weight of N₂ or CO, divided by 100.

0.320 = Molecular weight of O₂, divided by 100.

0.440 = Molecular weight of CO₂, divided by 100.

6.2 Percent Excess Air. Calculate the percent excess air (if applicable), by substituting the appropriate values of percent O₂, CO, and N₂ (obtained from Section 4.1.3 or 4.2.4) into Equation 3-1.

$$\%EA = \left[\frac{\%O_2 - 0.5\%CO}{0.264\%N_2 (\%O_2 - 0.5\%CO)} \right] 100$$

Equation 3-1

NOTE.—The equation above assumes that ambient air is used as the source of O₂, and that the fuel does not contain appreciable amounts of N₂ (as do coke oven or blast furnace gases). For those cases when appreciable amounts of N₂ are present (coal, oil, and natural gas do not contain appreciable amounts of N₂), or when oxygen enrichment is used, alternate methods, subject to approval of the Administrator, are required.

6.3 Dry Molecular Weight. Use Equation 3-2 to calculate the dry molecular weight of the stack gas

$$M_d = 0.440(\%CO_2) + 0.320(\%O_2) + 0.280(\%N_2 + \%CO)$$

Equation 3-2

NOTE.—The above equation does not consider argon in air (about 0.9 percent, molecular weight of 37.7). A negative error of about 0.4 percent is introduced. The tester may opt to include argon in the analysis using procedures subject to approval of the Administrator.

7. Bibliography

1. Altshuler, A. P. Storage of Gases and Vapors in Plastic Bags. *International Journal of Air and Water Pollution*. 6:75-81. 1963.

2. Conner, William D. and J. S. Nader. Air Sampling with Plastic Bags. *Journal of the American Industrial Hygiene Association*. 25:291-297. 1964.

3. Burrell Manual for Gas Analysts, Seventh edition. Burrell Corporation, 2223 Fifth Avenue, Pittsburgh, Pa. 15219. 1951.

4. Mitchell, W. J. and M. R. Midgett. Field Reliability of the Orsat Analyzer. *Journal of Air Pollution Control Association* 26:491-495. May 1976.


5. Shigehara, R. T., R. M. Neulicht, and W. S. Smith. Validating Orsat Analysis Data from Fossil Fuel-Fired Units. *Stack Sampling News*. 4(2):21-26. August, 1976.



The ALMEGA CORPORATION

APPENDIX D

DETERMINATION OF MOISTURE IN STACK GASES



THE ALMEGA CORPORATION

1. Principle and Applicability

1.1 Principle. A gas sample is extracted at a constant rate from the source; moisture is removed from the sample stream and determined either volumetrically or gravimetrically.

1.2 Applicability. This method is applicable for determining the moisture content of stack gas.

Two procedures are given. The first is a reference method, for accurate determinations of moisture content (such as are needed to calculate emission data). The second is an approximation method, which provides estimates of percent moisture to aid in setting isokinetic sampling rates prior to a pollutant emission measurement run. The approximation method described herein is only a suggested approach; alternative means for approximating the moisture content, e.g., drying tubes, wet bulb-dry bulb techniques, condensation techniques, stoichiometric calculations, previous experience, etc., are also acceptable.

The reference method is often conducted simultaneously with a pollutant emission measurement run; when it is, calculation of percent isokinetic, pollutant emission rate, etc., for the run shall be based upon the results of the reference method or its equivalent; these calculations shall not be based upon the results of the approximation method, unless the approximation method is shown, to the satisfaction of the Administrator, U.S. Environmental Protection Agency, to be capable of yielding results within 1 percent H₂O of the reference method.

NOTE.—The reference method may yield questionable results when applied to saturated gas streams or to streams that contain water droplets. Therefore, when these conditions exist or are suspected, a second determination of the moisture content shall be made simultaneously with the reference method, as follows: Assume that the gas stream is saturated. Attach a temperature sensor [capable of measuring to $\pm 1^\circ\text{C}$ (2°F)] to the reference method probe. Measure the stack gas temperature at each traverse point (see Section 2.2.1) during the reference method traverse; calculate the average stack gas temperature. Next, determine the moisture percentage, either by: (1) using a psychrometric chart and making appropriate corrections if stack pressure is different from that of the chart, or (2) using saturation vapor pressure tables. In cases where the psychrometric chart or the saturation vapor pressure tables are not applicable (based on evaluation of the process), alternate methods, subject to the approval of the Administrator, shall be used.

2. Reference Method

The procedure described in Method 5 for determining moisture content is acceptable as a reference method.

2.1 Apparatus. A schematic of the sampling train used in this reference method is shown in Figure 4-1. All components shall be maintained and calibrated according to the procedure outlined in Method 5.

2.1.1 Probe. The probe is constructed of stainless steel or glass tubing, sufficiently heated to prevent water condensation, and is equipped with a filter, either in-stack (e.g., a plug of glass wool inserted into the end of the probe) or heated out-stack (e.g., as described in Method 5), to remove particulate matter.

When stack conditions permit, other metals or plastic tubing may be used for the probe, subject to the approval of the Administrator.

2.1.2 Condenser. The condenser consists of four impingers connected in series with ground glass, leak-free fittings or any similarly leak-free non-contaminating fittings. The first, third, and fourth impingers shall be of the Greenburg-Smith design, modified by replacing the tip with a 1.3 centimeter ($\frac{1}{2}$ inch) ID glass tube extending to about 1.3 cm ($\frac{1}{2}$ inch) from the bottom of the flask. The second impinger shall be of the Greenburg-Smith design with the standard tip. Modifications (e.g., using flexible connections between the impingers, using materials other than glass, or using flexible vacuum lines to connect the filter holder to the condenser) may be used, subject to the approval of the Administrator.

The first two impingers shall contain known volumes of water, the third shall be empty, and the fourth shall contain a known weight of 6- to 16-mesh indicating type silica gel, or equivalent desiccant. If the silica gel has been previously used, dry at 175°C (350°F) for 2 hours. New silica gel may be used as received. A thermometer, ca-

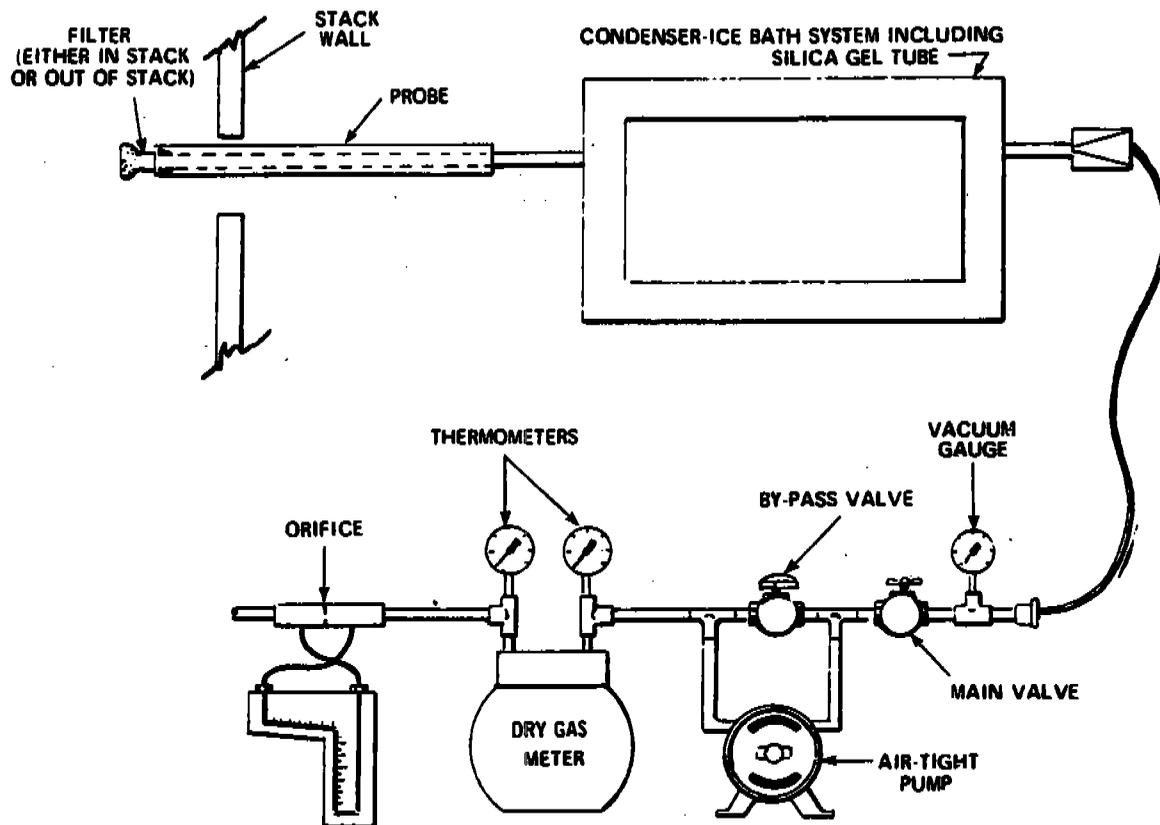


Figure 4-1. Moisture sampling train-reference method.

The ALMEGA CORPORATION

pable of measuring temperature to within 1° C (2° F), shall be placed at the outlet of the fourth impinger, for monitoring purposes.

Alternatively, any system may be used (subject to the approval of the Administrator) that cools the sample gas stream and allows measurement of both the water that has been condensed and the moisture leaving the condenser, each to within 1 ml or 1 g. Acceptable means are to measure the condensed water, either gravimetrically or volumetrically, and to measure the moisture leaving the condenser by: (1) monitoring the temperature and pressure at the exit of the condenser and using Dalton's law of partial pressures, or (2) passing the sample gas stream through a tared silica gel (or equivalent desiccant) trap, with exit gases kept below 20° C (68° F), and determining the weight gain.

If means other than silica gel are used to determine the amount of moisture leaving the condenser, it is recommended that silica gel (or equivalent) still be used between the condenser system and pump, to prevent moisture condensation in the pump and metering devices and to avoid the need to make corrections for moisture in the metered volume.

2.1.3 Cooling System. An ice bath container and crushed ice (or equivalent) are used to aid in condensing moisture.

2.1.4 Metering System. This system includes a vacuum gauge, leak-free pump, thermometers capable of measuring temperature to within 3° C (5.4° F), dry gas meter capable of measuring volume to within 2 percent, and related equipment as shown in Figure 4-1. Other metering systems, capable of maintaining a constant sampling rate and determining sample gas volume, may be used, subject to the approval of the Administrator.

2.1.5 Barometer. Mercury, aneroid, or other barometer capable of measuring atmospheric pressure to within 2.5 mm Hg (0.1 in. Hg) may be used. In many cases, the barometric reading may be obtained from a nearby national weather service station, in which case the station value (which is the absolute barometric pressure) shall be requested and an adjustment for elevation differences between the weather station and the sampling point shall be applied at a rate of minus 2.5 mm Hg (0.1 in. Hg) per 30 m (100 ft) elevation increase or vice versa for elevation decrease.

2.1.6 Graduated Cylinder and/or Balance. These items are used to measure condensed water and moisture caught in the silica gel to within 1 ml or 0.5 g. Graduated cylinders shall have subdivisions no greater than 2 ml. Most laboratory balances are capable of weighing to the nearest 0.5 g or less. These balances are suitable for use here.

2.2 Procedure. The following procedure is written for a condenser system (such as the impinger system described in Section 2.1.2) incorporating volumetric analysis to measure the condensed moisture, and silica gel and gravimetric analysis to measure the moisture leaving the condenser.

2.2.1 Unless otherwise specified by the Administrator, a minimum of eight traverse points shall be used for circular stacks having diameters less than 0.61 m (24 in.), a minimum of nine points shall be used for rectangular stacks having equivalent diameters less than 0.61 m (24 in.), and a minimum of twelve traverse points shall be used in all other cases. The traverse points shall be located according to Method 1. The use of fewer points is subject to the approval of

the Administrator. Select a suitable probe and probe length such that all traverse points can be sampled. Consider sampling from opposite sides of the stack (four total sampling ports) for large stacks, to permit use of shorter probe lengths. Mark the probe with heat resistant tape or by some other method to denote the proper distance into the stack or duct for each sampling point. Place known volumes of water in the first two impingers. Weigh and record the weight of the silica gel to the nearest 0.5 g, and transfer the silica gel to the fourth impinger; alternatively, the silica gel may first be transferred to the impinger, and the weight of the silica gel plus impinger recorded.

2.2.2 Select a total sampling time such that a minimum total gas volume of 0.60 scm (21 scf) will be collected, at a rate no greater than 0.021 m³/min (0.75 cfm). When both moisture content and pollutant emission rate are to be determined, the moisture determination shall be simultaneous with, and for the same total length of time as, the pollutant emission rate run, unless otherwise specified in an applicable subpart of the standards.

2.2.3 Set up the sampling train as shown in Figure 4-1. Turn on the probe heater and (if applicable) the filter heating system to temperatures of about 120° C (248° F), to prevent water condensation ahead of the condenser; allow time for the temperatures to stabilize. Place crushed ice in the ice bath container. It is recommended, but not required, that a leak check be done, as follows: Disconnect the probe from the first impinger or (if applicable) from the filter holder. Plug the inlet to the first impinger (or filter holder) and pull a 380 mm (15 in.) Hg vacuum; a lower vacuum may be used, provided that it is not exceeded during the test. A leakage rate in excess of 4 percent of the average sampling rate or 0.00057 m³/min (0.02 cfm), whichever is less, is unacceptable. Following the leak check, reconnect the probe to the sampling train.

2.2.4 During the sampling run, maintain a sampling rate within 10 percent of constant rate, or as specified by the Administrator. For each run, record the data required on the example data sheet shown in Figure 4-2. Be sure to record the dry gas meter reading at the beginning and end of each sampling time increment and whenever sampling is halted. Take other appropriate readings at each sample point, at least once during each time increment.

2.2.5 To begin sampling, position the probe tip at the first traverse point. Immediately start the pump and adjust the flow to the desired rate. Traverse the cross section, sampling at each traverse point for an equal length of time. Add more ice and, if necessary, salt to maintain a temperature of less 20° C (68° F) at the silica gel outlet.

2.2.6 After collecting the sample, disconnect the probe from the filter holder (or from the first impinger) and conduct a leak check (mandatory) as described in Section 2.2.3. Record the leak rate. If the leakage rate exceeds the allowable rate, the tester shall either reject the test results or shall correct the sample volume as in Section 6.3 of Method 5. Next, measure the volume of the moisture condensed to the nearest ml. Determine the increase in weight of the silica gel (or silica gel plus impinger) to the nearest 0.5 g. Record this information (see example data sheet, Figure 4-3) and calculate the moisture percentage, as described in 2.3 below.

2.3 Calculations. Carry out the following calculations, retaining at least one extra decimal figure beyond that of the acquired data. Round off figures after final calculation.

	IMPINGER VOLUME, ml	SILICA GEL WEIGHT, g
FINAL		
INITIAL		
DIFFERENCE		

Figure 4-3. Analytical data - reference method.

2.3.1 Nomenclature.

E_w = Proportion of water vapor, by volume, in the gas stream.

M_w = Molecular weight of water, 18.0 g/mole (18.0 lb/lb-mole).

P_m = Absolute pressure (for this method, same as barometric pressure) at the dry gas meter, mm Hg (in. Hg).

P_{std} = Standard absolute pressure, 760 mm Hg (29.92 in. Hg).

R = Ideal gas constant, 0.08236 (mm Hg) (m³)/(g-mole) (°K) for metric units and 21.85 (in. Hg) (ft³)/(lb-mole) (°R) for English units.

T_m = Absolute temperature at meter, °K (°R).

T_{std} = Standard absolute temperature, 293° K (528°R).

V_w = Dry gas volume measured by dry gas meter, dcm (dcf).

ΔV_m = Incremental dry gas volume measured by dry gas meter at each traverse point, dcm (dcf).

$V_{m(std)}$ = Dry gas volume measured by the dry gas meter, corrected to standard conditions, dscm (dscf).

$V_{w(std)}$ = Volume of water vapor condensed corrected to standard conditions, scm (scf).

$V_{w(imp)} =$ Volume of water vapor collected in silica gel corrected to standard conditions, scm (scf).

V_f = Final volume of condenser water, ml.

V_i = Initial volume, if any, of condenser water, ml.

W_f = Final weight of silica gel or silica gel plus impinger, g.

W_i = Initial weight of silica gel or silica gel plus impinger, g.

Y = Dry gas meter calibration factor.

ρ_w = Density of water, 0.9982 g/ml (0.002201 lb/ml).

2.3.2 Volume of water vapor condensed.

$$V_{w(std)} = \frac{(V_f - V_i) \rho_w R T_{std}}{P_{std} M_w} = K_1 (V_f - V_i) \quad \text{Equation 4.1}$$

The ALMEGA CORPORATION

3.1.4 **Drying Tube.** Tube packed with new or regenerated 6- to 16-mesh indicating-type silica gel (or equivalent desiccant), to dry the sample gas and to protect the meter and pump.

3.1.5 **Valve.** Needle valve, to regulate the sample gas flow rate.

3.1.6 **Pump.** Leak-free, diaphragm type, or equivalent, to pull the gas sample through the train.

3.1.7 **Volume Meter.** Dry gas meter, sufficiently accurate to measure the sample volume within 2%, and calibrated over the range of flow rates and conditions actually encountered during sampling.

3.1.8 **Rate Meter.** Rotameter, to measure the flow range from 0 to 3 lpm (0 to 0.11 cfm).

3.1.9 **Graduated Cylinder.** 25 ml.

3.1.10 **Barometer.** Mercury, aneroid, or other barometer, as described in Section 2.1.5 above.

3.1.11 **Vacuum Gauge.** At least 760 mm Hg (30 in. Hg) gauge, to be used for the sampling leak check.

3.2 Procedure.

3.2.1 Place exactly 5 ml distilled water in each impinger.

Leak check the sampling train as follows: Temporarily insert a vacuum gauge at or near the probe inlet; then, plug the probe inlet and pull a vacuum of at least 250 mm Hg (10 in. Hg). Note the time rate of change of the dry gas meter dial; alternatively, a rotameter (0-40 cc/min) may be temporarily attached to the dry gas meter outlet to determine the leakage rate. A leak rate not in excess of 2 percent of the average sampling rate is acceptable.

NOTE.—Carefully release the probe inlet plug before turning off the pump.

3.2.2 Connect the probe, insert it into the stack, and sample at a constant rate of 2 lpm (0.071 cfm). Continue sampling until the dry gas meter registers about 30 liters (1.1 ft³) or until visible liquid droplets are carried over from the first impinger to the second. Record temperature, pressure, and dry gas meter readings as required by Figure 4-5.

3.2.3 After collecting the sample, combine the contents of the two impingers and measure the volume to the nearest 0.5 ml.

3.3 **Calculations.** The calculation method presented is designed to estimate the moisture in the stack gas; therefore, other data, which are only necessary for accurate moisture determinations, are not collected. The following equations adequately estimate the moisture content, for the purpose of determining isokinetic sampling rate settings.

3.3.1 Nomenclature.

B_{wm} = Approximate proportion, by volume, of water vapor in the gas stream leaving the second impinger, 0.025.

B_{wv} = Water vapor in the gas stream, proportion by volume.

M_w = Molecular weight of water, 18.0 g/g-mole (18.0 lb/lb-mole).

P_m = Absolute pressure (for this method, same as barometric pressure) at the dry gas meter.

P_{std} = Standard absolute pressure, 760 mm Hg (29.92 in. Hg).

R = Ideal gas constant, 0.06236 (mm Hg)(m³)/(g-mole)(°K) for metric units and 21.85 (in. Hg)(ft³)/lb-mole)(°R) for English units.

T_m = Absolute temperature at meter, °K (°R).

T_{std} = Standard absolute temperature, 293° K (528° R).

V_f = Final volume of impinger contents, ml.

V_i = Initial volume of impinger contents, ml.

V_m = Dry gas volume measured by dry gas meter, dcm (def).

$V_{m(std)}$ = Dry gas volume measured by dry gas meter, corrected to standard conditions, dscm (dscf).

$V_{w(std)}$ = Volume of water vapor condensed, corrected to standard conditions, scm (scf).

ρ_w = Density of water, 0.9982 g/ml (0.002201 lb/ml).

Y = Dry gas meter calibration factor.

3.3.2 Volume of water vapor collected, where:

$$V_{wv} = \frac{(V_f - V_i) \rho_w R T_{std}}{P_{std} M_w} = K_1 (V_f - V_i)$$

Equation 4-5

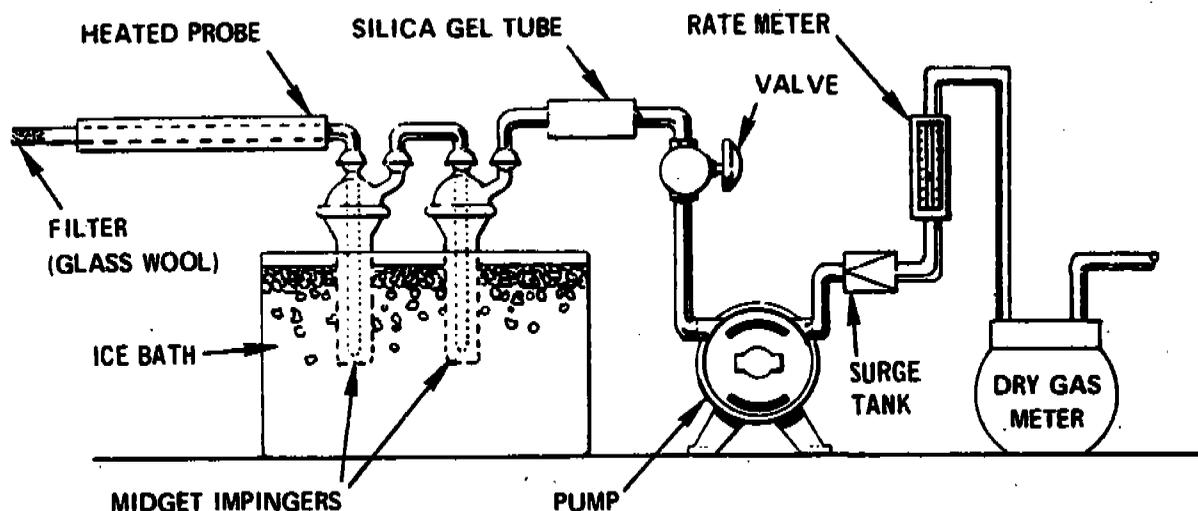


Figure 4-4. Moisture-sampling train - approximation method.

The ALMEGA CORPORATION

LOCATION _____ COMMENTS
 TEST _____
 DATE _____
 OPERATOR _____
 BAROMETRIC PRESSURE _____

CLOCK TIME	GAS VOLUME THROUGH METER, (Vm), m ³ (ft ³)	RATE METER SETTING m ³ /min. (ft ³ /min.)	METER TEMPERATURE. °C (°F)

Figure 4-5. Field moisture determination - approximation method.

K_v = 0.001333 m³/ml for metric units
= 0.04707 ft³/ml for English units.

3.3.3 Gas volume.

$$\begin{aligned}
 V_{m(std)} &= V_m \left(\frac{P_m}{P_{std}} \right) \left(\frac{T_{std}}{T_m} \right) \\
 &= K_v \frac{V_m P_m}{T_m}
 \end{aligned}$$

Equation 4-6

where:

K_v = 0.3858 °K/mm Hg for metric units
= 17.64 °R/in. Hg for English units

3.3.4 Approximate moisture content.

$$\begin{aligned}
 B_{rs} &= \frac{V_{rc}}{V_{rc} + V_{m(std)}} + B_{rm} \\
 &= \frac{V_{rc}}{V_{rc} + V_m} + (0.025)
 \end{aligned}$$

Equation 4-7

4. Calibration

4.1 For the reference method, calibrate equipment as specified in the following sections of Method 5: Section 5.3 (metering system); Section 5.5 (temperature gauges); and Section 5.7 (barometer). The recommended leak check of the metering system (Section 5.6 of Method 5) also applies to the reference method. For the approximation method, use the procedures outlined in Section 5.1.1 of Method 6 to calibrate the metering system, and the procedure of Method 5, Section 5.7 to calibrate the barometer.

5. Bibliography

1. Air Pollution Engineering Manual (Second Edition). Danielson, J. A. (ed.). U.S. Environmental Protection Agency, Office of Air Quality Planning and Standards. Research Triangle Park, N.C. Publication No. AP-40. 1973.
2. Devorkin, Howard, et al. Air Pollution Source Testing Manual. Air Pollution Control District, Los Angeles, Calif. November, 1963.
3. Methods for Determination of Velocity, Volume Dust and Mist Content of Gases. Western Precipitation Division of Joy Manufacturing Co., Los Angeles, Calif. Bulletin WP-50. 1968.



THE ALMEGA CORPORATION

APPENDIX E

DETERMINATION OF PARTICULATE EMISSIONS FROM STATIONARY SOURCES



The ALMEGA CORPORATION

1. Principle and Applicability

1.1 Principle. Particulate matter is withdrawn isokinetically from the source and collected on a glass fiber filter maintained at a temperature in the range of $120 \pm 14^\circ \text{C}$ ($248 \pm 25^\circ \text{F}$) or such other temperature as specified by an applicable subpart of the standards or approved by Administrator, U.S. Environmental Protection Agency, for a particular application. The particulate mass, which includes any material that condenses at or above the filtration temperature, is determined gravimetrically after removal of uncombined water.

1.2 Applicability. This method is applicable for the determination of particulate emissions from stationary sources.

2. Apparatus

2.1 Sampling Train. A schematic of the sampling train used in this method is shown in Figure 5-1. Complete construction details are given in APTD-0581 (Citation 2 in Section 7); commercial models of this train are also available. For changes from APTD-0581 and for allowable modifications of the train shown in Figure 5-1, see the following subsections.

*Mention of trade names or specific product does not constitute endorsement by the Environmental Protection Agency.

The operating and maintenance procedures for the sampling train are described in APTD-0576 (Citation 3 in Section 7). Since correct usage is important in obtaining valid results, all users should read APTD-0576 and adopt the operating and maintenance procedures outlined in it, unless otherwise specified herein. The sampling train consists of the following components:

2.1.1 Probe Nozzle. Stainless steel (316) or glass with sharp, tapered leading edge. The angle of taper shall be 30° and the taper shall be on the outside to preserve a constant internal diameter. The probe nozzle shall be of the button-hook or elbow design, unless otherwise specified by the Administrator. If made of stainless steel, the nozzle shall be constructed from seamless tubing; other materials of construction may be used, subject to the approval of the Administrator.

A range of nozzle sizes suitable for isokinetic sampling should be available, e.g., 0.32 to 1.27 cm ($\frac{1}{8}$ to $\frac{1}{2}$ in.)—or larger if higher volume sampling trains are used—inside diameter (ID) nozzles in increments of 0.16 cm ($\frac{1}{16}$ in.). Each nozzle shall be calibrated ac-

ording to the procedures outlined in Section 5.

2.1.2 Probe Liner. Borosilicate or quartz glass tubing with a heating system capable of maintaining a gas temperature at the exit end during sampling of $120 \pm 14^\circ \text{C}$ ($248 \pm 25^\circ \text{F}$), or such other temperature as specified by an applicable subpart of the standards or approved by the Administrator for a particular application. (The tester may opt to operate the equipment at a temperature lower than that specified.) Since the actual temperature at the outlet of the probe is not usually monitored during sampling, probes constructed according to APTD-0581 and utilizing the calibration curves of APTD-0576 (or calibrated according to the procedure outlined in APTD-0576) will be considered acceptable.

Either borosilicate or quartz glass probe liners may be used for stack temperatures up to about 480°C (900°F) quartz liners shall be used for temperatures between 480 and 900°C (900 and $1,650^\circ \text{F}$). Both types of liners may be used at higher temperatures than specified for short periods of time, subject to the approval of the Administrator. The softening temperature for borosilicate is 820°C ($1,508^\circ \text{F}$), and for quartz it is $1,500^\circ \text{C}$ ($2,732^\circ \text{F}$).

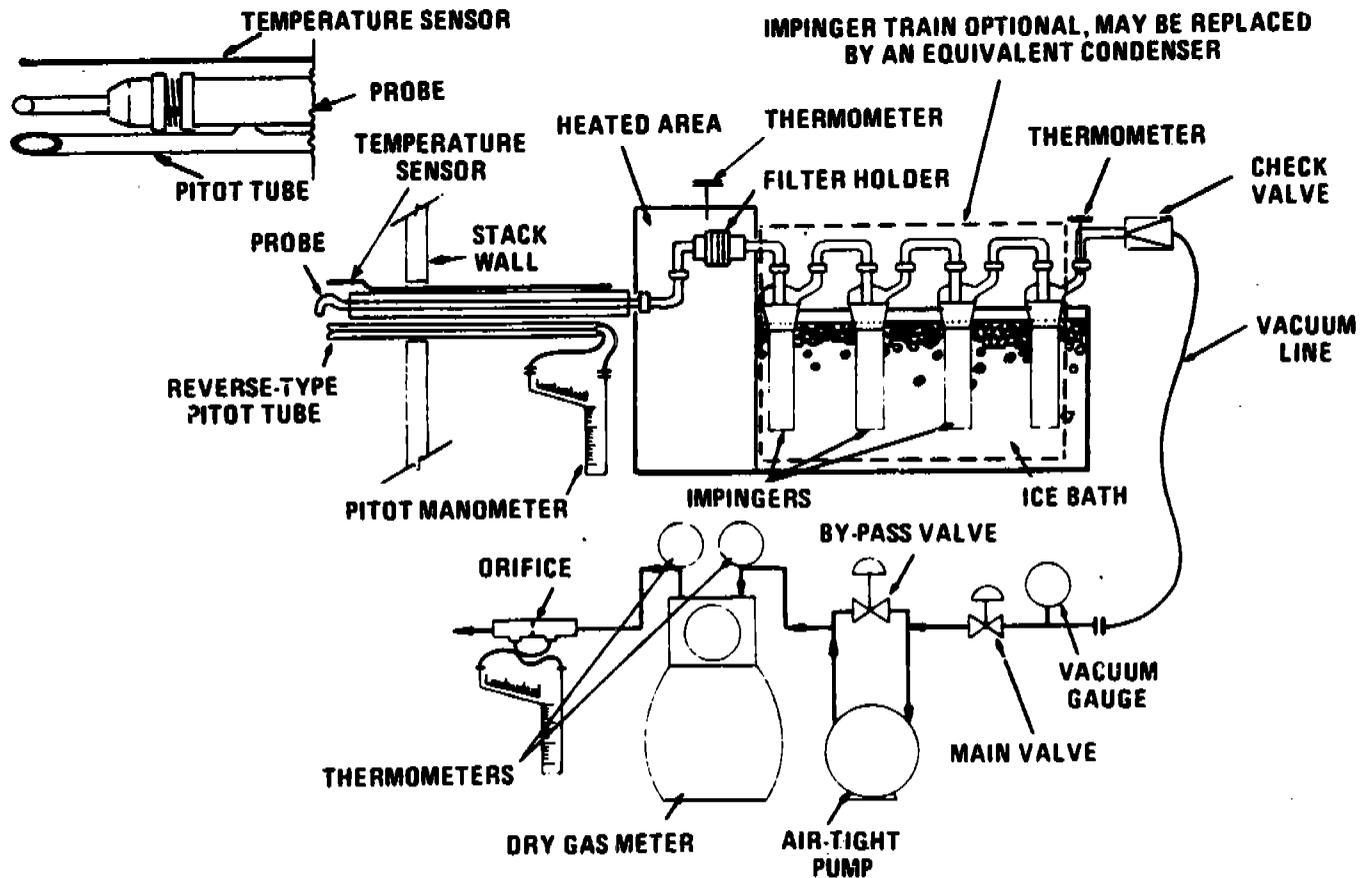


Figure 5-1. Particulate-sampling train

99-113 O-80-22

The ALMEGA CORPORATION

Whenever practical, every effort should be made to use borosilicate or quartz glass probe liners. Alternatively, metal liners (e.g., 316 stainless steel, Incoloy 825,² or other corrosion resistant metals) made of seamless tubing may be used, subject to the approval of the Administrator.

2.1.3 Pitot Tube. Type S, as described in Section 2.1 of Method 2, or other device approved by the Administrator. The pitot tube shall be attached to the probe (as shown in Figure 5-1) to allow constant monitoring of the stack gas velocity. The impact (high pressure) opening plane of the pitot tube shall be even with or above the nozzle entry plane (see Method 2, Figure 2-6b) during sampling. The Type S pitot tube assembly shall have a known coefficient, determined as outlined in Section 4 of Method 2.

2.1.4 Differential Pressure Gauge. Inclined manometer or equivalent device (two), as described in Section 2.2 of Method 2. One manometer shall be used for velocity head (Δp) readings, and the other, for orifice differential pressure readings.

2.1.5 Filter Holder. Borosilicate glass, with a glass frit filter support and a silicone rubber gasket. Other materials of construction (e.g., stainless steel, Teflon, Viton) may be used, subject to approval of the Administrator. The holder design shall provide a positive seal against leakage from the outside or around the filter. The holder shall be attached immediately at the outlet of the probe (or cyclone, if used).

2.1.6 Filter Heating System. Any heating system capable of maintaining a temperature around the filter holder during sampling of $120 \pm 14^\circ \text{C}$ ($248 \pm 25^\circ \text{F}$), or such other temperature as specified by an applicable subpart of the standards or approved by the Administrator for a particular application. Alternatively, the tester may opt to operate the equipment at a temperature lower than that specified. A temperature gauge capable of measuring temperature to within 3°C (5.4°F) shall be installed so that the temperature around the filter holder can be regulated and monitored during sampling. Heating systems other than the one shown in APTD-0581 may be used.

2.1.7 Condenser. The following system shall be used to determine the stack gas moisture content: Four impingers connected in series with leak-free ground glass fittings or any similar leak-free non-contaminating fittings. The first, third, and fourth impingers shall be of the Greenburg-Smith design, modified by replacing the tip with 1.3 cm ($\frac{1}{2}$ in.) ID glass tube extending to about 1.3 cm ($\frac{1}{2}$ in.) from the bottom of the flask. The second impinger shall be of the Greenburg-Smith design with the standard tip. Modifications (e.g., using flexible connections between the impingers, using materials other than glass, or using flexible vacuum lines to connect the filter holder to the condenser) may be used, subject to the approval of the Administrator. The first and second impingers shall contain known quantities of water (Section 4.1.3), the third shall be empty, and the fourth shall contain a known weight of silica gel, or equivalent desiccant. A thermometer, capable of measuring temperature to within 1°C (2°F) shall be placed at the outlet of the fourth impinger for monitoring purposes.

Alternatively, any system that cools the sample gas stream and allows measurement of the water condensed and moisture leaving the condenser, each to within 1 ml or 1 g

may be used, subject to the approval of the Administrator. Acceptable means are to measure the condensed water either gravimetrically or volumetrically and to measure the moisture leaving the condenser by: (1) monitoring the temperature and pressure at the exit of the condenser and using Dalton's law of partial pressures; or (2) passing the sample gas stream through a tared silica gel (or equivalent desiccant) trap with exit gases kept below 20°C (68°F) and determining the weight gain.

If means other than silica gel are used to determine the amount of moisture leaving the condenser, it is recommended that silica gel (or equivalent) still be used between the condenser system and pump to prevent moisture condensation in the pump and metering devices and to avoid the need to make corrections for moisture in the metered volume.

NOTE.—If a determination of the particulate matter collected in the impingers is desired in addition to moisture content, the impinger system described above shall be used, without modification. Individual States or control agencies requiring this information shall be contacted as to the sample recovery and analysis of the impinger contents.

2.1.8 Metering System. Vacuum gauge, leak-free pump, thermometers capable of measuring temperature to within 3°C (5.4°F), dry gas meter capable of measuring volume to within 2 percent, and related equipment, as shown in Figure 5-1. Other metering systems capable of maintaining sampling rates within 10 percent of isokinetic and of determining sample volumes to within 2 percent may be used, subject to the approval of the Administrator. When the metering system is used in conjunction with a pitot tube, the system shall enable checks of isokinetic rates.

Sampling trains utilizing metering systems designed for higher flow rates than that described in APTD-0581 or APDT-0576 may be used provided that the specifications of this method are met.

2.1.9 Barometer. Mercury aneroid, or other barometer capable of measuring atmospheric pressure to within 2.5 mm Hg (0.1 in. Hg). In many cases the barometric reading may be obtained from a nearby national weather service station, in which case the station value (which is the absolute barometric pressure) shall be requested and an adjustment for elevation differences between the weather station and sampling point shall be applied at a rate of minus 2.5 mm Hg (0.1 in. Hg) per 30 m (100 ft) elevation increase or vice versa for elevation decrease.

2.1.10 Gas Density Determination Equipment. Temperature sensor and pressure gauge, as described in Sections 2.3 and 2.4 of Method 2, and gas analyzer, if necessary, as described in Method 3. The temperature sensor shall, preferably, be permanently attached to the pitot tube or sampling probe in a fixed configuration, such that the tip of the sensor extends beyond the leading edge of the probe sheath and does not touch any metal. Alternatively, the sensor may be attached just prior to use in the field. Note, however, that if the temperature sensor is attached in the field, the sensor must be placed in an interference-free arrangement with respect to the Type S pitot tube openings (see Method 2, Figure 2-7). As a second alternative, if a difference of not more than

1 percent in the average velocity measurement is to be introduced, the temperature gauge need not be attached to the probe or pitot tube. (This alternative is subject to the approval of the Administrator.)

2.2 Sample Recovery. The following items are needed.

2.2.1 Probe-Liner and Probe-Nozzle Brushes. Nylon bristle brushes with stainless steel wire handles. The probe brush shall have extensions (at least as long as the probe) of stainless steel, Nylon, Teflon, or similarly inert material. The brushes shall be properly sized and shaped to brush out the probe liner and nozzle.

2.2.2 Wash Bottles—Two. Glass wash bottles are recommended; polyethylene wash bottles may be used at the option of the tester. It is recommended that acetone not be stored in polyethylene bottles for longer than a month.

2.2.3 Glass Sample Storage Containers. Chemically resistant, borosilicate glass bottles, for acetone washes, 500 ml or 1000 ml. Screw cap liners shall either be rubber-backed Teflon or shall be constructed so as to be leak-free and resistant to chemical attack by acetone. (Narrow mouth glass bottles have been found to be less prone to leakage.) Alternatively, polyethylene bottles may be used.

2.2.4 Petri Dishes. For filter samples, glass or polyethylene, unless otherwise specified by the Administrator.

2.2.5 Graduated Cylinder and/or Balance. To measure condensed water to within 1 ml or 1 g. Graduated cylinders shall have subdivisions no greater than 2 ml. Most laboratory balances are capable of weighing to the nearest 0.5 g or less. Any of these balances is suitable or use here and in Section 2.3.4.

2.2.6 Plastic Storage Containers. Airtight containers to store silica gel.

2.2.7 Funnel and Rubber Policeman. To aid in transfer of silica gel to container; not necessary if silica gel is weighed in the field.

2.2.8 Funnel. Glass or polyethylene, to aid in sample recovery.

2.2 Analysis. For analysis, the following equipment is needed.

2.3.1 Glass Weighing Dishes.

2.3.2 Desiccator.

2.3.3 Analytical Balance. To measure to within 0.1 mg.

2.3.4 Balance. To measure to within 0.5 g.

2.3.5 Beakers. 250 ml.

2.3.6 Hygrometer. To measure the relative humidity of the laboratory environment.

2.3.7 Temperature Gauge. To measure the temperature of the laboratory environment.

3. Reagents

3.1 Sampling. The reagents used in sampling are as follows:

3.1.1 Filters. Glass fiber filters, without organic binder, exhibiting at least 99.95 percent efficiency (<0.05 percent penetration) on 0.3-micron dioctyl phthalate smoke particles. The filter efficiency test shall be conducted in accordance with ASTM standard method D 2986-71. Test data from the supplier's quality control program are sufficient for this purpose.

3.1.2 Silica Gel. Indicating type, 6 to 16 mesh. If previously used, dry at 175°C (350°F) for 2 hours. New silica gel may be used as received. Alternatively, other types of desiccants (equivalent or better) may be used, subject to the approval of the Administrator.

The ALMEGA CORPORATION

3.1.3 Water. When analysis of the material caught in the impingers is required, distilled water shall be used. Run blanks prior to field use to eliminate a high blank on test samples.

3.1.4 Crushed Ice.

3.1.5 Stopcock Grease. Acetone-insoluble, heat-stable silicone grease. This is not necessary if screw-on connectors with Teflon sleeves, or similar, are used. Alternatively, other types of stopcock grease may be used, subject to the approval of the Administrator.

3.2 Sample Recovery. Acetone-reagent grade, <0.001 percent residue, in glass bottles—is required. Acetone from metal containers generally has a high residue blank and should not be used. Sometimes, suppliers transfer acetone to glass bottles from metal containers; thus, acetone blanks shall be run prior to field use and only acetone with low blank values (<0.001 percent) shall be used. In no case shall a blank value of greater than 0.001 percent of the weight of acetone used be subtracted from the sample weight.

3.3 Analysis. Two reagents are required for the analysis:

3.3.1 Acetone. Same as 3.2.

3.3.2 Desiccant. Anhydrous calcium sulfate, indicating type. Alternatively, other types of desiccants may be used, subject to the approval of the Administrator.

4. Procedure

4.1 Sampling. The complexity of this method is such that, in order to obtain reliable results, testers should be trained and experienced with the test procedures.

4.1.1 Pretest Preparation. All the components shall be maintained and calibrated according to the procedure described in APTD-0576, unless otherwise specified herein.

Weigh several 200 to 300 g portions of silica gel in air-tight containers to the nearest 0.5 g. Record the total weight of the silica gel plus container, on each container. As an alternative, the silica gel need not be preweighed, but may be weighed directly in the impinger or sampling holder just prior to train assembly.

Check filters visually against light for irregularities and flaws or pinhole leaks. Label filters of the proper diameter on the back side near the edge using numbering machine ink. As an alternative, label the shipping containers (glass or plastic petri dishes) and keep the filters in these containers at all times except during sampling and weighing.

Desiccate the filters at $20 \pm 5.6^\circ \text{C}$ ($68 \pm 10^\circ \text{F}$) and ambient pressure for at least 24 hours and weigh at intervals of at least 6 hours to a constant weight, i.e., 0.5 mg change from previous weighing; record results to the nearest 0.1 mg. During each weighing the filter must not be exposed to the laboratory atmosphere for a period greater than 2 minutes and a relative humidity above 50 percent. Alternatively (unless otherwise specified by the Administrator), the filters may be oven dried at 105°C (220°F) for 2 to 3 hours, desiccated for 2 hours, and weighed. Procedures other than those described, which account for relative humidity effects, may be used, subject to the approval of the Administrator.

4.1.2 Preliminary Determinations. Select the sampling site and the minimum number of sampling points according to Method 1 or as specified by the Administrator. Determine the stack pressure, temperature, and

the range of velocity heads using Method 2; it is recommended that a leak-check of the pitot lines (see Method 2, Section 3.1) be performed. Determine the moisture content using Approximation Method 4 or its alternatives for the purpose of making isokinetic sampling rate settings. Determine the stack gas dry molecular weight, as described in Method 2, Section 3.6; if integrated Method 3 sampling is used for molecular weight determination, the integrated bag sample shall be taken simultaneously with, and for the same total length of time as, the particulate sample run.

Select a nozzle size based on the range of velocity heads, such that it is not necessary to change the nozzle size in order to maintain isokinetic sampling rates. During the run, do not change the nozzle size. Ensure that the proper differential pressure gauge is chosen for the range of velocity heads encountered (see Section 2.2 of Method 2).

Select a suitable probe liner and probe length such that all traverse points can be sampled. For large stacks, consider sampling from opposite sides of the stack to reduce the length of probes.

Select a total sampling time greater than or equal to the minimum total sampling time specified in the test procedures for the specific industry such that (1) the sampling time per point is not less than 2 min (or some greater time interval as specified by the Administrator), and (2) the sample volume taken (corrected to standard conditions) will exceed the required minimum total gas sample volume. The latter is based on an approximate average sampling rate.

It is recommended that the number of minutes sampled at each point be an integer or an integer plus one-half minute, in order to avoid timekeeping errors. The sampling time at each point shall be the same.

In some circumstances, e.g., batch cycles, it may be necessary to sample for shorter times at the traverse points and to obtain smaller gas sample volumes. In these cases, the Administrator's approval must first be obtained.

4.1.3 Preparation of Collection Train. During preparation and assembly of the sampling train, keep all openings where contamination can occur covered until just prior to assembly or until sampling is about to begin.

Place 100 ml of water in each of the first two impingers, leave the third impinger empty, and transfer approximately 200 to 300 g of preweighed silica gel from its container to the fourth impinger. More silica gel may be used, but care should be taken to ensure that it is not entrained and carried out from the impinger during sampling. Place the container in a clean place for later use in the sample recovery. Alternatively, the weight of the silica gel plus impinger may be determined to the nearest 0.5 g and recorded.

Using a tweezer or clean disposable surgical gloves, place a labeled (identified) and weighed filter in the filter holder. Be sure that the filter is properly centered and the gasket properly placed so as to prevent the sample gas stream from circumventing the filter. Check the filter for tears after assembly is completed.

When glass liners are used, install the selected nozzle using a Viton A O-ring when stack temperatures are less than 260°C (500°F) and an asbestos string gasket when temperatures are higher. See APTD-0576 for details. Other connecting systems using either 316 stainless steel or Teflon ferrules may be used. When metal liners are used,

install the nozzle as above or by a leak-free direct mechanical connection. Mark the probe with heat resistant tape or by some other method to denote the proper distance into the stack or duct for each sampling point.

Set up the train as in Figure 5-1, using (if necessary) a very light coat of silicone grease on all ground glass joints, greasing only the outer portion (see APTD-0576) to avoid possibility of contamination by the silicone grease. Subject to the approval of the Administrator, a glass cyclone may be used between the probe and filter holder when the total particulate catch is expected to exceed 100 mg or when water droplets are present in the stack gas.

Place crushed ice around the impingers.

4.1.4 Leak-Check Procedures.

4.1.4.1 Pretest Leak-Check. A pretest leak-check is recommended, but not required. If the tester opts to conduct the pretest leak-check, the following procedure shall be used.

After the sampling train has been assembled, turn on and set the filter and probe heating systems at the desired operating temperatures. Allow time for the temperatures to stabilize. If a Viton A O-ring or other leak-free connection is used in assembling the probe nozzle to the probe liner, leak-check the train at the sampling site by plugging the nozzle and pulling a 380 mm Hg (15 in. Hg) vacuum.

Note.—A lower vacuum may be used, provided that it is not exceeded during the test.

If an asbestos string is used, do not connect the probe to the train during the leak-check. Instead, leak-check the train by first plugging the inlet to the filter holder (cyclone, if applicable) and pulling a 380 mm Hg (15 in. Hg) vacuum (see Note immediately above). Then connect the probe to the train and leak-check at about 25 mm Hg (1 in. Hg) vacuum; alternatively, the probe may be leak-checked with the rest of the sampling train, in one step, at 380 mm Hg (15 in. Hg) vacuum. Leakage rates in excess of 4 percent of the average sampling rate or $0.00057 \text{ m}^3/\text{min}$ (0.02 cfm), whichever is less, are unacceptable.

The following leak-check instructions for the sampling train described in APTD-0576 and APTD-0581 may be helpful. Start the pump with bypass valve fully open and coarse adjust valve, completely closed. Partially open the coarse adjust valve and slowly close the bypass valve until the desired vacuum is reached. Do not reverse direction of bypass valve; this will cause water to back up into the filter holder. If the desired vacuum is exceeded, either leak-check at this higher vacuum or end the leak-check as shown below and start over.

When the leak-check is completed, first slowly remove the plug from the inlet to the probe, filter holder, or cyclone (if applicable) and immediately turn off the vacuum pump. This prevents the water in the impingers from being forced backward into the filter holder and silica gel from being entrained backward into the third impinger.

4.1.4.2 Leak-Checks During Sample Run. If, during the sampling run, a component (e.g., filter assembly or impinger) change becomes necessary, a leak-check shall be conducted immediately before the change is made. The leak-check shall be done according to the procedure outlined in Section 4.1.4.1 above, except that it shall be done at a vacuum equal to or greater than the maximum value recorded up to that point in the test. If the leakage rate is found to be no

The ALMEGA CORPORATION

When the stack is under significant negative pressure (height of impinger stem), take care to close the coarse adjust valve before inserting the probe into the stack to prevent water from backing into the filter holder. If necessary, the pump may be turned on with the coarse adjust valve closed.

When the probe is in position, block off the openings around the probe and porthole to prevent unrepresentative dilution of the gas stream.

Traverse the stack cross-section, as required by Method 1 or as specified by the Administrator, being careful not to bump the probe nozzle into the stack walls when sampling near the walls or when removing or inserting the probe through the portholes; this minimizes the chance of extracting deposited material.

During the test run, make periodic adjustments to keep the temperature around the filter holder at the proper level; add more ice and, if necessary, salt to maintain a temperature of less than 20° C (68° F) at the condenser/silica gel outlet. Also, periodically check the level and zero of the manometer.

If the pressure drop across the filter becomes too high, making isokinetic sampling difficult to maintain, the filter may be replaced in the midst of a sample run. It is recommended that another complete filter assembly be used rather than attempting to change the filter itself. Before a new filter assembly is installed, conduct a leak-check (see Section 4.1.4.2). The total particulate weight shall include the summation of all filter assembly catches.

A single train shall be used for the entire sample run, except in cases where simultaneous sampling is required in two or more separate ducts or at two or more different locations within the same duct, or, in cases where equipment failure necessitates a change of trains. In all other situations, the use of two or more trains will be subject to the approval of the Administrator.

Note that when two or more trains are used, separate analyses of the front-half and (if applicable) impinger catches from each train shall be performed, unless identical nozzle sizes were used on all trains, in which case, the front-half catches from the individual trains may be combined (as may the impinger catches) and one analysis of front-half catch and one analysis of impinger catch may be performed. Consult with the Administrator for details concerning the calculation of results when two or more trains are used.

At the end of the sample run, turn off the coarse adjust valve, remove the probe and nozzle from the stack, turn off the pump, record the final dry gas meter reading, and conduct a post-test leak-check, as outlined in Section 4.1.4.3. Also, leak-check the pitot lines as described in Method 2, Section 3.1; the lines must pass this leak-check, in order to validate the velocity head data.

4.1.6 Calculation of Percent Isokinetic. Calculate percent isokinetic (see Calculations, Section 6) to determine whether the run was valid or another test run should be made. If there was difficulty in maintaining isokinetic rates due to source conditions, consult with the Administrator for possible variance on the isokinetic rates.

4.2 Sample Recovery. Proper cleanup procedure begins as soon as the probe is removed from the stack at the end of the sampling period. Allow the probe to cool.

When the probe can be safely handled, wipe off all external particulate matter near the tip of the probe nozzle and place a cap over it to prevent losing or gaining particulate matter. Do not cap off the probe tip tightly while the sampling train is cooling down as this would create a vacuum in the filter holder, thus drawing water from the impingers into the filter holder.

Before moving the sample train to the cleanup site, remove the probe from the sample train, wipe off the silicone grease, and cap the open outlet of the probe. Be careful not to lose any condensate that might be present. Wipe off the silicone grease from the filter inlet where the probe was fastened and cap it. Remove the umbilical cord from the last impinger and cap the impinger. If a flexible line is used between the first impinger or condenser and the filter holder, disconnect the line at the filter holder and let any condensed water or liquid drain into the impingers or condenser. After wiping off the silicone grease, cap off the filter holder outlet and impinger inlet. Either ground-glass stoppers, plastic caps, or serum caps may be used to close these openings.

Transfer the probe and filter-impinger assembly to the cleanup area. This area should be clean and protected from the wind so that the chances of contamination or losing the sample will be minimized.

Save a portion of the acetone used for cleanup as a blank. Take 200 ml of this acetone directly from the wash bottle being used and place it in a glass sample container labeled "acetone blank."

Inspect the train prior to and during disassembly and note any abnormal conditions. Treat the samples as follows:

Container No. 1. Carefully remove the filter from the filter holder and place it in its identified petri dish container. Use a pair of tweezers and/or clean disposable surgical gloves to handle the filter. If it is necessary to fold the filter, do so such that the particulate cake is inside the fold. Carefully transfer to the petri dish any particulate matter and/or filter fibers which adhere to the filter holder gasket, by using a dry Nylon bristle brush and/or a sharp-edged blade. Seal the container.

Container No. 2. Taking care to see that dust on the outside of the probe or other exterior surfaces does not get into the sample, quantitatively recover particulate matter or any condensate from the probe nozzle, probe fitting, probe liner, and front half of the filter holder by washing these components with acetone and placing the wash in a glass container. Distilled water may be used instead of acetone when approved by the Administrator and shall be used when specified by the Administrator; in these cases, save a water blank and follow the Administrator's directions on analysis. Perform the acetone rinses as follows:

Carefully remove the probe nozzle and clean the inside surface by rinsing with acetone from a wash bottle and brushing with a Nylon bristle brush. Brush until the acetone rinse shows no visible particles, after which make a final rinse of the inside sur-

face with acetone.

Brush and rinse the inside parts of the Swagelok fitting with acetone in a similar way until no visible particles remain.

Rinse the probe liner with acetone by tilting and rotating the probe while squirting acetone into its upper end so that all inside surfaces will be wetted with acetone. Let the acetone drain from the lower end into the sample container. A funnel (glass or polyethylene) may be used to aid on transferring liquid washes to the container. Follow the acetone rinse with a probe brush. Hold the probe in an inclined position, squirt acetone into the upper end as the probe brush is being pushed with a twisting action through the probe; hold a sample container underneath the lower end of the probe, and catch any acetone and particulate matter which is brushed from the probe. Run the brush through the probe three times or more until no visible particulate matter is carried out with the acetone or until none remains in the probe liner on visual inspection. With stainless steel or other metal probes, run the brush through in the above prescribed manner at least six times since metal probes have small crevices in which particulate matter can be entrapped. Rinse the brush with acetone, and quantitatively collect these washings in the sample container. After the brushing, make a final acetone rinse of the probe as described above.

It is recommended that two people be used to clean the probe to minimize sample losses. Between sampling runs, keep brushes clean and protected from contaminations.

After ensuring that all joints have been wiped clean of silicone grease, clean the inside of the front half of the filter holder by rubbing the surfaces with a Nylon bristle brush and rinsing with acetone. Rinse each surface three times or more if needed to remove visible particulate. Make a final rinse of the brush and filter holder. Carefully rinse out the glass cyclone, also (if applicable). After all acetone washings and particulate matter have been collected in the sample container, tighten the lid on the sample container so that acetone will not leak out when it is shipped to the laboratory. Mark the height of the fluid level to determine whether or not leakage occurred during transport. Label the container to clearly identify its contents.

Container No. 3. Note the color of the indicating silica gel to determine if it has been completely spent and make a notation of its condition. Transfer the silica gel from the fourth impinger to its original container and seal. A funnel may make it easier to pour the silica gel without spilling. A rubber policeman may be used as an aid in removing the silica gel from the impinger. It is not necessary to remove the small amount of dust particles that may adhere to the impinger wall and are difficult to remove. Since the gain in weight is to be used for moisture calculations, do not use any water or other liquids to transfer the silica gel. If a balance is available in the field, follow the procedure for container No. 3 in Section 4.3.

Impinger Water. Treat the impingers as follows; Make a notation of any color or film in the liquid catch. Measure the liquid which is in the first three impingers to within ± 1 ml by using a graduated cylinder or by weighing it to within ± 0.5 g by using a balance (if one is available). Record the

The ALMEGA CORPORATION

volume or weight of liquid present. This information is required to calculate the moisture content of the effluent gas.

Discard the liquid after measuring and recording the volume or weight, unless analysis of the impinger catch is required (see Note, Section 2.1.7).

If a different type of condenser is used, measure the amount of moisture condensed either volumetrically or gravimetrically.

Whenever possible, containers should be shipped in such a way that they remain upright at all times.

4.3 Analysis. Record the data required on a sheet such as the one shown in Figure 5-3. Handle each sample container as follows:

Container No. 1. Leave the contents in the shipping container or transfer the filter and any loose particulate from the sample container to a tared glass weighing dish. Desiccate for 24 hours in a desiccator containing anhydrous calcium sulfate. Weigh to a constant weight and report the results to the nearest 0.1 mg. For purposes of this Section, 4.3, the term "constant weight" means a difference of no more than 0.5 mg or 1 percent of total weight less tare weight, whichever is greater, between two consecutive weighings, with no less than 6 hours of desiccation time between weighings.

Alternatively, the sample may be oven dried at 105° C (220° F) for 2 to 3 hours, cooled in the desiccator, and weighed to a constant weight, unless otherwise specified by the Administrator. The tester may also opt to oven dry the sample at 105° C (220° F) for 2 to 3 hours, weigh the sample, and use this weight as a final weight.

Container No. 2. Note the level of liquid in the container and confirm on the analysis sheet whether or not leakage occurred during transport. If a noticeable amount of leakage has occurred, either void the sample or use methods, subject to the approval of the Administrator, to correct the final results. Measure the liquid in this container either volumetrically to ±1 ml or gravimetrically to ±0.5 g. Transfer the contents to a tared 250-ml beaker and evaporate to dryness at ambient temperature and pressure. Desiccate for 24 hours and weigh to a constant weight. Report the results to the nearest 0.1 mg.

Container No. 3. Weigh the spent silica gel (or silica gel plus impinger) to the nearest 0.5 g using a balance. This step may be conducted in the field.

"Acetone Blank" Container. Measure acetone in this container either volumetrically or gravimetrically. Transfer the acetone to a tared 250-ml beaker and evaporate to dryness at ambient temperature and pressure. Desiccate for 24 hours and weigh to a constant weight. Report the results to the nearest 0.1 mg.

NOTE.—At the option of the tester, the contents of Container No. 2 as well as the acetone blank container may be evaporated at temperatures higher than ambient. If evaporation is done at an elevated temperature, the temperature must be below the boiling point of the solvent; also, to prevent "bumping," the evaporation process must be closely supervised, and the contents of the beaker must be swirled occasionally to maintain an even temperature. Use extreme care, as acetone is highly flammable and has a low flash point.

Plant _____

Date _____

Run No. _____

Filter No. _____

Amount liquid lost during transport _____

Acetone blank volume, ml _____

Acetone wash volume, ml _____

Acetone blank concentration, mg/mg (equation 5-4) _____

Acetone wash blank, mg (equation 5-5) _____

CONTAINER NUMBER	WEIGHT OF PARTICULATE COLLECTED, mg		
	FINAL WEIGHT	TARE WEIGHT	WEIGHT GAIN
1			
2			
TOTAL	X		
	Less acetone blank		
	Weight of particulate matter		

	VOLUME OF LIQUID WATER COLLECTED	
	IMPINGER VOLUME, ml	SILICA GEL WEIGHT, g
FINAL		
INITIAL		
LIQUID COLLECTED		
TOTAL VOLUME COLLECTED		g* ml

* CONVERT WEIGHT OF WATER TO VOLUME BY DIVIDING TOTAL WEIGHT INCREASE BY DENSITY OF WATER (1g/ml).

$$\frac{\text{INCREASE, g}}{1 \text{ g/ml}} = \text{VOLUME WATER, ml}$$

Figure 5-3. Analytical data.

The ALMEGA CORPORATION

5. Calibration

Maintain a laboratory log of all calibrations.

5.1 Probe Nozzle. Probe nozzles shall be calibrated before their initial use in the field. Using a micrometer, measure the inside diameter of the nozzle to the nearest 0.025 mm (0.001 in.). Make three separate measurements using different diameters each time, and obtain the average of the measurements. The difference between the high and low numbers shall not exceed 0.1 mm (0.004 in.). When nozzles become nicked, dented, or corroded, they shall be reshaped, sharpened, and recalibrated before use. Each nozzle shall be permanently and uniquely identified.

5.2 Pitot Tube. The Type S pitot tube assembly shall be calibrated according to the procedure outlined in Section 4 of Method 2.

5.3 Metering System. Before its initial use in the field, the metering system shall be calibrated according to the procedure outlined in APTD-0576. Instead of physically adjusting the dry gas meter dial readings to correspond to the wet test meter readings, calibration factors may be used to mathematically correct the gas meter dial readings to the proper values. Before calibrating the metering system, it is suggested that a leak-check be conducted. For metering systems having diaphragm pumps, the normal leak-check procedure will not detect

leakages within the pump, for these cases the following leak-check procedure is suggested: make a 10-minute calibration run at 0.0057 m³/min (0.02 cfm); at the end of the run, take the difference of the measured wet test meter and dry gas meter volumes; divide the difference by 10, to get the leak rate. The leak rate should not exceed 0.00057 m³/min (0.02 cfm).

After each field use, the calibration of the metering system shall be checked by performing three calibration runs at a single, intermediate orifice setting (based on the previous field test). With the vacuum set at the maximum value reached during the test series. To adjust the vacuum, insert a valve between the wet test meter and the inlet of the metering system. Calculate the average value of the calibration factor. If the calibration has changed by more than 5 percent, recalibrate the meter over the full range of orifice settings, as outlined in APTD-0576.

Alternative procedures, e.g., using the orifice meter coefficients, maybe used, subject to the approval of the Administrator.

NOTE—If the dry gas meter coefficient values obtained before and after a test series differ by more than 5 percent, the test series shall either be voided, or calculations for test series shall be performed using whichever meter coefficient value (i.e., before or after) gives the lower value of total sample volume.

5.4 Probe Heater Calibration. The probe heating system shall be calibrated before its initial use in the field according to the procedure outlined in APTD-0576. Probes constructed according to APTD-0581 need not be calibrated if the calibration curves in APTD-0576 are used.

5.5 Temperature Gauges. Use the procedure in Section 4.3 of Method 2 to calibrate in-stack temperature gauges. Dial thermometers, such as are used for the dry gas meter and condenser outlet, shall be calibrated against mercury-in-glass thermometers.

5.6 Leak Check of Metering System Shown in Figure 5-1. That portion of the sampling train from the pump to the orifice meter should be leak checked prior to initial use and after each shipment. Leakage after the pump will result in less volume being recorded than is actually sampled. The following procedure is suggested (see Figure 5-4): Close the main valve on the meter box. Insert a one-hole rubber stopper with rubber tubing attached into the orifice exhaust pipe. Disconnect and vent the low side of the orifice manometer. Close off the low side orifice tap. Pressurize the system to 13 to 18 cm (5 to 7 in.) water column by blowing into the rubber tubing. Pinch off the tubing and observe the manometer for one minute. A loss of pressure on the manometer indicates a leak in the meter box; leaks, if present, must be corrected.

5.7 Barometer. Calibrate against a mercury barometer.

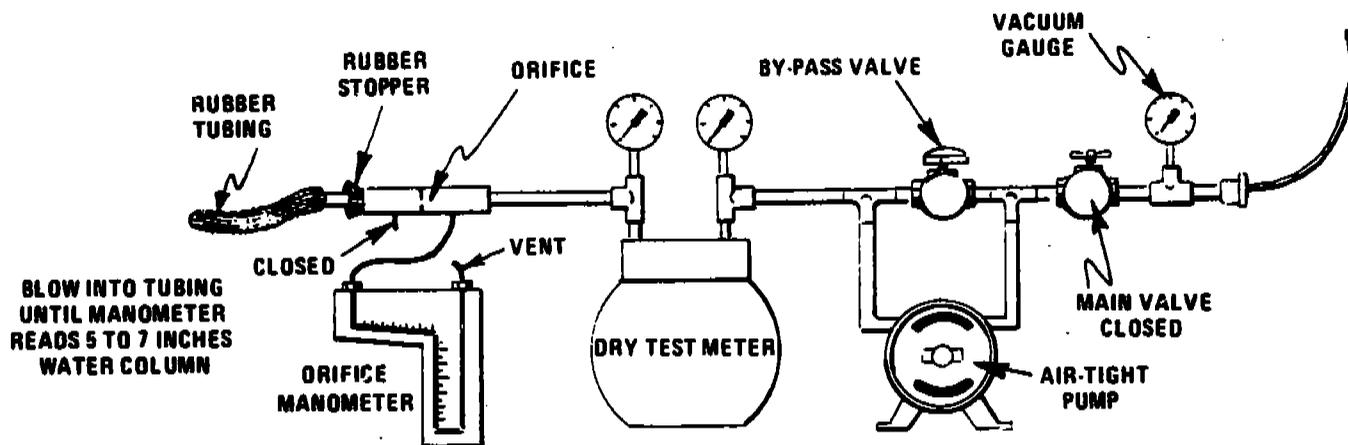


Figure 5-4. Leak check of meter box.

The ALMEGA CORPORATION

6. Calculations

Carry out calculations, retaining at least one extra decimal figure beyond that of the acquired data. Round off figures after the final calculation. Other forms of the equations may be used as long as they give equivalent results.

6.1 Nomenclature

A_n = Cross-sectional area of nozzle, m^2 (ft^2).
 B_{ws} = Water vapor in the gas stream, proportion by volume.
 C_a = Acetone blank residue concentration, mg/g .
 C_p = Concentration of particulate matter in stack gas, dry basis, corrected to standard conditions, $g/dscm$ ($g/dscf$).
 I = Percent of isokinetic sampling.
 L_m = Maximum acceptable leakage rate for either a pretest leak check or for a leak check following a component change; equal to $0.0057 m^3/min$ ($0.02 cfm$) or 4 percent of the average sampling rate, whichever is less.
 L_i = Individual leakage rate observed during the leak check conducted prior to the " i^{th} " component change ($i=1, 2, 3, \dots, n$), m^3/min (cfm).
 L_p = Leakage rate observed during the post-test leak check, m^3/min (cfm).
 m_n = Total amount of particulate matter collected, mg .
 M_w = Molecular weight of water, $18.0 g/g\text{-mole}$ ($18.0 lb/lb\text{-mole}$).
 m_a = Mass of residue of acetone after evaporation, mg .
 P_{bar} = Barometric pressure at the sampling site, $mm\ Hg$ ($in. Hg$).
 P_s = Absolute stack gas pressure, $mm\ Hg$ ($in. Hg$).
 P_{std} = Standard absolute pressure, $760\ mm\ Hg$ ($29.92\ in. Hg$).
 R = Ideal gas constant, $0.06236\ mm\ Hg\text{-}m^3/\text{K-g-mole}$ ($21.85\ in. Hg\text{-}ft^3/\text{R-lb-mole}$).
 T_m = Absolute average dry gas meter temperature (see Figure 5-2), $^{\circ}K$ ($^{\circ}R$).
 T_s = Absolute average stack gas temperature (see Figure 5-2), $^{\circ}K$ ($^{\circ}R$).
 T_{std} = Standard absolute temperature, $293^{\circ}\ K$ ($528^{\circ}\ R$).
 V_a = Volume of acetone blank, ml .
 V_{ar} = Volume of acetone used in wash, ml .
 V_{lc} = Total volume of liquid collected in impingers and silica gel (see Figure 5-3), ml .
 V_m = Volume of gas sample as measured by dry gas meter, dcm ($dscf$).
 $V_{m(std)}$ = Volume of gas sample measured by the dry gas meter, corrected to standard conditions, $dscm$ ($dscf$).
 $V_{w(std)}$ = Volume of water vapor in the gas sample, corrected to standard conditions, scm (scf).
 v_s = Stack gas velocity, calculated by Method 2, Equation 2-9, using data obtained from Method 5, m/sec (ft/sec).
 W_a = Weight of residue in acetone wash, mg .
 Y = Dry gas meter calibration factor.
 ΔH = Average pressure differential across the orifice meter (see Figure 5-2), $mm\ H_2O$ ($in. H_2O$).
 ρ_w = Density of acetone, mg/ml (see label on bottle).

ρ_w = Density of water, $0.9982\ g/ml$ ($0.002201\ lb/ml$).
 θ = Total sampling time, min .
 θ_1 = Sampling time interval, from the beginning of a run until the first component change, min .
 θ_i = Sampling time interval, between two successive component changes, beginning with the interval between the first and second changes, min .
 θ_n = Sampling time interval, from the final (n^{th}) component change until the end of the sampling run, min .
 13.6 = Specific gravity of mercury.
 60 = Sec/min .
 100 = Conversion to percent.

6.2 Average dry gas meter temperature and average orifice pressure drop. See data sheet (Figure 5-2).

6.3 Dry Gas Volume. Correct the sample volume measured by the dry gas meter to standard conditions ($20^{\circ}\ C$, $760\ mm\ Hg$ or $68^{\circ}\ F$, $29.92\ in. Hg$) by using Equation 5-1.

$$V_{m(std)} = V_m Y \left(\frac{T_{std}}{T_m} \right) \left[\frac{P_{bar} + \frac{\Delta H}{13.6}}{P_{std}} \right]$$

$$= K_1 V_m Y \frac{P_{bar} + (\Delta H/13.6)}{T_m}$$

Equation 5-1

where:
 $K_1 = 0.3858\ ^{\circ}K/mm\ Hg$ for metric units
 $= 17.64\ ^{\circ}R/in. Hg$ for English units

NOTE.—Equation 5-1 can be used as written unless the leakage rate observed during any of the mandatory leak checks (i.e., the post-test leak check or leak checks conducted prior to component changes) exceeds L_m . If L_p or L_i exceeds L_m , Equation 5-1 must be modified as follows:

(a) Case I. No component changes made during sampling run. In this case, replace V_m in Equation 5-1 with the expression:

$$V_m - (L_p - L_m)\theta$$

(b) Case II. One or more component changes made during the sampling run. In this case, replace V_m in Equation 5-1 by the expression:

$$\left[V_m - (L_p - L_m)\theta \right] - \sum_{i=2}^n (L_i - L_m)\theta_i - (L_p - L_m)\theta_p$$

and substitute only for those leakage rates (L_i or L_p) which exceed L_m .

6.4 Volume of water vapor.

$$V_{w(std)} = V_{lc} \left(\frac{\rho_w}{M_w} \right) \left(\frac{R T_{std}}{P_{std}} \right) = K_2 V_{lc}$$

Equation 5-2

where:

$K_2 = 0.001333\ m^3/ml$ for metric units
 $= 0.04707\ ft^3/ml$ for English units.

6.5 Moisture Content.

$$B_{ws} = \frac{V_{w(std)}}{V_{m(std)} + V_{w(std)}}$$

Equation 5-3

NOTE.—In saturated or water droplet-laden gas streams, two calculations of the moisture content of the stack gas shall be made, one from the impinger analysis (Equation 5-3), and a second from the assumption of saturated conditions. The lower of the two values of B_{ws} shall be considered correct. The procedure for determining the moisture content based upon assumption of saturated conditions is given in the Note of Section 1.2 of Method 4. For the purposes of this method, the average stack gas temperature from Figure 5-2 may be used to make this determination, provided that the accuracy of the in-stack temperature sensor is $\pm 1^{\circ}\ C$ ($2^{\circ}\ F$).

6.6 Acetone Blank Concentration.

$$C_a = \frac{m_a}{V_a \rho_a}$$

Equation 5-4

6.7 Acetone Wash Blank.

$$W_a = C_a V_{ar} \rho_a$$

Equation 5-5

6.8 Total Particulate Weight. Determine the total particulate catch from the sum of the weights obtained from containers 1 and 2 less the acetone blank (see Figure 5-3). NOTE.—Refer to Section 4.1.5 to assist in calculation of results involving two or more filter assemblies or two or more sampling trains.

6.9 Particulate Concentration.

$$c_p = (0.001\ g/mg) (m_n / V_{m(std)})$$

Equation 5-6

6.10 Conversion Factors:

From	To	Multiply by
scf	m^3	0.02832
g/ft^3	g/m^3	15.43
g/ft^3	lb/ft^3	2.205×10^{-3}
g/ft^3	g/m^3	35.31

6.11 Isokinetic Variation.

6.11.1 Calculation From Raw Data.

$$I = 100 T_s \left[K_3 V_{lc} + \left(\frac{V_{m(std)}}{T_m} \right) \left(\frac{P_{bar} + \Delta H/13.6}{60 \theta v_s P_s A_n} \right) \right]$$

Equation 5-7

THE ALMEGA CORPORATION

where:

$K_2 = 0.003454$ mm Hg-m³/ml-°K for metric units.
 $= 0.002669$ -in. Hg-ft³/ml-°R for English units.

6.11.2 Calculation From Intermediate Values.

$$I = \frac{T_s V_m (s) P_{std} 100}{T_{std} v_s A_s P_s 60 (1 - B_{rs})}$$

$$= K_1 \frac{T_s V_m (s) d}{P_s V_s A_s \theta (1 - B_{rs})}$$

Equation 3-8

where:

$K_1 = 4.320$ for metric units
 $= 0.09450$ for English units.

6.12 Acceptable Results. If 90 percent I < 110 < percent, the results are acceptable.

If the results are low in comparison to the standard and I is beyond the acceptable range, or, if I is less than 90 percent, the Administrator may opt to accept the results.

Use Citation 4 to make judgments. Otherwise, reject the results and repeat the test.

7. Bibliography

1. Addendum to Specifications for Incinerator Testing at Federal Facilities. PHS, NCAPC, Dec. 6, 1967.

2. Martin, Robert M. Construction Details of Isokinetic Source-Sampling Equipment. Environmental Protection Agency, Research Triangle Park, N.C. APTD-0581, April 1971.

3. Rom, Jerome J. Maintenance, Calibration, and Operation of Isokinetic Source Sampling Equipment. Environmental Protection Agency, Research Triangle Park, N.C. APTD-0576, March, 1972.

4. Smith, W. S., R. T. Shigehara, and W. F. Todd. A method of Interpreting Stack Sampling Data. Paper Presented at the 63d Annual Meeting of the Air Pollution Control Association, St. Louis, Mo. June 14-19, 1970.


5. Smith, W. S., et al. Stack Gas Sampling Improved and Simplified With New Equipment. APCA Paper No. 67-119, 1967.

6. Specifications for Incinerator Testing at Federal Facilities. PHS, NCAPC, 1967.

7. Shigehara, R. T. Adjustments in the EPA Nomograph for Different Pitot Tube Coefficients and Dry Molecular Weights. Stack Sampling News 2:4-11, October, 1974.

8. Vollaro, R. F. A Survey of Commercially Available Instrumentation For the Measurement of Low-Range Gas Velocities. U.S. Environmental Protection Agency, Emission Measurement Branch, Research Triangle Park, N.C. November, 1976 (unpublished paper).


9. Annual Book of ASTM Standards, Part 26. Gaseous Fuels; Coal and Coke; Atmospheric Analysis. American Society for Testing and Materials, Philadelphia, Pa. 1974. pp. 617-622.



The ALMEGA CORPORATION

APPENDIX F

**FIELD TEST DATA, CALCULATION SUMMARIES
AND LABORATORY ANALYSES**



The ALMEGA CORPORATION

PARTICULATE CALCULATION SUMMARY

COMPANY: IMAND STEEL
 SOURCE:
 REPETITION NO:
 TEST DATE:

NO 4 CR2

RUN 2 6/26/85

ENGLISH UNITS
 (29.92 in. Hg 68°F)

Volume of sample at standard conditions on dry basis

$$V_{mstd} = \left[\frac{17.64}{\gamma} \right] V_m \gamma \left[\frac{P_{bar} + \frac{\Delta H}{13.6}}{T_m} \right] = \underline{31.961} \text{ dscf.}$$

$\gamma = \underline{0.9937}$

Volume of water vapor in sample at standard conditions

$$V_{wstd} = \left[\frac{0.04707 \text{ cu.ft.}}{\text{ml}} \right] V_{lc} = \underline{3.366} \text{ scf.}$$

$V_{lc} = \underline{745} \text{ ml.}$

Fractional moisture content of stack gas

$$B_{ws} = \frac{V_{wstd}}{V_{mstd} + V_{wstd}} = \underline{0.09528}$$

Particle concentration in stack gas on dry basis

$$c's = \left[\frac{0.01543 \text{ gr}}{\text{mg}} \right] \left[\frac{M_n}{V_{mstd}} \right] = \underline{0.02539} \text{ grains/dscf.}$$

$$= 2.205 \cdot 10^{-6} \frac{M_n}{V_{mstd}} = \underline{3.629} \times 10^{-6} \text{ lbs/dscf}$$

Stack gas volume flow rate on dry basis

$$Q_s = 3600 (1 - B_{ws}) V_s A_s \left[\frac{T_{std} \cdot P_s}{(T_s)_{avg} \cdot P_{std}} \right] = \underline{2.293} \times 10^6 \text{ dscf/hr}$$

$(A_s = \underline{11.98} \text{ sq. ft. } \quad V_s = \underline{68.32} \text{ ft/sec})$

Process rate or BTU rating P_w

Emission rate

$$Q_s \text{ c's} = \underline{8.321} \text{ lbs/hr}$$

$$\frac{Q_s \text{ c's}}{P_w} = \underline{\hspace{2cm}} \text{ lbs/}$$


Isokinetic sampling rate

$$I = \left(1.667 \frac{\text{min}}{\text{sec}} \right) T_s \left[\left(\frac{0.002669 \text{ in.Hg.cu.ft.}}{\text{ml. OR}} V_{lc} \right) + \frac{V_m \gamma}{T_m} \left(\frac{P_{bar} + \frac{\Delta H}{13.6}}{13.6} \right) \right]$$

$(A_n = \underline{500.867} \text{ sq. ft.})$

$\frac{Q_s P_s A_n}{V_s} = \underline{99.27}$

$\frac{47.33 \cdot 78.07}{\hspace{2cm}}$



The ALMEGA CORPORATION

STACK VOLUME FLOW RATE CALCULATION SUMMARY

COMPANY: MAND STEEL Nº 4 CR RUN 2 6/26/85
 SOURCE:
 REPETITION NO:
 TEST DATE:

Dry molecular weight of stack gas

$$M_d = 0.44 (\%CO_2) + 0.32 (\%O_2) + 0.28 (\%N_2 + \%CO)$$

$$= \underline{28.84} \text{ lb/lb-mole}$$

Molecular weight of stack gas, wet basis

$$M_s = M_d (1 - B_{ws}) + 18 B_{ws}$$

$$= \underline{27.81} \text{ lb/lb-mole}$$

Pitot tube coefficient

C_p (from calibration curve)

$$= \frac{0.84}{\frac{21 \text{ POINTS MEASURED (2e) FOR I}}{220} / \frac{24 \text{ POINTS OVERALL FOR QS}}{1.108}}$$

Average velocity head of stack gas, inches H_2O

$(\sqrt{\Delta p})$ avg.

$$= \frac{1.266}{1.108}$$

Average absolute stack gas temperature

(T_s) avg. = 152.3 OF + 460

$$= \underline{612.3} \text{ } ^\circ R$$

Absolute stack gas pressure

$P_s = P_b + (\text{Static Pressure}/13.6)$

$$= \underline{29.85} \text{ in. Hg}$$

Stack gas velocity

(V_s) avg. = $(85.49) C_p (\sqrt{\Delta p})^{2.492}$

$$= \frac{(T_s) \text{ avg.}}{P_s M_s} = \frac{612.3}{78.07} = \underline{68.32} \text{ ft/sec.}$$

Stack gas volume flow rate

$60 V_s A_s$


$$= \underline{49110} \text{ acfm}$$

Stack gas volume flow rate, dry basis

$Q_s = 3,600 (1 - B_{ws}) V_s A_s$

$$\left[\frac{T_{std} \cdot P_s}{(T_s) \text{ avg.} \cdot P_{std}} \right]$$

$$= \underline{\hspace{2cm}} \times 10^6 \text{ dscf/hr}$$





PARTICULATE FIELD DATA

PLANT INLAND STEEL
 DATE 6/26/85
 LOCATION Can 4 Pkt #2
 OPERATOR Jim Lehman
 STACK NO. Can 4 pkt #2
 RUN NO. 2
 SAMPLE BOX NO. 2
 METER BOX NO. 6/7
 METER A H₂O 0.752 / 2.1871
 Y = 1,000 / 0.937
 TIME START = 1:42 PM

AMBIENT TEMPERATURE 95°F
 BAROMETRIC PRESSURE 29.80
 ASSUMED MOISTURE, % 12%
 PROBE LENGTH, in. 76' effective
 NOZZLE DIAMETER, in. 0.185
 STACK DIAMETER, in. 58.5 X 29.5
 PROBE HEATER SETTING _____
 HEATER BOX SETTING 250°F
 Δ Cp FACTOR 0.84
 FILTER NO. 2
 FILTER TARE WEIGHT 669.0 mg

↑ NORTH

SCHMATIC OF STACK

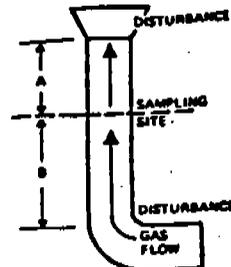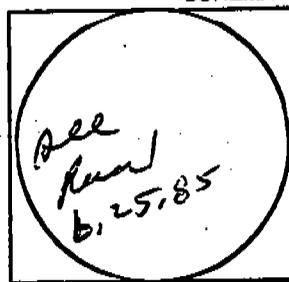

CROSS SECTION

PRE TEST LEAK CHECKS

METER <0.01 @ 26" in Hg
 PITOTS 0 @ 2.5 in H₂O
 ORSAT _____

clock START

P #	CLOCK	Static Pressure +/- in H ₂ O	Δ P in H ₂ O	Δ H in H ₂ O	Time	Vm ft ³	Tm Inlet °F	Tm Outlet °F	Oven Temp. °F	Imp. Outlet Temp. °F	Vacuum (in Hg)	
42:19	A-1 44:04	+0.1	148	0.8	1.75	0.08	51.43	110	110	250	70	<1.0
52:05	2 55:09	+0.4	149	3.0	3.07	0.15	54.15	112	110	265	70	<7.0
0:40	*3 6:52	+0.7	154	2.5	2.83	2.5	5.62	100	100	235	70	8.0
18:20	4 20:55	+0.5	152	1.8	2.58	1.8	4.12	100	95	250	70	7.0
0:20	5 32:43	+0.4	155	1.5	2.38	1.8	5.78	95	95	250	65	4.0
3:24	6 45:54		158	1.8	2.50	2.1	7.72	95	95	240	65	
0:58	7 3:15	+0.4	149	1.5	1.68	1.7	8.91	92	90	235	68	4.5
3:30	8 16:12	+0.3	158	1.0	2.70	1.1	10.51	92	90	235	68	3.0
7:00	B-1 28:46	+0.7	157	0.7	1.77	0.8	20.86	92	90	235	58	1.0
7:05	2 47:50		147	2.7	1.75	3.0	13.57	90	90	255	60	7.0
14:40	3 17:24	+0.9	140	1.7	2.73	2.0	15.73	95	92	235	62	5.0
2:15	4 30:33	+1.0	148	2.5	2.30	2.8	17.90	97	95	265	62	8.0
5:14	5 57:16	+1.6	144	3.8	2.03	4.0	19.95	97	97	265	64	9.0
12:11	6 13:44	+1.5	151	3.5	1.55	4.0	21.56	95	90	245	60	10.0
40:33	7 43:30	+1.8	144	3.3	2.95	3.8	24.64	95	92	260	62	10.0
7:24	8 54:20	+1.2	149	1.5	1.93	1.7	25.99	92	90	255	62	6.0
0:58	B-1 5:37	+0.4	157	0.2	2.65	0.28	27.04	92	90	260	63	<1.0
12:06	2 13:56	+0.6	157	1.0	1.83	1.2	28.07	95	92	260	65	3.0
2:15	3 22:53	+0.5	162	1.0	2.47	1.2	29.45	95	92	255	66	2.0
0:10	4 32:07	+0.4	166	1.0	1.88	1.2	30.57	95	92	250	68	2.0
8:04	5			0.0	NO	SAMPLE TAKEN			250			
	6 50:04	+0.5	160	1.2	2.00	1.4	31.68	95	90	250	68	3.0
	7	+0.1	153	0.0	NO	SAMPLE TAKEN			240			
	8			0.0	NO	SAMPLE TAKEN			250			
AV	0:47:33	+0.71	152.3		1.903			95.2	555.2			

* * * Leak Check per Turner 0.005 @ 10" Hg

POST TEST LEAK CHECKS


METER <0.01 @ 15.0 in Hg
 PITOTS _____
 ORSAT _____

Time ends = _____
 * Changed sample probes / start in ?
 + Leak Check per 7 <0.005 @ 20" Hg

Vm A-1 3.075
 A-3 10.466
 B-1 15.19
 C-1 5.08
 Σ 33.811
 ORSAT MEASUREMENT

VOLUME OF LIQUID WATER COLLECTED	IMPINGER VOLUME ml			SILICA GEL WEIGHT, gm
	1	2	3	
FINAL	2265			206.5
INITIAL	100	100	-	200
LIQUID COLLECTED				6.5
TOTAL VOLUME COLLECTED		65		71.5

TIME	CO ₂	O ₂	CO	N ₂
1	NA			
2	TAKEN AS AMBIENT AIR			
3				
4				



The Almega Corporation

PARTICULATE ANALYTICAL DATA FORM

COMPANY: Inland Steel RUN NUMBER: 2
 LOCATION: Car #4 RELATIVE HUMIDITY: 45 %
 DATE: 6-26-85 ACETONE DENSITY (Pa): 0.7857 g/ml
 LIQUID LEVEL MARKED AND CONTAINER SEALED?
 ACETONE BLANK RESIDUE CONCENTRATION (Ca) ND mg/g
 ACETONE RINSE VOLUME (Vaw) 410 ml
 BLANK RESIDUE IN ACETONE RINSE (Wa) = Ca.Vaw.Pa = ND mg


NOTE: IN NO CASE SHOULD A BLANK RESIDUE 0.01 mg/g OR 0.001 % OF THE WEIGHT OF ACETONE USED BE SUBTRACTED FROM THE SAMPLE WEIGHT.

DATE AND TIME OF WEIGHING	<u>6/27/85 11A</u>	GROSS WT.	<u>(100345.5)</u>	mg
DATE AND TIME OF WEIGHING	<u>6/29/85 10A</u>	GROSS WT.	<u>100343.6</u>	mg
	<u>7/1/85 11A</u>		<u>100343.7</u>	
		AVERAGE GROSS WT.	<u>343.65</u>	mg
		LESS BLANK RESIDUE (Wa)	<u>ND</u>	mg
		TARE WT.	<u>100307.1</u>	mg
		WEIGHT OF PARTICULATE IN ACETONE RINSE	<u>36.55</u>	mg

DATE AND TIME OF WEIGHING	<u>6/27/85 11A</u>	GROSS FILTER WT.	<u>(687.2)</u>	mg
DATE AND TIME OF WEIGHING	<u>6/29/85 10A</u>	GROSS FILTER WT.	<u>685.0</u>	mg
	<u>7/1/85 11A</u>		<u>685.1</u>	
		AVERAGE GROSS WT.	<u>685.05</u>	mg
		FILTER TARE WT.	<u>669.0</u>	mg
		WEIGHT OF PARTICULATE ON FILTER	<u>16.05</u>	mg
		WEIGHT OF PARTICULATE IN ACETONE RINSE		mg
		TOTAL WEIGHT OF PARTICULATE	<u>52.6</u>	mg

REMARKS _____

INITIALS OF ANALYST CK-SA



THE ALMEGA CORPORATION

PARTICULATE CALCULATION SUMMARY

COMPANY:
SOURCE:
REPETITION NO:
TEST DATE:

INLAND NO 4 CAR RUN 3 6/27/85

ENGLISH UNITS
(29.92in. Hg 68°F)

Volume of sample at standard conditions on dry basis

$$V_{mstd} = \left[17.64 \right] V_m \gamma \left[\frac{P_{bar} + \frac{\Delta H}{13.6}}{T_m} \right] = \underline{41.777} \text{ dscf.}$$

$\gamma = \underline{0.9937}$

Volume of water vapor in sample at standard conditions

$$V_{wstd} = \left[0.04707 \frac{\text{cu.ft.}}{\text{ml}} \right] V_{lc} = \underline{4.519} \text{ scf.}$$

$V_{lc} = \underline{96} \text{ ml.}$

Fractional moisture content of stack gas

$$B_{ws} = \frac{V_{wstd}}{V_{mstd} + V_{wstd}} = \underline{0.09761}$$

Particle concentration in stack gas on dry basis

$$c's = \left[0.01543 \frac{\text{gr}}{\text{mg}} \right] \left[\frac{M_n}{V_{mstd}} \right] = \underline{0.04127} \text{ grains/dscf.}$$

$$= 2.205 \cdot 10^{-6} \frac{M_n}{V_{mstd}} = \underline{5.898} \cdot 10^{-6} \text{ lbs/dscf}$$

Stack gas volume flow rate on dry basis

$$Q_s = 3600 (1 - B_{ws}) V_s A_s \left[\frac{T_{std} \cdot P_s}{(T_s)_{avg} \cdot P_{std}} \right] = \underline{2.836} \cdot 10^6 \text{ dscf/hr}$$

$(A_s = \underline{11.58} \text{ sq.ft.} \quad V_s = \text{ft/sec})$

Process rate or BTU rating P_w

Emission rate

$$Q_s \text{ c's} = \underline{16.73} \text{ lbs/hr}$$


$$\frac{Q_s \text{ c's}}{P_w} = \underline{\hspace{2cm}} \text{ lbs/}$$

Isokinetic sampling rate

$$I = \left(1.667 \frac{\text{min}}{\text{sec}} \right) T_s \left[\frac{\left(0.002669 \frac{\text{in.Hg.cu.ft.}}{\text{ml. OR}} V_{lc} \right) + \frac{V_m}{T_m} \gamma \left(\frac{P_{bar} + \frac{\Delta H}{13.6}}{T_m} \right)}{Q_s P_s A_n} \right]$$

$(A_n = \underline{0.001867} \text{ sq.ft.})$

$= \underline{92.74}$



The ALMEGA CORPORATION

STACK VOLUME FLOW RATE CALCULATION SUMMARY

COMPANY: INLAND No4 CR RUN 3 6/27/85
 SOURCE:
 REPETITION NO:
 TEST DATE:

Dry molecular weight of stack gas

$$M_d = 0.44 (\%CO_2) + 0.32 (\%O_2) + 0.28 (\%N_2 + \%CO)$$

$$= \underline{28.84} \text{ lb/lb-mole}$$

Molecular weight of stack gas, wet basis

$$M_s = M_d (1 - B_{ws}) + 18 B_{ws}$$

$$= \underline{27.78} \text{ lb/lb-mole}$$

Pitot tube coefficient

$$C_p \text{ (from calibration curve)} = \underline{0.84}$$

Average velocity head of stack gas, inches H₂O

$$(\sqrt{\Delta p}) \text{ avg.} = \underline{1.372}$$

Average absolute stack gas temperature

$$(T_s) \text{ avg.} = \underline{146.2} \text{ } ^\circ F + 460 = \underline{606.2} \text{ } ^\circ R$$

Absolute stack gas pressure

$$P_s = P_b + (\text{Static Pressure}/13.6)$$

$$= \underline{29.57} \text{ in. Hg}$$

Stack gas velocity

$$(V_s) \text{ avg.} = (85.49) C_p (\sqrt{\Delta p}) \text{ avg.} \sqrt{\frac{(T_s) \text{ avg.}}{P_s M_s}}$$

$$= \underline{84.65} \text{ ft/sec.}$$


Stack gas volume flow rate

$$60 V_s A_s = \underline{60850} \text{ acfm}$$

Stack gas volume flow rate, dry basis

$$Q_s = 3,600 (1 - B_{ws}) V_s A_s \left[\frac{T_{std} \cdot P_s}{(T_s) \text{ avg.} \cdot P_{std}} \right]$$


$$= \underline{\hspace{10em}} \times 10^6 \text{ dscf/l}$$



PARTICULATE FIELD DATA

PLANT INLAND STEEL
 DATE 6.27.85
 LOCATION Plant 2
 OPERATOR Jim Lehmann
 STACK NO. Can #4
 RUN NO. 3
 SAMPLE BOX NO. 7
 METER BOX NO. 7
 METER ΔH @ 2.247
 Y = 0.9937
 TIME START = 8:55 AM

AMBIENT TEMPERATURE 90.
 BAROMETRIC PRESSURE 29.50
 ASSUMED MOISTURE, % 12.
 PROBE LENGTH, in. 76' effective
 NOZZLE DIAMETER, in. 0.185
 STACK DIAMETER, in. 58 x perfor
 PROBE HEATER SETTING
 HEATER BOX SETTING 250°F
 Δ Cp FACTOR 0.84
 FILTER NO. 3
 FILTER TARE WEIGHT 666.0 mg.

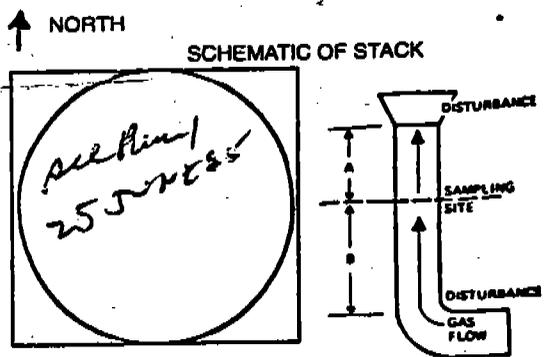

CROSS SECTION
 CF used $1.12p = \Delta H$
 PRE TEST LEAK CHECKS
 METER < 0.003 @ 22 in Hg
 PITOTS 0 @ 4.0 in H₂O
 ORSAT

Clock	TIME START	P #	CLOCK TIME	Static Pressure +/- in H ₂ O	Δ Ts °F	Δ P in H ₂ O	Δ H in H ₂ O	36,000 Vm ft. ³	Tm Inlet °F	Tm Outlet °F	Oven Temp. °F	Imp. Outlet Temp. °F	Vacuum (in Hg)	QV	
5:17	57:55	A1	57:55	+0.4	124.	1.5	2.47	1.7	37.61	80.	80.	230.	68.0	5.0	3
22:58	20:55	2	20:55	+0.6	139.	2.0	2.57	2.7	39.82	88.	85.	260.	68.0	5.0	23
24:58	26:40	3	26:40	+0.6	144.	2.0	2.45	2.3	41.82	88.	85.	235.	68.0	5.0	30
34:17	46:50	4	46:50	+0.7	153.	2.0	2.40	2.3	43.78	90.	88.	260.	90.0	5.0	43
44:26	57:26	5	57:26	+0.7	151.	2.0	2.45	2.3	45.73	88.	86.	235.	65.	5.0	5.
54:57	17:46	6	17:46	+1.1	142.	2.3	3.52	2.5	48.67	90.	88.	250.	65.	5.0	60
1:41:5	31:15	7	31:15	+0.6	145.	2.0	2.53	2.3	50.69	90.	90.	230.	65.	5.0	70
8:43	44:30	8	44:30	+0.4	134.	1.0	2.50	1.1	51.94	95.	92.	245.	65.	4.0	80
8:55	01:25	B1	01:25	+1.0	139.	1.3	2.55	1.5	52.88	97.	95.	265.	65.	3.0	90
10:56	16:44	B2	16:44	+1.4	134.	3.2	2.32	3.5	56.23	95.	91.	270.	65.	7.0	15
14:45	22:08	B3	22:08	+1.2	146.	3.5	2.38	3.8	58.49	95.	92.	260.	65.	9.0	20
21:52	34:19	B4	34:19	+1.4	157.	3.5	2.45	3.8	61.05	98.	94.	240.	65.	7.0	30
15:58	48:08	B5	48:08	+1.5	150.	3.5	2.50	3.8	63.58	96.	95.	250.	65.	8.0	45
25:5	1:02:27	B6	1:02:27	+1.6	150.	4.0	2.47	5.0	62.41	98.	95.	240.	67.	10.0	5
35:03	15:36	B7	15:36	+1.6	143.	3.5	2.55	3.8	69.01	98.	95.	260.	65.	3.0	60
35:22	25:53	B8	25:53	+0.8	152.	1.4	2.52	1.5	70.62	95.	92.	230.	65.	2.0	70
37:25	45:17	C1	45:17	+0.4	139.	0.2	2.78	0.2	71.02	98.	95.	250.	63.	21.0	80
37:30	56:12	C2	56:12	+0.6	150.	1.0	2.70	1.1	72.82	100.	96.	260.	60.	2.0	90
51:25	12:37	C3	12:37	+0.7	154.	2.0	2.70	2.2	74.55	98.	95.	245.	65.	4.0	100
2:04	24:29	C4	24:29	+0.7	151.	2.0	2.42	2.2	76.39	97.	95.	250.	65.	4.0	110
35:08	37:27	C5	37:27	+1.0	151.	2.5	2.48	2.8	78.50	97.	95.	270.	65.	5.0	120
52:24	52:47	C6	52:47	+1.0	153.	2.0	2.43	2.2	80.80	92.	90.	235.	61.	3.0	130
1:42	21:59	C7	21:59	+0.6	157.	0.5	2.50	0.55	81.10	100.	95.	270.	63.	4.0	140
30:42	33:45	C8	33:45	+0.5	157.	+0.3	3.05	0.35	81.91	95.	95.	240.	65.	0.	150
	AV		0:06:19	(+0.80)	(146.2)		(2.50)	(44.41)		92.05					

* LEAK CHECKS after port ~ 0.003 CFM
 Time ends = " B Port < 0.001


$\theta = 61.19$
 $(\Delta P)_{ave} = 1.3722$

POST TEST LEAK CHECKS
 METER < 0.003 @ 13.5 in Hg
 PITOTS 0 @ 1.5 in H₂O
 ORSAT OK 9.7

VOLUME OF LIQUID WATER COLLECTED	IMPINGER VOLUME ml			SILICA GEL WEIGHT, gm
	1	2	3	
FINAL	275			221
INITIAL	100	100	-	280
LIQUID COLLECTED				
TOTAL VOLUME COLLECTED		75	21	36

ORSAT MEASUREMENT	TIME	CO ₂	O ₂	CO	N ₂
1		ND			
2					
3					
4					

$V_m = 44.410$



The ALMEGA CORPORATION

PARTICULATE ANALYTICAL DATA FORM

COMPANY: INLAND STEEL RUN NUMBER: 3
LOCATION: CAR 24 RELATIVE HUMIDITY: 46 %
DATE: 6/27/85 ACETONE DENSITY (Pa): .7857 g/ml
LIQUID LEVEL MARKED AND CONTAINER SEALED? YES
ACETONE BLANK RESIDUE CONCENTRATION (Ca) ND mg/g
ACETONE RINSE VOLUME (Vaw) 430 ml
BLANK RESIDUE IN ACETONE RINSE (Wa) = Ca.Vaw.Pa = ND mg


NOTE: IN NO CASE SHOULD A BLANK RESIDUE 0.01 mg/g OR 0.001 % OF THE WEIGHT OF ACETONE USED BE SUBTRACTED FROM THE SAMPLE WEIGHT.

DATE AND TIME OF WEIGHING 7/1/85 10A GROSS WT. 99019.8 mg
DATE AND TIME OF WEIGHING 7/2/85 10A GROSS WT. 99020.0 mg
AVERAGE GROSS WT. 99019.9 mg
LESS BLANK RESIDUE (Wa) ND mg
TARE WT. 98946.4 mg
WEIGHT OF PARTICULATE IN ACETONE RINSE 735 mg

DATE AND TIME OF WEIGHING 7/1/85 10A GROSS FILTER WT. 704.2 mg
DATE AND TIME OF WEIGHING 7/2/85 10A GROSS FILTER WT. 704.3 mg
AVERAGE GROSS WT. 704.25 mg
FILTER TARE WT. 666.0 mg
WEIGHT OF PARTICULATE ON FILTER 38.25 mg
WEIGHT OF PARTICULATE IN ACETONE RINSE _____ mg
TOTAL WEIGHT OF PARTICULATE 111.75 mg

REMARKS _____

INITIALS OF ANALYST SA



THE ALMEGA CORPORATION

PARTICULATE CALCULATION SUMMARY

Run 4 6/28/85

COMPANY: INLAND
 SOURCE: No 4 CAR
 REPETITION NO:
 TEST DATE:

ENGLISH UNITS
 (29.92 in. Hg 68°F)

Volume of sample at standard conditions on dry basis

$$V_{mstd} = \left[\frac{17.64}{0.9937} \right] V_m \gamma \left[\frac{P_{bar} + \frac{\Delta H}{13.6}}{T_m} \right] = \underline{45.954} \text{ dscf.}$$

Volume of water vapor in sample at standard conditions

$$V_{wstd} = \left[\frac{0.04707 \text{ cu.ft.}}{115 \text{ ml}} \right] V_{lc} = \underline{5.413} \text{ scf.}$$

$V_{lc} = \underline{115} \text{ ml.}$

Fractional moisture content of stack gas

$$B_{ws} = \frac{V_{wstd}}{V_{mstd} + V_{wstd}} = \underline{.1054}$$

Particle concentration in stack gas on dry basis

$$c's = \left[\frac{0.01543 \text{ gr}}{mg} \right] \left[\frac{M_n}{V_{mstd}} \right] = \underline{.03059} \text{ grains/dscf.}$$

$$= 2.205 \cdot 10^{-6} \frac{M_n}{V_{mstd}} = \underline{4.371} \times 10^{-6} \text{ lbs/dscf}$$

Stack gas volume flow rate on dry basis

$$Q_s = 3600 (1 - B_{ws}) V_s A_s \left[\frac{T_{std} \cdot P_s}{(T_s)_{avg} \cdot P_{std}} \right] = \underline{2.883} \times 10^6 \text{ dscf/hr}$$

$(A_s = 1498 \text{ sq. ft. } V_s = \text{ft/sec})$

Process rate or BTU rating P_w = _____

Emission rate


$$Q_s \text{ c's} = \underline{12.60} \text{ lbs/hr}$$

$$\frac{Q_s \text{ c's}}{P_w} = \underline{\hspace{2cm}} \text{ lbs/}$$

Isokinetic sampling rate

$$I = \left(1.667 \frac{\text{min}}{\text{sec}} \right) T_s \left[\frac{\left(0.002669 \frac{\text{in.Hg.cu.ft.}}{\text{ml. OR}} V_{lc} \right) + \frac{V_m \gamma}{T_m} \left(\frac{P_{bar} + \frac{\Delta H}{13.6}}{26.5} \right)}{Q_s P_s A_n} \right] = \underline{101.3}$$

$(A_n = 1498 \text{ sq. ft.})$



The ALMEGA CORPORATION

STACK VOLUME FLOW RATE CALCULATION SUMMARY

6/28/85

COMPANY: INLAND NO 4 MR RUN 4
 SOURCE:
 REPETITION NO:
 TEST DATE:

Dry molecular weight of stack gas

$$M_d = 0.44 (\%CO_2) + 0.32 (\%O_2) + 0.28 (\%N_2 + \%CO)$$

$$= \underline{28.84} \text{ lb/lb-mole}$$

Molecular weight of stack gas, wet basis

$$M_s = M_d (1 - B_{ws}) + 18 B_{ws}^{1897}$$

$$= \underline{27.70} \text{ lb/lb-mole}$$

Pitot tube coefficient

$$C_p \text{ (from calibration curve)} = \underline{0.84}$$

Average velocity head of stack gas, inches H₂O

$$(\sqrt{\Delta p}) \text{ avg.} = \underline{1.400}$$

Average absolute stack gas temperature

$$(T_s) \text{ avg.} = \underline{142.7} \text{ OF} + 460 = \underline{602.7} \text{ } ^\circ\text{R}$$

Absolute stack gas pressure

$$P_s = P_b + (\text{Static Pressure}/13.6) = \underline{29.62} \text{ in. Hg}$$

Stack gas velocity

$$(V_s) \text{ avg.} = (85.49) C_p (\sqrt{\Delta p}) \text{ avg.} \sqrt{\frac{(T_s) \text{ avg.}}{P_s M_s}}$$

$$= \underline{86.17} \text{ ft/sec.}$$


Stack gas volume flow rate

$$60 V_s A_s = \underline{61940} \text{ acfm}$$

Stack gas volume flow rate, dry basis

$$Q_s = 3,600 (1 - B_{ws}) V_s A_s \left[\frac{T_{std} \cdot P_s}{(T_s) \text{ avg.} \cdot P_{std}} \right]$$


$$= \underline{\hspace{10em}} \times 10^6 \text{ dscf/l}$$



PARTICULATE FIELD DATA

PLANT INLAND STEEL
 DATE 6.28.85
 LOCATION Plant #2
 OPERATOR Jim Lehmann
 STACK NO. Car 4
 RUN NO. 4
 SAMPLE BOX NO. 8
 METER BOX NO. 7
 METER ΔH @ 2.247
 Y = 0.9937
 TIME START = 8:48 AM

AMBIENT TEMPERATURE 70°F
 BAROMETRIC PRESSURE 29.55
 ASSUMED MOISTURE, % 12%
 PROBE LENGTH, in >6' (4 feet)
 NOZZLE DIAMETER, in 0.185
 STACK DIAMETER, in See Plan [58.5" x 29.5"]
 PROBE HEATER SETTING _____
 HEATER BOX SETTING 250
 ΔCp FACTOR 0.840
 FILTER NO. A
 FILTER TARE WEIGHT 650.7 mg.

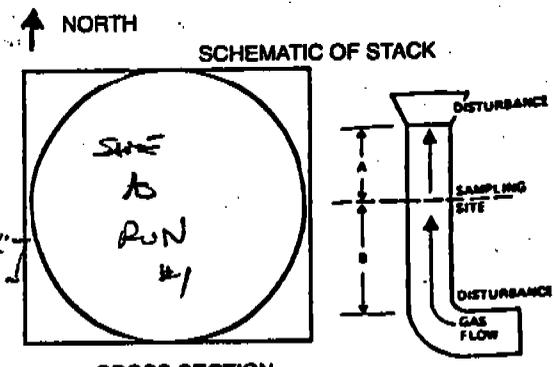

CROSS SECTION

PRE TEST LEAK CHECKS
 METER <0.001 @ 25.0 in Hg
 PITOTS 0 @ 1 in H₂O
 ORSAT


TIME	P #	clock θ	Static Pressure	ΔP	TIME	ΔH	V _m	T _m Inlet	T _m Outlet	Oven Temp.	Imp. Outlet Temp.	Vacuum	CFM	
START		(in Hg)	(in H ₂ O)	(in H ₂ O)	MIN	(in H ₂ O)	(ft ³)	(°F)	(°F)	(°F)	(°F)	(in Hg)		
8:50	A-1	57.14	+1.2	118.	3.5	2.40	4.2	86.45	70.	65.	225.	50.	7.	2
9:05	2	122	+1.0	137.	3.0	2.62	3.5	88.94	74.	68.	275.	50.	4.	21
9:15	3	11:19	+1.3	149.	1.8	2.60	2.2	90.95	70.	68.	270.	50.	2.	30
9:25	4	22:04	+1.0	146.	1.7	2.60	2.0	92.84	82.	78.	260.	50.	1.	58
9:35	5	35:08	+0.9	145.	2.0	2.50	2.4	94.92	82.	80.	270.	50.	2.2	61
9:45	6	46:07	+0.9	139.	2.0	2.53	2.4	96.96	85.	82.	270.	50.	2.2	7
9:55	7	22:16	+0.7	121.	1.5	2.62	1.7	98.720	82.	80.	230.	50.	1.	86
10:05	*8	33:08	+0.4	138.	1.0	2.50	1.25	100.165	85.	85.	270.	55.	<1.0	11
10:15	B 1	57:03	+0.8	142.	1.5	2.33	1.8	92.250	85.	80.	270.	55.	1.0	21
10:25	2	5:08	+1.3	141.	3.5	3.28	4.2	5.50	88.	85.	250.	60.	3.0	31
10:35	3	15:42	+1.1	144.	3.0	2.57	3.8	8.14	90.	88.	250.	60.	3.0	41
10:45	4	22:10	+1.1	131.	3.5	2.83	4.2	11.07	86.	84.	270.	55.	4.0	5
10:55	5	38:20	+1.4	148.	3.8	2.50	4.6	13.93	88.	85.	230.	55.	5.0	61
11:05	6	48:17	+1.4	149.	4.5	2.83	5.5	17.41	88.	85.	240.	55.	5.0	7
11:15	7	58:07	+1.2	150.	3.0	2.55	3.6	19.965	88.	86.	240.	57.	2.0	81
11:25	*8	33:08	+0.9	130.	1.5	2.88	1.8	21.97	88.	88.	255.	61.	1.0	91
11:35	C 1	51.49	+0.3	137.	0.2	2.35	0.25	23.250	88.	85.	230.	62.	<1.0	3
11:45	2	3:44	+0.5	146.	1.0	2.30	1.25	23.89	88.	85.	230.	63.	<1.0	13
11:55	3	14:25	+0.5	150.	1.0	2.37	2.7	25.66	90.	85.	240.	63.	<1.0	23
12:05	4	25:31	+0.6	152.	1.8	2.48	2.2	27.57	90.	88.	240.	65.	<1.0	33
12:15	5	36:33	+0.7	151.	2.5	2.47	3.0	29.77	90.	86.	240.	60.	2.0	43
12:25	6	51:11	+1.1	157.	2.5	2.40	3.0	31.43	90.	88.	230.	59.	2.0	53
12:35	7	60:00	+0.5	153.	0.7	2.58	0.85	33.07	88.	85.	255.	61.	<1.0	63
12:45	8	13:04	+0.5	150.	0.2	1.57	0.25	33.323	91.	88.	250.	62.	<1.0	73
	AV	0=60.61	(.8915)	142.7	AP _{AV} =1400	60.61	(2.581)	47.937						

* LEAK CHECKS μm. Turbine
 Time ends = _____
 V_m@A = 15.774 CF
 V_m@B = 21.470 CF
 V_m@C = 10.693 CF
 BCF_{AV} = (12 @ Hg) < 0.005
 BCF_{AV} = (12 @ Hg) < 0.006

POST TEST LEAK CHECKS
 METER <0.001 @ 10.0 in Hg
 PITOTS 0 @ 4.0 in H₂O
 ORSAT

VOLUME OF LIQUID WATER COLLECTED	IMPINGER VOLUME ml			SILICA GEL WEIGHT, g/m
	1	2	3	
FINAL	293			222
INITIAL	100	100	-	200
LIQUID COLLECTED				
TOTAL VOLUME COLLECTED	93	+	22	(115)

ORSAT MEASUREMENT	TIME	CO ₂	O ₂	CO	N ₂
1					
2		ND			
3					
4					



The ALMEGA CORPORATION

PARTICULATE ANALYTICAL DATA FORM

COMPANY: INLAND STEEL RUN NUMBER: 4
LOCATION: 2A2 #4 RELATIVE HUMIDITY: 46 %
DATE: 6/28/85 ACETONE DENSITY (Pa): 0.7857 g/ml
LIQUID LEVEL MARKED AND CONTAINER SEALED?
ACETONE BLANK RESIDUE CONCENTRATION (Ca) ND mg/g
ACETONE RINSE VOLUME (Vaw) 385 ml
BLANK RESIDUE IN ACETONE RINSE (Wa) = Ca.Vaw.Pa = ND mg


NOTE: IN NO CASE SHOULD A BLANK RESIDUE 0.01 mg/g OR 0.001 % OF THE WEIGHT OF ACETONE USED BE SUBTRACTED FROM THE SAMPLE WEIGHT.

DATE AND TIME OF WEIGHING 7/1/85 10^A GROSS WT. 100771.5 mg
DATE AND TIME OF WEIGHING 7/2/85 10^A GROSS WT. 71.6 mg
AVERAGE GROSS WT. 71.55 mg
LESS BLANK RESIDUE (Wa) ND mg
TARE WT. 100711.2 mg
WEIGHT OF PARTICULATE IN ACETONE RINSE 60.35 mg

DATE AND TIME OF WEIGHING 7/1/85 10^A GROSS FILTER WT. 681.5 mg
DATE AND TIME OF WEIGHING 7/2/85 10^A GROSS FILTER WT. 681.4 mg
AVERAGE GROSS WT. 681.45 mg
FILTER TARE WT. 650.7 mg
WEIGHT OF PARTICULATE ON FILTER 30.75 mg
WEIGHT OF PARTICULATE IN ACETONE RINSE _____ mg
TOTAL WEIGHT OF PARTICULATE 91.1 mg

REMARKS _____

INITIALS OF ANALYST SA



THE ALMEGA CORPORATION

607 C Country Club Drive
Bensenville, Illinois 60106
Phone: (312) 595-0175

BLANK ANALYTICAL DATA FORM

PLANT Inland Steel

Sample Location Push car #4

Relative Humidity 45%

Liquid level marked and container sealed Yes

Density of acetone (P_a) 1.7857 g/ml

Blank volume (V_a) 100 ml

Date and time of wt 6-11 9AM Gross wt 93174.3 mg

Date and time of wt 6-12 1PM Gross wt 93174.3 mg

Average gross wt 93174.3 mg

Tare wt 93174.3 mg

Weight of blank (m_a) 0 mg

$$C_a = \frac{m_a}{V_a P_a} = \frac{()}{() ()} = \underline{0} \text{ mg/g}$$


Note: In no case should a blank residue greater than 0.01 mg/g or 0.001% of the blank weight be subtracted from the sample weight.

<u>Filters</u>	<u>Filter number</u>	
Date and time of wt _____	Gross wt _____	mg
Date and time of wt _____	Gross wt _____	mg
	Average gross wt _____	mg
	Tare wt _____	mg
	Difference wt _____	mg

Note: Average difference must be less than 15 mg or 2% of total sample weight whichever is greater.

REMARKS _____


Signature of analyst CK



The ALMEGA CORPORATION

APPENDIX G


VISIBLE EMISSIONS OBSERVATIONS



The ALMEGA CORPORATION

INLAND STEEL
#4 Gas Cleaning Car Hood Opacity
6/26/85

Almega Corporation observer not available. All Opacity readings taken by
Inland Steel Company Visual Emissions Observer.




The ALMEGA CORPORATION

TABLE 2

INLAND STEEL
#4 Gas Cleaning Car Hood Opacity
6/27/85

<u>Push #</u>	<u>Battery #</u>	<u>Oven #</u>	<u>Average % Opacity</u>
1	7	3	Readings not possible due to sun position.
2	7	23	"
3	7	33	"
4	7	43	16.7
5	7	53	Readings not possible due to battery emissions blowing over hood.
6	7	63	"
7	7	73	5.8
8	7	83	4.1
9	7	93	Readings not possible due to other battery emissions obscuring view.
10	7	5	"
11	7	25	"
12	7	35	"
13	7	45	"
14	7	55	"
15	7	65	4.2
16	7	75	6.7
17	7	85	No reading possible due to battery emissions and dust obscuring view.
18	7	95	"
19	7	7	7.5
20	7	17	3.3
21	7	27	4.2
22	7	37	No reading possible due to other battery emissions obscuring view.
23	7	57	2.5
24	6	64	3.3
25	7	67	4.2

Push #23, oven #57 not sampled by testing crew.




VISIBLE EMISSIONS EVALUATION RECORD

DATE 6-27-85
 COMPANY INLAND STEEL REGISTRATION NO. Cook County IL
 LOCATION EAST CHICAGO IN.
 EMISSION POINT NAME # 4 GAS CREATING CAR HEIGHT OF DISCHARGE POINT _____
 OBSERVER REW JACOBSON CERTIFICATION EXPIRATION DATE NOV/85


CLOCK TIME: INITIAL 8:56 A.M./P.M. _____ FINAL _____ A.M./P.M. _____

	INITIAL	FINAL
Observer Location		
Distance to Discharge	30'	→
Direction to Discharge	S	NE
Height of Observation Point	GROUND	→
Background Description	COKE BATTERY	→
Weather Conditions		
Wind Direction	VARYING TO N-SW	→
Wind Speed	10-15	→
Ambient Temperature	69°F	76°F
Sky Conditions	PARTLY CLOUDY	→
Plume Description		
Color	black	→
Distance Visible	100'	→

MIN.	SECONDS				STEAM PLUME (Check if Applicable)		
	0	15	30	45	BATTERY Detached	OVEN Attached	PUSH STARTER
0	READING NOT POSSIBLE				7	3	8.56
1	DUE TO SUN POSITION						
2							
3	UNABLE TO READ COKE				7	23	9.23
4	BATTERY EMISSIONS CASCADE						
5	VIEW, SUN BEHIND CLOUD						
6	READING NOT POSSIBLE				7	33	9.34
7	DUE TO SUN POSITION						
8							
9	0	10	45	30	7	43	9.45
10	15	0	(NO SUN VISIBLE)		AVE 16.7%		
11							
12	NO READINGS POSSIBLE				7	53	9.56
13	DUE TO OTHER BATTERY						
14	EMISSIONS BLOWING OVER HEAD						
15					7	63	10.14
16							
17							
18	0	15	15	5	7	73	10.29
19	0	0	(NO SUN VISIBLE)		AVE 5.8%		
20							
21	0	10	10	5	7	83	10.42
22	0	0	(NO SUN VISIBLE)		AVE 4.1%		
23							
24	NO READINGS POSSIBLE DUE TO OTHER BATTERY EMISSIONS				7	93	10.59
25	OBSURING VIEW						
26	OBSURING VIEW						
27	NO READINGS POSSIBLE				7	5	12.09
28	DUE TO SUN POSITION						
29							

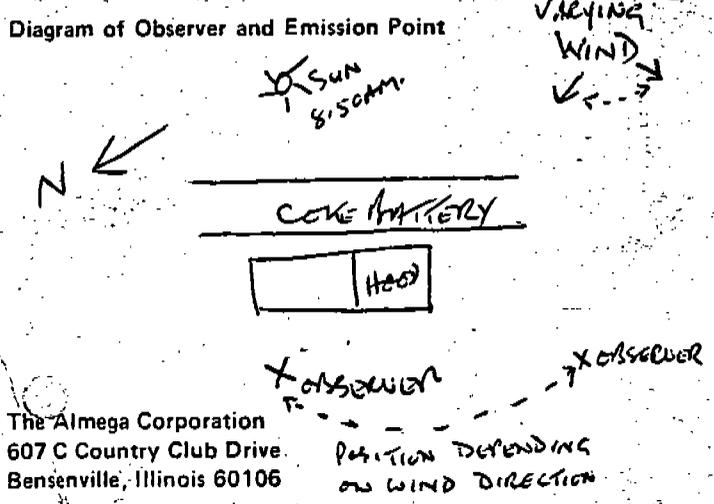

The Almega Corporation
 607 C Country Club Drive
 Bensenville, Illinois 60106
 Phone: (312) 595-0175



VISIBLE EMISSIONS EVALUATION RECORD


DATE 6-20-85
 COMPANY INLAND STEEL REGISTRATION NO. Cook County IL
 LOCATION EAST CHICAGO IN
 EMISSION POINT NAME #4 GAS CLEANING CASE HEIGHT OF DISCHARGE POINT _____
 OBSERVER BW JACKSON CERTIFICATION EXPIRATION DATE Nov/85

CLOCK TIME: INITIAL _____ A.M./P.M. _____ FINAL _____ A.M./P.M. _____


	INITIAL	FINAL
Observer Location:		
Distance to Discharge		
Direction to Discharge		
Height of Observation Point		
Background Description		
Weather Conditions:	See Page 1	
Wind Direction		
Wind Speed		
Ambient Temperature		
Sky Conditions		
Plume Description		
Color		
Distance Visible		

MIN.	SECONDS				STEAM PLUME (Check if Applicable)		
	0	15	30	45	WINDY Attached	WINDY Attached	PUSH Distances Covered
0	READING NOT POSSIBLE DUE TO				7	25	12.21
1	SUN POSITION PLUS						
2	HOOD EMISSIONS						
3	OBSCURED BY OTHER				7	35	12.33
4	BATTERY EMISSIONS						
5							
6					7	45	12.46
7							
8							
9					7	55	1.01
10							
11							
12	0	10	10	5	7	65	1.14
13	0	0			Avg 4.2%		
14							
15	0	10	15	10	7	75	1.24
16	5	0			Avg 6.7%		
17							
18	NO READINGS POSSIBLE DUE				7	85	1.44
19	TO BATTERY EMISSIONS AND DUST						
20	OBSCURING VIEW						
21					7	95	1.55
22							
23							
24	0	25	15	5	7	7	2.11
25	0	0			Avg 7.5%		
26							
27	0	5	10	5	7	17	2.23
28	0	0			Avg 3.3%		
29							

Diagram of Observer and Emission Point

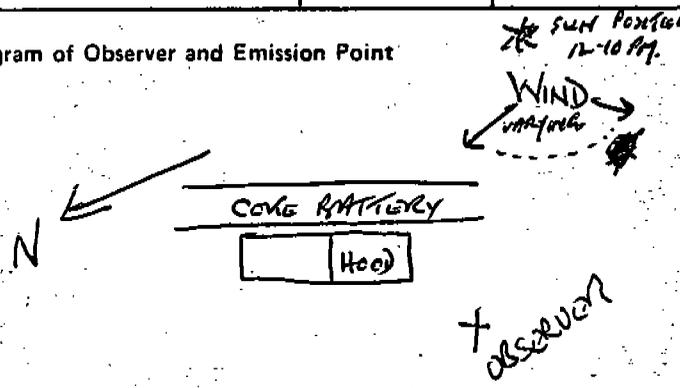

The Almega Corporation
 607 C Country Club Drive
 Bensenville, Illinois 60106
 Phone: (312) 595-0175



VISIBLE EMISSIONS EVALUATION RECORD

PAGE 3 OF 3


DATE 6-27-85
 COMPANY INLAND STEEL REGISTRATION NO. Cook County IL.
 LOCATION EAST CHICAGO IN.
 EMISSION POINT NAME #4 GAS CLEANING CAR HEIGHT OF DISCHARGE POINT _____
 OBSERVER B W JACKSON CERTIFICATION EXPIRATION DATE Nov/85

CLOCK TIME: INITIAL _____ A.M./P.M. FINAL _____ A.M./P.M.

	INITIAL	FINAL
Observer Location		
Distance to Discharge		
Direction to Discharge		
Height of Observation Point		
Background Description		
Weather Conditions		
Wind Direction		
Wind Speed		
Ambient Temperature		
Sky Conditions		
Plume Description		
Color		
Distance Visible		

MIN.	SECONDS				STEAM PLUME (Check if Applicable)			P.
	0	15	30	45	Plume Detached	OVEN Attached	PUSH Distance STARTED	
0	0	10	10	5	7	27	2-36	2
1	0	0			Ave 4.2%			
2								
3	No Reading Possible due to other background emissions				7	37	2.51	2
4	ASCENDING VIEW							
6	0	5	5	5	7	57	3.10	2
7	0	0			Ave 2.5%			
8								
9	0	5	10	5	6	64	3.21	2
10	0	0			Ave 3.3%			
11								
12	0	10	10	5	7	67	3.32	2
13	0	0			Ave 4.2%			
14								
15								
16	PULP # 23 OVEN # 57 COOK							
17	NOT SAMPLED BY TEST CREW							
18								
19								
20								
21								
22								
23								
24								
25								
26								
27								
28								
29								

Diagram of Observer and Emission Point

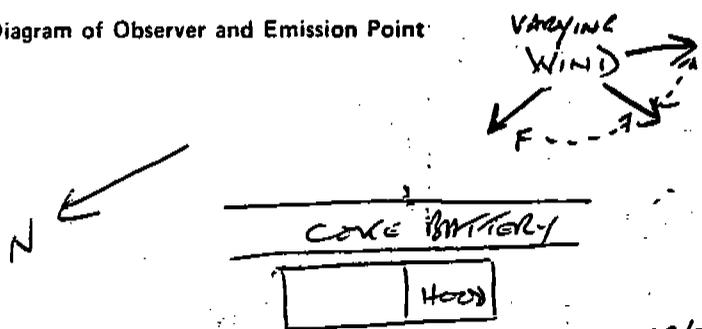

The Almaga Corporation
 607 C Country Club Drive
 Bensenville, Illinois 60106
 Phone: (312) 595-0175


PAGE 3 OF 3


THE ALMEGA CORPORATION


TABLE 3


INLAND STEEL
#4 Gas Cleaning Car Hood Opacity
6/28/85

<u>Push #</u>	<u>Battery #</u>	<u>Oven #</u>	<u>Average % Opacity</u>
1			
2			
3			
4	Readings for Push #1 through Push #8 carried out by Inland Steel Company Visual Emissions Observer.		
5			
6			
7			
8			
9	7	21	Readings not possible due to sun position.
10	7	31	"
11	7	41	"
12	7	51	"
13	7	61	"
14	7	71	"
15	7	81	"
16	7	91	"
17	7	3	6.7
18	7	13	2.5
19	7	23	2.5
20	7	33	6.7
21	7	43	5.0
22	7	53	2.5
23	7	63	4.0
24	6	12	2.5










The ALMEGA CORPORATION

APPENDIX H

EQUIPMENT CALIBRATIONS AND CERTIFICATIONS



THE ALMEGA CORPORATION

607 C Country Club Drive
Bensenville, Illinois 60106
Phone: (312) 595-0175

July 5, 1985

This is to certify that B. W. Jackson was recertified for Visual Determination of The Opacity of Emissions from Stationary Sources on May 23, 1985 at a school held by Cook County Environmental Control in Maywood, Illinois.


At this time, certificates of qualification have not been issued.

Should you have any questions regarding the recertification, please contact Mr. W. Franek, Cook County Environmental Control at 865-6165.

THE ALMEGA CORPORATION


Eric Aynsley, Ph.D.
President

EA:dml



THE ALMEGA CORPORATION

STACK TEMPERATURE SENSOR CALIBRATION DATA FORM


Date 5/12/85 Thermocouple number Meter Box #7 Gas In
 Ambient Temperature 70 °F Barometric pressure 29.2 in. Hg.
 Calibrator CT Reference: Mercury-in-glass
 Other _____

REFERENCE POINT NUMBER ^b	SOURCE ^b (Specify)	REFERENCE THERMOMETER TEMPERATURE, °F	THERMOCOUPLE POTENTIOMETER TEMPERATURE, °F	TEMPERATURE DIFFERENCE, %
	Boiling Water	212°F	211°F	.15%
	Ice Water	32°F	33°F	.20%

^a Every 50°F for each reference point.

^b Type of calibration system used.

$$\left[\frac{(\text{ref temp, } ^\circ\text{F} + 460) - (\text{test thermom temp, } ^\circ\text{F} + 460)}{\text{ref temp, } ^\circ\text{F} + 460} \right] 100 \leq 1.5\%$$



THE ALMEGA CORPORATION

STACK TEMPERATURE SENSOR CALIBRATION DATA FORM


Date 5/12/85 Thermocouple number Meter Box #7 Gas Out
 Ambient Temperature 70 °F Barometric pressure 29.2 in. Hg.
 Calibrator CT Reference: Mercury-in-glass
 Other _____

REFERENCE POINT NUMBER ^b	SOURCE ^b (Specify)	REFERENCE THERMOMETER TEMPERATURE, °F	THERMOCOUPLE POTENTIOMETER TEMPERATURE, °F	TEMPERATURE DIFFERENCE, %
	Boiling Water	212°F	210°F	30%
	Ice Water	32°F	34°F	41%

^a Every 50°F for each reference point.

^b Type of calibration system used.

$$\left[\frac{(\text{ref temp, } ^\circ\text{F} + 460) - (\text{test thermom temp, } ^\circ\text{F} + 460)}{\text{ref temp, } ^\circ\text{F} + 460} \right] 100 \leq 1.5\%$$



THE ALMEGA CORPORATION

Calibrated by: BWT

Date: 5-26-85


Box. No.: 7

Barometric pressure, $P_b =$ 28.64 in. Hg Dry gas meter No.: 83K419056

Orifice manometer setting ΔH , in. H ₂ O	Reference gas volume test meter V_w , ft ³	Gas volume Dry gas meter V_d , ft ³	Temperature			Time e, min	$\Delta H\theta$	
			Reference test meter t_w , OF	Dry gas meter				
				Inlet t_{di} , OF	Outlet t_{do} , OF			Average t_d , OF
1.0	6.4443	6.406	64.0	67.0	68.0	14	1.010	2.7176
2.0	5.729	5.868	64.0	69.5	72.0	8	.986	2.2278
3.0	11.619	11.805	64.0	70.5	73.5	13	.9944	2.1393
4.0	10.400	10.613	64.0	70.5	73.25	10	.9871	2.1077
5.0	11.451	11.705	64.0	70.5	76.25	10	.9884	2.1600
6.0	13.864	14.095	64.0	73.0	79.0	11	.9964	2.1297
Average							.9937	2.2470

Calculations

$\frac{\Delta H}{13.6}$	$\frac{V_w P_b}{P_b + \frac{\Delta H}{13.6}} \left(\frac{\Delta H}{13.6} \right) (t_w + 460)$	$\frac{V_d}{V_d + \frac{V_w P_b}{P_b + \frac{\Delta H}{13.6}}} \left(\frac{\Delta H}{13.6} \right) (t_w + 460)$	$\frac{0.0317 \Delta H}{P_b (t_d + 460)}$	$\frac{\Delta H\theta}{\theta(t_w + 460) \left[\frac{V_w}{V_d} \right]}$



THE ALMEGA CORPORATION

TEMPERATURE SENSOR CALIBRATION DATA FORM


Date 4-30-85 Thermocouple number 5 0.01564
 Ambient Temperature 59 °F Barometric pressure 29.4 in. Hg
 Calibrator GW Reference: Mercury-in-glass _____
 Other _____

REFERENCE POINT NUMBER ^b	SOURCE ^b (Specify)	REFERENCE THERMOMETER TEMPERATURE, °F	THERMOCOUPLE POTENTIOMETER TEMPERATURE, °F	TEMPERATURE DIFFERENCE, %
	ICE WATER	32 ^{°F}	32 ^{°F}	0
	BOILING WATER	208.4	209	.09 %
	OIL	377	378	.12 %

^a Every 50°F for each reference point.

^b Type of calibration system used.

$$\left[\frac{(\text{ref temp, } ^\circ\text{F} + 460) - (\text{test thermom temp, } ^\circ\text{F} + 460)}{\text{ref temp, } ^\circ\text{F} + 460} \right] \cdot 100 < 1.5\%$$



THE ALMEGA CORPORATION

Magnehelic Calibration Data

Date: JUNE 10 1985

Calibrated by: *Jim Lehmann*

Magnehelic #: 14 TAC

DWYER Serial # 80921 DB 70


Magnehelic range: 0-5" H₂O column


"w.g.

Test Readings

"w.g.

<u>Magnehelic</u>	<u>Manometer</u>
0.50	0.51
1.00	1.01
0.70	0.71
0.35	0.36
0.20	0.21
0.05	0.06
4.6	4.5"
2.90	2.95





THE ALMEGA CORPORATION

NOZZLE CALIBRATION DATA FORM

Date 6/4/85

Calibrated by JL

Nozzle Identification Number	Nozzle Diameter ^a			AD, ^b	D ^c
	D ₁ mm (in.)	D ₂ mm (in.)	D ₃ mm (in.)	mm (in.)	avg
4	0.185	0.185	0.185	0	0.185

where:

^aD_{1,2,3} = three different nozzle diameters, mm (in.); each diameter must be within (0.025 mm) 0.001 in.

^b ΔD = maximum difference between any two diameters, mm (in.),
ΔD ≤ (0.10mm) 0.004 in.

^c D_{avg} = average of D₁, D₂, and D₃.

THE ALMEGA CORPORATION

STACK TEMPERATURE SENSOR CALIBRATION DATA FORM

Date 4-12-85 Thermocouple number Sample Box # 8 Low
 Ambient Temperature 79 °F Barometric pressure 29.6 in. Hg.
 Calibrator CT Reference: Mercury-in-glass
 Other _____

REFERENCE POINT NUMBER ^b	SOURCE ^b (Specify)	REFERENCE THERMOMETER TEMPERATURE, °F	THERMOCOUPLE POTENTIOMETER TEMPERATURE, °F	TEMPERATURE DIFFERENCE, °C
	Boiling Water	212°F	210°F	.3070
	Ice Water	32°F	31°C	.2070

^a Every 50°F for each reference point.

^b Type of calibration system used.

$$\left[\frac{(\text{ref temp, } ^\circ\text{F} + 460) - (\text{test thermom temp, } ^\circ\text{F} + 460)}{\text{ref temp, } ^\circ\text{F} + 460} \right] \cdot 100 \leq 1.5\%$$

100

THE ALMEGA CORPORATION

STACK TEMPERATURE SENSOR CALIBRATION DATA FORM

Date 4-12-85 Thermocouple number Sample Bar 2 Dine Out
 Ambient Temperature 79 °F Barometric pressure 29.6 in. Hg.
 Calibrator CT Reference: Mercury-in-glass
 Other _____

REFERENCE POINT NUMBER ^b	SOURCE ^b (Specify)	REFERENCE THERMOMETER TEMPERATURE, °F	THERMOCOUPLE POTENTIOMETER TEMPERATURE, °F	TEMPERATURE DIFFERENCE, %
	Boiling Water	212 ^{°F}	214 ^{°F}	.30%
	Ice Water	32 ^{°F}	33 ^{°F}	.20%

^a Every 50° F for each reference point.

^b Type of calibration system used.

$$\left[\frac{(\text{ref temp, } ^\circ\text{F} + 460) - (\text{test thermom temp, } ^\circ\text{F} + 460)}{\text{ref temp, } ^\circ\text{F} + 460} \right] \cdot 100 \leq 1.5\%$$

