



U.S. ENVIRONMENTAL PROTECTION AGENCY
 Office of Pesticide Programs
 Antimicrobials Division (7510P)
 1200 Pennsylvania Ave., N.W.
 Washington, D.C. 20460

EPA Reg. Number:

89110-21

Date of Issuance:

8/10/18

NOTICE OF PESTICIDE:

Registration
 Reregistration
 (under FIFRA, as amended)

Term of Issuance:

Conditional

Name of Pesticide Product:

BIONIX GA1203

Name and Address of Registrant (include ZIP Code):

Isomeric Industries, Inc.
 361 17th Street NW #1224
 Atlanta, GA 30363

Note: Changes in labeling differing in substance from that accepted in connection with this registration must be submitted to and accepted by the Antimicrobials Division prior to use of the label in commerce. In any correspondence on this product always refer to the above EPA registration number.

On the basis of information furnished by the registrant, the above named pesticide is hereby registered under the Federal Insecticide, Fungicide and Rodenticide Act.

Registration is in no way to be construed as an endorsement or recommendation of this product by the Agency. In order to protect health and the environment, the Administrator, on his motion, may at any time suspend or cancel the registration of a pesticide in accordance with the Act. The acceptance of any name in connection with the registration of a product under this Act is not to be construed as giving the registrant a right to exclusive use of the name or to its use if it has been covered by others.

This product is conditionally registered in accordance with FIFRA section 3(c)(7)(A). You must comply with the following conditions:

1. Submit and/or cite all data required for registration/reregistration/registration review of your product under FIFRA when the Agency requires all registrants of similar products to submit such data.

Signature of Approving Official:

John Hebert, Chief
 Regulatory Management Branch 1
 Antimicrobials Division (7510P)
 Office of Pesticide Programs

Date:

8/10/18

2. You are required to comply with the data requirements described in the DCI Order identified below:
 - a. Glutaraldehyde GDCI-043901-1668
 - b. 1-Decanaminium, N-decyl-N, N-dimethyl-chloride GDCI-069149-30869
 - c. Alkyl*dimethyl benzyl ammonium chloride *(50% C14, 40% C12, 10% C16) GDCI-069105-30882

You must comply with all of the data requirements within the established deadlines. If you have questions about the Generic DCI listed above, you may contact the Reevaluation Team Leader (Team 36): <http://www2.epa.gov/pesticide-contacts/contacts-office-pesticide-programs-antimicrobial-division>

3. Make the following label changes before you release the product for shipment:
 - Revise the EPA Registration Number to read, “EPA Reg. No. 89110-21.”
4. Submit one copy of the final printed label for the record before you release the product for shipment.

Should you wish to add/retain a reference to the company’s website on your label, then please be aware that the website becomes labeling under the Federal Insecticide Fungicide and Rodenticide Act and is subject to review by the Agency. If the website is false or misleading, the product would be misbranded and unlawful to sell or distribute under FIFRA section 12(a)(1)(E). 40 CFR 156.10(a)(5) list examples of statements EPA may consider false or misleading. In addition, regardless of whether a website is referenced on your product’s label, claims made on the website may not substantially differ from those claims approved through the registration process. Therefore, should the Agency find or if it is brought to our attention that a website contains false or misleading statements or claims substantially differing from the EPA approved registration, the website will be referred to the EPA’s Office of Enforcement and Compliance.

If you fail to satisfy these data requirements, EPA will consider appropriate regulatory action including, among other things, cancellation under FIFRA section 6(e). Your release for shipment of the product constitutes acceptance of these conditions. A stamped copy of the label is enclosed for your records. Please also note that the record for this product currently contains the following CSFs:

- Basic CSF dated March 19, 2018
- Alternate CSF #1 dated March 19, 2018
- Alternate CSF #2 dated April 12, 2018
- Alternate CSF #3 dated April 13, 2018
- Alternate CSF #4 dated April 13, 2018
- Alternate CSF #5 dated March 19, 2018
- Alternate CSF# 6 dated April 13, 2018
- Alternate CSF #7 dated April 13, 2018
- Alternate CSF #8 dated April 13, 2018

- Alternate CSF #9 dated March 19, 2018
- Alternate CSF #10 dated April 13, 2018
- Alternate CSF # 11 dated April 13, 2018

If you have any questions, please contact Zebora Johnson by phone at (703) 308-7080, or via email at johnson.zebor@epa.gov.

Enclosure: Accepted Label

BIONIX GA 1203

INDUSTRIAL ANTIMICROBIAL

Active Ingredient:

Glutaraldehyde.....	12.0%
Didecyl dimethyl ammonium chloride.....	1.8%
Alkyl (50% C ₁₄ , 40% C ₁₂ , 10% C ₁₆) dimethyl benzyl ammonium chloride.....	1.2%
Other Ingredients:	<u>85.0%</u>
Total:	100.0%

EPA Reg. No. 89110-TBD EPA Est. _____ NET CONTENTS: As Marked on Container

**KEEP OUT OF REACH OF CHILDREN
DANGER**

FIRST AID	
If in eyes:	<ul style="list-style-type: none"> • Hold eye open and rinse slowly and gently with water for 15-20 minutes. • Remove contact lenses, if present, after the first 5 minutes, then continue rinsing eye.
If on skin or clothing:	<ul style="list-style-type: none"> • Take off contaminated clothing. • Rinse skin immediately with plenty of water for 15-20 minutes.
If inhaled:	<ul style="list-style-type: none"> • Move person to fresh air. • If person is not breathing, call 911 or an ambulance, then give artificial respiration, preferably mouth-to-mouth, if possible.
If swallowed:	<ul style="list-style-type: none"> • Have person sip a glass of water if able to swallow. • Do not induce vomiting unless told to do so by a poison control center or doctor. • Do not give anything by mouth to an unconscious person. • Call a poison control center or doctor for treatment advice.
In case of emergency, call a poison control center or doctor for treatment advice. Have the product container or label with you when calling a poison control center or doctor, or going for treatment.	
Note to physician: Probable mucosal damage may contraindicate the use of gastric lavage.	


[See back/side panels for additional Precautionary Statements]

In case of emergency, call INFOTRAC: (800)-535-5053

Manufactured

by:

ISOMERIC INDUSTRIES
361 17TH Street NW #1224
Atlanta, GA 30363
678-665-4275

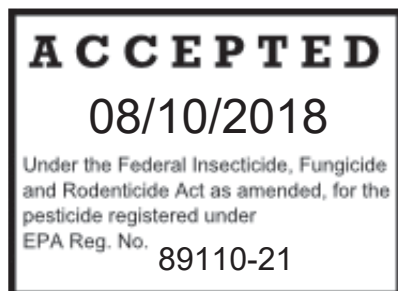

PRECAUTIONARY STATEMENTS HAZARD TO HUMANS AND DOMESTIC ANIMALS

DANGER. Corrosive. Causes irreversible eye damage. Harmful if swallowed, absorbed through the skin or inhaled. Do not get in eyes. Avoid contact with skin or clothing. Do not breathe spray mist. Wear goggles or face shield when handling, chemical-resistant gloves and protective clothing. Wash thoroughly with soap and water after handling and before eating, drinking, chewing gum, using tobacco or using the toilet. Remove contaminated clothing and wash before reuse.

ENVIRONMENTAL HAZARDS:

(If container is \geq 5 gal., the following statement must appear on the label.)

This product is toxic to fish, aquatic invertebrates, oysters and shrimp. Do not discharge effluent containing this product into lakes, ponds, streams, estuaries, oceans or other waters unless in accordance with the requirements of a National Pollutant Discharge Elimination System (NPDES) permit and the permitting authority has been notified in writing prior to discharge. Do not discharge effluent containing this product to sewer systems without previously notifying the local sewage treatment plant authority. For guidance contact your State Water Board or Regional Office of the EPA.

(If container is < 5 gal., use the following as an alternate to the above statement.)

This product is toxic to fish, aquatic invertebrates, oysters and shrimp.

DIRECTIONS FOR USE

It is a violation of Federal Law to use this product in a manner inconsistent with its labeling.

Read these entire Directions for Use before using BIONIX GA1203.

AIR WASHERS, INDUSTRIAL AND/OR COMMERCIAL RECIRCULATING COOLING WATER TOWERS, RETORT WATER SYSTEMS, EVAPORATIVE CONDENSERS, HEAT EXCHANGE, TRANSFER WATER SYSTEMS, DAIRY SWEETWATER SYSTEMS, HYDROSTATIC STERILIZERS, PASTEURIZERS AND WARMERS: [Not for use in California]

For best results, clean heavily contaminated systems before treatment with this product. If soap or anionic detergent is used, rinse thoroughly before charging with this algacide. Cooling tower waters that are inherently low in algae growth and bacteria count may be adequately controlled by the lower range of these dosages. Repeat every seven days or increase frequency if needed. Should slime develop again, repeat initial dosage.

1. **Dosing Location:** This product is to be applied at a point in the system where it will be uniformly mixed, such as the basin area, the sump, or another reservoir or collecting area.
2. **Dosing Condition:** This product must be applied when the system is in jeopardy of being affected or after cleaning systems where efficiency is already impaired. (Tower bleed off valves must be closed to permit a retention time of 4 hours)
3. **Method of Application:**
 - a. **INTERMITTENT OR SLUG METHOD**

Initial Dose: When the system is noticeably fouled, apply 41 – 83 oz. of this product per 1,000 gal. of water (50 – 100ppm active) in the system. Repeat until it is achieved.

Subsequent Dose: When microbial control is evident, add 17 – 41 oz. of this product per 1,000 gal. of water (20 – 50 ppm active) in the system weekly or as needed to maintain control.
 - b. **CONTINUOUS FEED METHOD**

Initial Dose: When the system is noticeably fouled, apply 41 – 83 oz. of this product per 1,000 gal. of water (50 – 100ppm active) in the system.

Subsequent Dose: Maintain this treatment by starting a continuous feed of 8 – 41 oz. of this product per 1,000 gal. of water (10 -50ppm active) lost by blowdown.

AUXILIARY SYSTEMS AND SERVICE WATER: [Not for use in California]

Add 41 – 83 oz. of this product per 1,000 gal. of water (50 – 100 ppm active) in the system continuously. This product must be added to the system at a point of uniform mixing by slug or intermittent feed or by spraying onto a waster pile. The frequency of feed or spray and the duration of treatment will depend upon the severity of the contamination. Additions to water systems must be made during the pumping operation and as close to the pump as possible to ensure adequate mixing.

INDUSTRIAL WASTEWATER SYSTEMS (WASTEWATER SYSTEMS, WASTERWATER SLUDGE AND WASTEWATER HOLDING TANKS: [Not for use in California]

This product is added to a wastewater system or sludge at a convenient point of uniform mixing such as digester. Add 1.6 – 8 gal. of this product per 1,000 gal. of wastewater sludge (250-1250ppm active).

OIL FIELD, GAS PRODUCTION, TRANSMISION PIPELINE AND SYSTEMS: [Not for use in California]

Specific treatment requirements vary among oil and/or gas field sites and subsystem components. Oil field fluids and subsystems most commonly requiring microbial contamination control are raw water sources, separators, ballasts, storage and mixing tanks, screens, surface injection equipment, product equipment, such as injection and product piping casting, completion and valving and the formation itself. The primary point of treatment will vary among oil and/or gas field operations depending on the site problems, water-flood treatment methods and equipment. This product must be added where it will disperse rapidly and uniformly to the desired area of treatment.

Additions of this product must be made with the proper type of metering pump equipment, suction (low pressure) side of pumping equipment or similar device. This product must be added to the system by slug, continuous or on an intermittent basis, depending on the degree of system fouling.

OIL FIELD WATER FLOOD SYSTEMS AND FRACTURING FLUIDS: [Not for use in California]

This product must be added to the water flood at a point of uniform mixing:

1. **Continuous Use:** Add 3 – 16 gal. of this product per 1,000 gal. of flood water (50-2500 ppm active) to control slime forming and sulfate reducing bacteria. Levels for effective control will vary depending on conditions at the site.
2. **Intermittent Use:** Add at a rate of 0.3 – 16 gal. of this product per 1,000 gal. of flood water (50 – 2500 ppm active) for 4 to 8 hrs. per day, one to four times a week as needed to maintain control.
3. **Treatment of flow back return water:** Post Hydraulic Fracturing, dose at a rate of 0.3 – 16 gal. of this product per 1,000 gal. of flood water of water (50 – 2500 ppm active) for 4 – 8 hrs. per day, one to four times a week as needed to maintain control.

FRACTURING/FAC FLUIDS: [Not for use in California]

Add this product to the frac water storage tanks or directly into the well head injection pipeline as the water is being pumped down-hole.

Dose Range: Add 3 – 160 gal. of this product per 10,000 gal. of flood water (50 – 2500 ppm active) to control slime forming and sulfate reducing bacteria. Levels for effective control will vary depending on conditions at the site.

OIL AND GAS PRODUCTION AND TRANSMISION PIPELINE AND SYSTEMS: [Not for use in California]

For the control of sulfate-reducing bacteria and slime forming bacteria, this product must be added to a gas production or transmission pipeline via direct injection at a point where uniform and maximum distribution will occur. The application must be conducted to ensure maximum distribution of the product through the internal surface of the pipeline by adding an amount of biocide which eventually comes out the other end of the pipeline. Criteria for success of the treatment will be reduction in bacterial count and/or corrosion rates. To facilitate application, it is desirable to dilute the product with the treatment will be reduction in bacterial count and/or corrosion rates. To facilitate application, it is desirable to dilute the product with an appropriate solvent immediately before use. The concentration in the solvent must not fall below an active concentration range of

500 – 5000ppm active based on the volume of water in the pipeline. Injections to the system must be weekly, or as needed to maintain control

GAS STORAGE WELLS AND SYSTEMS: *[Not for use in California]*

Treat individual injection wells with 1.6 – 16 gal. of this product per 1,000 gal. of water (250 – 2500 ppm active). Update treatment rate as needed. This product must be diluted by the water present in the formation. Injection takes place before gas is injected and may be repeated yearly or as needed to maintain control.

Individual drips should be treated with a sufficient quantity of this product to produce a concentration of 100 – 1000 ppm active of this product when diluted by the water present in the drip. Injections should be repeated yearly or as needed to maintain control.

PIPELINE PIGGING AND SCRAPING OPERATIONS: *[Not for use in California]*

Add this product to slug water immediately following the scraper, keep the water volume to a minimum and contained between the scraper and the following trailing pig. Add an effective concentration of 3 – 32 gal. Of product per 1,000 gal. of water (500 -5000 ppm active) depending on the length of the pipeline and the severity of the biofouling.

DRILLING, COMPLETION AND WORKOVER FLUIDS SYSTEMS: *[Not for use in California]*

This product is to be added to these fluid systems at a point of uniform mixing, such as a circulating, holding or mud tank. Levels for effective control will vary depending on conditions at the site and the severity of the contamination.

1. **Initial treatment:** Add 0.2 – 3.2 gal. of this product per 1,000 gal. of freshly prepared fluid (25 – 500ppm active)
2. **Maintenance dosage:** Add 0.2 – 3.2 gal. of this product per 1,000 gal. of freshly prepared fluid (25 – 500ppm active).

PACKER FLUIDS: *[Not for use in California]*

This product is to be added to the packer fluid at a point of uniform mixing such as a circulating holding tank and other mixing device locations. Add 0.2 – 1.9 gal. of this product per 1,000 gal. of freshly prepared packer fluid (25 – 300ppm active). Levels for effective control vary depending on conditions at the site and the severity of contamination. Seal the treated packer fluid in the wall between the casing and the product tube.

HYDROTESTING: *[Not for use in California]*

Treat water used to hydrotest pipelines or vessels by adding 0.3 – 13 gal. of this product per 1,000 gal. of water (50 – 2000ppm active) depending on the water quality and length of time the equipment will remain idle.

PULP AND PAPER MILLS: *[Not for use in California]*

Do not use to treat paper or paperboard which will contact food.

SLIMICIDE APPLICATIONS:

1. **Initial dose:** When system is noticeably contaminated, add 0.6 to 129 gal. of this product per 100,000 gal. of whitewater (1- 200ppm active) to be treated as a continuous of slug dose. Repeat until control is achieved. Heavily fouled systems must be boiled out prior to initial treatment.
2. **Subsequent dose:** When microbial control is evident, add 0.6 to 129 gal. of this product per 100,000 gal. of whitewater (1 – 200ppm active) to be treated as necessary to maintain control.

WATER BASED COATING, PIGMENTS AND FILLER SLURRIES FOR PULP AND PAPERBOARD:

Application of this product must be made at a point in the system where mixing action is good or can be made at the size press or water box. Apply at a rate of 0.32 – 2.0 lbs. of this product per 1,000 lbs. of dry powder or 0.33 to 2.0 kg of this product per metric ton of dry slurry to produce a concentration of 322.6 to 1935.5 ppm active as product (based on slurry solids) in the mixed slurry.

STORAGE AND DISPOSAL

Do not contaminate water, food or feed by storage and disposal.

PESTICIDE STORAGE

Store only in original container. Keep this product under locked storage sufficient to make it inaccessible to children or persons unfamiliar with its proper use.

PESTICIDE DISPOSAL

Pesticide wastes are acutely hazardous. Improper disposal of excess pesticide spray mixture or rinsate is a violation of Federal Law. If these wastes cannot be disposed of by use according to label instructions, contact your State pesticide or environmental control agency or the hazardous waste representative at the nearest EPA regional office for guidance.

CONTAINER DISPOSAL

[For containers ≥ 5 gallons] Nonrefillable container. Do not reuse or refill this container. Triple rinse container or equivalent promptly after emptying. Triple rinse as follows. Fill the container ¼ full with water and recap. Shake for 10 seconds. Drain for 10 seconds after the flow begins to drip. Follow Disposal instructions for rinsate disposal. Repeat this procedure two more times. Then offer for recycling if available or puncture and dispose of in a sanitary landfill, or by incineration.

[For containers < 5 gallons] Nonrefillable container. Do not reuse or refill this container. Triple rinse container or equivalent promptly after emptying. Triple rinse as follows. Fill the container ¼ full with water and recap. Replace and tighten closures. Tip container on its side and roll it back and forth, ensuring at least one complete revolution, for 30 seconds. Stand the container on its end and tip back and forth several times. Turn the container over onto its other end and tip back and forth several times. Follow Disposal instructions for rinsate disposal. Repeat this procedure two more times. Then offer for recycling if available or puncture and dispose of in a sanitary landfill, or by incineration.

[Refillable containers]

Refill this container with this product only. Do not reuse this container for any other purpose. Cleaning the container before final disposal is the responsibility of the person disposing of the container. Cleaning before refilling is the responsibility of the refiller. To clean the container before final disposal, empty the remaining contents from this container into application equipment or a mix tank. Fill container about 10 percent full with water. Agitate vigorously or recirculate water with the pump for 2 minutes. Pour or pump rinsate into application equipment or rinsate collection system. Repeat this rinsing procedure two more times.

WARRANTIES AND WARRANTY DISCLAIMERS

Conditions of Sale: Isomeric Industries (“ISOMERIC”) warrants that this product conforms to the chemical description on the label and is reasonably fit for the purposes stated on the label when used in accordance with the directions under normal conditions of use. This warranty does not extend to the use of this product contrary to label instructions, or under abnormal use conditions, or under conditions not reasonably foreseeable to ISOMERIC. To the extent consistent with applicable law, ISOMERIC DISCLAIMS ALL OTHER WARRANTIES, EXPRESS OR IMPLIED, INCLUDING ANY WARRANTY OF FITNESS OR MERCHANTABILITY. To the extent consistent with applicable law, ISOMERIC SHALL NOT BE LIABLE FOR CONSEQUENTIAL, SPECIAL, OR INDIRECT DAMAGES RESULTING FROM THE USE OR HANDLING OF THIS PRODUCT, and ISOMERIC’s sole liability and Buyer’s and User’s exclusive remedy shall be limited to the refund of the purchase price. BUYER AND USER ACKNOWLEDGE AND ASSUME ALL RISKS AND LIABILITY RESULTING FROM HANDLING, STORAGE AND USE OF THIS PRODUCT. ISOMERIC DOES NOT AUTHORIZE ANY AGENT OR REPRESENTATIVE TO MAKE ANY OTHER WARRANTY, GUARANTEE OR REPRESENTATION CONCERNING THIS PRODUCT.