RIVIAN AUTOMOTIVE, LLC

Application for Certification - Part 1 (Update)

2027 **Model Year**

EPA Manufacturer Code: RIV
Test Group: VRIVT00.0232

Durability Group: N.A. **Evaporative Family:** N.A.

Test Group Description:	Battery Electric Vehicle
Applicable Standards:	U.S. EPA: Interim Tier 4 Bin 0 LDT3 CA: ZEV LDT
Carlines Covered:	Rivian R2 Performance AWD (21") Rivian R2 Performance AWD (20" AT) Rivian R2 Premium AWD (21") Rivian R2 Premium AWD (20")
Document Date:	8/31/2026

For Questions, Contact:
S. Zaker, SepZaker@rivian.com

14600 Myford Road
Irvine, CA 92606

Ms. Hannah Frame
Implementation, Analysis, and Compliance Division
Office of Transportation and Air Quality
Environmental Protection Agency
2000 Traverwood, Ann Arbor, MI 48105

Subject: MY 2027 Rivian Light-Duty Vehicle Initial Application for Issuance of Certificate of Conformity for Test Group VRIVT00.0232.

Rivian believes that all vehicles within this test group comply with all applicable regulations within Code of Federal Regulations Title 40 Parts 85, 86, 600, and California Code of Regulations Title 13 Division 3, Chapter 1, article 2, Sections 1962 Advanced Clean Cars II. This test group's certification pathway is CARB ACC-II.

Vehicle Category:	Light-Duty Truck (6173 lbs. GVW)
Test Group:	VRIVT00.0232
Evaporative Family:	N/A
Federal Standard:	Interim Tier 4 Bin 0 LDT3
California Standard:	ZEV LDT

Test Group Description:

2 - Rivian R2
3 - 3 Module Battery
2 - 2 AC Motors

Vehicles Covered by this certificate:

Rivian R2 Performance AWD (21")
Rivian R2 Performance AWD (20" AT)
Rivian R2 Premium AWD (21")
Rivian R2 Premium AWD (20")

Your early review and issuance of the certificate will be greatly appreciated. If you have any questions, please email me at sepzaker@rivian.com or my phone number available on CDX.

Sep Zaker
Director, Homologation

08/31/2026

14600 Myford Road
Irvine, CA 92606

Ms. Hannah Frame
Implementation, Analysis, and Compliance Division
Office of Transportation and Air Quality
Environmental Protection Agency
2000 Traverwood, Ann Arbor, MI 48105

Subject: MY 2027 Rivian Light-Duty Vehicle OBD Letter for Issuance of Certificate of Conformity for Test Group VRIVT00.0232.

Rivian is a manufacturer of Battery Electric Vehicles, including R2. Rivian R2 is certified under 1962 CARB ACC-II with the OBD II requirements.

Vehicle Category:	Light-Duty Truck (6173 lbs. GVW)
Test Group:	VRIVT00.0232
Evaporative Family:	N/A
Federal Standard:	Interim Tier 4 Bin 0 LDT3
California Standard:	ZEV LDT

Test Group Description:

2 - Rivian R2
3 - 3 Module Battery
2 - 2 AC Motors

Vehicles Covered by this certificate:

Rivian R2 Performance AWD (21")
Rivian R2 Performance AWD (20" AT)
Rivian R2 Premium AWD (21”)
Rivian R2 Premium AWD (20”)

Your early review and issuance of the certificate will be greatly appreciated. If you have any questions, please email me at sepzaker@rivian.com or my phone number available on CDX.

Sep Zaker
Director, Homologation

08/31/2026

14600 Myford Road
Irvine, CA 92606

Ms. Hannah Frame
Implementation, Analysis, and Compliance Division
Office of Transportation and Air Quality
Environmental Protection Agency
2000 Traverwood, Ann Arbor, MI 48105

Subject: MY 2027 Rivian Light-Duty Vehicle Durability Letter for Issuance of Certificate of Conformity for Test Group VRIVT00.0232.

Rivian is a manufacturer of Battery Electric Vehicles, including R2. Battery Electric Vehicles (no tailpipe emissions) are exempt from emissions equipment durability requirements.

Vehicle Category:	Light-Duty Truck (6173 lbs. GVW)
Test Group:	VRIVT00.0232
Evaporative Family:	N/A
Federal Standard:	Interim Tier 4 Bin 0 LDT3
California Standard:	ZEV LDT

Test Group Description:

2 - Rivian R2
3 - 3 Module Battery
2 - 2 AC Motors

Vehicles Covered by this certificate:

Rivian R2 Performance AWD (21")
Rivian R2 Performance AWD (20" AT)
Rivian R2 Premium AWD (21")
Rivian R2 Premium AWD (20")

Your early review and issuance of the certificate will be greatly appreciated. If you have any questions, please email me at sepzaker@rivian.com or my phone number available on CDX.

Sep Zaker
Director, Homologation

08/31/2026

14600 Myford Road
Irvine, CA 92606

Mr. Richard Uyehara
Emissions Certification and Compliance Division (ECCD)
Air Resources Board
4001 Iowa Ave, Riverside, CA 92507

Subject: MY 2027 Rivian Light-Duty Vehicles Initial Application for Issuance of an Executive Order for Test Group VRIVT00.0232.

Rivian believes that all vehicles within this test group comply with all applicable regulations within Code of Federal Regulations Title 40 Parts 85, 86, 600, and California Code of Regulations Title 13 Division 3, Chapter 1, Article 2, Section 1962 Advanced Clean Cars II. This test group's certification pathway is via CARB ACC-II.

Vehicle Category:	Light-Duty Truck (6173 lbs. GVW)
Test Group:	VRIVT00.0232
Evaporative Family:	N/A
Federal Standard:	Interim Tier 4 Bin 0 LDT3
California Standard:	ZEV LDT

Test Group Description:

2 - Rivian R2
3 - 3 Module Battery
2 - 2 AC Motors

Vehicles Covered by this certificate:

Rivian R2 Performance AWD (21")
Rivian R2 Performance AWD (20" AT)
Rivian R2 Premium AWD (21")
Rivian R2 Premium AWD (20")

Your early review and issuance of the certificate will be greatly appreciated. If you have any questions, please email me at sepzaker@rivian.com or my phone number available on DMS.

Sepehr Zakeresfahani
Director, Homologation

08/31/2026

Contents

01.00.00 Communications 9
01.01.00 Mailing Information 9
01.01.01 Certification Information 9
01.01.02 Responsible official | Agent of Service 9
02.00.00 Confidential Information 9
02.01.00 Statement of confidentiality 9
02.02.00 Test vehicle selection 9
02.03.00 Projected annual model-year sales 9
03.00.00 Facilities, equipment, and test procedures 9
03.01.00 (Reserved) 9
03.02.00 Battery pre-conditioning procedures (if necessary) 9
03.03.00 Configurations and Sub configurations 10
03.04.00 Test Procedures 10
03.04.01 Range Test Procedures 10
03.04.02 Description of Coastdown 10
03.05.00 Special Test Instructions 11
03.05.00 Statement of Compliance 12
04.00.00 (Reserved) 12
05.00.00 (Reserved) 12
06.00.00 Maintenance 12
06.01.00 Test vehicle scheduled maintenance 12
06.02.00 Recommended customer maintenance schedule 12
06.03.00 Lubricants and heater fuels if any 12
07.00.00 Vehicle Emission Control Information (VECI) and Environmental 13
07.01.00 VECI Label locations 13
07.02.00 Sample VECI labels (MY2027 Sample Label): 13
07.03.00 Sample Fuel Economy Label (Formerly called the Smog Index label) 14
07.04.00 Statement of compliance 14
07.05.00 Sample Battery Specification Label 14
07.06.00 Battery Information Label 15
07.07.00 Data Repository Website 15
08.00.00 General technical description 15
08.01.00 Description of Propulsion System 15
08.01.01 Description of Vehicle Architecture 15
08.01.02 Description of Drive Unit Architecture 15
08.01.03 Description of Motor(s) 15
08.01.04 Description of Gearbox(s) 15
08.01.05 Description of Inverter(s) 15

08.01.06 Description of Drivetrain(s) 16
08.03.00 Description of Batteries 16
08.03.01 Battery charging capacity 16
08.03.02 Self-discharge information 16
08.03.03 Description of thermal management system 16
08.03.04 Definition of end-of-life 16
08.03.05 Description of battery disposal plan 16
08.04.00 Description of Controller/Inverter 16
08.05.00 Description of Transmission 16
08.06.00 Description of climate control system 16
08.06.01 Electric Heat Pump 17
08.06.02 (Reserved) 17
08.06.03 Climate control system logic 17
08.06.04 (Reserved) 17
08.07.00 Description of Regenerative Braking System 17
08.07.01 Control logic 17
08.07.02 Percentage of braking performed on road by each axle 17
08.07.03 Overlap of friction brakes and regenerative braking 17
08.08.00 Description of charger 18
08.08.01 Proper recharging procedures 19
08.08.02 Power requirements necessary to recharge vehicle 19
08.09.00 Accessories which draw energy from the batteries 19
08.10.00 Other unique features (e.g. solar panels) 19
08.11.00 Description of warning system(s) for maintenance / malfunction 19
08.11.01 Cut off terminal voltages for prevention of battery damage 20
09.00.00 (Reserved) 20
10.00.00 (Reserved) 20
11.00.00 Starting and shifting schedules 20
12.00.00 (Reserved) 21
13.00.00 (Reserved) 21
14.00.00 (Reserved) 21
15.00.00 (Reserved) 21
16.00.00 (Reserved) 21
17.00.00 California requirements 21
17.01.00 Statement of compliance 21
17.01.01 General statement 21
17.01.02 Drivability statement 21
17.02.00 Supplemental Data and Certification Review Sheets 21
17.03.00 (Reserved) 21

17.04.00 Credits 21
17.04.01 Description of multi-manufacturer arrangements 21
17.04.02 Credit calculation 21
17.05.00 Vehicle Safety 22
17.05.01 All information for safe operation of vehicle 22
17.05.02 Information on safe handling of battery system 22
17.05.03 Description of emergency procedures 22
17.06.00 (Reserved) 22
17.07.00 High-Priced Parts List and Warranty 22
17.08.00 Owner Instructions for In-Vehicle Data 22
17.09.00 Data Standardization Attestation 23
17.10.00 OBD II Communication Protocol 23
Test Results: 24
R2 Performance AWD (21") 24
R2 Premium AWD (21") 24
R2 Performance AWD (20" AT) 25
R2 Premium AWD (20") 26

01.00.00 Communications

01.01.00 Mailing Information
Rivian Automotive, LLC
14600 Myford Road
Irvine, CA 92606
Attention: Sep Zaker

01.01.01 Certification Information
Rivian Automotive, LLC
14600 Myford Road
Irvine, CA 92606

01.01.02 Responsible official | Agent of Service
Primary Contact:
Sep Zaker, Director, Homologation
sepzaker@rivian.com
14600 Myford Road
Irvine, CA 92606

02.00.00 Confidential Information

02.01.00 Statement of confidentiality

02.02.00 Test vehicle selection

02.03.00 Projected annual model-year sales

03.00.00 Facilities, equipment, and test procedures

03.01.00 (Reserved)

03.02.00 Battery pre-conditioning procedures (if necessary)

03.03.00 Configurations and Sub configurations

Program	A [lbf]	B [lbf/mph]	C [lbf/mph^2]	Curb Weight [lbs]	LVW [lbs]	Test Weight [lbs]	GVWR [lbs]	Tire Size
R2 Performance AWD (21in) R2 Premium AWD (21in)								
	22.83	0.5386	0.01640	4998	5298	5250	6173	255/55R21
R2 Performance (20in AT)								
	27.29	0.3400	0.02174	5016	5316	5250	6173	255/60R20
R2 Premium AWD (20in)								
	24.47	0.2703	0.02176	4989	5289	5250	6173	255/60R20

03.04.00 Test Procedures

03.04.01 Range Test Procedures

03.04.02 Description of Coastdown

03.05.00 Special Test Instructions

Vehicle Setup:
Bleyer rigid bar fixation system. Front bar fixed to the front tow hook. and rear bar fixed to the tow hitch receiver.

Instrumentation:
Battery voltage and current measurement were taken using a HBM Gen4TB power analyzer and Hioki CT684X-05 current clamps.

- Clamps installed to minimize the number of measured current channels.
- Current clamp sizes were determined by the max circuit current.

Front/ Rear Drive Units – 500A, eAC – 200A Under vehicle, DCDC – 200A Cabin

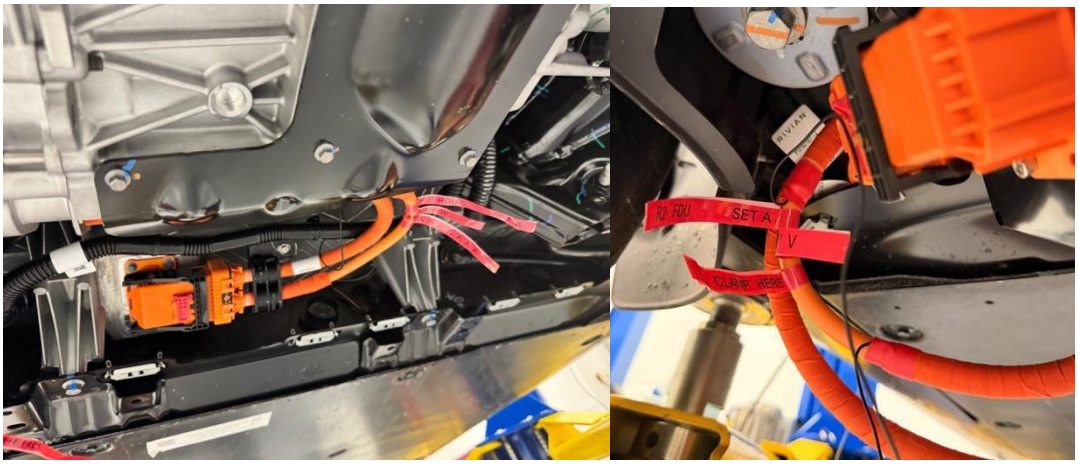

Above: Hioki CT684X-05 current clamp and HBM Gen4TB power analyzer

AC Level 2 240 V/ 48 A (11.5 kW) charger was used for charging.

03.05.00 Statement of Compliance
Every vehicle which is covered by this application conforms to US EPA Federal Interim Tier 4 Bin 0 regulations applicable to new Light-Duty Trucks and state of California ZEV regulations applicable to new Light-Duty Vehicles for the 2027 Model Year.

04.00.00 (Reserved)
05.00.00 (Reserved)
06.00.00 Maintenance

06.01.00 Test vehicle scheduled maintenance
06.02.00 Recommended customer maintenance schedule
The maintenance schedule can be found in the Rivian owner's guide. It is available at https://rivian.com/support/support-documents

06.03.00 Lubricants and heater fuels if any

Drive Unit Oil: Valvoline SEV

Coolant: L228

Performance of L288 According to ASTM D3306

Table 1 – ASTM D3306 Results

Item			ASTM D3306 Type I	CCI L288
Color			Distinctive	Yellow
Relative Density 15.5/15.5°C			1.110 ~ 1.145	1.128
Freezing Point °C		50 vol% in DI water	-36.4 max.	-37
Boiling Point °C		50 vol% in DI water	108 min.	109
Ash content mass%			5 max.	1.7
pH		50 vol% in DI water	7.5 ~ 11.0	7.6
Chloride μg/g			25 max.	<25
Water mass%			5 max.	3.8
Reserve Alkalinity mL			Report	8.0
Effect on Automotive Finish			No Effect	Pass
Corrosion in Glassware	Weight Loss[1] mg/Specimen	Copper	10 max.	0.2
		Solder	30 max.	4.3
		Brass	10 max.	1.9
		Steel	10 max.	0.7
		Cast Iron	10 max.	1.4
		Aluminum	30 max.	+0.2
Simulated Service Test	Weight Loss[1] mg/Specimen	Copper	20 max.	0.7
		Solder	60 max.	6.9
		Brass	20 max.	5.9
		Steel	20 max.	0.2
		Cast Iron	20 max.	3.3
		Aluminum	60 max.	0.1
Corrosion of Cast Aluminum Alloys at Heat-Rejecting Surfaces mg/cm²/week			1.0 max.	0.1
Foaming	Volume mL		150 max.	20
	Break Time s		5 max.	3
Cavitation-Erosion Rating for pitting, cavitation, and erosion of the water pump			8 min.	9

Note (1): A plus sign designates weight gain.

07.00.00 Vehicle Emission Control Information (VECI) and Environmental
07.01.00 VECI Label locations
Under-hood, passenger-side, near front of the vehicle.

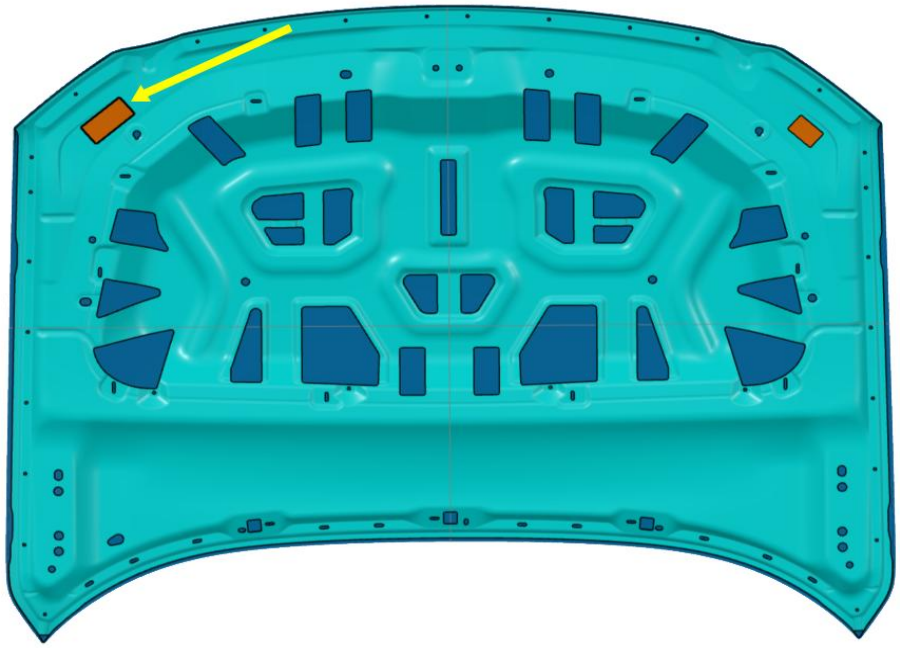

07.02.00 Sample VECI labels (MY2027 Sample Label):

RIVIAN

RIVIAN AUTOMOTIVE, LLC
VEHICLE EMISSION CONTROL INFORMATION

CONFORMS TO REGULATIONS: 2027 MY
TEST GROUP: VRIVT00.0232
U.S. EPA: IT4B0 LDT
CALIFORNIA: ZEV LDT

MOTOR: ELECTRIC MOTOR
FUEL: ELECTRICITY
EVAP: N/A
OBD: N/A

THIS VEHICLE CONFORMS TO ALL APPLICABLE STANDARDS PRESCRIBED BY THE ON-ROAD VEHICLE AND ENGINE EMISSION REGULATIONS / CE VÉHICULE EST CONFORME À TOUTES LES NORMES QUI LUI SONT APPLICABLES EN VERTU DU RÈGLEMENT SUR LES ÉMISSIONS DES VÉHICULES ROUTIERS ET DE LEURS MOTEURS.

07.03.00 Sample Fuel Economy Label (Formerly called the Smog Index label)

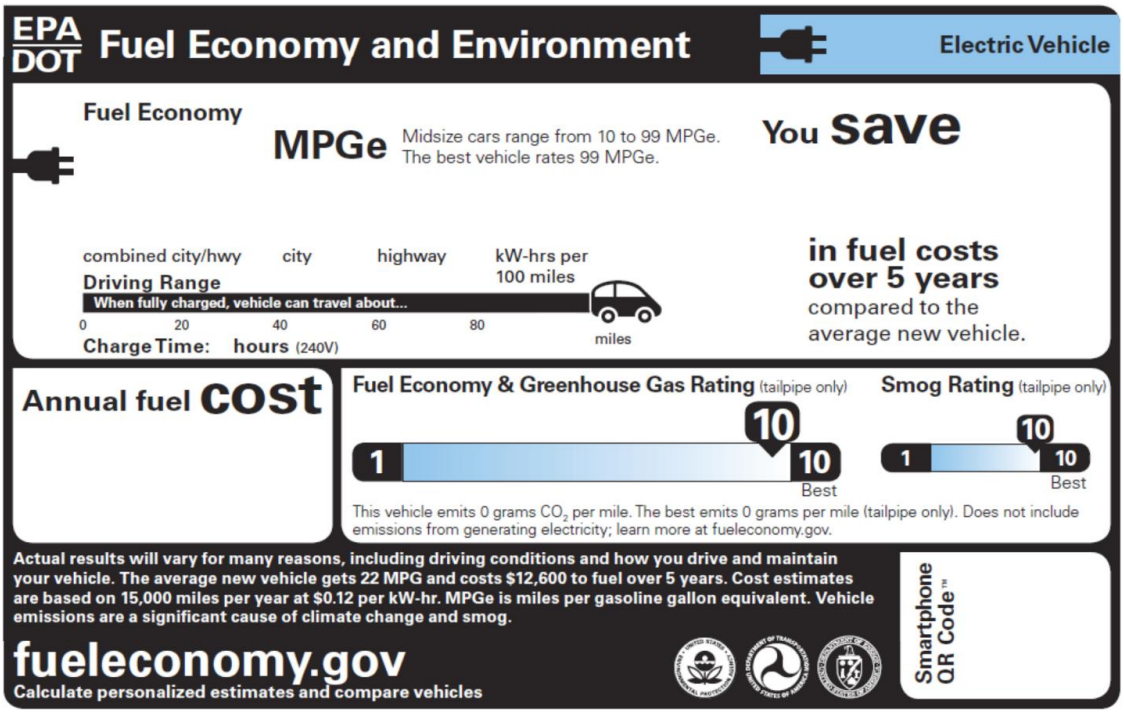

07.04.00 Statement of compliance

Every vehicle which is covered by this application conforms to US EPA Federal Interim Tier 4 Bin 0 regulations applicable to new Light-Duty Trucks and state of California ZEV regulations applicable to new Light-Duty Vehicles for the 2027 Model Year.

07.05.00 Sample Battery Specification Label

Located outside of the back at the rear of the battery pack.

07.06.00 Battery Information Label
Located under the hood of the vehicle.

07.07.00 Data Repository Website

08.00.00 General technical description
08.01.00 Description of Propulsion System

08.01.01 Description of Vehicle Architecture
08.01.02 Description of Drive Unit Architecture
08.01.03 Description of Motor(s)
08.01.04 Description of Gearbox(s)
08.01.05 Description of Inverter(s)

08.01.06 Description of Drivetrain(s)

-

08.03.00 Description of Batteries

08.03.01 Battery charging capacity

08.03.02 Self-discharge information
Rivian estimates the average self-discharge rate of the battery is less than 4% per month.

08.03.03 Description of thermal management system

-

08.03.04 Definition of end-of-life
See section 08.03.05 for information on reuse strategy.

08.03.05 Description of battery disposal plan
Safe battery removal and discharge by Rivian service is recommended. Rivian service will determine which battery components meet standards for reuse. Rivian prioritizes the remanufacture of battery components into equivalent vehicle parts, then consumption in 2nd life applications. For components which do not meet the necessary standards, Rivian approved partners will transport, break down and recycle all materials used within the battery.

Rivian is pursuing UL 1973 certification of vehicle battery modules to enable their reuse for 2nd life grid storage applications. Rivian also plans to develop a process to evaluate the suitability of modules from field returned packs for reuse for grid storage applications in line with UL 1974 (Standard for Evaluation for Repurposing Batteries).

If a facility other than one approved by Rivian intends to dispose of the HV Battery or components, the vehicle owner and/or facility assume the responsibility to comply with any local or federal standards that may apply. A certificate from the recycler should be obtained as proof the materials were properly and legally disposed of.

08.04.00 Description of Controller/Inverter
See Section 08.01.05

08.05.00 Description of Transmission
See Section 08.01.04

08.06.00 Description of climate control system

- Rivian's climate control is a Dual Zone system with Automatic Temperature control.
- HVAC predominantly includes Defrost mode, Panel mode, and Floor mode (or any combination of these three).
- The vehicle could be remotely conditioned to a comfortable climate setpoint using a Mobile Application.
- The system consists of four electronically controlled face vents to direct airflow around passengers.

- The recirculation door is independently controlled by the passengers.
- Auto humidity control.
- Auto/manual blower fan control.

08.06.01 Electric Heat Pump

08.06.02 (Reserved)

08.06.03 Climate control system logic

HVAC software has multiple modes which can be selected based on user preference:

- In Manual Mode, the user has complete control on blower speed, temperature, and airflow distribution to face or feet. Recirculation of air is also manually controlled by the user.
- In Auto mode, the software provides adequate heating and cooling requests to control the breathing temperature of both driver and passenger to the requested setpoint. In this mode, the airflow distribution and the blower speeds are automatically selected to maintain the desired temperature from the screen. The software estimates the breathing temperature of individual passenger based on airflow through ducts, In-Cabin sensors, external ambient temperature sensors, and solar load sensors. Recirculation of air inside the cabin is automatically selected based on humidity level inside the cabin.
- Additionally, defrost or demist mode is provided to the user for a clear view while driving. During defog mode, the software supplies conditioned air towards the windshield based on the dew point calculation. If the desired mode is Defrost, the heat pump blows hot air towards the windshield to clear frost.

08.06.04 (Reserved)

08.07.00 Description of Regenerative Braking System

08.07.01 Control logic

08.07.02 Percentage of braking performed on road by each axle

08.07.03 Overlap of friction brakes and regenerative braking

08.08.00 Description of charger

08.08.01 Proper recharging procedures
Detailed instructions can be found in the owner's guide.

08.08.02 Power requirements necessary to recharge vehicle
The Rivian R2 complies with industry standard NACS for AC Level 1 (120 VAC) and AC Level 2 (240 VAC) charging.

See section 08.08.00 for power adapters.

AC Level 1 charging requires a conventional 110–120 Volt AC grounded outlet capable of the rating of the EVSE to be used. A portable EVSE cord set that is capable of AC Level 1 charging is included with the vehicle.

AC Level 2 charging requires a 220–240 Volt AC outlet capable of the rating of the EVSE to be used.

08.09.00 Accessories which draw energy from the batteries

08.10.00 Other unique features (e.g. solar panels)
N/A

08.11.00 Description of warning system(s) for maintenance / malfunction
The Rivian vehicles communicate maintenance and malfunction needs to the driver through easy-to-read and timely notifications. If issues do occur, the notification system uses a combination of telltales, texts, and visuals to explain the situation. Our notifications are simple to understand, communicate when the vehicle needs service, and alerts customer if an issue arises. The customer leaves the experience feeling confident knowing the system explains the proper actions to take. Any notifications that appear in the driver's instrument cluster retire to the center display so the driver can recall still relevant notifications later.

08.11.01 Cut off terminal voltages for prevention of battery damage
Battery management control system is programmed to prevent a state of under-voltage or over-voltage per the voltage limits defined by Rivian. Contactor opens and DTCs are set when voltage of the battery is below 240 V (240 V if cell temperature is below 5°C) or above 401 V.

09.00.00 (Reserved)
10.00.00 (Reserved)
11.00.00 Starting and shifting schedules

12.00.00 (Reserved)
13.00.00 (Reserved)
14.00.00 (Reserved)
15.00.00 (Reserved)
16.00.00 (Reserved)
17.00.00 California requirements

17.01.00 Statement of compliance
Every vehicle which is covered by this application conforms to US EPA Federal Interim Tier 4 Bin 0 regulations applicable to new Light-Duty Trucks and state of California ZEV regulations applicable to new Light-Duty Vehicles for the 2027 Model Year.

17.01.01 General statement
Rivian confirms that the production vehicles covered by this application will be substantially the same as the vehicles tested for the purposes of this application.

17.01.02 Drivability statement
As of 01/01/2006, This statement is no longer included in the California Exhaust Emission Standards and Test Procedures.

17.02.00 Supplemental Data and Certification Review Sheets
See end of document for ZEV Supplemental Sheets

17.03.00 (Reserved)
17.04.00 Credits

17.04.01 Description of multi-manufacturer arrangements
N/A

17.04.02 Credit calculation

17.05.00 Vehicle Safety
The Rivian architecture comprises a body attached to a skateboard frame structure. The primary structure encompasses engineered crush zones used to, in case of crash, absorb the crash energy. The “safety cage” comprises of body pillars, side impact bars, floor sills and roof rails (working with other structural elements) and with an advanced optimized restraint system to help properly restrain and protect occupants.

17.05.01 All information for safe operation of vehicle
See sections 03.04.00, 03.05.00, and 11.00.00.

17.05.02 Information on safe handling of battery system

17.05.03 Description of emergency procedures

17.06.00 (Reserved)
17.07.00 High-Priced Parts List and Warranty

17.08.00 Owner Instructions for In-Vehicle Data

17.09.00 Data Standardization Attestation

17.10.00 OBD II Communication Protocol

Test Results:

R2 Performance AWD (21")
R2 Premium AWD (21")

EPA EV Multicycle Calculator (SAE J1634 Oct 2012)

Manufacturer:	RIVIAN
Carline:	R2 (21in)
Model Year	2027
Vehicle	R2-162X (21in)
Test Number	
Comments:	**ALL PURPOSE**
Test Date	3/5/2026

As used by EPA laboratory

D.Good March 8, 2016

Cycle	Energy (Wh)	Distance (mi)	ECdc_cyc	Kuwgt	Kwgt
UDDS1	1725.36	7.453	231.50	57.88	4.50
UDDS2	1369.14	7.442	183.96	45.99	60.13
UDDS3	1341.20	7.463	179.71	44.93	58.74
UDDS4	1333.00	7.442	179.12	44.78	58.55
HWY1	2249.33	10.261	219.22	109.61	
HWY2	2179.17	10.257	212.45	106.23	
SS1	69331.13	251.639	275.52		
SS2	9143.39	33.192	275.47		
TOTAL	**88671.72**	**335.149**			

Recharge AC WattHrs: 105510.000

K-Factors	UDDS1	UDDS2	UDDS3	UDDS4	HWY1	HWY2
Unweighted	0.250	0.250	0.250	0.250	0.500	0.500
Weighted	0.019	0.327	0.327	0.327	NA	NA

Results	Range (mi)	AC Wh/mi	MPGe	kWh/100mi
UDDSu	458.07	230.34		
UDDSw	487.43	216.46	155.7080	21.6463
HWY	410.83	256.82	131.2394	25.6821

EPA version
kWh/100mi
21.64629
25.68208

MCT Results	whdc/mi	mi/kwhdc	mi/kwhac
UDDS	181.9177	5.4970	4.6197
HFEDS	215.8349	4.6332	3.8938

R2 Performance AWD (20" AT)

EPA EV Multicycle Calculator (SAE J1634 Oct 2012)

Manufacturer:	RIVIAN	As used by EPA laboratory	
Carline:	R2 (20in AT)		
Model Year	2027	D.Good	March 8, 2016
Vehicle	R2-159X (20in AT)		
Test Number			
Comments:	**ALL PURPOSE**		
Test Date	2/10/2026		

Cycle	**Energy (Wh)**	**Distance (mi)**	**ECdc_cyc**	**Kuwgt**	**Kwgt**	Recharge AC WattHrs
UDDS1	1751.46	7.426	235.86	58.96	4.61	104688.73
UDDS2	1413.55	7.445	189.87	47.47	62.05	
UDDS3	1373.02	7.437	184.62	46.16	60.34	
UDDS4	1357.43	7.399	183.46	45.87	59.96	
HWY1	2373.80	10.242	231.77	115.89		
HWY2	2301.76	10.230	225.00	112.50		
SS1	68704.16	229.736	299.06			
SS2	10274.09	34.085	301.43			
TOTAL	**89549.27**	**314.000**				

K-Factors	**UDDS1**	**UDDS2**	**UDDS3**	**UDDS4**	**HWY1**	**HWY2**
Unweighted	0.250	0.250	0.250	0.250	0.500	0.500
Weighted	0.020	0.327	0.327	0.327	NA	NA

Results	**Range (mi)**	**AC Wh/mi**	**MPGe**	**kWh/100mi**	**EPA version** kWh/100mi
UDDSu	**451.24**	**232.00**			
UDDSw	**478.98**	**218.57**	**154.2101**	**21.8565**	21.85654
HWY	**392.10**	**267.00**	**126.2371**	**26.6998**	26.69977

MCT Results	**whdc/mi**	**mi/kwhdc**	**mi/kwhac**
UDDS	186.9578	5.3488	4.5753
HFEDS	228.3861	4.3786	3.7454

EPA EV Multicycle Calculator (SAE J1634 Oct 2012)

Manufacturer:	RIVIAN	As used by EPA laboratory	
Carline:	R2 Premium AWD (20in)		
Model Year	2027	D.Good	March 8, 2016
Vehicle	R2-159X 20"B		
Test Number			
Comments:	**ALL PURPOSE** FEV		
Test Date	8/11/2026		

Cycle	Energy (Wh)	Distance (mi)	ECdc_cyc	Kuwgt	Kwgt		Recharge AC WattHrs
UDDS1	1583.21	7.424	213.26	53.31	3.80	21.33	101157.75
UDDS2	1313.53	7.433	176.72	44.18	57.85	17.67	
UDDS3	1259.04	7.461	168.75	42.19	55.25	16.87	
UDDS4	1250.11	7.395	169.05	42.26	55.34	16.9	
HWY1	2197.16	10.242	214.52	107.26		21.45	
HWY2	2105.58	10.254	205.34	102.67		20.53	
SS1	70914.52	255.716	277.32			27.73	
SS2	8117.28	28.905	280.83			28.08	
TOTAL	**88740.43**	**334.830**					

K-Factors	UDDS1	UDDS2	UDDS3	UDDS4	HWY1	HWY2
Unweighted	0.250	0.250	0.250	0.250	0.500	0.500
Weighted	0.018	0.327	0.327	0.327	NA	NA

Results	Range (mi)	AC Wh/mi	MPGe	kWh/100mi	EPA version kWh/100mi
UDDSu	**487.74**	**207.40**			
UDDSw	**515.19**	**196.35**	**171.6560**	**19.6352**	19.63520
HWY	**422.71**	**239.31**	**140.8430**	**23.9309**	23.93091

MCT Results	whdc/mi	mi/kwhdc	mi/kwhac
UDDS	172.2494	5.8055	5.0929
HFEDS	209.9334	4.7634	4.1787

Certification Summary Information Report

Manufacturer	Rivian Automotive LLC	**Manufacturer Code**	RIV
Test Group	VRIVT00.0232	**Evaporative/Refueling Family**	--
Certificate Number	--	**CARB Executive Order #**	--
Certificate Issue Date	--	**Certificate Revision Date**	--
Certificate Effective Date	--	**Conditional Certificate**	--
CSI Revision #	--	**CSI Submission/Revision Date**	08/26/2026 03:03:35 PM
Model Year	2027		

Test Group Information

CSI Type	Update for Correction	**Running Change Reference Number**	--
GHG Exempt Status	Not Exempt		

Drive Sources and Fuel(s)

Drive Source #1: Electric Motor

Fuel	Basic Fuel Metering System	Lean Burn Strategy Indicator
Electricity	--	--

Hybrid Indicator	No		
Multiple Fuel Storage	--	**Rechargeable Energy Storage System Indicator**	Yes
Multiple Fuel Combustion	--	**Off-board Charge Capable Indicator**	Yes
Fuel Cell Indicator	No	**EPA Vehicle Class**	LDT3
Federal Clean Fuel Vehicle	Yes	**Federal Clean Fuel Vehicle Standard**	ZEV
Federal Clean Fuel Vehicle ILEV	No	**California Partial Zero Emissions Vehicle Indicator**	--
Durability Group Name	VRIVR0000232	**Durability Group Equivalency Factor**	1
Reduced Fee Test Group	No	**Certification Region Code(s)**	FA, CA
Complies with HD GHG 2b/3 regulations?	No		
Introduction into Commerce Date	03/16/2026	**CAP2000 Conditional Certificate?**	N/A
Independent Commercial Importer?	--	**Alternative Fuel Converter Certificate?**	--
SFTP Federal Composite Compliance Identifier	Not Applicable	**SFTP Tier 2 Composite CO Option**	No
SFTP LEV-III Composite Compliance Indicator	No		
OBD Compliance Type	CARB	**OBD Demonstration Vehicle Test Group**	VRIVT00.0232
Test Group OBD Compliance Level	Full - no deficiencies	**Number of Test Group OBD Deficiencies**	0
OBD Deficiencies Comments	OBD COMPLIANCE IS NOT APPLICABLE TO ZEV. PARAMETERS ARE PLACEHOLDERS TO ALLOW DATASET SUBMISSION.		
Mfr Test Group Comments	DURABILITY IS NOT APPLICABLE TO ZEV. PARAMETERS ARE PLACEHOLDERS TO ALLOW DATASET SUBMISSION. TEST GROUP IS CERTIFIED AS INTERIM TIER 4 BIN 0.		
Mfr Exhaust / Evap Standards Comments	--		

Certification Summary Information Report

Test Group	VRIVT00.0232	Evaporative/Refueling Family	--

Models Covered by this Certificate

Carline Manufacturer	Division	Carline	Certification Region Code(s)	Drive System	Trans - Type	- # of Gears	Trans - Lockup
Rivian Automotive LLC	1 - Rivian	201 - R2 Performance AWD (20in AT)	Federal	4-Wheel Drive	Automatic	1	No
Rivian Automotive LLC	1 - Rivian	200 - R2 Performance AWD (21in)	California + CAA Section 177 states	4-Wheel Drive	Automatic	1	No
Rivian Automotive LLC	1 - Rivian	202 - R2 Premium AWD (20in)	California + CAA Section 177 states	4-Wheel Drive	Automatic	1	No
Rivian Automotive LLC	1 - Rivian	202 - R2 Premium AWD (20in)	Federal	4-Wheel Drive	Automatic	1	No
Rivian Automotive LLC	1 - Rivian	201 - R2 Performance AWD (20in AT)	California + CAA Section 177 states	4-Wheel Drive	Automatic	1	No
Rivian Automotive LLC	1 - Rivian	203 - R2 Premium AWD (21in)	California + CAA Section 177 states	4-Wheel Drive	Automatic	1	No
Rivian Automotive LLC	1 - Rivian	200 - R2 Performance AWD (21in)	Federal	4-Wheel Drive	Automatic	1	No
Rivian Automotive LLC	1 - Rivian	203 - R2 Premium AWD (21in)	Federal	4-Wheel Drive	Automatic	1	No

Engine Description

Hybrid Type	--	**Hybrid Description**	--
Engine Type	--	**Mfr Engine Description**	--
Engine Block Arrangement	--	**Mfr Engine Block Arrangement Description**	--
Camless Valvetrain Indicator	--	**Oil Viscosity/Classification**	
Number of Cylinders/Rotors	--	**Mechanically Variable Compression Ratio Indicator**	--

After Treatment Device(s) (ATD)

Mfr After Treatment Device (ATD) Comments	--
Direct Ozone Reduction (DOR) Device	--
Mfr Emission Control Device Comments	--

Official Test Numbers

Test Group Fuel	FTP	US06	SC03	Cold CO	Highway	EPA City Litmus Value	EPA City Litmus Threshold	EPA Highway Litmus Value	EPA Highway Litmus Threshold	CREE Weighting Factor
Electricity	--	--	--	--	--	--	--	--	--	--

SFTP LEV-III Official Test Numbers

Test Group Fuel	FTP	US06	SC03
Electricity	--	--	--

Certification Summary Information Report

Test Group	VRIVT00.0232	**Evaporative/Refueling Family**	--

Hybrid Electric Vehicle And Fuel Cell Information

Rechargable Energy Storage System	Battery(s)	**Rechargable Energy Storage System, if Other**	--
Battery Type	Lithium Ion	**Number of Battery Packs**	1
Total Voltage of Battery Packs	353	**Battery Energy Capacity**	260.8
Battery Specific Energy	167	**Battery Charger Type**	Both
Number of Capacitors	--	**Capacitor Rating (In Farads)**	--
Mfr Capacitor Comments	--		
Hydraulic System Description	--		
Regenerative Braking Type	Electrical Regen Brake		
Regenerative Braking Source	Both	**Driver Controlled Regenerative Braking**	Yes
Mfr Regenerative Braking Description	--		
Drive Motor(s)/Generator(s)	2		
Motor/Generator Type 1	AC Permanent Magnet	**Rated Motor/Generator Power**	300
Motor/Generator Type 2	AC Permanent Magnet	**Rated Motor/Generator Power**	300
Mfr Fuel Cell Description	--		
Fuel Cell On-Board H2 Storage Capacity (kg)	--	**Usable H2 Fill Capacity (kg)**	--
Mfr Hybrid Electric/ Electric Vehicle Comments	All-Purpose Drive Mode (Default)		

Certification Summary Information Report

Test Group	VRIVT00.0232	**Evaporative/Refueling Family**	--

Emission Data Vehicle Information

Vehicle ID / Configuration	R2-159XR20 / 0	**Manufacturer Vehicle Configuration Number**	0
Original Test Group Name	VRIVT00.0232	**Original Evaporative/Refueling Family**	--
Original Test Vehicle Model Year	2027		

Vehicle Model

Represented Test Vehicle Make	Rivian	**Represented Test Vehicle Model**	R2 Premium AWD (20in)

Leak Family Details

Leak Family Identifier	--	**Leak Family Name**	--

Drive Sources and Fuel System Details

Drive Source and Fuel#	Drive Source	Fuel
1	Electric Motor	Electricity

Hybrid Indicator	No		
Multiple Fuel Storage	--	**Multiple Fuel Combustion**	--
Fuel Cell Indicator	No	**Rechargeable Energy Storage System Indicator**	Yes
Rechargeable Energy Storage System	Battery(s)	**Rechargeable Energy Storage System, if 'Other'**	--
Off-board charge Capable Indicator	Yes		
Odometer Correction -- Initial	1	**Odometer Correction Factor**	1
Odometer Correction Sign	+ = System Miles is equal to (Test odometer reading * Correction factor) + Initial system miles		
Odometer Correction Units	Miles		
Engine Code	300X2RW	**Rated Horsepower**	656
Displacement (liters)	99.999		
Air Aspiration Method	Naturally Aspirated	**Air Aspiration Method, if 'Other'**	Electric
Number of Air Aspiration Devices	--	**Air Aspiration Device Configuration**	--
Charge Air Cooler Type	--	**Drive Mode While Testing**	4-Wheel Drive
Shift Indicator Light Usage	Not eqipped	**Aged Emission Components**	4,000 (mi)
Curb Weight (lbs)	4989	**Equivalent Test Weight (pounds)**	5250
GVWR (lbs)	--	**N/V Ratio**	999
Axle Ratio	9.99		
Transmission Type	Automatic	**# of Transmission Gears**	1
Transmission Lockup	No	**Creeper Gear**	No

Certification Summary Information Report

Test Group	VRIVT00.0232	Evaporative/Refueling Family	--

Dynamometer Coefficients:

Coefficient Category	Target Coefficients A (lbf)	Target Coefficients B (lbf/mph)	Target Coefficients C (lbf/mph**2)	Set Coefficients A (lbf)	Set Coefficients B (lbf/mph)	Set Coefficients C (lbf/mph**2)	EPA Calculated Total Road Load Horse Power for City/Highway/Evap Coefficients
City/Highway/Evap	24.47	0.2703	0.02176	-5.96	0.0766	0.02101	12.3
Cold CO	26.92	0.2973	0.02394	99.9	0.9999	0.9999	N/A
US06	24.47	0.2703	0.02176	-5.96	0.0766	0.02101	N/A

Emission Control Device Comments Battery Electric Vehicle

Manufacturer Test Vehicle Comments R2 Premium AWD (20in) - All-Purpose (Default) Drive Mode FDU Axle Ratio: 8.8 RDU Axle Ratio: 10 FDU N/V: 95.4 RDU N/V: 107.7

Certification Summary Information Report

Test Group	VRIVT00.0232	**Evaporative/Refueling Family**	--

Test #	**VRIV10095405**	**Test Procedure**	**77 - Multi-Cycle Test (MCT)**
Exhaust Test # for this Evap Test	--	**Test Fuel Type**	62 - Electricity
Test Date	08/11/2026	**Fuel**	N/A
Fuel Batch ID	--	**Fuel Calibration Number**	--
Vehicle Class	N/A	**DF Type**	EPA Assigned
Verify Test Lab ID	FEV Michigan		
E10 Evaporative Test Measurement Method	--		
Test Start Odometer Reading	5972	**Odometer Units**	M
4WD Test Dyno	Yes	**Diesel Adjustment Factor Usage**	--
State of Charge Delta	Yes		
Drive Cycle Speed Tolerance Criteria	Used Part 86 (+/- 2 mph, +/- 1 sec)	**Road Speed Fan Usage**	Yes

PHEV/EV Charge Depleting Test Information

Recharge Event Voltage	240	**Recharge Event Energy (kiloWatt-hours)**	101.16
Charge Depleting Range (Calculated miles)	515.149	**Charge Depleting Range (Actual miles)**	515.149
Charge Depleting Range Highway (Calculated miles)	422.685	**Derived 5-Cycle Coefficient Model Year**	--
All Electric Range Unadjusted (miles)	--	**Equivalent All Electric Range (miles)**	515.149
Number of Charge Depleting Bags/Phases Conducted	8	**Transition Bag/Phase Number**	--

Charge Depleting Bag/Phase #1

Test Result/Emission Name	Unrounded Test Result
Actual Distance Driven (miles)	7.424
Carbon-Related Exhaust Emissions	0
Drive Trace Absolute Speed Change Rating	0.843
Drive Trace Energy Economy Rating	0.585
Drive Trace Inertia Work Ratio Rating	1.056
Integrated DC KW-HRS	1.583
Manufacturer Fuel Economy	21.33
Watt Hours	1583.21

Charge Depleting Bag/Phase #2

Test Group	VRIVT00.0232	**Evaporative/Refueling Family**	--

Test Result/Emission Name	Unrounded Test Result
Actual Distance Driven (miles)	10.242
Carbon-Related Exhaust Emissions	0
Drive Trace Absolute Speed Change Rating	2.41
Drive Trace Energy Economy Rating	0.215
Drive Trace Inertia Work Ratio Rating	2.883
Integrated DC KW-HRS	2.197
Manufacturer Fuel Economy	21.45
Watt Hours	2197.16

Charge Depleting Bag/Phase #3

Test Result/Emission Name	Unrounded Test Result
Actual Distance Driven (miles)	7.433
Carbon-Related Exhaust Emissions	0
Drive Trace Absolute Speed Change Rating	1.419
Drive Trace Energy Economy Rating	0.88
Drive Trace Inertia Work Ratio Rating	2.161
Integrated DC KW-HRS	1.314
Manufacturer Fuel Economy	17.67
Watt Hours	1313.53

Charge Depleting Bag/Phase #4

Test Result/Emission Name	Unrounded Test Result
Actual Distance Driven (miles)	255.716
Carbon-Related Exhaust Emissions	0
Drive Trace Absolute Speed Change Rating	17.184
Drive Trace Energy Economy Rating	0.045
Drive Trace Inertia Work Ratio Rating	34.386
Integrated DC KW-HRS	70.915
Manufacturer Fuel Economy	27.73

Charge Depleting Bag/Phase #5

Test Group	VRIVT00.0232	**Evaporative/Refueling Family**	--

Test Result/Emission Name	Unrounded Test Result
Actual Distance Driven (miles)	7.461
Carbon-Related Exhaust Emissions	0
Drive Trace Absolute Speed Change Rating	-0.701
Drive Trace Energy Economy Rating	-0.19
Drive Trace Inertia Work Ratio Rating	-0.784
Integrated DC KW-HRS	1.259
Manufacturer Fuel Economy	16.87
Watt Hours	1259.04

Charge Depleting Bag/Phase #6

Test Result/Emission Name	Unrounded Test Result
Actual Distance Driven (miles)	10.254
Carbon-Related Exhaust Emissions	0
Drive Trace Absolute Speed Change Rating	-1.097
Drive Trace Energy Economy Rating	-0.519
Drive Trace Inertia Work Ratio Rating	-1.095
Integrated DC KW-HRS	2.106
Manufacturer Fuel Economy	20.53
Watt Hours	2105.58

Charge Depleting Bag/Phase #7

Test Result/Emission Name	Unrounded Test Result
Actual Distance Driven (miles)	7.395
Carbon-Related Exhaust Emissions	0
Drive Trace Absolute Speed Change Rating	-2.449
Drive Trace Energy Economy Rating	-1.887
Drive Trace Inertia Work Ratio Rating	-4.054
Integrated DC KW-HRS	1.25
Manufacturer Fuel Economy	16.9
Watt Hours	1250.11

Charge Depleting Bag/Phase #8

Certification Summary Information Report

Test Group	VRIVT00.0232	**Evaporative/Refueling Family**	--

Test Result/Emission Name	Unrounded Test Result
Actual Distance Driven (miles)	28.905
Carbon-Related Exhaust Emissions	0
Drive Trace Absolute Speed Change Rating	99.99
Drive Trace Energy Economy Rating	-0.516
Drive Trace Inertia Work Ratio Rating	8.432
Integrated DC KW-HRS	8.117
Manufacturer Fuel Economy	28.08

Manufacturer Test Comments

R2 - Drive Mode: All-Purpose (Default Mode), Dual Motor, Large Battery Pack, and 20" All-Season Tires. UDDS1: 213.26 Wh/mi, UDDS2: 176.72 Wh/mi, UDDS3: 168.75 Wh/mi, UDDS4: 169.05 Wh/mi. UDDS1 Energy: 1583.21 Wh HWY1: 214.52 Wh/mi, HWY2: 205.34 Wh/mi MCT Energy: 88740.43 Wh

Certification Summary Information Report

Test Group	VRIVT00.0232	**Evaporative/Refueling Family**	--

Emission Data Vehicle Information

Vehicle ID / Configuration	R2-159XR20AT / 0	**Manufacturer Vehicle Configuration Number**	0
Original Test Group Name	VRIVT00.0232	**Original Evaporative/Refueling Family**	--
Original Test Vehicle Model Year	2027		

Vehicle Model

Represented Test Vehicle Make	Rivian	**Represented Test Vehicle Model**	R2 (20in AT)

Leak Family Details

Leak Family Identifier	--	**Leak Family Name**	--

Drive Sources and Fuel System Details

Drive Source and Fuel#	Drive Source	Fuel
1	Electric Motor	Electricity

Hybrid Indicator	No		
Multiple Fuel Storage	--	**Multiple Fuel Combustion**	--
Fuel Cell Indicator	No	**Rechargeable Energy Storage System Indicator**	Yes
Rechargeable Energy Storage System	Battery(s)	**Rechargeable Energy Storage System, if 'Other'**	--
Off-board charge Capable Indicator	Yes		
Odometer Correction -- Initial	1	**Odometer Correction Factor**	1
Odometer Correction Sign	+ = System Miles is equal to (Test odometer reading * Correction factor) + Initial system miles		
Odometer Correction Units	Miles		
Engine Code	300X2RW	**Rated Horsepower**	656
Displacement (liters)	99.999		
Air Aspiration Method	Naturally Aspirated	**Air Aspiration Method, if 'Other'**	Electric
Number of Air Aspiration Devices	--	**Air Aspiration Device Configuration**	--
Charge Air Cooler Type	--	**Drive Mode While Testing**	4-Wheel Drive
Shift Indicator Light Usage	Not eqipped	**Aged Emission Components**	4,000 (mi)
Curb Weight (lbs)	5016	**Equivalent Test Weight (pounds)**	5250
GVWR (lbs)	--	**N/V Ratio**	999
Axle Ratio	9.99		
Transmission Type	Automatic	**# of Transmission Gears**	1
Transmission Lockup	No	**Creeper Gear**	No

Certification Summary Information Report

Test Group	VRIVT00.0232	Evaporative/Refueling Family	--

Dynamometer Coefficients:

Coefficient Category	Target Coefficients A (lbf)	Target Coefficients B (lbf/mph)	Target Coefficients C (lbf/mph**2)	Set Coefficients A (lbf)	Set Coefficients B (lbf/mph)	Set Coefficients C (lbf/mph**2)	EPA Calculated Total Road Load Horse Power for City/Highway/Evap Coefficients
City/Highway/Evap	27.29	0.34	0.02174	-8.62	0.1648	0.02087	13.2
Cold CO	30.02	0.374	0.02391	-10.93	-0.1084	0.02507	N/A
US06	27.29	0.34	0.02174	-8.62	0.1648	0.02087	N/A

Emission Control Device Comments Battery Electric Vehicle

Manufacturer Test Vehicle Comments R2 (20in All-Terrain) - All-Purpose (Default) Drive Mode FDU Axle Ratio: 8.8 RDU Axle Ratio: 10 FDU N/V: 95.4 RDU N/V: 107.7

Certification Summary Information Report

Test Group	VRIVT00.0232	**Evaporative/Refueling Family**	--

Test #	**VRIV10093326**	**Test Procedure**	**2 - CVS 75 and later (w/o can. load)**
Exhaust Test # for this Evap Test	--	**Test Fuel Type**	62 - Electricity
Test Date	02/14/2026	**Fuel**	Electricity
Fuel Batch ID	--	**Fuel Calibration Number**	--
Vehicle Class	LDT3 (ALVW 3751-5750, LVW 0-3750, GVW > 6000)	**DF Type**	EPA Assigned
Verify Test Lab ID	FEV Michigan		
E10 Evaporative Test Measurement Method	--		
Test Start Odometer Reading	4636	**Odometer Units**	M
4WD Test Dyno	Yes	**Diesel Adjustment Factor Usage**	--
State of Charge Delta	Yes		
Drive Cycle Speed Tolerance Criteria	Used Part 86 (+/- 2 mph, +/- 1 sec)	**Road Speed Fan Usage**	Yes

Test Results

Test Result Name	Unrounded Test Result	Verify Calculated FE Equivalent Value (kilowatt-hour per 100 miles)
METHANE (CH4 - Methane)	0	--
CO (Carbon Monoxide)	0	--
DT-ASCR (Drive Trace Absolute Speed Change Rating)	1.04	--
DT-EER (Drive Trace Energy Economy Rating)	0.69	--
DT-IWRR (Drive Trace Inertia Work Ratio Rating)	1.48	--
MFR FE (Manufacturer Fuel Economy)	19.05	176.9291339
NOX (Nitrogen Oxide)	0	--
N2O (Nitrous Oxide)	0	--
HC-NM (Non-methane Hydrocarbon)	0	--
NMOG (Non-methane organic gases)	0	--

Test Result Name	Unrounded Test Result	Verify Calculated CREE/OPT-CREE
Carbon-Related Exhaust Emissions	0	0
Optional Carbon-Related Exhaust Emissions	0	0

Test Result Name	Unrounded Test Result	Verify Calculated CO2
Carbon dioxide	0	--

Manufacturer Test Comments R2 - Drive Mode: All-Purpose (Default Mode), Dual Motor, Large Battery Pack, and 20" All-Terrain Wheels and Tires. Cycle 1: 217.59 Wh/mi, Cycle 2: 168.52 Wh/mi, Cycle 3: 212.15 Wh/mi, Cycle 4: 167.03 Wh/mi.

Certification Summary Information Report

Test Group VRIVT00.0232 **Evaporative/Refueling Family** --

Certification Region	Useful Life	Standard Level	Emission Name	Rounded Result	RAF	NMOG/NMHC Ratio	Diesel Adjustment Factor	Add DF	Mult DF	Certification Level	Standard	Pass/Fail
Fed	150,000 miles	Federal Tier 3 Bin 0	CO	0.0	--	--	--	0	--	0	0	Pass
CA	150,000 miles	California ZEV	CO	0.0	--	--	--	0	--	0	0	Pass

Certification Summary Information Report

Test Group	VRIVT00.0232	**Evaporative/Refueling Family**	--

Test #	**VRIV10093327**	**Test Procedure**	**3 - HWFE**
Exhaust Test # for this Evap Test	--	**Test Fuel Type**	62 - Electricity
Test Date	02/14/2026	**Fuel**	N/A
Fuel Batch ID	--	**Fuel Calibration Number**	--
Vehicle Class	N/A	**DF Type**	EPA Assigned
Verify Test Lab ID	FEV Michigan		
E10 Evaporative Test Measurement Method	--		
Test Start Odometer Reading	4636	**Odometer Units**	M
4WD Test Dyno	Yes	**Diesel Adjustment Factor Usage**	--
State of Charge Delta	Yes		
Drive Cycle Speed Tolerance Criteria	Used Part 86 (+/- 2 mph, +/- 1 sec)	**Road Speed Fan Usage**	Yes

Test Results

Test Result Name	Unrounded Test Result	Verify Calculated FE Equivalent Value (kilowatt-hour per 100 miles)
METHANE (CH4 - Methane)	0	--
CO (Carbon Monoxide)	0	--
DT-ASCR (Drive Trace Absolute Speed Change Rating)	0.52	--
DT-EER (Drive Trace Energy Economy Rating)	-0.62	--
DT-IWRR (Drive Trace Inertia Work Ratio Rating)	0.84	--
MFR FE (Manufacturer Fuel Economy)	22.79	147.8938131
NOX (Nitrogen Oxide)	0	--
N2O (Nitrous Oxide)	0	--
HC-NM (Non-methane Hydrocarbon)	0	--
NMOG (Non-methane organic gases)	0	--

Test Result Name	Unrounded Test Result	Verify Calculated CREE/OPT-CREE
Carbon-Related Exhaust Emissions	0	0
Optional Carbon-Related Exhaust Emissions	0	0

Test Result Name	Unrounded Test Result	Verify Calculated CO2
Carbon dioxide	0	--

Manufacturer Test Comments R2 - Drive Mode: All-Purpose (Default Mode), Dual Motor, Large Battery Pack, and 20" All-Terrain Wheels and Tires. Cycle 1: 227.90 Wh/mi

Certification Summary Information Report

Test Group	VRIVT00.0232	**Evaporative/Refueling Family**	--

Test #	**VRIV10093328**	**Test Procedure**	**90 - US06**
Exhaust Test # for this Evap Test	--	**Test Fuel Type**	62 - Electricity
Test Date	02/14/2026	**Fuel**	N/A
Fuel Batch ID	--	**Fuel Calibration Number**	--
Vehicle Class	N/A	**DF Type**	EPA Assigned
Verify Test Lab ID	FEV Michigan		
E10 Evaporative Test Measurement Method	--		
Test Start Odometer Reading	4662	**Odometer Units**	M
4WD Test Dyno	Yes	**Diesel Adjustment Factor Usage**	--
State of Charge Delta	Yes		
Drive Cycle Speed Tolerance Criteria	Used Part 86 (+/- 2 mph, +/- 1 sec)	**Road Speed Fan Usage**	Yes

Test Results

Test Result Name	Unrounded Test Result	Verify Calculated FE Equivalent Value (kilowatt-hour per 100 miles)
METHANE (CH4 - Methane)	0	--
CO (Carbon Monoxide)	0	--
DT-ASCR (Drive Trace Absolute Speed Change Rating)	-1.38	--
DT-EER (Drive Trace Energy Economy Rating)	-0.98	--
DT-IWRR (Drive Trace Inertia Work Ratio Rating)	-3.34	--
MFR FE (Manufacturer Fuel Economy)	31.88	105.7245922
NOX (Nitrogen Oxide)	0	--
N2O (Nitrous Oxide)	0	--
HC-NM (Non-methane Hydrocarbon)	0	--
NMOG (Non-methane organic gases)	0	--

Test Result Name	Unrounded Test Result	Verify Calculated CREE/OPT-CREE
Carbon-Related Exhaust Emissions	0	--
Optional Carbon-Related Exhaust Emissions	0	--

Test Result Name	Unrounded Test Result	Verify Calculated CO2
Carbon dioxide	0	--

Manufacturer Test Comments R2 - Drive Mode: All-Purpose (Default Mode), Dual Motor, Large Battery Pack, and 20" All-Terrain Wheels and Tires. Cycle 1 (City1): 294.79 Wh/mi, Cycle 2 (HWY): 318.74 Wh/mi, Cycle 3 (City2): 383.14 Wh/mi

Certification Summary Information Report

Test Group	VRIVT00.0232	**Evaporative/Refueling Family**	--

Test #	**VRIV10093329**	**Test Procedure**	**95 - SC03**
Exhaust Test # for this Evap Test	--	**Test Fuel Type**	62 - Electricity
Test Date	02/14/2026	**Fuel**	N/A
Fuel Batch ID	--	**Fuel Calibration Number**	--
Vehicle Class	N/A	**DF Type**	EPA Assigned
Verify Test Lab ID	FEV Michigan		
E10 Evaporative Test Measurement Method	--		
Test Start Odometer Reading	4678	**Odometer Units**	M
4WD Test Dyno	Yes	**Diesel Adjustment Factor Usage**	--
State of Charge Delta	Yes		
Drive Cycle Speed Tolerance Criteria	Used Part 86 (+/- 2 mph, +/- 1 sec)	**Road Speed Fan Usage**	Yes

Test Results

Test Result Name	Unrounded Test Result	Verify Calculated FE Equivalent Value (kilowatt-hour per 100 miles)
METHANE (CH4 - Methane)	0	--
CO (Carbon Monoxide)	0	--
DT-ASCR (Drive Trace Absolute Speed Change Rating)	1.36	--
DT-EER (Drive Trace Energy Economy Rating)	0.81	--
DT-IWRR (Drive Trace Inertia Work Ratio Rating)	1.87	--
MFR FE (Manufacturer Fuel Economy)	27.24	123.7334802
NOX (Nitrogen Oxide)	0	--
N2O (Nitrous Oxide)	0	--
HC-NM (Non-methane Hydrocarbon)	0	--
NMOG (Non-methane organic gases)	0	--

Test Result Name	Unrounded Test Result	Verify Calculated CREE/OPT-CREE
Carbon-Related Exhaust Emissions	0	--
Optional Carbon-Related Exhaust Emissions	0	--

Test Result Name	Unrounded Test Result	Verify Calculated CO2
Carbon dioxide	0	--

Manufacturer Test Comments R2 - Drive Mode: All-Purpose (Default Mode), Dual Motor, Large Battery Pack, and 20" All-Terrain Wheels and Tires. Cycle 1: 272.36 Wh/mi

Certification Summary Information Report

Test Group	VRIVT00.0232	**Evaporative/Refueling Family**	--

Test #	**VRIV10093229**	**Test Procedure**	**77 - Multi-Cycle Test (MCT)**
Exhaust Test # for this Evap Test	--	**Test Fuel Type**	62 - Electricity
Test Date	02/10/2026	**Fuel**	N/A
Fuel Batch ID	--	**Fuel Calibration Number**	--
Vehicle Class	N/A	**DF Type**	EPA Assigned
Verify Test Lab ID	FEV Michigan		
E10 Evaporative Test Measurement Method	--		
Test Start Odometer Reading	4186	**Odometer Units**	M
4WD Test Dyno	Yes	**Diesel Adjustment Factor Usage**	--
State of Charge Delta	Yes		
Drive Cycle Speed Tolerance Criteria	Used Part 86 (+/- 2 mph, +/- 1 sec)	**Road Speed Fan Usage**	Yes

PHEV/EV Charge Depleting Test Information

Recharge Event Voltage	240	**Recharge Event Energy (kiloWatt-hours)**	104.689
Charge Depleting Range (Calculated miles)	478.98	**Charge Depleting Range (Actual miles)**	478.98
Charge Depleting Range Highway (Calculated miles)	392.1	**Derived 5-Cycle Coefficient Model Year**	--
All Electric Range Unadjusted (miles)	--	**Equivalent All Electric Range (miles)**	478.98
Number of Charge Depleting Bags/Phases Conducted	8	**Transition Bag/Phase Number**	--

Charge Depleting Bag/Phase #1

Test Result/Emission Name	Unrounded Test Result
Actual Distance Driven (miles)	7.426
Carbon-Related Exhaust Emissions	0
Drive Trace Absolute Speed Change Rating	0.17
Drive Trace Energy Economy Rating	0.12
Drive Trace Inertia Work Ratio Rating	0.2
Integrated DC KW-HRS	1.751
Manufacturer Fuel Economy	23.59

Charge Depleting Bag/Phase #2

Test Group	VRIVT00.0232	**Evaporative/Refueling Family**	--

Test Result/Emission Name	Unrounded Test Result
Actual Distance Driven (miles)	10.242
Carbon-Related Exhaust Emissions	0
Drive Trace Absolute Speed Change Rating	0.23
Drive Trace Energy Economy Rating	0.14
Drive Trace Inertia Work Ratio Rating	0.18
Integrated DC KW-HRS	2.374
Manufacturer Fuel Economy	23.18

Charge Depleting Bag/Phase #3

Test Result/Emission Name	Unrounded Test Result
Actual Distance Driven (miles)	7.445
Carbon-Related Exhaust Emissions	0
Drive Trace Absolute Speed Change Rating	0.8
Drive Trace Energy Economy Rating	0.41
Drive Trace Inertia Work Ratio Rating	1.63
Integrated DC KW-HRS	1.414
Manufacturer Fuel Economy	18.99

Charge Depleting Bag/Phase #4

Test Result/Emission Name	Unrounded Test Result
Actual Distance Driven (miles)	229.736
Carbon-Related Exhaust Emissions	0
Drive Trace Absolute Speed Change Rating	17.06
Drive Trace Energy Economy Rating	0.02
Drive Trace Inertia Work Ratio Rating	34.12
Integrated DC KW-HRS	68.704
Manufacturer Fuel Economy	29.91

Charge Depleting Bag/Phase #5

Test Result/Emission Name	Unrounded Test Result
Actual Distance Driven (miles)	7.437
Carbon-Related Exhaust Emissions	0
Drive Trace Absolute Speed Change Rating	0.4
Drive Trace Energy Economy Rating	0.4
Drive Trace Inertia Work Ratio Rating	0.48
Integrated DC KW-HRS	1.373
Manufacturer Fuel Economy	18.46

Charge Depleting Bag/Phase #6

Test Group	VRIVT00.0232	**Evaporative/Refueling Family**	--

Test Result/Emission Name	Unrounded Test Result
Actual Distance Driven (miles)	10.23
Carbon-Related Exhaust Emissions	0
Drive Trace Absolute Speed Change Rating	-0.57
Drive Trace Energy Economy Rating	-0.36
Drive Trace Inertia Work Ratio Rating	-0.88
Integrated DC KW-HRS	2.302
Manufacturer Fuel Economy	22.5

Charge Depleting Bag/Phase #7

Test Result/Emission Name	Unrounded Test Result
Actual Distance Driven (miles)	7.399
Carbon-Related Exhaust Emissions	0
Drive Trace Absolute Speed Change Rating	-0.23
Drive Trace Energy Economy Rating	0.92
Drive Trace Inertia Work Ratio Rating	-0.1
Integrated DC KW-HRS	1.357
Manufacturer Fuel Economy	18.35

Charge Depleting Bag/Phase #8

Test Result/Emission Name	Unrounded Test Result
Actual Distance Driven (miles)	34.085
Carbon-Related Exhaust Emissions	0
Drive Trace Absolute Speed Change Rating	99.99
Drive Trace Energy Economy Rating	0
Drive Trace Inertia Work Ratio Rating	33.16
Integrated DC KW-HRS	10.274
Manufacturer Fuel Economy	30.14

Manufacturer Test Comments R2 - Drive Mode: All-Purpose (Default Mode), Dual Motor, Large Battery Pack, and 20" All-Terrain Tires. UDDS1: 235.86 Wh/mi, UDDS2: 189.87 Wh/mi, UDDS3: 184.62 Wh/mi, UDDS4: 183.46 Wh/mi. UDDS1 Energy: 1751.46 Wh HWY1: 231.77 Wh/mi, HWY2: 225.00 Wh/mi MCT Energy: 89549.27 Wh

Certification Summary Information Report

Test Group	VRIVT00.0232	**Evaporative/Refueling Family**	--

Test #	**VRIV10093330**	**Test Procedure**	**86 - Charge Depleting 20 Degree F FTP**
Exhaust Test # for this Evap Test	--	**Test Fuel Type**	62 - Electricity
Test Date	02/13/2026	**Fuel**	N/A
Fuel Batch ID	--	**Fuel Calibration Number**	--
Vehicle Class	N/A	**DF Type**	EPA Assigned
Verify Test Lab ID	FEV Michigan		
E10 Evaporative Test Measurement Method	--		
Test Start Odometer Reading	4622	**Odometer Units**	M
4WD Test Dyno	Yes	**Diesel Adjustment Factor Usage**	--
State of Charge Delta	Yes		
Drive Cycle Speed Tolerance Criteria	Used Part 86 (+/- 2 mph, +/- 1 sec)	**Road Speed Fan Usage**	Yes

PHEV/EV Charge Depleting Test Information

Recharge Event Voltage	240	**Recharge Event Energy (kiloWatt-hours)**	104.689
Charge Depleting Range (Calculated miles)	14.87	**Charge Depleting Range (Actual miles)**	14.87
Charge Depleting Range Highway (Calculated miles)	--	**Derived 5-Cycle Coefficient Model Year**	--
All Electric Range Unadjusted (miles)	--	**Equivalent All Electric Range (miles)**	14.87
Number of Charge Depleting Bags/Phases Conducted	4	**Transition Bag/Phase Number**	--

Charge Depleting Bag/Phase #1

Test Result/Emission Name	Unrounded Test Result
Actual Distance Driven (miles)	3.579
Carbon-Related Exhaust Emissions	0
Drive Trace Absolute Speed Change Rating	0.99
Drive Trace Energy Economy Rating	0.77
Drive Trace Inertia Work Ratio Rating	1.67
Integrated DC KW-HRS	1.376
Manufacturer Fuel Economy	38.44

Charge Depleting Bag/Phase #2

Test Group	VRIVT00.0232	**Evaporative/Refueling Family**	--

Test Result/Emission Name	Unrounded Test Result
Actual Distance Driven (miles)	3.846
Carbon-Related Exhaust Emissions	0
Drive Trace Absolute Speed Change Rating	0.88
Drive Trace Energy Economy Rating	0.48
Drive Trace Inertia Work Ratio Rating	1.42
Integrated DC KW-HRS	1.151
Manufacturer Fuel Economy	29.94

Charge Depleting Bag/Phase #3

Test Result/Emission Name	Unrounded Test Result
Actual Distance Driven (miles)	3.595
Carbon-Related Exhaust Emissions	0
Drive Trace Absolute Speed Change Rating	1.23
Drive Trace Energy Economy Rating	1.49
Drive Trace Inertia Work Ratio Rating	1.96
Integrated DC KW-HRS	1.163
Manufacturer Fuel Economy	32.35

Charge Depleting Bag/Phase #4

Test Result/Emission Name	Unrounded Test Result
Actual Distance Driven (miles)	3.856
Carbon-Related Exhaust Emissions	0
Drive Trace Absolute Speed Change Rating	1.84
Drive Trace Energy Economy Rating	2.18
Drive Trace Inertia Work Ratio Rating	3.17
Integrated DC KW-HRS	1.021
Manufacturer Fuel Economy	26.47

Manufacturer Test Comments R2 - Drive Mode: All-Purpose (Default Mode), Dual Motor, Large Battery Pack, and 20" All-Terrain Wheels and Tires. Cycle 1: 384.43 Wh/mi, Cycle 2: 299.38 Wh/mi, Cycle 3: 323.51 Wh/mi, Cycle 4: 264.65 Wh/mi.

Certification Summary Information Report

Test Group	VRIVT00.0232	**Evaporative/Refueling Family**	--

Emission Data Vehicle Information

Vehicle ID / Configuration	R2-162XR21 / 0	**Manufacturer Vehicle Configuration Number**	0
Original Test Group Name	VRIVT00.0232	**Original Evaporative/Refueling Family**	--
Original Test Vehicle Model Year	2027		

Vehicle Model

Represented Test Vehicle Make	Rivian	**Represented Test Vehicle Model**	R2 (21in)

Leak Family Details

Leak Family Identifier	--	**Leak Family Name**	--

Drive Sources and Fuel System Details

Drive Source and Fuel#	Drive Source	Fuel
1	Electric Motor	Electricity

Hybrid Indicator	No		
Multiple Fuel Storage	--	**Multiple Fuel Combustion**	--
Fuel Cell Indicator	No	**Rechargeable Energy Storage System Indicator**	Yes
Rechargeable Energy Storage System	Battery(s)	**Rechargeable Energy Storage System, if 'Other'**	--
Off-board charge Capable Indicator	Yes		
Odometer Correction -- Initial	1	**Odometer Correction Factor**	1
Odometer Correction Sign	+ = System Miles is equal to (Test odometer reading * Correction factor) + Initial system miles		
Odometer Correction Units	Miles		
Engine Code	300X2RW	**Rated Horsepower**	656
Displacement (liters)	99.999		
Air Aspiration Method	Naturally Aspirated	**Air Aspiration Method, if 'Other'**	Electric
Number of Air Aspiration Devices	--	**Air Aspiration Device Configuration**	--
Charge Air Cooler Type	--	**Drive Mode While Testing**	4-Wheel Drive
Shift Indicator Light Usage	Not eqipped	**Aged Emission Components**	4,000 (mi)
Curb Weight (lbs)	4998	**Equivalent Test Weight (pounds)**	5250
GVWR (lbs)	--	**N/V Ratio**	999
Axle Ratio	9.99		
Transmission Type	Automatic	**# of Transmission Gears**	1
Transmission Lockup	No	**Creeper Gear**	No

Certification Summary Information Report

Test Group	VRIVT00.0232	Evaporative/Refueling Family	--

Dynamometer Coefficients:

Coefficient Category	Target Coefficients A (lbf)	Target Coefficients B (lbf/mph)	Target Coefficients C (lbf/mph**2)	Set Coefficients A (lbf)	Set Coefficients B (lbf/mph)	Set Coefficients C (lbf/mph**2)	EPA Calculated Total Road Load Horse Power for City/Highway/Evap Coefficients
City/Highway/Evap	22.83	0.5386	0.0164	-6.47	0.37	0.01562	12.1
Cold CO	25.11	0.5925	0.01804	-11.96	0.1432	0.01887	N/A
US06	22.83	0.5386	0.0164	-6.47	0.37	0.01562	N/A

Emission Control Device Comments Battery Electric Vehicle

Manufacturer Test Vehicle Comments R2 (21in) - All-Purpose (Default) Drive Mode FDU Axle Ratio: 8.8 RDU Axle Ratio: 10 FDU N/V: 95.4 RDU N/V: 107.7

Certification Summary Information Report

Test Group	VRIVT00.0232	**Evaporative/Refueling Family**	--

Test #	**VRIV10093331**	**Test Procedure**	**2 - CVS 75 and later (w/o can. load)**
Exhaust Test # for this Evap Test	--	**Test Fuel Type**	62 - Electricity
Test Date	02/14/2026	**Fuel**	Electricity
Fuel Batch ID	--	**Fuel Calibration Number**	--
Vehicle Class	LDT3 (ALVW 3751-5750, LVW 0-3750, GVW > 6000)	**DF Type**	EPA Assigned
Verify Test Lab ID	FEV Michigan		
E10 Evaporative Test Measurement Method	--		
Test Start Odometer Reading	4572	**Odometer Units**	M
4WD Test Dyno	Yes	**Diesel Adjustment Factor Usage**	--
State of Charge Delta	Yes		
Drive Cycle Speed Tolerance Criteria	Used Part 86 (+/- 2 mph, +/- 1 sec)	**Road Speed Fan Usage**	Yes

Test Results

Test Result Name	Unrounded Test Result	Verify Calculated FE Equivalent Value (kilowatt-hour per 100 miles)
METHANE (CH4 - Methane)	0	--
CO (Carbon Monoxide)	0	--
DT-ASCR (Drive Trace Absolute Speed Change Rating)	-0.57	--
DT-EER (Drive Trace Energy Economy Rating)	-0.3	--
DT-IWRR (Drive Trace Inertia Work Ratio Rating)	-1.28	--
MFR FE (Manufacturer Fuel Economy)	18.16	185.6002203
NOX (Nitrogen Oxide)	0	--
N2O (Nitrous Oxide)	0	--
HC-NM (Non-methane Hydrocarbon)	0	--
NMOG (Non-methane organic gases)	0	--

Test Result Name	Unrounded Test Result	Verify Calculated CREE/OPT-CREE
Carbon-Related Exhaust Emissions	0	0
Optional Carbon-Related Exhaust Emissions	0	0

Test Result Name	Unrounded Test Result	Verify Calculated CO2
Carbon dioxide	0	--

Manufacturer Test Comments R2 - Drive Mode: All-Purpose (Default Mode), Dual Motor, Large Battery Pack, and 21" All-Season Wheels and Tires. Cycle 1: 205.58 Wh/mi, Cycle 2: 163.07 Wh/mi, Cycle 3: 199.39 Wh/mi, Cycle 4: 160.88 Wh/mi.

Certification Summary Information Report

Test Group VRIVT00.0232 **Evaporative/Refueling Family** --

Certification Region	Useful Life	Standard Level	Emission Name	Rounded Result	RAF	NMOG/NM HC Ratio	Diesel Adjustment Factor	Add DF	Mult DF	Certification Level	Standard	Pass/Fail
Fed	150,000 miles	Federal Tier 3 Bin 0	CO	0.0	--	--	--	0	--	0	0	Pass
CA	150,000 miles	California ZEV	CO	0.0	--	--	--	0	--	0	0	Pass

Certification Summary Information Report

Test Group	VRIVT00.0232	**Evaporative/Refueling Family**	--

Test #	**VRIV10093332**	**Test Procedure**	**3 - HWFE**
Exhaust Test # for this Evap Test	--	**Test Fuel Type**	62 - Electricity
Test Date	02/14/2026	**Fuel**	N/A
Fuel Batch ID	--	**Fuel Calibration Number**	--
Vehicle Class	N/A	**DF Type**	EPA Assigned
Verify Test Lab ID	FEV Michigan		
E10 Evaporative Test Measurement Method	--		
Test Start Odometer Reading	4572	**Odometer Units**	M
4WD Test Dyno	Yes	**Diesel Adjustment Factor Usage**	--
State of Charge Delta	Yes		
Drive Cycle Speed Tolerance Criteria	Used Part 86 (+/- 2 mph, +/- 1 sec)	**Road Speed Fan Usage**	Yes

Test Results

Test Result Name	Unrounded Test Result	Verify Calculated FE Equivalent Value (kilowatt-hour per 100 miles)
METHANE (CH4 - Methane)	0	--
CO (Carbon Monoxide)	0	--
DT-ASCR (Drive Trace Absolute Speed Change Rating)	1.4	--
DT-EER (Drive Trace Energy Economy Rating)	0.53	--
DT-IWRR (Drive Trace Inertia Work Ratio Rating)	1.68	--
MFR FE (Manufacturer Fuel Economy)	21.1	159.7393365
NOX (Nitrogen Oxide)	0	--
N2O (Nitrous Oxide)	0	--
HC-NM (Non-methane Hydrocarbon)	0	--
NMOG (Non-methane organic gases)	0	--

Test Result Name	Unrounded Test Result	Verify Calculated CREE/OPT-CREE
Carbon-Related Exhaust Emissions	0	0
Optional Carbon-Related Exhaust Emissions	0	0

Test Result Name	Unrounded Test Result	Verify Calculated CO2
Carbon dioxide	0	--

Manufacturer Test Comments R2 - Drive Mode: All-Purpose (Default Mode), Dual Motor, Large Battery Pack, and 21" All-Season Wheels and Tires. Cycle 1: 211.04 Wh/mi

Certification Summary Information Report

Test Group	VRIVT00.0232	**Evaporative/Refueling Family**	--

Test #	**VRIV10093333**	**Test Procedure**	**90 - US06**
Exhaust Test # for this Evap Test	--	**Test Fuel Type**	62 - Electricity
Test Date	02/14/2026	**Fuel**	N/A
Fuel Batch ID	--	**Fuel Calibration Number**	--
Vehicle Class	N/A	**DF Type**	EPA Assigned
Verify Test Lab ID	FEV Michigan		
E10 Evaporative Test Measurement Method	--		
Test Start Odometer Reading	4597	**Odometer Units**	M
4WD Test Dyno	Yes	**Diesel Adjustment Factor Usage**	--
State of Charge Delta	Yes		
Drive Cycle Speed Tolerance Criteria	Used Part 86 (+/- 2 mph, +/- 1 sec)	**Road Speed Fan Usage**	Yes

Test Results

Test Result Name	Unrounded Test Result	Verify Calculated FE Equivalent Value (kilowatt-hour per 100 miles)
METHANE (CH4 - Methane)	0	--
CO (Carbon Monoxide)	0	--
DT-ASCR (Drive Trace Absolute Speed Change Rating)	-4.01	--
DT-EER (Drive Trace Energy Economy Rating)	-2.89	--
DT-IWRR (Drive Trace Inertia Work Ratio Rating)	-7.25	--
MFR FE (Manufacturer Fuel Economy)	28.87	116.7474887
NOX (Nitrogen Oxide)	0	--
N2O (Nitrous Oxide)	0	--
HC-NM (Non-methane Hydrocarbon)	0	--
NMOG (Non-methane organic gases)	0	--

Test Result Name	Unrounded Test Result	Verify Calculated CREE/OPT-CREE
Carbon-Related Exhaust Emissions	0	--
Optional Carbon-Related Exhaust Emissions	0	--

Test Result Name	Unrounded Test Result	Verify Calculated CO2
Carbon dioxide	0	--

Manufacturer Test Comments R2 - Drive Mode: All-Purpose (Default Mode), Dual Motor, Large Battery Pack, and 21" All-Season Wheels and Tires. Cycle 1 (City1): 272.49 Wh/mi, Cycle 2 (HWY): 286.92 Wh/mi, Cycle 3 (City2): 353.15 Wh/mi

Certification Summary Information Report

Test Group	VRIVT00.0232	**Evaporative/Refueling Family**	--

Test #	**VRIV10093334**	**Test Procedure**	**95 - SC03**
Exhaust Test # for this Evap Test	--	**Test Fuel Type**	62 - Electricity
Test Date	02/14/2026	**Fuel**	N/A
Fuel Batch ID	--	**Fuel Calibration Number**	--
Vehicle Class	N/A	**DF Type**	EPA Assigned
Verify Test Lab ID	FEV Michigan		
E10 Evaporative Test Measurement Method	--		
Test Start Odometer Reading	4613	**Odometer Units**	M
4WD Test Dyno	Yes	**Diesel Adjustment Factor Usage**	--
State of Charge Delta	Yes		
Drive Cycle Speed Tolerance Criteria	Used Part 86 (+/- 2 mph, +/- 1 sec)	**Road Speed Fan Usage**	Yes

Test Results

Test Result Name	Unrounded Test Result	Verify Calculated FE Equivalent Value (kilowatt-hour per 100 miles)
METHANE (CH4 - Methane)	0	--
CO (Carbon Monoxide)	0	--
DT-ASCR (Drive Trace Absolute Speed Change Rating)	-0.72	--
DT-EER (Drive Trace Energy Economy Rating)	-0.22	--
DT-IWRR (Drive Trace Inertia Work Ratio Rating)	-0.48	--
MFR FE (Manufacturer Fuel Economy)	26.09	129.1874281
NOX (Nitrogen Oxide)	0	--
N2O (Nitrous Oxide)	0	--
HC-NM (Non-methane Hydrocarbon)	0	--
NMOG (Non-methane organic gases)	0	--

Test Result Name	Unrounded Test Result	Verify Calculated CREE/OPT-CREE
Carbon-Related Exhaust Emissions	0	--
Optional Carbon-Related Exhaust Emissions	0	--

Test Result Name	Unrounded Test Result	Verify Calculated CO2
Carbon dioxide	0	--

Manufacturer Test Comments R2 - Drive Mode: All-Purpose (Default Mode), Dual Motor, Large Battery Pack, and 21" All-Season Wheels and Tires. Cycle 1: 260.91 Wh/mi

Certification Summary Information Report

Test Group	VRIVT00.0232	**Evaporative/Refueling Family**	--

Test #	**VRIV10093230**	**Test Procedure**	**77 - Multi-Cycle Test (MCT)**
Exhaust Test # for this Evap Test	--	**Test Fuel Type**	62 - Electricity
Test Date	02/07/2026	**Fuel**	N/A
Fuel Batch ID	--	**Fuel Calibration Number**	--
Vehicle Class	N/A	**DF Type**	EPA Assigned
Verify Test Lab ID	FEV Michigan		
E10 Evaporative Test Measurement Method	--		
Test Start Odometer Reading	4105	**Odometer Units**	M
4WD Test Dyno	Yes	**Diesel Adjustment Factor Usage**	--
State of Charge Delta	Yes		
Drive Cycle Speed Tolerance Criteria	Used Part 86 (+/- 2 mph, +/- 1 sec)	**Road Speed Fan Usage**	Yes

PHEV/EV Charge Depleting Test Information

Recharge Event Voltage	240	**Recharge Event Energy (kiloWatt-hours)**	100.994
Charge Depleting Range (Calculated miles)	490.576	**Charge Depleting Range (Actual miles)**	490.576
Charge Depleting Range Highway (Calculated miles)	413.43	**Derived 5-Cycle Coefficient Model Year**	--
All Electric Range Unadjusted (miles)	--	**Equivalent All Electric Range (miles)**	490.576
Number of Charge Depleting Bags/Phases Conducted	8	**Transition Bag/Phase Number**	--

Charge Depleting Bag/Phase #1

Test Result/Emission Name	Unrounded Test Result
Actual Distance Driven (miles)	7.397
Carbon-Related Exhaust Emissions	0
Drive Trace Absolute Speed Change Rating	-0.59
Drive Trace Energy Economy Rating	-0.63
Drive Trace Inertia Work Ratio Rating	-1.62
Integrated DC KW-HRS	1.639
Manufacturer Fuel Economy	22.16

Charge Depleting Bag/Phase #2

Test Group	VRIVT00.0232	**Evaporative/Refueling Family**	--

Test Result/Emission Name	Unrounded Test Result
Actual Distance Driven (miles)	10.254
Carbon-Related Exhaust Emissions	0
Drive Trace Absolute Speed Change Rating	-0.2
Drive Trace Energy Economy Rating	0.03
Drive Trace Inertia Work Ratio Rating	-0.46
Integrated DC KW-HRS	2.21
Manufacturer Fuel Economy	21.55

Charge Depleting Bag/Phase #3

Test Result/Emission Name	Unrounded Test Result
Actual Distance Driven (miles)	7.406
Carbon-Related Exhaust Emissions	0
Drive Trace Absolute Speed Change Rating	-1.95
Drive Trace Energy Economy Rating	-1.05
Drive Trace Inertia Work Ratio Rating	-2.85
Integrated DC KW-HRS	1.34
Manufacturer Fuel Economy	18.09

Charge Depleting Bag/Phase #4

Test Result/Emission Name	Unrounded Test Result
Actual Distance Driven (miles)	271.153
Carbon-Related Exhaust Emissions	0
Drive Trace Absolute Speed Change Rating	18.34
Drive Trace Energy Economy Rating	0.2
Drive Trace Inertia Work Ratio Rating	36.47
Integrated DC KW-HRS	73.961
Manufacturer Fuel Economy	27.28

Charge Depleting Bag/Phase #5

Test Result/Emission Name	Unrounded Test Result
Actual Distance Driven (miles)	7.464
Carbon-Related Exhaust Emissions	0
Drive Trace Absolute Speed Change Rating	0.38
Drive Trace Energy Economy Rating	0.36
Drive Trace Inertia Work Ratio Rating	0.5
Integrated DC KW-HRS	1.327
Manufacturer Fuel Economy	17.78

Charge Depleting Bag/Phase #6

Test Group	VRIVT00.0232	**Evaporative/Refueling Family**	--

Test Result/Emission Name	Unrounded Test Result
Actual Distance Driven (miles)	10.257
Carbon-Related Exhaust Emissions	0
Drive Trace Absolute Speed Change Rating	1
Drive Trace Energy Economy Rating	-0.14
Drive Trace Inertia Work Ratio Rating	1.59
Integrated DC KW-HRS	2.16
Manufacturer Fuel Economy	21.05

Charge Depleting Bag/Phase #7

Test Result/Emission Name	Unrounded Test Result
Actual Distance Driven (miles)	7.446
Carbon-Related Exhaust Emissions	0
Drive Trace Absolute Speed Change Rating	0.72
Drive Trace Energy Economy Rating	0.39
Drive Trace Inertia Work Ratio Rating	1.08
Integrated DC KW-HRS	1.322
Manufacturer Fuel Economy	17.75

Charge Depleting Bag/Phase #8

Test Result/Emission Name	Unrounded Test Result
Actual Distance Driven (miles)	14.834
Carbon-Related Exhaust Emissions	0
Drive Trace Absolute Speed Change Rating	99.99
Drive Trace Energy Economy Rating	-1.41
Drive Trace Inertia Work Ratio Rating	6.72
Integrated DC KW-HRS	4.125
Manufacturer Fuel Economy	27.81

Manufacturer Test Comments R2 - Drive Mode: All-Purpose (Default Mode), Dual Motor, Large Battery Pack, and 21" All-Season Wheels and Tires. UDDS1: 221.61 Wh/mi, UDDS2: 180.91 Wh/mi, UDDS3: 177.79 Wh/mi, UDDS4: 177.52 Wh/mi. UDDS1 Energy: 1639.27 Wh HWY1: 215.49 Wh/mi, HWY2: 210.54 Wh/mi MCT Energy: 88082.60 Wh

Certification Summary Information Report

Test Group	VRIVT00.0232	**Evaporative/Refueling Family**	--

Test #	**VRIV10093335**	**Test Procedure**	**86 - Charge Depleting 20 Degree F FTP**
Exhaust Test # for this Evap Test	--	**Test Fuel Type**	62 - Electricity
Test Date	02/16/2026	**Fuel**	N/A
Fuel Batch ID	--	**Fuel Calibration Number**	--
Vehicle Class	N/A	**DF Type**	EPA Assigned
Verify Test Lab ID	FEV Michigan		
E10 Evaporative Test Measurement Method	--		
Test Start Odometer Reading	4620	**Odometer Units**	M
4WD Test Dyno	Yes	**Diesel Adjustment Factor Usage**	--
State of Charge Delta	Yes		
Drive Cycle Speed Tolerance Criteria	Used Part 86 (+/- 2 mph, +/- 1 sec)	**Road Speed Fan Usage**	Yes

PHEV/EV Charge Depleting Test Information

Recharge Event Voltage	240	**Recharge Event Energy (kiloWatt-hours)**	100.994
Charge Depleting Range (Calculated miles)	14.9	**Charge Depleting Range (Actual miles)**	14.9
Charge Depleting Range Highway (Calculated miles)	--	**Derived 5-Cycle Coefficient Model Year**	--
All Electric Range Unadjusted (miles)	--	**Equivalent All Electric Range (miles)**	14.9
Number of Charge Depleting Bags/Phases Conducted	4	**Transition Bag/Phase Number**	--

Charge Depleting Bag/Phase #1

Test Result/Emission Name	Unrounded Test Result
Actual Distance Driven (miles)	3.598
Carbon-Related Exhaust Emissions	0
Drive Trace Absolute Speed Change Rating	2.29
Drive Trace Energy Economy Rating	1.9
Drive Trace Inertia Work Ratio Rating	3.35
Integrated DC KW-HRS	1.284
Manufacturer Fuel Economy	35.68

Charge Depleting Bag/Phase #2

Test Group	VRIVT00.0232	**Evaporative/Refueling Family**	--

Test Result/Emission Name	Unrounded Test Result
Actual Distance Driven (miles)	3.853
Carbon-Related Exhaust Emissions	0
Drive Trace Absolute Speed Change Rating	2.13
Drive Trace Energy Economy Rating	1.62
Drive Trace Inertia Work Ratio Rating	2.88
Integrated DC KW-HRS	1.114
Manufacturer Fuel Economy	28.91

Charge Depleting Bag/Phase #3

Test Result/Emission Name	Unrounded Test Result
Actual Distance Driven (miles)	3.587
Carbon-Related Exhaust Emissions	0
Drive Trace Absolute Speed Change Rating	1.86
Drive Trace Energy Economy Rating	1.58
Drive Trace Inertia Work Ratio Rating	2.87
Integrated DC KW-HRS	1.093
Manufacturer Fuel Economy	30.48

Charge Depleting Bag/Phase #4

Test Result/Emission Name	Unrounded Test Result
Actual Distance Driven (miles)	3.866
Carbon-Related Exhaust Emissions	0
Drive Trace Absolute Speed Change Rating	3
Drive Trace Energy Economy Rating	2.42
Drive Trace Inertia Work Ratio Rating	4.55
Integrated DC KW-HRS	0.988
Manufacturer Fuel Economy	25.56

Manufacturer Test Comments R2 - Drive Mode: All-Purpose (Default Mode), Dual Motor, Large Battery Pack, and 21" All-Season Wheels and Tires. Cycle 1: 356.80 Wh/mi, Cycle 2: 289.14 Wh/mi, Cycle 3: 304.84 Wh/mi, Cycle 4: 255.56 Wh/mi.

Certification Summary Information Report

Test Group	VRIVT00.0232	**Evaporative/Refueling Family**	--

Test #	**VRIV10093452**	**Test Procedure**	**77 - Multi-Cycle Test (MCT)**
Exhaust Test # for this Evap Test	--	**Test Fuel Type**	62 - Electricity
Test Date	03/05/2026	**Fuel**	N/A
Fuel Batch ID	--	**Fuel Calibration Number**	--
Vehicle Class	N/A	**DF Type**	EPA Assigned
Verify Test Lab ID	EPA Ann Arbor		
E10 Evaporative Test Measurement Method	--		
Test Start Odometer Reading	4676	**Odometer Units**	M
4WD Test Dyno	Yes	**Diesel Adjustment Factor Usage**	--
State of Charge Delta	Yes		
Drive Cycle Speed Tolerance Criteria	Used Part 86 (+/- 2 mph, +/- 1 sec)	**Road Speed Fan Usage**	Yes

PHEV/EV Charge Depleting Test Information

Recharge Event Voltage	248.4	**Recharge Event Energy (kiloWatt-hours)**	105.51
Charge Depleting Range (Calculated miles)	487.457	**Charge Depleting Range (Actual miles)**	487.457
Charge Depleting Range Highway (Calculated miles)	410.871	**Derived 5-Cycle Coefficient Model Year**	--
All Electric Range Unadjusted (miles)	--	**Equivalent All Electric Range (miles)**	487.457
Number of Charge Depleting Bags/Phases Conducted	8	**Transition Bag/Phase Number**	--

Charge Depleting Bag/Phase #1

Test Result/Emission Name	Unrounded Test Result
Actual Distance Driven (miles)	7.453
Carbon-Related Exhaust Emissions	0
Drive Trace Absolute Speed Change Rating	1.37
Drive Trace Energy Economy Rating	0.407
Drive Trace Inertia Work Ratio Rating	1.645
Integrated DC KW-HRS	1.725
Manufacturer Fuel Economy	23.15

Charge Depleting Bag/Phase #2

Test Group	VRIVT00.0232	**Evaporative/Refueling Family**	--

Test Result/Emission Name	Unrounded Test Result
Actual Distance Driven (miles)	10.261
Carbon-Related Exhaust Emissions	0
Drive Trace Absolute Speed Change Rating	0.76
Drive Trace Energy Economy Rating	0.044
Drive Trace Inertia Work Ratio Rating	0.913
Integrated DC KW-HRS	2.249
Manufacturer Fuel Economy	21.92

Charge Depleting Bag/Phase #3

Test Result/Emission Name	Unrounded Test Result
Actual Distance Driven (miles)	7.442
Carbon-Related Exhaust Emissions	0
Drive Trace Absolute Speed Change Rating	1.34
Drive Trace Energy Economy Rating	0.947
Drive Trace Inertia Work Ratio Rating	1.727
Integrated DC KW-HRS	1.369
Manufacturer Fuel Economy	18.4

Charge Depleting Bag/Phase #4

Test Result/Emission Name	Unrounded Test Result
Actual Distance Driven (miles)	251.639
Carbon-Related Exhaust Emissions	0
Drive Trace Absolute Speed Change Rating	99.99
Drive Trace Energy Economy Rating	99.99
Drive Trace Inertia Work Ratio Rating	99.99
Integrated DC KW-HRS	69.331
Manufacturer Fuel Economy	27.55

Charge Depleting Bag/Phase #5

Test Result/Emission Name	Unrounded Test Result
Actual Distance Driven (miles)	7.463
Carbon-Related Exhaust Emissions	0
Drive Trace Absolute Speed Change Rating	2.26
Drive Trace Energy Economy Rating	1.26
Drive Trace Inertia Work Ratio Rating	3.091
Integrated DC KW-HRS	1.341
Manufacturer Fuel Economy	17.97

Charge Depleting Bag/Phase #6

Test Group	VRIVT00.0232	**Evaporative/Refueling Family**	--

Test Result/Emission Name	Unrounded Test Result
Actual Distance Driven (miles)	10.257
Carbon-Related Exhaust Emissions	0
Drive Trace Absolute Speed Change Rating	5
Drive Trace Energy Economy Rating	0.982
Drive Trace Inertia Work Ratio Rating	6.21
Integrated DC KW-HRS	2.179
Manufacturer Fuel Economy	21.25

Charge Depleting Bag/Phase #7

Test Result/Emission Name	Unrounded Test Result
Actual Distance Driven (miles)	7.442
Carbon-Related Exhaust Emissions	0
Drive Trace Absolute Speed Change Rating	1.26
Drive Trace Energy Economy Rating	0.487
Drive Trace Inertia Work Ratio Rating	1.961
Integrated DC KW-HRS	1.333
Manufacturer Fuel Economy	17.91

Charge Depleting Bag/Phase #8

Test Result/Emission Name	Unrounded Test Result
Actual Distance Driven (miles)	33.192
Carbon-Related Exhaust Emissions	0
Drive Trace Absolute Speed Change Rating	99.99
Drive Trace Energy Economy Rating	99.99
Drive Trace Inertia Work Ratio Rating	99.99
Integrated DC KW-HRS	9.143
Manufacturer Fuel Economy	27.55

Manufacturer Test Comments R2 - Drive Mode: All-Purpose (Default Mode), Dual Motor, Large Battery Pack, and 21" All-Season Wheels and Tires. UDDS1: 231.50 Wh/mi, UDDS2: 183.96 Wh/mi, UDDS3: 179.71 Wh/mi, UDDS4: 179.12 Wh/mi. UDDS1 Energy: 1725.36 Wh HWY1: 219.22 Wh/mi, HWY2: 212.45 Wh/mi MCT Energy: 88671.72 Wh

Fuel Properties

Certification Summary Information Report

Test Group	VRIVT00.0232	**Evaporative/Refueling Family**	--

Consolidated List of Standards

Exhaust Standards

Cert Region	Federal	**Cert/In-Use Code**	Cert
Vehicle Class	LDT3 (ALVW 3751-5750, LVW 0-3750, GVW > 6000)	**Standard Level**	Federal Tier 3 Bin 0
Fuel	Electricity	**Test Procedure**	Charge Depleting UDDS

Useful Life	Emission Name	Rounded Result	RAF	NMOG / NMHC	Upward Diesel Adjustment Factor	Downward Diesel Adjustment Factor	Mult DF	Add DF	Std
150,000 miles	CO	--	--	--	--	--	--	0	0
150,000 miles	CO-COMP	--	--	--	--	--	--	0	0
150,000 miles	CREE	--	--	--	--	--	--	0	0
150,000 miles	NMOG+NOX-COMP	--	--	--	--	--	--	0	0

Cert Region	Federal	**Cert/In-Use Code**	Cert
Vehicle Class	LDT3 (ALVW 3751-5750, LVW 0-3750, GVW > 6000)	**Standard Level**	Federal Tier 3 Bin 0
Fuel	Electricity	**Test Procedure**	CVS 75 and later (w/o can. load)

Useful Life	Emission Name	Rounded Result	RAF	NMOG / NMHC	Upward Diesel Adjustment Factor	Downward Diesel Adjustment Factor	Mult DF	Add DF	Std
150,000 miles	CO	--	--	--	--	--	--	0	0

Cert Region	Federal	**Cert/In-Use Code**	Cert
Vehicle Class	LDT3 (ALVW 3751-5750, LVW 0-3750, GVW > 6000)	**Standard Level**	Federal Tier 3 Bin 0
Fuel	Electricity	**Test Procedure**	Charge Depleting Highway

Useful Life	Emission Name	Rounded Result	RAF	NMOG / NMHC	Upward Diesel Adjustment Factor	Downward Diesel Adjustment Factor	Mult DF	Add DF	Std
150,000 miles	CO	--	--	--	--	--	--	0	0
150,000 miles	CO-COMP	--	--	--	--	--	--	0	0
150,000 miles	CREE	--	--	--	--	--	--	0	0
150,000 miles	NMOG+NOX-COMP	--	--	--	--	--	--	0	0

Certification Summary Information Report

Test Group	VRIVT00.0232	**Evaporative/Refueling Family**	--

Cert Region	California + CAA Section 177 states	**Cert/In-Use Code**	Cert
Vehicle Class	LDT3 (ALVW 3751-5750, LVW 0-3750, GVW > 6000)	**Standard Level**	California ZEV
Fuel	Electricity	**Test Procedure**	Charge Depleting UDDS

Useful Life	Emission Name	Rounded Result	RAF	NMOG / NMHC	Upward Diesel Adjustment Factor	Downward Diesel Adjustment Factor	Mult DF	Add DF	Std
150,000 miles	CO	--	--	--	--	--	--	0	0
150,000 miles	CO-COMP	--	--	--	--	--	--	0	0
150,000 miles	CREE	--	--	--	--	--	--	0	0
150,000 miles	NMOG+NOX-COMP	--	--	--	--	--	--	0	0

Cert Region	California + CAA Section 177 states	**Cert/In-Use Code**	Cert
Vehicle Class	LDT3 (ALVW 3751-5750, LVW 0-3750, GVW > 6000)	**Standard Level**	California ZEV
Fuel	Electricity	**Test Procedure**	CVS 75 and later (w/o can. load)

Useful Life	Emission Name	Rounded Result	RAF	NMOG / NMHC	Upward Diesel Adjustment Factor	Downward Diesel Adjustment Factor	Mult DF	Add DF	Std
150,000 miles	CO	--	--	--	--	--	--	0	0

Cert Region	California + CAA Section 177 states	**Cert/In-Use Code**	Cert
Vehicle Class	LDT3 (ALVW 3751-5750, LVW 0-3750, GVW > 6000)	**Standard Level**	California ZEV
Fuel	Electricity	**Test Procedure**	Charge Depleting Highway

Useful Life	Emission Name	Rounded Result	RAF	NMOG / NMHC	Upward Diesel Adjustment Factor	Downward Diesel Adjustment Factor	Mult DF	Add DF	Std
150,000 miles	CO	--	--	--	--	--	--	0	0
150,000 miles	CO-COMP	--	--	--	--	--	--	0	0
150,000 miles	CREE	--	--	--	--	--	--	0	0
150,000 miles	NMOG+NOX-COMP	--	--	--	--	--	--	0	0

Certification Summary Information Report

Test Group	VRIVT00.0232	**Evaporative/Refueling Family**	--

Glossary

Useful Life			
4	4,000 miles	120	120,000 miles
50	50,000 miles	150	150,000 miles
100	100,000 miles		

Emission Name			
HC-TOTAL	Total Hydrocarbon	COMB-CREE	Combined Carbon-Related Exhaust Emissions
CO	Carbon Monoxide	COMB-OPT-CREE	Combined Optional Carbon-Related Exhaust Emissions
CO2	Carbon dioxide	HC-TOTAL-EQUIV	Total Hydrocarbon equivalent - Evap only
CREE	Carbon-Related Exhaust Emissions	METHANE-COMB	Combined CH4 for HD 2b/3 vehicles only
OPT-CREE	Optional Carbon-Related Exhaust Emissions	N2O-COMB	Combined Nitrous Oxide for HD 2b/3 vehicles only
NOX	Nitrogen Oxide	LEAK-DIA	Effective Leak Diameter (inches)
PM	Particulate Matter	LEAK-GAS CAP	Gas Cap Leakage (cc/min)
PM-COMP	SFTP Composite Particulate Matter	CO2-COMB	Combined Carbon Dioxide for HD 2b/3 Vehicles Only
HC-NM	Non-methane Hydrocarbon	KW-HRS	Integrated DC KW-HRS
OMHCE	Organic material Hydrocarbon Equivalent	CH4 BAG 1	Bag 1 Methane
OMNMHCE	Organic material non-methane HC equivalent	CH4 BAG 2	Bag 2 Methane
NMOG	Non-methane organic gases	CH4 BAG 3	Bag 3 Methane
HCHO	Formaldehyde	CH4 BAG 4	Bag 4 Methane
H3C2HO	Acetaldehyde	CO BAG 1	Bag 1 Carbon Monoxide
HC-NM+NOX	SFTP Non-methane Hydrocarbon + Nitrogen Oxides for US06 or SC03	CO BAG 2	Bag 2 Carbon Monoxide
HC-NM+NOX-COMP	SFTP Composite Non-methane Hydrocarbon + Nitrogen Oxides	CO BAG 3	Bag 3 Carbon Monoxide
CO-COMP	SFTP Composite Carbon Monoxide	CO BAG 4	Bag 4 Carbon Monoxide
ETHANOL	C2H5OH - Ethanol	NMOG BAG 1	Bag 1 Non-methane organic gases
FE BAG 1	Bag 1 Fuel Economy	NMOG BAG 2	Bag 2 Non-methane organic gases
FE BAG 2	Bag 2 Fuel Economy	NMOG BAG 3	Bag 3 Non-methane organic gases
FE BAG 3	Bag 3 Fuel Economy	NMOG BAG 4	Bag 4 Non-methane organic gases
FE BAG 4	Bag 4 Fuel Economy	ACT-DISTANCE BAG 1	Bag 1 Actual Distance
MFR FE	Manufacturer Fuel Economy	ACT-DISTANCE BAG 2	Bag 2 Actual Distance
HC	Hydrocarbon for Running Loss and ORVR	ACT-DISTANCE BAG 3	Bag 3 Actual Distance
METHANE	CH4 - Methane	ACT-DISTANCE BAG 4	Bag 4 Actual Distance
METHANOL	CH3OH - Methanol	HC-TOTAL BAG 1	Bag 1 Total Hydrocarbon
N2O	Nitrous Oxide	HC-TOTAL BAG 2	Bag 2 Total Hydrocarbon
SPITBACK	Spitback Hydrocarbon in grams	HC-TOTAL BAG 3	Bag 3 Total Hydrocarbon
AMP-HRS	Integrated Amp-hours	HC-TOTAL BAG 4	Bag 4 Total Hydrocarbon
START-SOC	System Start State of Charge Watt-hours	WATT-HRS BAG 1	Bag 1 Watt Hours
END-SOC	System End State of Charge Watt-hours	WATT-HRS BAG 2	Bag 2 Watt Hours

Certification Summary Information Report

Test Group	VRIVT00.0232	**Evaporative/Refueling Family**	--
ACT-DISTANCE	Actual Distance Driven (miles)	WATT-HRS BAG 3	Bag 3 Watt Hours
AS-VOLT	Average System Voltage	WATT-HRS BAG 4	Bag 4 Watt Hours
CO2 BAG 1	Bag 1 Carbon Dioxide	WATT-HRS	Watt Hours
CO2 BAG 2	Bag 2 Carbon Dioxide	HC-NM BAG 1	Bag 1 Non-methane Hydrocarbon
CO2 BAG 3	Bag 3 Carbon Dioxide	HC-NM BAG 2	Bag 2 Non-methane Hydrocarbon
CO2 BAG 4	Bag 4 Carbon Dioxide	HC-NM BAG 3	Bag 3 Non-methane Hydrocarbon
NMOG+NOX	Non-methane organic gases plus Nitrogen Oxides	HC-NM BAG 4	Bag 4 Non-methane Hydrocarbon
NMOG+NOX-COMP	SFTP Composite Non-methane Organic Gases + Nitrogen Oxides	N2O BAG 1	Bag 1 Nitrous Oxide
DT-IWRR	Drive Trace Inertia Work Ratio Rating	N2O BAG 2	Bag 2 Nitrous Oxide
DT-ASCR	Drive Trace Absolute Speed Change Rating	N2O BAG 3	Bag 3 Nitrous Oxide
DT-EER	Drive Trace Energy Economy Rating	N2O BAG 4	Bag 4 Nitrous Oxide

Certification Region			
CA	California + CAA Section 177 states	FA	Federal

Exhaust Emission Standard Level			
B1	Federal Tier 2 Bin 1	HDV2B340	Federal Tier 3 HD Class 2b Transitional Bin 340
B2	Federal Tier 2 Bin 2	HDV2B250	Federal Tier 3 HD Class 2b Bin 250
B3	Federal Tier 2 Bin 3	HDV2B200	Federal Tier 3 HD Class 2b Bin 200
B4	Federal Tier 2 Bin 4	HDV2B170	Federal Tier 3 HD Class 2b Bin 170
B5	Federal Tier 2 Bin 5	HDV2B150	Federal Tier 3 HD Class 2b Bin 150
B6	Federal Tier 2 Bin 6	HDV2B0	Federal Tier 3 HD Class 2b Bin 0
B7	Federal Tier 2 Bin 7	HDV3B630	Federal Tier 3 HD Class 3 Transitional Bin 630
B8	Federal Tier 2 Bin 8	HDV3B570	Federal Tier 3 HD Class 3 Transitional Bin 570
B9	Federal Tier 2 Bin 9	HDV3B400	Federal Tier 3 HD Class 3 Bin 400
B10	Federal Tier 2 Bin 10	HDV3B270	Federal Tier 3 HD Class 3 Bin 270
B11	Federal Tier 2 Bin 11	HDV3B230	Federal Tier 3 HD Class 3 Bin 230
HDV1	HDV1 (Federal HD chassis Class 2b GVW 8501-10000)	HDV3B200	Federal Tier 3 HD Class 3 Bin 200
HDV2	HDV2 (Federal HD chassis Class 3 GVW 10001-14000)	HDV3B0	Federal Tier 3 HD Class 3 Bin 0
L2	California LEV-II LEV	L4SULEV100	California LEV-IV SULEV100
L2OP	California LEV-II LEV Optional	L4SULEV125	California LEV-IV SULEV125
U2	California LEV-II ULEV	L4SULEV15	California LEV-IV SULEV15
S2	California LEV-II SULEV	L4SULEV150	California LEV-IV SULEV150
ZEV	California ZEV	L4SULEV170	California LEV-IV SULEV170
OT	Other	L4SULEV175	California LEV-IV SULEV175
T1	Federal Tier 1	L4SULEV20	California LEV-IV SULEV20
PZEV	California PZEV	L4SULEV200	California LEV-IV SULEV200
L2LEV160	California LEV-II LEV160	L4SULEV230	California LEV-IV SULEV230
L2ULEV125	California LEV-II ULEV125	L4SULEV25	California LEV-IV SULEV25
L2SULEV30	California LEV-II SULEV30	L4SULEV30	California LEV-IV SULEV30
L2LEV395	California LEV-II LEV395	L4SULEV75	California LEV-IV SULEV75

Certification Summary Information Report

Test Group	VRIVT00.0232	**Evaporative/Refueling Family**	--
L2ULEV340	California LEV-II ULEV340	L4SULEV85	California LEV-IV SULEV85
L2LEV630	California LEV-II LEV630	L4ULEV125	California LEV-IV ULEV125
L2ULEV570	California LEV-II ULEV570	L4ULEV200	California LEV-IV ULEV200
L3LEV160	California LEV-III LEV160	L4ULEV250	California LEV-IV ULEV250
L3ULEV125	California LEV-III ULEV125	L4ULEV270	California LEV-IV ULEV270
L3ULEV70	California LEV-III ULEV70	L4ULEV40	California LEV-IV ULEV40
L3ULEV50	California LEV-III ULEV50	L4ULEV400	California LEV-IV ULEV400
L3SULEV30	California LEV-III SULEV30	L4ULEV50	California LEV-IV ULEV50
L3SULEV20	California LEV-III SULEV20	L4ULEV60	California LEV-IV ULEV60
L3LEV395	California LEV-III LEV395	L4ULEV70	California LEV-IV ULEV70
L3ULEV340	California LEV-III ULEV340	T4B170	Federal Tier 4 MDV Bin 170
L3ULEV250	California LEV-III ULEV250	T4B150	Federal Tier 4 MDV Bin 150
L3ULEV200	California LEV-III ULEV200	T4B125	Federal Tier 4 MDV Bin 125
L3SULEV170	California LEV-III SULEV170	T4B100	Federal Tier 4 MDV Bin 100
L3SULEV150	California LEV-III SULEV150	T4B85	Federal Tier 4 MDV Bin 85
L3LEV630	California LEV-III LEV630	T4B75	Federal Tier 4 MDV Bin 75
L3ULEV570	California LEV-III ULEV570	T4B70	Federal Tier 4 Bin 70
L3ULEV400	California LEV-III ULEV400	T4B65	Federal Tier 4 Bin 65
L3ULEV270	California LEV-III ULEV270	T4B60	Federal Tier 4 Bin 60
L3SULEV230	California LEV-III SULEV230	T4B55	Federal Tier 4 Bin 55
L3SULEV200	California LEV-III SULEV200	T4B50	Federal Tier 4 Bin 50
T3B160	Federal Tier 3 Bin 160	T4B45	Federal Tier 4 Bin 45
T3B125	Federal Tier 3 Bin 125	T4B40	Federal Tier 4 Bin 40
T3B110	Federal Tier 3 Transitional Bin 110	T4B35	Federal Tier 4 Bin 35
T3B85	Federal Tier 3 Transitional Bin 85	T4B30	Federal Tier 4 Bin 30
T3SULEV30	Federal Tier 3 Transitional LEV-II SULEV30 Carryover	T4B25	Federal Tier 4 Bin 25
T3B70	Federal Tier 3 Bin 70	T4B20	Federal Tier 4 Bin 20
T3B50	Federal Tier 3 Bin 50	T4B15	Federal Tier 4 Bin 15
T3B30	Federal Tier 3 Bin 30	T4B10	Federal Tier 4 Bin 10
T3B20	Federal Tier 3 Bin 20	T4B5	Federal Tier 4 Bin 5
T3B0	Federal Tier 3 Bin 0	T4B0	Federal Tier 4 Bin 0
HDV2B395	Federal Tier 3 HD Class 2b Transitional Bin 395		

Transmission Type Code			
AMS	Automated Manual- Selectable (e.g. Automated Manual with paddles)	M	Manual
A	Automatic	OT	Other
AM	Automated Manual	SA	Semi-Automatic
CVT	Continuously Variable	SCV	Selectable Continuously Variable (e.g. CVT with paddles)

Drive System Code			
4	4-Wheel Drive	P	Part-time 4-Wheel Drive

Certification Summary Information Report

Test Group	VRIVT00.0232	**Evaporative/Refueling Family**	--
F	2-Wheel Drive, Front	A	All Wheel Drive
R	2-Wheel Drive, Rear		

Additional Terms and Acronyms

AFC	Alternative Fuel Converter	ICI	Independent Commercial Importer
CSI	Certificate Summary Information	ORVR	Onboard Refueling Vapor Recovery
DF	Deterioration Factor	SIL	Shift Indicator Light
Evap	Evaporation, Evaporative	Trans	Transmission

Suggested ZEV Application Format for Certification

E.O.#. _____ Page 1 of 2

2027 MODEL-YEAR AIR RESOURCES BOARD SUPPLEMENTAL DATA SHEET ZEV PASSENGER CARS, LIGHT-DUTY TRUCKS AND MEDIUM-DUTY VEHICLES

Manufacturer: Rivian Automotive, LLC Test Group: VRIVT00.0232

Vehicle Class(es): PC____, LDT1 (0-3750 lbs. LVW)____, LDT2 (≥ 3,751 lbs. LVW) X ,

MDV6 (8,500-10,000 lbs. GVW)_____ , MDV7 (10,001-14,000 lbs. GVW)_____

ZEV Type: NEV___, ZEV X

Vehicle Value: 1.0 (ZEV)

Fuel Type: Electro-chemical Battery X , Fuel Cell___, Capacitor___, Other (specify)_____

Battery Type(s): Lead Acid____ Nickel Cadmium____ SBLA____ Sodium Sulfur_____

Sodium Nickel Chloride____ Nickel Metal Hydride____ Lithium Metal Disulfide_____

Zinc Air _____ Zinc Bromine _____ Lithium Polymer ___, Lithium Ion X ,

Other (specify):_____

Total Battery Weight (kg.): 541 Total Battery Volume (liters): 394

No. of batteries or modules per vehicle: 1 Total Battery Voltage: 353.3

Charger(s): On-board X Off-board X Conductive X Inductive___.

Drive Motors(s): AC Induction____ DC Brush____. DC Brushless_____

Switched Reluctance____ Other (specify): AC Permanent Magnet .

No. of Drive Motors 2 Rated motor power 219(F), 270(R) kW @ 7900(F), 6975(R rpm Max rpm: 16000 .

Drive: FWD_____ RWD ___ 4WD-FT 4WD-PT X _

Regenerative Braking: No ____ Yes X FW __ RW____ AW X .

Driver Controlled Regen Braking: Yes X No ____ Coast Regen Braking: Yes X No ___.

Air Conditioning: Yes X No___, Fuel Fired Heater:[1] Yes____ No X .

Vehicle Make & Models (If coded, see attachments)	Trans type M5, A4 (If applicable)	GVWR	Curb Weight	ETW or Test Weight	DPA / RLHP or Dyno Coeff. a=, b=, c=
Make: Rivian Model: R2 Premium AWD (20in)	Automatic	6173 lbs.	4989 lbs.	5250 lbs.	a: 24.47 lbf b: 0.2703 lbf/mph c: 0.02176 lbf/mph^2

Date Issued: 8/31/2026 Revisions:

[1] Fuel fired heaters are not allowed in pure ZEVs for model year 2009 and subsequently.

2027 MODEL-YEAR AIR RESOURCES BOARD CERTIFICATION REVIEW SHEET
ZEV-PASSENGER CARS, LIGHT-DUTY TRUCKS AND MEDIUM-DUTY VEHICLES

Manufacturer: Rivian Automotive, LLC Test Group: VRIVT00.0232

Range Test Results

Vehicle ID	Trans	(check one) ____TW X ETW	(check one) ____DPA ____RLHP Or dyno coeff.	City Range	System AC (Wh/mi)	System DC (Wh/mi)	Vehicle DC (Wh/mi)
R2-159XR20	Auto	5250 lbs.	a: -5.96 lbf b: 0.0766 lbf/mph c: 0.02101 lbf/mph^2	515.19	196.35	172.25	172.25

Hwy. Range	System AC (Wh/mi)	System DC (Wh/mi)	Vehicle DC (Wh/mi)
422.71	239.31	209.93	209.93

Battery Test Results: PASS Specific Energy: Wh/kg 167

Remarks: N/A

Date Issued: 8/31/2026 Revisions:

---------- **ARB USE ONLY** ----------

Application:

Processed By:_____ Date:_____ Reviewed by:_____ Date:_____

Suggested ZEV Application Format for Certification

E.O.#. _____ Page 1 of 2

2027 MODEL-YEAR AIR RESOURCES BOARD SUPPLEMENTAL DATA SHEET ZEV
PASSENGER CARS, LIGHT-DUTY TRUCKS AND MEDIUM-DUTY VEHICLES

Manufacturer: Rivian Automotive, LLC Test Group: VRIVT00.0232

Vehicle Class(es): PC____, LDT1 (0-3750 lbs. LVW)____, LDT2 (≥ 3,751 lbs. LVW) X ,
MDV6 (8,500-10,000 lbs. GVW)_____ , MDV7 (10,001-14,000 lbs. GVW)_____

ZEV Type: NEV___, ZEV X

Vehicle Value: 1.0 (ZEV)

Fuel Type: Electro-chemical Battery X , Fuel Cell___, Capacitor___, Other (specify)_____

Battery Type(s): Lead Acid____ Nickel Cadmium____ SBLA____ Sodium Sulfur_____
Sodium Nickel Chloride____ Nickel Metal Hydride____ Lithium Metal Disulfide_____
Zinc Air _____ Zinc Bromine _____ Lithium Polymer ___, Lithium Ion X ,

Other (specify):_____

Total Battery Weight (kg.): 541 Total Battery Volume (liters): 394

No. of batteries or modules per vehicle: 1 Total Battery Voltage: 353.3

Charger(s): On-board X Off-board X Conductive X Inductive___.

Drive Motors(s): AC Induction____ DC Brush____. DC Brushless_____
Switched Reluctance____ Other (specify): AC Permanent Magnet .

No. of Drive Motors 2 Rated motor power 219(F), 270(R) kW @ 7900(F), 6975(R rpm Max rpm: 16000 .

Drive: FWD_____ RWD ___ 4WD-FT 4WD-PT X _

Regenerative Braking: No ____ Yes X FW __ RW____ AW X .

Driver Controlled Regen Braking: Yes X No ____ Coast Regen Braking: Yes X No ___.

Air Conditioning: Yes X No___, Fuel Fired Heater:[1] Yes____ No X .

Vehicle Make & Models (If coded, see attachments)	Trans type M5, A4 (If applicable)	GVWR	Curb Weight	ETW or Test Weight	DPA / RLHP or Dyno Coeff. a=, b=, c=
Make: Rivian Model: R2 Performance AWD (21in)	Automatic	6173 lbs.	4998 lbs.	5250 lbs.	a: 22.83 lbf b: 0.5386 lbf/mph c: 0.01640 lbf/mph^2

Date Issued: 3/10/2026 Revisions:

[1] Fuel fired heaters are not allowed in pure ZEVs for model year 2009 and subsequently.

2027 MODEL-YEAR AIR RESOURCES BOARD CERTIFICATION REVIEW SHEET
ZEV-PASSENGER CARS, LIGHT-DUTY TRUCKS AND MEDIUM-DUTY VEHICLES

Manufacturer: Rivian Automotive, LLC Test Group: VRIVT00.0232

Range Test Results							
Vehicle ID	Trans	(check one) ____TW X ETW	(check one) ____DPA ____RLHP Or dyno coeff.	City Range	System AC (Wh/mi)	System DC (Wh/mi)	Vehicle DC (Wh/mi)
R2-162XR21	Auto	5250 lbs.	a: -5.38 lbf b: 0.3526 lbf/mph c: 0.01582 lbf/mph^2	487.428	216.463	181.918	181.918
				Hwy. Range	System AC (Wh/mi)	System DC (Wh/mi)	Vehicle DC (Wh/mi)
				410.831	256.821	215.835	215.835

Battery Test Results: PASS Specific Energy: Wh/kg 167

Remarks: N/A

Date Issued: 3/10/2026 Revisions:

---------- **ARB USE ONLY** ----------

Application:

Processed By:_____ Date:_____ Reviewed by:_____ Date:_____

Suggested ZEV Application Format for Certification

E.O.#. _____ Page 1 of 2

2027 MODEL-YEAR AIR RESOURCES BOARD SUPPLEMENTAL DATA SHEET ZEV PASSENGER CARS, LIGHT-DUTY TRUCKS AND MEDIUM-DUTY VEHICLES

Manufacturer: Rivian Automotive, LLC Test Group: VRIVT00.0232

Vehicle Class(es): PC____, LDT1 (0-3750 lbs. LVW)____, LDT2 (≥ 3,751 lbs. LVW) X ,

MDV6 (8,500-10,000 lbs. GVW)_____ , MDV7 (10,001-14,000 lbs. GVW)_____

ZEV Type: NEV___, ZEV X

Vehicle Value: 1.0 (ZEV)

Fuel Type: Electro-chemical Battery X , Fuel Cell___, Capacitor___, Other (specify)_____

Battery Type(s): Lead Acid____ Nickel Cadmium____ SBLA____ Sodium Sulfur_____

Sodium Nickel Chloride____ Nickel Metal Hydride____ Lithium Metal Disulfide_____

Zinc Air _____ Zinc Bromine _____ Lithium Polymer ___, Lithium Ion X ,

Other (specify):_____

Total Battery Weight (kg.): 541 Total Battery Volume (liters): 394

No. of batteries or modules per vehicle: 1 Total Battery Voltage: 353.3

Charger(s): On-board X Off-board X Conductive X Inductive___.

Drive Motors(s): AC Induction____ DC Brush____. DC Brushless_____

Switched Reluctance____ Other (specify): AC Permanent Magnet .

No. of Drive Motors 2 Rated motor power 219(F), 270(R) kW @ 7900(F), 6975(R rpm Max rpm: 16000 .

Drive: FWD_____ RWD ___ 4WD-FT 4WD-PT X _

Regenerative Braking: No ____ Yes X FW __ RW____ AW X .

Driver Controlled Regen Braking: Yes X No ____ Coast Regen Braking: Yes X No ___.

Air Conditioning: Yes X No___, Fuel Fired Heater:[1] Yes____ No X .

Vehicle Make & Models (If coded, see attachments)	Trans type M5, A4 (If applicable)	GVWR	Curb Weight	ETW or Test Weight	DPA / RLHP or Dyno Coeff. a=, b=, c=
Make: Rivian Model: R2 Performance AWD (20in AT)	Automatic	6173 lbs.	5016 lbs.	5250 lbs.	a: 27.29 lbf b: 0.3400 lbf/mph c: 0.02174 lbf/mph^2

Date Issued: 2/20/2026 Revisions:

[1] Fuel fired heaters are not allowed in pure ZEVs for model year 2009 and subsequently.

2027 MODEL-YEAR AIR RESOURCES BOARD CERTIFICATION REVIEW SHEET
ZEV-PASSENGER CARS, LIGHT-DUTY TRUCKS AND MEDIUM-DUTY VEHICLES

Manufacturer: Rivian Automotive, LLC Test Group: VRIVT00.0232

Range Test Results

Vehicle ID	Trans	(check one) ____TW X ETW	(check one) ____DPA ____RLHP Or dyno coeff.	City Range	System AC (Wh/mi)	System DC (Wh/mi)	Vehicle DC (Wh/mi)
R2-159XR20AT	Auto	5250 lbs.	a: -8.62 lbf b: 0.1648 lbf/mph c: 0.02087 lbf/mph^2	478.981	218.565	186.958	186.958

Hwy. Range	System AC (Wh/mi)	System DC (Wh/mi)	Vehicle DC (Wh/mi)
392.096	266.998	228.386	228.386

Battery Test Results: PASS Specific Energy: Wh/kg 167

Remarks: N/A

Date Issued: 2/20/2026 Revisions:

---------- **ARB USE ONLY** ----------

Application:

Processed By:_____ Date:_____ Reviewed by:_____ Date:_____

US EPA Fee Form

Help and EPA Instructions

* Required Field

General Information

Date: 01/20/2026

Process Code *

Submit New Fee Filing Form

Manufacturer Code *

RIV

Manufacturer Name *

Rivian Automotive LLC

Contact Name *

Sep Zaker

Contact Email Address *

sepzaker@rivian.com

Contact Phone *

Calendar Year complete application submitted to EPA *

2026

calendar year in which the complete certification application is received, not the model year.

Engine Family / Evaporative Family / Test Group *

VRIVT00.0232

Certificate Request Type (Industry Sector Code)

Certificate Request Type *

- (●) On-Highway LDV, LTD, MDVPV, HDV Chassis Cert (Federal) (A, B, D, J, T, V)
- ( ) On-Highway HDE Dyno Cert (Federal) (E, H)
- ( ) On-Highway LD ICI, MDPV ICI, HDV ICI (A, B, D, J, T, V)
- ( ) On-Highway Motorcycle (C)
- ( ) On-Highway HDV Evap (F)
- ( ) On-Highway LDV, LTD, MDVPV, HDV Chassis Cert (California-Only) (A, B, D, J, T, V)
- ( ) On-Highway HDE Dyno Cert (California-Only) (E, H)
- ( ) Nonroad CI (L)
- ( ) Nonroad SI (B, S)
- ( ) Locomotive (G, K)
- ( ) All Nonroad Recreational, excluding Marine engines (X, Y)
- ( ) All Marine (Including IMO) (M, N, W)
- ( ) Component Certification for Evaporative Emissions (P)

IMO Name (Required for dual US/IMO Marine Only)

ICI VIN Number (Required for ICIs Only)

Do you qualify for a Reduced Fee? *

No

Amount Owed

$32,317.00

Payment Type *

Online ACH

Comments

EPA Form Number 3520-29
OMB Control No. 2060-0545
Approval expires 7/31/2027

The public reporting and recordkeeping burden for this collection of information is estimated to average 12 minutes per response. Send comments on the Agency's need for this information, the accuracy of the provided burden estimates, and any suggested methods for minimizing respondent burden, including through the use of automated collection techniques to the Director, Collection Strategies Division, U.S. Environmental Protection Agency (2822T), 1200 Pennsylvania Ave., NW, Washington, D.C. 20460. Include the OMB control number in any correspondence. Do not send the completed forms to this address.

The content of this document may contain Sensitive But Unclassified (SBU) data and/or Controlled Unclassified Information (CUI).