

TOYOTA

Application For Certification - Part 1 2027 Model Year

Durability Group : VTYXGPGNN626
Evap/refueling Families : VTYXR0130P42
Test Group : VTYXV02.0V2A
Durability Group Description : Four Stroke, Otto Cycle, Gasoline Fueled,
: Ported FI, Catalyst code : 3-IIZ61+3-IIJ6
Test Group Description : 2.0 Liter I4 LDV
Applicable Standards : Federal State : Interim Tier 4-Bin 20 - LDV
: California : LEVIV-ULEV20-PC
Carlines Covered : COROLLA
Engine Series : M20A-FKS
Vehicles Tested :

Vehicle I.D.	Config.	Test	Test Number
27-ME1C	00	FTP	VTYX10093719
27-ME1C	00	FTP(QDA)	VTYX10093753
27-ME1C	00	HWY	VTYX10093722
27-ME1C	00	SFTP (US06)	VTYX10093720
27-ME1C	00	SFTP(SC03)	VTYX10093768
18-AV1A	02	EVAP	NTYX10068444
18-AV1A	02	Running loss	NTYX10068443
18-AV1A	01	Refueling	JTYX10046255
18-AV1A	01	Canister Bleed	JTYX10046336
27-ME1C	00	C.CO, C.HC	VTYX10093721

EPA Response Requested By : July 17, 2026

For Questions, Contact : Lisa Florida 734-695-2697

Note : Conditional certificate requested.

Table of Contents

Section 1	Correspondence and Communications
Section 2	Durability Group Description
Section 3	Evaporative/Refueling Family Description
Section 4	Durability Procedure Description
Section 5	Test Group Description
Section 6	Test Vehicle Description
Section 7	Test Results
Section 8	Emission Testing Waiver Statements
Section 9	OBD System Description
Section 10	Description of Alternate-fueled Vehicles
Section 11	AECD Descriptions
Section 12	Description of vehicles covered by certificate and test parameters
Section 13	Projected Sales
Section 14	Request for Certificate
Section 15	Other Information
Section 16	Confidential Information
Section 17	California ARB Information
Section 18	Information on Service of Process

1. **Correspondence and Communications**

Please refer to the FOI common file.

2. **Durability Group Description**

Durability Group Name : VTYXGPGNN626

Please refer to the common file for details.

3. **Evaporative/Refueling Family Description**

Evaporative/Refueling Family Name : VTYXR0130P42

Please refer to the FOI common file for details.

4. Durability Procedure Description

4.1 Exhaust Durability Test Procedure

4.2 Durability Showing

4.3 Evap/refueling Durability Test Procedure

Please refer to the CBI common file.

4.4 Exhaust Emission Deterioration Factors

4.5 Evap/refueling Emission Deterioration Factors

4.6 Equivalency Factor

Please refer to Certification Summary Information Report in Section 7 or FOI common file.

5. Test Group Description

5.1	Test group name	:	VTYXV02.0V2A
5.2	Engine displacements covered	:	1,987 cm ³ (121.3 CID)
5.3	Arrangement and number of cylinders	:	I4
5.4	Vehicle class (es) covered	:	LDV
5.5	Federal emission standards class	:	Interim-Tier4-Bin20 - LDV
5.6	California emission standards class	:	LEVIV-ULEV20 - PC
5.7	Applicable emission standards		
	Please refer to Certification Summary Information Report in Section 7.		

6. Test Vehicle Description

DDV: Utilizing good engineering judgement that considered vehicle curb weight, road load coefficients, catalyst heat stress, we judged 27MY COROLLA is the representative DDV in this Durability Group. COROLLA was chosen as representative DDV because it has the same engine(M20A-FKS), same ECS, and the exact same catalyst specification.

EDV: Utilizing good engineering judgement that considered vehicle curb weight, road load coefficients, catalyst heat stress, we judged 27MY COROLLA is the worst case and representative EDV in this Test Group. COROLLA was chosen as representative EDV because it has the same engine (M20A-FKS), same ECS, and the exact same catalyst specification.

For complete vehicle description, refer to Certification Summary Information Report Sheet, enclosed in Section 7 of this application.

7. Test Results

Certification Summary Information Report

Manufacturer	Toyota Motor Corporation	Manufacturer Code	TYX
Test Group	VTYXV02.0V2A	Evaporative/Refueling Family	VTYXR0130P42
Certificate Number	--	CARB Executive Order #	--
Certificate Issue Date	--	Certificate Revision Date	--
Certificate Effective Date	--	Conditional Certificate	--
CSI Revision #	--	CSI Submission/Revision Date	05/15/2026 07:35:19 AM
Model Year	2027		

Test Group Information

CSI Type	New	Running Change Reference Number	--
GHG Exempt Status	Not Exempt		

Drive Sources and Fuel(s)

Drive Source #1: Combustion Engine

Fuel	Basic Fuel Metering System	Lean Burn Strategy Indicator
Gasoline	Spark Ignition direct & ported injection	No

Hybrid Indicator	No		
Multiple Fuel Storage	--	Rechargeable Energy Storage System Indicator	--
Multiple Fuel Combustion	--	Off-board Charge Capable Indicator	--
Fuel Cell Indicator	--	EPA Vehicle Class	LDV
Federal Clean Fuel Vehicle	No	Federal Clean Fuel Vehicle Standard	--
Federal Clean Fuel Vehicle ILEV	No	California Partial Zero Emissions Vehicle Indicator	No
Durability Group Name	VTYXGPGNN626	Durability Group Equivalency Factor	0.7
Reduced Fee Test Group	No	Certification Region Code(s)	FA, CA
Complies with HD GHG 2b/3 regulations?	No		
Introduction into Commerce Date	--	CAP2000 Conditional Certificate?	N/A
Independent Commercial Importer?	--	Alternative Fuel Converter Certificate?	--
SFTP Federal Composite Compliance Identifier	Tier 3	SFTP Tier 2 Composite CO Option	No
SFTP LEV-III Composite Compliance Indicator	Yes		
OBD Compliance Type	CARB	OBD Demonstration Vehicle Test Group	VTYXT03.4B5A
Test Group OBD Compliance Level	Full - no deficiencies	Number of Test Group OBD Deficiencies	0
OBD Deficiencies Comments	--		
Mfr Test Group Comments	--		
Mfr Exhaust / Evap Standards Comments	--		

Certification Summary Information Report

Test Group	VTYXV02.0V2A	Evaporative/Refueling Family	VTYXR0130P42				
Evaporative/Refueling Family Information							
Evaporative Summary Information Type	New	Submission/Correction Date	03/16/2026 05:40:50 AM				
Integrated ORVR?	Yes	Fuel(s)	Gasoline				
Multiple Fuel Storage	--						
Bladder Fuel Tank?	No						
Fuel Tank Material	Plastic	Fuel Tank Material Description	EVOH				
Fill Pipe Seal Type	Liquid seal						
Air Intake System Vapor Storage Device?	No	Air Intake System Vapor Storage Device Description	--				
Fuel System Vapor Storage Canister?	Yes	Other Vapor Storage	--				
Fuel System Vapor Storage Canister(s) Total Working Capacity (grams)	130	Number of Primary Canisters	1				
Number of Bleed Canisters	1	Bleed Canister Total Working Capacity (grams)	2				
Mfr Evaporative/Refueling Family Comments	--						
Leak Family Details							
Leak Family Indicator	No						
Canister Bleed Test Indicator	Yes	Applicability of Evaporative Canister Bleed Test	50 State				
Evaporative Canister Bleed Test Comments	--						
CARB Fuel Only (Rig) Test Indicator	No	Applicability of CARB Fuel Only (Rig) Test	--				
CARB Fuel Only (Rig) Test Comments	--						
Models Covered by this Certificate							
Carline Manufacturer	Division	Carline	Certification Region Code(s)	Drive System	Trans - Type	- # of Gears	Trans - Lockup
Toyota Motor Corporation	1 - TOYOTA	5 - COROLLA	California + CAA Section 177 states	2-Wheel Drive, Front	Selectable Continuously Variable (e.g. CVT with paddles)	10	Yes
Toyota Motor Corporation	1 - TOYOTA	5 - COROLLA	Federal	2-Wheel Drive, Front	Selectable Continuously Variable (e.g. CVT with paddles)	10	Yes
Toyota Motor Corporation	1 - TOYOTA	5 - COROLLA	California + CAA Section 177 states	2-Wheel Drive, Front	Continuously Variable	1	Yes
Toyota Motor Corporation	1 - TOYOTA	5 - COROLLA	Federal	2-Wheel Drive, Front	Continuously Variable	1	Yes
Engine Description							
Hybrid Type	--	Hybrid Description	--				
Engine Type	4-Stroke Spark Ignition	Mfr Engine Description	--				
Engine Block Arrangement	Inline	Mfr Engine Block Arrangement Description	--				
Camless Valvetrain Indicator	No	Oil Viscosity/Classification	0W-8				
Number of Cylinders/Rotors	4	Mechanically Variable Compression Ratio Indicator	N				

Certification Summary Information Report

Test Group	VTYXV02.0V2A	Evaporative/Refueling Family	VTYXR0130P42								
After Treatment Device(s) (ATD)											
ATD Number	ATD Type	ATD Precious Metal	Substrate Material	Substrate Construction							
1	Three-way catalyst	Palladium + Rhodium	Ceramic	Monolith							
2	Three-way catalyst	Platinum + Rhodium	Ceramic	Monolith							
Mfr After Treatment Device (ATD) Comments --											
Direct Ozone Reduction (DOR) Device Not Equipped											
Mfr Emission Control Device Comments --											
Engine Configuration Number 1											
Engine Displacement (liters)	2.0	Engine Rated Horsepower	169								
Number of Inlet Valves Per Cylinder	2	Number of Exhaust Valves Per Cylinder	2								
Air Aspiration Method	Naturally Aspirated	Number of Air Aspiration Devices	--								
Air Aspiration Device Configuration	--	Charge Air Cooler Type	N/A								
Air Aspiration Drive Method(s)	--										
Cylinder Deactivation	No										
Cylinder Deactivation Description	--										
Variable Valve Timing	Yes										
Variable Valve Timing System Description	Intake and exhaust										
Variable Valve Lift?	No										
Variable Valve Lift System Description	--										
Number of Knock Sensors	1	Number of Air/Fuel Sensors	2								
Air/Fuel Sensor # 1 Type	Heated air fuel	Air/Fuel Sensor # 1 Description	--								
Air/Fuel Sensor # 2 Type	Heated air fuel	Air/Fuel Sensor # 2 Description	--								
Mfr Air/Fuel Sensor Comments	--										
Exhaust Gas Recirculation	Yes	Cooled Exhaust Gas Recirculation	Yes								
EGR Type	Electronic/Electric	Exhaust Gas Recirculation Description if 'Other'	--								
Closed Loop Air Injection System	No										
Air Injection Type	Not Applicable	Air Injection Type if 'Other'	--								
Mfr Engine Configuration Comments	--										
Official Test Numbers											
Test Group	Fuel	FTP	US06	SC03	Cold CO	Highway	EPA City Litmus Value	EPA City Litmus Threshold	EPA Highway Litmus Value	EPA Highway Litmus Threshold	CREE Weighting Factor
Gasoline	VTYX10093719	VTYX10093720	VTYX10093720	VTYX10093768	VTYX10093721	VTYX10093722	136.3	23.7	122.5	30.1	--

Certification Summary Information Report

Test Group	VTYXV02.0V2A	Evaporative/Refueling Family	VTYXR0130P42
SFTP LEV-III Official Test Numbers			
Test Group Fuel	FTP	US06	SC03
Gasoline	VTYX10093719	VTYX10093720	VTYX10093768

Certification Summary Information Report

Test Group	VTYXV02.0V2A	Evaporative/Refueling Family	VTYXR0130P42
-------------------	--------------	-------------------------------------	--------------

Emission Data Vehicle Information

Vehicle ID / Configuration	18-AV1A / 1	Manufacturer Vehicle Configuration Number	1
Original Test Group Name	JTYXV02.5P3A	Original Evaporative/Refueling Family	JTYXR0130P72
Original Test Vehicle Model Year	2018		

Vehicle Model

Represented Test Vehicle Make	TOYOTA	Represented Test Vehicle Model	CAMRY XLE/XSE
--------------------------------------	--------	---------------------------------------	---------------

Leak Family Details

Leak Family Identifier	--	Leak Family Name	--
-------------------------------	----	-------------------------	----

Drive Sources and Fuel System Details

Drive Source and Fuel#	Drive Source	Fuel
1	Combustion Engine	Gasoline

Hybrid Indicator	No		
Multiple Fuel Storage	--	Multiple Fuel Combustion	--
Fuel Cell Indicator	--	Rechargeable Energy Storage System Indicator	--
Rechargeable Energy Storage System	--	Rechargeable Energy Storage System, if 'Other'	--
Off-board charge Capable Indicator	--		
Odometer Correction -- Initial	11	Odometer Correction Factor	1
Odometer Correction Sign	- = System Miles is equal to (Test odometer reading - Initial system miles) * Correction factor		
Odometer Correction Units	Miles		
Engine Code	02	Rated Horsepower	206
Displacement (liters)	2.487		
Air Aspiration Method	Naturally Aspirated	Air Aspiration Method, if 'Other'	
Number of Air Aspiration Devices	--	Air Aspiration Device Configuration	--
Charge Air Cooler Type	N/A	Drive Mode While Testing	2-Wheel Drive, Front
Shift Indicator Light Usage	Not equipped	Aged Emission Components	4,000 (mi)
Curb Weight (lbs)	3415	Equivalent Test Weight (pounds)	3750
GVWR (lbs)	--	N/V Ratio	24.7
Axle Ratio	2.8		
Transmission Type	Automatic	# of Transmission Gears	8
Transmission Lockup	Yes	Creep Gear	No

Dynamometer Coefficients:

Target Coefficients				Set Coefficients			EPA Calculated Total Road Load Horse Power for City/Highway/Evap Coefficients
Coefficient Category	A (lbf)	B (lbf/mph)	C (lbf/mph**2)	A (lbf)	B (lbf/mph)	C (lbf/mph**2)	
City/Highway/Evap	32.527	0.22484	0.017128	12.884	0.07426	0.017856	11.5
US06	32.527	0.22484	0.017128	12.884	0.07426	0.017856	N/A

Certification Summary Information Report

Test Group	VTYXV02.0V2A	Evaporative/Refueling Family	VTYXR0130P42						
Emission Control Device Comments	--								
Manufacturer Test Vehicle Comments	POWER SHIFT PATTERN								
Test #	JTYX10046255	Test Procedure	24 - Federal fuel refueling test (ORVR)						
Exhaust Test # for this Evap Test	JTYX10046251	Test Fuel Type	48 - Tier 3 E10 Regular Gasoline (9 RVP @Low Alt.)						
Test Date	01/07/2016	Fuel	Gasoline						
Fuel Batch ID	1L6-07	Fuel Calibration Number	1						
Vehicle Class	N/A	DF Type	Mfr. Determined						
Verify Test Lab ID	Toyota Motor Corporation								
E10 Evaporative Test Measurement Method	Calculated (1.08 x FID Total Hydrocarbons)								
Test Start Odometer Reading	4013	Odometer Units	M						
4WD Test Dyno	No	Diesel Adjustment Factor Usage	--						
State of Charge Delta	Yes								
Drive Cycle Speed Tolerance Criteria	Used Part 1066 (+/- 2.0 mph, +/- 1.0 sec)	Road Speed Fan Usage	Yes						
Test Results									
<table border="1"> <thead> <tr> <th>Test Result Name</th> <th>Unrounded Test Result</th> <th>Verify Calculated FE Equivalent Value (miles per gallon)</th> </tr> </thead> <tbody> <tr> <td>HC-TOTAL-EQUIV (Total Hydrocarbon equivalent - Evap only)</td> <td>0.0029655</td> <td>--</td> </tr> </tbody> </table>				Test Result Name	Unrounded Test Result	Verify Calculated FE Equivalent Value (miles per gallon)	HC-TOTAL-EQUIV (Total Hydrocarbon equivalent - Evap only)	0.0029655	--
Test Result Name	Unrounded Test Result	Verify Calculated FE Equivalent Value (miles per gallon)							
HC-TOTAL-EQUIV (Total Hydrocarbon equivalent - Evap only)	0.0029655	--							
Manufacturer Test Comments --									
Certification Region	Useful Life	Standard Level	Emission Name	Rounded Result	Add DF	Certification Level	Standard	Pass/Fail	
Fed	150,000 miles	Federal Tier 3 Evap	HC-TOTAL-EQUIV	0.003	0.000	0.00	0.20	Pass	
CA	150,000 miles	California LEV-IV Zero Evap (Option 2)	HC-TOTAL-EQUIV	0.003	0.000	0.00	0.20	Pass	

Certification Summary Information Report

Test Group	VTYXV02.0V2A	Evaporative/Refueling Family	VTYXR0130P42						
Test #	JTYX10046336	Test Procedure	65 - Evap Canister Bleed Test						
Exhaust Test # for this Evap Test	--	Test Fuel Type	46 - CARB LEV3 E10 Regular						
Test Date	12/23/2016	Fuel	Gasoline						
Fuel Batch ID	--	Fuel Calibration Number	--						
Vehicle Class	N/A	DF Type	Mfr. Determined						
Verify Test Lab ID	Toyota Motor Corporation								
E10 Evaporative Test Measurement Method	Calculated (1.08 x FID Total Hydrocarbons)								
Test Start Odometer Reading	3969	Odometer Units	M						
4WD Test Dyno	No	Diesel Adjustment Factor Usage	--						
State of Charge Delta	Yes								
Drive Cycle Speed Tolerance Criteria	Used Part 1066 (+/- 2.0 mph, +/- 1.0 sec)	Road Speed Fan Usage	Yes						
Test Results									
<table border="1"> <tr> <th>Test Result Name</th> <th>Unrounded Test Result</th> <th>Verify Calculated FE Equivalent Value</th> </tr> <tr> <td>HC-TOTAL-EQUIV (Total Hydrocarbon equivalent - Evap only)</td> <td>0.012096</td> <td>--</td> </tr> </table>				Test Result Name	Unrounded Test Result	Verify Calculated FE Equivalent Value	HC-TOTAL-EQUIV (Total Hydrocarbon equivalent - Evap only)	0.012096	--
Test Result Name	Unrounded Test Result	Verify Calculated FE Equivalent Value							
HC-TOTAL-EQUIV (Total Hydrocarbon equivalent - Evap only)	0.012096	--							
Manufacturer Test Comments --									
Certification Region	Useful Life	Standard Level	Emission Name	Rounded Result	Add DF	Certification Level	Standard	Pass/Fail	
Fed	150,000 miles	Federal Tier 3 Evap	HC-TOTAL-EQUIV	0.0121	0.0000	0.012	0.020	Pass	
CA	150,000 miles	California LEV-IV Zero Evap (Option 2)	HC-TOTAL-EQUIV	0.0121	0.0000	0.012	0.020	Pass	

Certification Summary Information Report

Test Group	VTYXV02.0V2A	Evaporative/Refueling Family	VTYXR0130P42
-------------------	--------------	-------------------------------------	--------------

Emission Data Vehicle Information

Vehicle ID / Configuration	18-AV1A / 2	Manufacturer Vehicle Configuration Number	2
Original Test Group Name	NTYXV02.5P3A	Original Evaporative/Refueling Family	NTYXR0130P72
Original Test Vehicle Model Year	2022		

Vehicle Model

Represented Test Vehicle Make	TOYOTA	Represented Test Vehicle Model	CAMRY
--------------------------------------	--------	---------------------------------------	-------

Leak Family Details

Leak Family Identifier	--	Leak Family Name	--
-------------------------------	----	-------------------------	----

Drive Sources and Fuel System Details

Drive Source and Fuel#	Drive Source	Fuel
1	Combustion Engine	Gasoline

Hybrid Indicator	No		
Multiple Fuel Storage	--	Multiple Fuel Combustion	--
Fuel Cell Indicator	--	Rechargeable Energy Storage System Indicator	--
Rechargeable Energy Storage System	--	Rechargeable Energy Storage System, if 'Other'	--
Off-board charge Capable Indicator	--		
Odometer Correction -- Initial	11	Odometer Correction Factor	1
Odometer Correction Sign	- = System Miles is equal to (Test odometer reading - Initial system miles) * Correction factor		
Odometer Correction Units	Miles		
Engine Code	02	Rated Horsepower	206
Displacement (liters)	2.487		
Air Aspiration Method	Naturally Aspirated	Air Aspiration Method, if 'Other'	
Number of Air Aspiration Devices	--	Air Aspiration Device Configuration	--
Charge Air Cooler Type	N/A	Drive Mode While Testing	2-Wheel Drive, Front
Shift Indicator Light Usage	Not equipped	Aged Emission Components	4,000 (mi)
Curb Weight (lbs)	3425	Equivalent Test Weight (pounds)	3750
GVWR (lbs)	--	N/V Ratio	24.7
Axle Ratio	2.8		
Transmission Type	Automatic	# of Transmission Gears	8
Transmission Lockup	Yes	Creep Gear	No

Dynamometer Coefficients:

Target Coefficients				Set Coefficients			EPA Calculated Total Road Load Horse Power for City/Highway/Evap Coefficients
Coefficient Category	A (lbf)	B (lbf/mph)	C (lbf/mph**2)	A (lbf)	B (lbf/mph)	C (lbf/mph**2)	
City/Highway/Evap	30.095	0.21026	0.017605	10.685	-0.00157	0.019215	11.3
US06	30.095	0.21026	0.017605	10.685	-0.00157	0.019215	N/A

Certification Summary Information Report

Test Group	VTYXV02.0V2A	Evaporative/Refueling Family	VTYXR0130P42
Emission Control Device Comments	--		
Manufacturer Test Vehicle Comments	Drive mode is SPORTS.		

Certification Summary Information Report

Test Group	VTYXV02.0V2A	Evaporative/Refueling Family	VTYXR0130P42
Test #	NTYX10068444	Test Procedure	34 - Federal fuel 3-day evap
Exhaust Test # for this Evap Test	NTYX10068428	Test Fuel Type	48 - Tier 3 E10 Regular Gasoline (9 RVP @Low Alt.)
Test Date	02/04/2021	Fuel	Gasoline
Fuel Batch ID	2G0-04	Fuel Calibration Number	3
Vehicle Class	N/A	DF Type	Mfr. Determined
Verify Test Lab ID	Toyota Motor Corporation		
E10 Evaporative Test Measurement Method	Actual Total Hydrocarbon Equivalent Measurement (with speciation)		
Test Start Odometer Reading	5109	Odometer Units	M
4WD Test Dyno	No	Diesel Adjustment Factor Usage	--
State of Charge Delta	Yes		
Drive Cycle Speed Tolerance Criteria	Used Part 1066 (+/- 2.0 mph, +/- 1.0 sec)	Road Speed Fan Usage	Yes

Test Results

Test Result Name	Unrounded Test Result	Verify Calculated FE Equivalent Value (miles per gallon)
CO2 BAG 1 (Bag 1 Carbon Dioxide)	0	--
FE BAG 1 (Bag 1 Fuel Economy)	999	999
CO2 BAG 2 (Bag 2 Carbon Dioxide)	0	--
FE BAG 2 (Bag 2 Fuel Economy)	999	999
CO2 BAG 3 (Bag 3 Carbon Dioxide)	0	--
FE BAG 3 (Bag 3 Fuel Economy)	999	999
MFR FE (Manufacturer Fuel Economy)	999	999
HC-TOTAL-EQUIV (Total Hydrocarbon equivalent - Evap only)	0.2688435	--

Test Result Name	Unrounded Test Result	Verify Calculated CREE/OPT-CREE
Carbon-Related Exhaust Emissions	0	--

Test Result Name	Unrounded Test Result	Verify Calculated CO2
Carbon dioxide	0	--

Manufacturer Test Comments HSL=0.0514, 1ST DBL=0.2175, 2ND DBL=0.1459, 3RD DBL=0.1372, 1ST DBL IS ADDED KEY OFF MONITOR LOSS(0.0002GRAM)

Certification Region	Useful Life	Standard Level	Emission Name	Rounded Result	Add DF	Certification Level	Standard	Pass/Fail
Fed	150,000 miles	Federal Tier 3 Evap	HC-TOTAL-EQUIV	0.2688	0.0000	0.269	0.300	Pass
CA	150,000 miles	California LEV-IV Zero Evap (Option 2)	HC-TOTAL-EQUIV	0.2688	0.0000	0.269	0.300	Pass

Certification Summary Information Report

Test Group	VTYXV02.0V2A	Evaporative/Refueling Family	VTYXR0130P42
Test #	NTYX10068443	Test Procedure	32 - Federal Fuel Running Loss
Exhaust Test # for this Evap Test	NTYX10068428	Test Fuel Type	48 - Tier 3 E10 Regular Gasoline (9 RVP @Low Alt.)
Test Date	02/04/2021	Fuel	Gasoline
Fuel Batch ID	2G0-04	Fuel Calibration Number	3
Vehicle Class	N/A	DF Type	Mfr. Determined
Verify Test Lab ID	Toyota Motor Corporation		
E10 Evaporative Test Measurement Method	Calculated (1.08 x FID Total Hydrocarbons)		
Test Start Odometer Reading	5109	Odometer Units	M
4WD Test Dyno	No	Diesel Adjustment Factor Usage	--
State of Charge Delta	Yes		
Drive Cycle Speed Tolerance Criteria	Used Part 1066 (+/- 2.0 mph, +/- 1.0 sec)	Road Speed Fan Usage	Yes

Test Results

Test Result Name	Unrounded Test Result	Verify Calculated FE Equivalent Value (miles per gallon)
CO2 BAG 1 (Bag 1 Carbon Dioxide)	0	--
FE BAG 1 (Bag 1 Fuel Economy)	999	999
CO2 BAG 2 (Bag 2 Carbon Dioxide)	0	--
FE BAG 2 (Bag 2 Fuel Economy)	999	999
CO2 BAG 3 (Bag 3 Carbon Dioxide)	0	--
FE BAG 3 (Bag 3 Fuel Economy)	999	999
MFR FE (Manufacturer Fuel Economy)	999	999
HC-TOTAL-EQUIV (Total Hydrocarbon equivalent - Evap only)	0.0078958	--

Test Result Name	Unrounded Test Result	Verify Calculated CREE/OPT-CREE
Carbon-Related Exhaust Emissions	0	--

Test Result Name	Unrounded Test Result	Verify Calculated CO2
Carbon dioxide	0	--

Manufacturer Test Comments --

Certification Region	Useful Life	Standard Level	Emission Name	Rounded Result	Add DF	Certification Level	Standard	Pass/Fail
Fed	150,000 miles	Federal Tier 3 Evap	HC-TOTAL-EQUIV	0.008	0.000	0.01	0.05	Pass
CA	150,000 miles	California LEV-IV Zero Evap (Option 2)	HC-TOTAL-EQUIV	0.008	0.000	0.01	0.01	Pass

Certification Summary Information Report

Test Group	VTYXV02.0V2A	Evaporative/Refueling Family	VTYXR0130P42						
Emission Data Vehicle Information									
Vehicle ID / Configuration	27-ME1C / 0	Manufacturer Vehicle Configuration Number	0						
Original Test Group Name	VTYXV02.0V2A	Original Evaporative/Refueling Family	VTYXR0130P42						
Original Test Vehicle Model Year	2027								
Vehicle Model									
Represented Test Vehicle Make	TOYOTA	Represented Test Vehicle Model	COROLLA						
Leak Family Details									
Leak Family Identifier	--	Leak Family Name	--						
Drive Sources and Fuel System Details									
	<table border="1"> <tr> <th>Drive Source and Fuel#</th><th>Drive Source</th><th>Fuel</th></tr> <tr> <td>1</td><td>Combustion Engine</td><td>Gasoline</td></tr> </table>	Drive Source and Fuel#	Drive Source	Fuel	1	Combustion Engine	Gasoline		
Drive Source and Fuel#	Drive Source	Fuel							
1	Combustion Engine	Gasoline							
Hybrid Indicator	No								
Multiple Fuel Storage	--	Multiple Fuel Combustion	--						
Fuel Cell Indicator	--	Rechargeable Energy Storage System Indicator	--						
Rechargeable Energy Storage System	--	Rechargeable Energy Storage System, if 'Other'	--						
Off-board charge Capable Indicator	--								
Odometer Correction -- Initial	0	Odometer Correction Factor	1						
Odometer Correction Sign	- = System Miles is equal to (Test odometer reading - Initial system miles) * Correction factor								
Odometer Correction Units	Miles								
Engine Code	02	Rated Horsepower	169						
Displacement (liters)	1.987								
Air Aspiration Method	Naturally Aspirated	Air Aspiration Method, if 'Other'							
Number of Air Aspiration Devices	--	Air Aspiration Device Configuration	--						
Charge Air Cooler Type	N/A	Drive Mode While Testing	2-Wheel Drive, Front						
Shift Indicator Light Usage	Not equipped	Aged Emission Components	4,000 (mi)						
Curb Weight (lbs)	3155	Equivalent Test Weight (pounds)	3500						
GVWR (lbs)	--	N/V Ratio	23.3						
Axle Ratio	3.79								
Transmission Type	Continuously Variable	# of Transmission Gears	1						
Transmission Lockup	Yes	Creep Gear	No						

Certification Summary Information Report

Test Group		VTYXV02.0V2A			Evaporative/Refueling Family		VTYXR0130P42	
Dynamometer Coefficients:								
Target Coefficients				Set Coefficients			EPA Calculated Total Road Load Horse Power for City/Highway/Evap Coefficients	
Coefficient Category	A (lbf)	B (lbf/mph)	C (lbf/mph**2)	A (lbf)	B (lbf/mph)	C (lbf/mph**2)		
City/Highway/Evap	25.904	0.19174	0.018379	6.099	0.06815	0.018976	10.9	
Cold CO	28.495	0.21092	0.020217	1.103	0.13946	0.020863	N/A	
US06	25.904	0.19174	0.018379	6.099	0.06815	0.018976	N/A	
Emission Control Device Comments		--						
Manufacturer Test Vehicle Comments		Drive mode is SPORT.						

Certification Summary Information Report

Test Group	VTYXV02.0V2A	Evaporative/Refueling Family	VTYXR0130P42
Test #	VTYX10093719	Test Procedure	21 - Federal fuel 2-day exhaust (w/can load)
Exhaust Test # for this Evap Test	--	Test Fuel Type	48 - Tier 3 E10 Regular Gasoline (9 RVP @Low Alt.)
Test Date	02/19/2026	Fuel	Gasoline
Fuel Batch ID	2D5-02	Fuel Calibration Number	4
Vehicle Class	LDV/Passenger Car	DF Type	Mfr. Determined
Verify Test Lab ID	Toyota Motor Corporation		
E10 Evaporative Test Measurement Method	--		
Test Start Odometer Reading	4663	Odometer Units	M
4WD Test Dyno	No	Diesel Adjustment Factor Usage	--
State of Charge Delta	Yes		
Drive Cycle Speed Tolerance Criteria	Used Part 1066 (+/- 2.0 mph, +/- 1.0 sec)	Road Speed Fan Usage	Yes
Test Results			

Certification Summary Information Report

Test Group	VTYXV02.0V2A	Evaporative/Refueling Family	VTYXR0130P42
Test Result Name	Unrounded Test Result	Verify Calculated FE Equivalent Value (miles per gallon)	
ACT-DISTANCE (Actual Distance Driven (miles))	11.0395963	--	
ACT-DISTANCE BAG 1 (Bag 1 Actual Distance)	3.5917984	--	
CO2 BAG 1 (Bag 1 Carbon Dioxide)	270.3528293	--	
CO BAG 1 (Bag 1 Carbon Monoxide)	0.3312078	--	
FE BAG 1 (Bag 1 Fuel Economy)	999	999	
CH4 BAG 1 (Bag 1 Methane)	0.0036244	--	
NMOG BAG 1 (Bag 1 Non-methane organic gases)	0.0136278	--	
WATT-HRS BAG 1 (Bag 1 Watt Hours)	0	--	
ACT-DISTANCE BAG 2 (Bag 2 Actual Distance)	3.8569405	--	
CO2 BAG 2 (Bag 2 Carbon Dioxide)	280.9642046	--	
CO BAG 2 (Bag 2 Carbon Monoxide)	0.022114	--	
FE BAG 2 (Bag 2 Fuel Economy)	999	999	
CH4 BAG 2 (Bag 2 Methane)	0.0005642	--	
NMOG BAG 2 (Bag 2 Non-methane organic gases)	0	--	
WATT-HRS BAG 2 (Bag 2 Watt Hours)	0	--	
ACT-DISTANCE BAG 3 (Bag 3 Actual Distance)	3.5908574	--	
CO2 BAG 3 (Bag 3 Carbon Dioxide)	258.4721822	--	
CO BAG 3 (Bag 3 Carbon Monoxide)	0.115928	--	
FE BAG 3 (Bag 3 Fuel Economy)	999	999	
CH4 BAG 3 (Bag 3 Methane)	0.0021491	--	
NMOG BAG 3 (Bag 3 Non-methane organic gases)	0.0001812	--	
WATT-HRS BAG 3 (Bag 3 Watt Hours)	0	--	
METHANE (CH4 - Methane)	0.0016342	--	
CO (Carbon Monoxide)	0.1119854	--	
DT-ASCR (Drive Trace Absolute Speed Change Rating)	0.67	--	
DT-EER (Drive Trace Energy Economy Rating)	0.33	--	
DT-IWRR (Drive Trace Inertia Work Ratio Rating)	1.13	--	
MFR FE (Manufacturer Fuel Economy)	999	999	
NOX (Nitrogen Oxide)	0.003533	--	
N2O (Nitrous Oxide)	0.000373	--	
HC-NM (Non-methane Hydrocarbon)	0.0026078	--	

Certification Summary Information Report

Test Group	VTYXV02.0V2A	Evaporative/Refueling Family	VTYXR0130P42												
	<table><tr><td>NMOG (Non-methane organic gases)</td><td>0.0028717</td><td>--</td></tr><tr><td>PM (Particulate Matter)</td><td>0.0001159</td><td>--</td></tr><tr><td>HC-TOTAL (Total Hydrocarbon)</td><td>0.0039235</td><td>--</td></tr><tr><td>WATT-HRS (Watt Hours)</td><td>0</td><td>--</td></tr></table>	NMOG (Non-methane organic gases)	0.0028717	--	PM (Particulate Matter)	0.0001159	--	HC-TOTAL (Total Hydrocarbon)	0.0039235	--	WATT-HRS (Watt Hours)	0	--		
NMOG (Non-methane organic gases)	0.0028717	--													
PM (Particulate Matter)	0.0001159	--													
HC-TOTAL (Total Hydrocarbon)	0.0039235	--													
WATT-HRS (Watt Hours)	0	--													
	<table><tr><td>Test Result Name</td><td>Unrounded Test Result</td><td>Verify Calculated CREE/OPT-CREE</td></tr><tr><td>Carbon-Related Exhaust Emissions</td><td>0</td><td>273</td></tr></table>	Test Result Name	Unrounded Test Result	Verify Calculated CREE/OPT-CREE	Carbon-Related Exhaust Emissions	0	273								
Test Result Name	Unrounded Test Result	Verify Calculated CREE/OPT-CREE													
Carbon-Related Exhaust Emissions	0	273													
	<table><tr><td>Test Result Name</td><td>Unrounded Test Result</td><td>Verify Calculated CO2</td></tr><tr><td>Carbon dioxide</td><td>272.5827563</td><td>--</td></tr></table>	Test Result Name	Unrounded Test Result	Verify Calculated CO2	Carbon dioxide	272.5827563	--								
Test Result Name	Unrounded Test Result	Verify Calculated CO2													
Carbon dioxide	272.5827563	--													
Manufacturer Test Comments	NMOG = HC-NM x 1.1012, Bag1:NMOG = HC-NM x 1.1036, Bag2:NMOG = HC-NM x 1.1235, Bag3:NMOG = HC-NM x 1.0505														

Certification Summary Information Report

Test Group		VTYXV02.0V2A				Evaporative/Refueling Family				VTYXR0130P42		
Certification Region	Useful Life	Standard Level	Emission Name	Rounded Result	RAF	NMOG/NM HC Ratio	Diesel Adjustment Factor	Add DF	Mult DF	Certification Level	Standard	Pass/Fail
Fed	150,000 miles	Federal Tier 3 Bin 20	CO	0.11	--	--	--	0.18	--	0.3	1.0	Pass
Fed	150,000 miles	Federal Tier 3 Bin 20	CO-COMP	0.51	--	--	--	0.18	--	0.5	4.2	Pass
Fed	150,000 miles	Federal Tier 3 Bin 20	CREE	273	--	--	--	0.028	--	273	--	--
Fed	150,000 miles	Federal Tier 3 Bin 20	METHANE	0.0016	--	--	--	0.0100	--	0.012	0.030	Pass
Fed	150,000 miles	Federal Tier 3 Bin 20	N2O	0.0004	--	--	--	0.0006	--	0.001	0.010	Pass
Fed	150,000 miles	Federal Tier 3 Bin 20	NMOG	0.0029	1	1.10	--	0.0066	--	0.010	999.999	Pass
Fed	150,000 miles	Federal Tier 3 Bin 20	NMOG+NOX	0.0064	1	1.10	--	--	--	0.013	0.020	Pass
Fed	150,000 miles	Federal Tier 3 Bin 20	NMOG+NOX-COMP	0.0148	1	1.03	--	0.0069	--	0.015	0.040	Pass
Fed	150,000 miles	Federal Tier 3 Bin 20	NOX	0.0035	--	--	--	0.0003	--	0.004	999.999	Pass
Fed	150,000 miles	Federal Tier 3 Bin 20	PM	0.0001	--	--	--	0.0000	--	0.000	0.001	Pass
CA	150,000 miles	California LEV-IV SULEV20	CO	0.11	--	--	--	0.18	--	0.3	1.0	Pass
CA	150,000 miles	California LEV-IV SULEV20	NMOG	0.0029	1	1.10	--	0.0066	--	0.010	999.999	Pass
CA	150,000 miles	California LEV-IV SULEV20	NMOG+NOX	0.0064	1	1.10	--	--	--	0.013	0.020	Pass
CA	150,000 miles	California LEV-IV SULEV20	NOX	0.0035	--	--	--	0.0003	--	0.004	999.999	Pass
CA	150,000 miles	California LEV-IV SULEV20	PM	0.0001	--	--	--	0.0000	--	0.000	0.001	Pass

NOTE: For Non-charge depleting tests, the Rounded Result for CREE/OPT-CREE Emission names are Verify-calculated values.

Certification Summary Information Report

Test Group	VTYXV02.0V2A	Evaporative/Refueling Family	VTYXR0130P42
Test #	VTYX10093721	Test Procedure	11 - Cold CO
Exhaust Test # for this Evap Test	--	Test Fuel Type	28 - Cold CO E10 Regular Gasoline (Tier 3)
Test Date	03/12/2026	Fuel	Gasoline
Fuel Batch ID	2M3A01	Fuel Calibration Number	23
Vehicle Class	LDV/Passenger Car	DF Type	Mfr. Determined
Verify Test Lab ID	Toyota Motor Corporation		
E10 Evaporative Test Measurement Method	--		
Test Start Odometer Reading	4892	Odometer Units	M
4WD Test Dyno	No	Diesel Adjustment Factor Usage	--
State of Charge Delta	Yes		
Drive Cycle Speed Tolerance Criteria	Used Part 1066 (+/- 2.0 mph, +/- 1.0 sec)	Road Speed Fan Usage	Yes
Test Results			

Certification Summary Information Report

Test Group	VTYXV02.0V2A	Evaporative/Refueling Family	VTYXR0130P42
Test Result Name	Unrounded Test Result	Verify Calculated FE Equivalent Value (miles per gallon)	
ACT-DISTANCE (Actual Distance Driven (miles))	11.0327603	--	
ACT-DISTANCE BAG 1 (Bag 1 Actual Distance)	3.5908655	--	
CO2 BAG 1 (Bag 1 Carbon Dioxide)	342.4895633	--	
CO BAG 1 (Bag 1 Carbon Monoxide)	4.1995016	--	
FE BAG 1 (Bag 1 Fuel Economy)	999	999	
CH4 BAG 1 (Bag 1 Methane)	0.0413107	--	
NMOG BAG 1 (Bag 1 Non-methane organic gases)	0.4810161	--	
WATT-HRS BAG 1 (Bag 1 Watt Hours)	0	--	
ACT-DISTANCE BAG 2 (Bag 2 Actual Distance)	3.8568061	--	
CO2 BAG 2 (Bag 2 Carbon Dioxide)	299.7331311	--	
CO BAG 2 (Bag 2 Carbon Monoxide)	0.0411008	--	
FE BAG 2 (Bag 2 Fuel Economy)	999	999	
CH4 BAG 2 (Bag 2 Methane)	0.0005512	--	
NMOG BAG 2 (Bag 2 Non-methane organic gases)	0.0020808	--	
WATT-HRS BAG 2 (Bag 2 Watt Hours)	0	--	
ACT-DISTANCE BAG 3 (Bag 3 Actual Distance)	3.5850887	--	
CO2 BAG 3 (Bag 3 Carbon Dioxide)	261.2371635	--	
CO BAG 3 (Bag 3 Carbon Monoxide)	0.1748883	--	
FE BAG 3 (Bag 3 Fuel Economy)	999	999	
CH4 BAG 3 (Bag 3 Methane)	0.0014346	--	
NMOG BAG 3 (Bag 3 Non-methane organic gases)	0.000266	--	
WATT-HRS BAG 3 (Bag 3 Watt Hours)	0	--	
METHANE (CH4 - Methane)	0.0092442	--	
CO (Carbon Monoxide)	0.9399694	--	
DT-ASCR (Drive Trace Absolute Speed Change Rating)	0.74	--	
DT-EER (Drive Trace Energy Economy Rating)	0.58	--	
DT-IWRR (Drive Trace Inertia Work Ratio Rating)	0.86	--	
MFR FE (Manufacturer Fuel Economy)	999	999	
NOX (Nitrogen Oxide)	0.0042273	--	
N2O (Nitrous Oxide)	0.0004176	--	
HC-NM (Non-methane Hydrocarbon)	0.091393	--	

Certification Summary Information Report

Test Group		VTYXV02.0V2A			Evaporative/Refueling Family			VTYXR0130P42				
		NMOG (Non-methane organic gases)		0.1008767		--						
		HC-TOTAL (Total Hydrocarbon)		0.0996594		--						
		WATT-HRS (Watt Hours)		0		--						
		Test Result Name		Unrounded Test Result		Verify Calculated CREE/OPT-CREE						
		Carbon-Related Exhaust Emissions		0		--						
		Test Result Name		Unrounded Test Result		Verify Calculated CO2						
		Carbon dioxide		298.0267482		--						
Manufacturer Test Comments		Bag1:NMOG = HC-NM x 1.1036, Bag2:NMOG = HC-NM x 1.1235, Bag3:NMOG = HC-NM x 1.0505										
Certification Region	Useful Life	Standard Level	Emission Name	Rounded Result	RAF	NMOG/NM HC Ratio	Diesel Adjustment Factor	Add DF	Mult DF	Certification Level	Standard	Pass/Fail
Fed	50,000 miles	Federal Tier 3 Bin 20	CO	0.94	--	--	--	0.06	--	1.0	10.0	Pass
Fed	120,000 miles	Federal Tier 3 Bin 20	HC-NM	0.09	--	--	--	0.01	--	0.1	0.2	Pass
CA	50,000 miles	California LEV-IV SULEV20	CO	0.94	--	--	--	0.06	--	1.0	10.0	Pass

Certification Summary Information Report

Test Group	VTYXV02.0V2A	Evaporative/Refueling Family	VTYXR0130P42
Test #	VTYX10093753	Test Procedure	49 - Quick-Driveway (QD)
Exhaust Test # for this Evap Test	--	Test Fuel Type	48 - Tier 3 E10 Regular Gasoline (9 RVP @Low Alt.)
Test Date	02/20/2026	Fuel	Gasoline
Fuel Batch ID	2D5-02	Fuel Calibration Number	5
Vehicle Class	LDV/Passenger Car	DF Type	Mfr. Determined
Verify Test Lab ID	Toyota Motor Corporation		
E10 Evaporative Test Measurement Method	--		
Test Start Odometer Reading	4718	Odometer Units	M
4WD Test Dyno	No	Diesel Adjustment Factor Usage	--
State of Charge Delta	Yes		
Drive Cycle Speed Tolerance Criteria	Used Part 1066 (+/- 2.0 mph, +/- 1.0 sec)	Road Speed Fan Usage	Yes
Test Results			

Certification Summary Information Report

Test Group	VTYXV02.0V2A	Evaporative/Refueling Family	VTYXR0130P42
Test Result Name	Unrounded Test Result	Verify Calculated FE Equivalent Value (miles per gallon)	
ACT-DISTANCE (Actual Distance Driven (miles))	3.5930246	--	
ACT-DISTANCE BAG 1 (Bag 1 Actual Distance)	3.5930246	--	
CO2 BAG 1 (Bag 1 Carbon Dioxide)	266.0369292	--	
CO BAG 1 (Bag 1 Carbon Monoxide)	0.3579099	--	
FE BAG 1 (Bag 1 Fuel Economy)	999	999	
CH4 BAG 1 (Bag 1 Methane)	0.0042469	--	
NMOG BAG 1 (Bag 1 Non-methane organic gases)	0.0211241	--	
WATT-HRS BAG 1 (Bag 1 Watt Hours)	0	--	
ACT-DISTANCE BAG 2 (Bag 2 Actual Distance)	3.8618189	--	
CO2 BAG 2 (Bag 2 Carbon Dioxide)	282.1199331	--	
CO BAG 2 (Bag 2 Carbon Monoxide)	0.0249937	--	
FE BAG 2 (Bag 2 Fuel Economy)	999	999	
CH4 BAG 2 (Bag 2 Methane)	0.0003881	--	
NMOG BAG 2 (Bag 2 Non-methane organic gases)	0	--	
WATT-HRS BAG 2 (Bag 2 Watt Hours)	0	--	
ACT-DISTANCE BAG 3 (Bag 3 Actual Distance)	3.5942519	--	
CO2 BAG 3 (Bag 3 Carbon Dioxide)	254.6534416	--	
CO BAG 3 (Bag 3 Carbon Monoxide)	0.1093428	--	
FE BAG 3 (Bag 3 Fuel Economy)	999	999	
CH4 BAG 3 (Bag 3 Methane)	0.0011261	--	
NMOG BAG 3 (Bag 3 Non-methane organic gases)	0	--	
WATT-HRS BAG 3 (Bag 3 Watt Hours)	0	--	
METHANE (CH4 - Methane)	0.0013906	--	
CO (Carbon Monoxide)	0.1171667	--	
DT-ASCR (Drive Trace Absolute Speed Change Rating)	0.72	--	
DT-EER (Drive Trace Energy Economy Rating)	0.32	--	
DT-IWRR (Drive Trace Inertia Work Ratio Rating)	1.12	--	
MFR FE (Manufacturer Fuel Economy)	999	999	
NOX (Nitrogen Oxide)	0.0059722	--	
N2O (Nitrous Oxide)	0.0006791	--	
HC-NM (Non-methane Hydrocarbon)	0.003967	--	

Test Group		VTYXV02.0V2A			Evaporative/Refueling Family			VTYXR0130P42				
		NMOG (Non-methane organic gases)			0.0043685			--				
		HC-TOTAL (Total Hydrocarbon)			0.0050001			--				
		WATT-HRS (Watt Hours)			0			--				
		Test Result Name			Unrounded Test Result			Verify Calculated CREE/OPT-CREE				
		Carbon-Related Exhaust Emissions			0			--				
		Test Result Name			Unrounded Test Result			Verify Calculated CO2				
		Carbon dioxide			271.2397266			--				
Manufacturer Test Comments		FTP TestLinkIdentifier = VTYX10093723, NMOG = HC-NM x 1.1012, Bag1:NMOG = HC-NM x 1.1036, Bag2:NMOG = HC-NM x 1.1235, Bag3:NMOG = HC-NM x 1.0505										
Certification Region	Useful Life	Standard Level	Emission Name	Rounded Result	RAF	NMOG/NM HC Ratio	Diesel Adjustment Factor	Add DF	Mult DF	Certification Level	Standard	Pass/Fail
CA	150,000 miles	California LEV-IV SULEV20	NMOG	0.0044	1	1.10	--	0.0066	--	0.011	999.999	Pass
CA	150,000 miles	California LEV-IV SULEV20	NMOG+NOX	0.0104	1	1.10	--	--	--	0.017	0.032	Pass
CA	150,000 miles	California LEV-IV SULEV20	NOX	0.0060	--	--	--	0.0003	--	0.006	999.999	Pass

Certification Summary Information Report

Test Group	VTYXV02.0V2A	Evaporative/Refueling Family	VTYXR0130P42
Test #	VTYX10093722	Test Procedure	3 - HWFE
Exhaust Test # for this Evap Test	--	Test Fuel Type	48 - Tier 3 E10 Regular Gasoline (9 RVP @Low Alt.)
Test Date	02/19/2026	Fuel	Gasoline
Fuel Batch ID	2D5-02	Fuel Calibration Number	4
Vehicle Class	LDV/Passenger Car	DF Type	Mfr. Determined
Verify Test Lab ID	Toyota Motor Corporation		
E10 Evaporative Test Measurement Method	--		
Test Start Odometer Reading	4674	Odometer Units	M
4WD Test Dyno	No	Diesel Adjustment Factor Usage	--
State of Charge Delta	Yes		
Drive Cycle Speed Tolerance Criteria	Used Part 1066 (+/- 2.0 mph, +/- 1.0 sec)	Road Speed Fan Usage	Yes

Test Results

Test Result Name	Unrounded Test Result	Verify Calculated FE Equivalent Value (miles per gallon)
METHANE (CH4 - Methane)	0.0010429	--
CO (Carbon Monoxide)	0.1097607	--
DT-ASCR (Drive Trace Absolute Speed Change Rating)	0.66	--
DT-EER (Drive Trace Energy Economy Rating)	0.02	--
DT-IWRR (Drive Trace Inertia Work Ratio Rating)	0.93	--
MFR FE (Manufacturer Fuel Economy)	999	999
NOX (Nitrogen Oxide)	0.0007587	--
N2O (Nitrous Oxide)	0	--
HC-NM (Non-methane Hydrocarbon)	0	--
NMOG (Non-methane organic gases)	0	--
HC-TOTAL (Total Hydrocarbon)	0.0008003	--

Test Result Name	Unrounded Test Result	Verify Calculated CREE/OPT-CREE
Carbon-Related Exhaust Emissions	0	190

Test Result Name	Unrounded Test Result	Verify Calculated CO2
Carbon dioxide	189.9659396	--

Manufacturer Test Comments NMOG = HC-NM x 1.03

Certification Summary Information Report

Test Group		VTYXV02.0V2A				Evaporative/Refueling Family				VTYXR0130P42		
Certification Region	Useful Life	Standard Level	Emission Name	Rounded Result	RAF	NMOG/NM HC Ratio	Diesel Adjustment Factor	Add DF	Mult DF	Certification Level	Standard	Pass/Fail
Fed	150,000 miles	Federal Tier 3 Bin 20	CREE	190	--	--	--	0.028	--	190	--	--
Fed	150,000 miles	Federal Tier 3 Bin 20	NMOG	0.0000	1	1.03	--	0.0066	--	0.007	999.999	Pass
Fed	150,000 miles	Federal Tier 3 Bin 20	NMOG+NOX	0.0008	1	1.03	--	--	--	0.008	0.020	Pass
Fed	150,000 miles	Federal Tier 3 Bin 20	NOX	0.0008	--	--	--	0.0003	--	0.001	999.999	Pass
CA	150,000 miles	California LEV-IV SULEV20	NMOG	0.0000	1	1.03	--	0.0066	--	0.007	999.999	Pass
CA	150,000 miles	California LEV-IV SULEV20	NMOG+NOX	0.0008	1	1.03	--	--	--	0.008	0.020	Pass
CA	150,000 miles	California LEV-IV SULEV20	NOX	0.0008	--	--	--	0.0003	--	0.001	999.999	Pass

NOTE: For Non-charge depleting tests, the Rounded Result for CREE/OPT-CREE Emission names are Verify-calculated values.

Certification Summary Information Report

Test Group	VTYXV02.0V2A	Evaporative/Refueling Family	VTYXR0130P42
Test #	VTYX10093720	Test Procedure	90 - US06
Exhaust Test # for this Evap Test	--	Test Fuel Type	48 - Tier 3 E10 Regular Gasoline (9 RVP @Low Alt.)
Test Date	02/19/2026	Fuel	Gasoline
Fuel Batch ID	2D5-02	Fuel Calibration Number	4
Vehicle Class	LDV/Passenger Car	DF Type	Mfr. Determined
Verify Test Lab ID	Toyota Motor Corporation		
E10 Evaporative Test Measurement Method	--		
Test Start Odometer Reading	4694	Odometer Units	M
4WD Test Dyno	No	Diesel Adjustment Factor Usage	--
State of Charge Delta	Yes		
Drive Cycle Speed Tolerance Criteria	Used Part 1066 (+/- 2.0 mph, +/- 1.0 sec)	Road Speed Fan Usage	Yes
Test Results			

Certification Summary Information Report

Test Group	VTYXV02.0V2A	Evaporative/Refueling Family	VTYXR0130P42
Test Result Name	Unrounded Test Result	Verify Calculated FE Equivalent Value (miles per gallon)	
ACT-DISTANCE (Actual Distance Driven (miles))	8.0092787	--	
ACT-DISTANCE BAG 1 (Bag 1 Actual Distance)	1.7726494	--	
CO2 BAG 1 (Bag 1 Carbon Dioxide)	440.8596615	--	
CO BAG 1 (Bag 1 Carbon Monoxide)	2.0801341	--	
FE BAG 1 (Bag 1 Fuel Economy)	999	999	
CH4 BAG 1 (Bag 1 Methane)	0.0045729	--	
NMOG BAG 1 (Bag 1 Non-methane organic gases)	0.0132549	--	
WATT-HRS BAG 1 (Bag 1 Watt Hours)	0	--	
ACT-DISTANCE BAG 2 (Bag 2 Actual Distance)	6.2366292	--	
CO2 BAG 2 (Bag 2 Carbon Dioxide)	241.5749202	--	
CO BAG 2 (Bag 2 Carbon Monoxide)	0.4090434	--	
FE BAG 2 (Bag 2 Fuel Economy)	999	999	
CH4 BAG 2 (Bag 2 Methane)	0.0011851	--	
NMOG BAG 2 (Bag 2 Non-methane organic gases)	0.0047079	--	
WATT-HRS BAG 2 (Bag 2 Watt Hours)	0	--	
METHANE (CH4 - Methane)	0.0019349	--	
CO (Carbon Monoxide)	0.7788967	--	
DT-ASCR (Drive Trace Absolute Speed Change Rating)	0.83	--	
DT-EER (Drive Trace Energy Economy Rating)	-0.22	--	
DT-IWRR (Drive Trace Inertia Work Ratio Rating)	1.61	--	
MFR FE (Manufacturer Fuel Economy)	999	999	
NOX (Nitrogen Oxide)	0.0045067	--	
N2O (Nitrous Oxide)	0	--	
HC-NM (Non-methane Hydrocarbon)	0.0064073	--	
NMOG (Non-methane organic gases)	0.0065995	--	
PM (Particulate Matter)	0.0002167	--	
HC-TOTAL (Total Hydrocarbon)	0.0082044	--	
WATT-HRS (Watt Hours)	0	--	
Test Result Name	Unrounded Test Result	Verify Calculated CREE/OPT-CREE	
Carbon-Related Exhaust Emissions	0	--	

Certification Summary Information Report

Test Group		VTYXV02.0V2A				Evaporative/Refueling Family				VTYXR0130P42		
		Test Result Name		Unrounded Test Result		Verify Calculated CO2						
		Carbon dioxide		285.681512		--						
Manufacturer Test Comments		NMOG = HC-NM x 1.0300										
Certification Region	Useful Life	Standard Level	Emission Name	Rounded Result	RAF	NMOG/NM HC Ratio	Diesel Adjustment Factor	Add DF	Mult DF	Certification Level	Standard	Pass/Fail
Fed	150,000 miles	Federal Tier 3 Bin 20	PM	0.0002	--	--	--	0.0000	--	0.000	0.006	Pass
CA	150,000 miles	California LEV-IV SULEV20	CO	0.78	--	--	--	0.18	--	1.0	9.6	Pass
CA	150,000 miles	California LEV-IV SULEV20	NMOG	0.0066	1	1.03	--	0.0066	--	0.013	999.999	Pass
CA	150,000 miles	California LEV-IV SULEV20	NMOG+NOX	0.0111	1	1.03	--	--	--	0.018	0.030	Pass
CA	150,000 miles	California LEV-IV SULEV20	NOX	0.0045	--	--	--	0.0003	--	0.005	999.999	Pass
CA	150,000 miles	California LEV-IV SULEV20	PM	0.0002	--	--	--	0.0000	--	0.000	0.003	Pass

Certification Summary Information Report

Test Group	VTYXV02.0V2A	Evaporative/Refueling Family	VTYXR0130P42
Test #	VTYX10093768	Test Procedure	95 - SC03
Exhaust Test # for this Evap Test	--	Test Fuel Type	48 - Tier 3 E10 Regular Gasoline (9 RVP @Low Alt.)
Test Date	03/17/2026	Fuel	Gasoline
Fuel Batch ID	2E5-03	Fuel Calibration Number	1
Vehicle Class	LDV/Passenger Car	DF Type	Mfr. Determined
Verify Test Lab ID	Toyota Motor Corporation		
E10 Evaporative Test Measurement Method	--		
Test Start Odometer Reading	4933	Odometer Units	M
4WD Test Dyno	No	Diesel Adjustment Factor Usage	--
State of Charge Delta	Yes		
Drive Cycle Speed Tolerance Criteria	Used Part 1066 (+/- 2.0 mph, +/- 1.0 sec)	Road Speed Fan Usage	Yes

Test Results

Test Result Name	Unrounded Test Result	Verify Calculated FE Equivalent Value (miles per gallon)
METHANE (CH4 - Methane)	0.00217	--
CO (Carbon Monoxide)	0.212079	--
DT-ASCR (Drive Trace Absolute Speed Change Rating)	0.86	--
DT-EER (Drive Trace Energy Economy Rating)	0.79	--
DT-IWRR (Drive Trace Inertia Work Ratio Rating)	1.54	--
MFR FE (Manufacturer Fuel Economy)	999	999
NOX (Nitrogen Oxide)	0.004204	--
HC-NM (Non-methane Hydrocarbon)	0.002523	--
NMOG (Non-methane organic gases)	0.0025987	--
HC-TOTAL (Total Hydrocarbon)	0.004547	--

Test Result Name	Unrounded Test Result	Verify Calculated CREE/OPT-CREE
Carbon-Related Exhaust Emissions	0	--

Test Result Name	Unrounded Test Result	Verify Calculated CO2
Carbon dioxide	348.678408	--

Manufacturer Test Comments NMOG = HC-NM x 1.03

Certification Summary Information Report

Test Group		VTYXV02.0V2A				Evaporative/Refueling Family				VTYXR0130P42		
Certification Region	Useful Life	Standard Level	Emission Name	Rounded Result	RAF	NMOG/NM HC Ratio	Diesel Adjustment Factor	Add DF	Mult DF	Certification Level	Standard	Pass/Fail
CA	150,000 miles	California LEV-IV SULEV20	CO	0.21	--	--	--	0.18	--	0.4	1.0	Pass
CA	150,000 miles	California LEV-IV SULEV20	NMOG	0.0026	1	1.03	--	0.0066	--	0.009	999.999	Pass
CA	150,000 miles	California LEV-IV SULEV20	NMOG+NOX	0.0068	1	1.03	--	--	--	0.014	0.020	Pass
CA	150,000 miles	California LEV-IV SULEV20	NOX	0.0042	--	--	--	0.0003	--	0.004	999.999	Pass

Certification Summary Information Report

Test Group	VTYXV02.0V2A	Evaporative/Refueling Family	VTYXR0130P42
Fuel Properties			
Fuel Batch ID	2D5-02	Fuel Calibration Number	4
Test Fuel Type	48 - Tier 3 E10 Regular Gasoline (9 RVP @Low Alt.)	Fuel Batch Calibration Date	04/03/2025
Fuel Batch Calibration Effective Date	02/01/2026	Fuel Batch Calibration Ineffective Date	02/28/2026
Carbon Weight Fraction NMHC	--	Carbon Weight Fraction HC	--
Exhaust Carbon Weight Fraction	--	Fuel Methanol Volume Fraction	--
Fuel Density (grams/cubic ft)	--	Fuel Specific Gravity	0.74
Fuel Ethanol Volume Percent (%)	9.9	Fuel Net Heating Value / Fuel Net Heat of Combustion (E0) (BTU/lb)	--
Fuel Net Heat of Combustion (E10) (MJ/kg)	41.528	Fuel Carbon Mass Fraction (E10)	0.825
Fuel Blend Carbon Weight Fraction / Fuel Carbon Mass Fraction (E0)	--	Weight Fraction CO2	--
Fuel Batch ID	2E5-03	Fuel Calibration Number	1
Test Fuel Type	48 - Tier 3 E10 Regular Gasoline (9 RVP @Low Alt.)	Fuel Batch Calibration Date	05/27/2025
Fuel Batch Calibration Effective Date	03/01/2026	Fuel Batch Calibration Ineffective Date	03/31/2026
Carbon Weight Fraction NMHC	--	Carbon Weight Fraction HC	--
Exhaust Carbon Weight Fraction	--	Fuel Methanol Volume Fraction	--
Fuel Density (grams/cubic ft)	--	Fuel Specific Gravity	0.74
Fuel Ethanol Volume Percent (%)	9.6	Fuel Net Heating Value / Fuel Net Heat of Combustion (E0) (BTU/lb)	--
Fuel Net Heat of Combustion (E10) (MJ/kg)	41.528	Fuel Carbon Mass Fraction (E10)	0.826
Fuel Blend Carbon Weight Fraction / Fuel Carbon Mass Fraction (E0)	--	Weight Fraction CO2	--
Fuel Batch ID	2G0-04	Fuel Calibration Number	3
Test Fuel Type	48 - Tier 3 E10 Regular Gasoline (9 RVP @Low Alt.)	Fuel Batch Calibration Date	07/28/2020
Fuel Batch Calibration Effective Date	01/21/2021	Fuel Batch Calibration Ineffective Date	02/28/2021
Carbon Weight Fraction NMHC	--	Carbon Weight Fraction HC	--
Exhaust Carbon Weight Fraction	--	Fuel Methanol Volume Fraction	--
Fuel Density (grams/cubic ft)	--	Fuel Specific Gravity	0.74
Fuel Ethanol Volume Percent (%)	9.7	Fuel Net Heating Value / Fuel Net Heat of Combustion (E0) (BTU/lb)	17847
Fuel Net Heat of Combustion (E10) (MJ/kg)	--	Fuel Carbon Mass Fraction (E10)	--
Fuel Blend Carbon Weight Fraction / Fuel Carbon Mass Fraction (E0)	0.826	Weight Fraction CO2	--
Fuel Batch ID	2D5-02	Fuel Calibration Number	5
Test Fuel Type	48 - Tier 3 E10 Regular Gasoline (9 RVP @Low Alt.)	Fuel Batch Calibration Date	04/03/2025

Certification Summary Information Report

Test Group	VTYXV02.0V2A	Evaporative/Refueling Family	VTYXR0130P42
Fuel Batch Calibration Effective Date	03/01/2026	Fuel Batch Calibration Ineffective Date	03/31/2026
Carbon Weight Fraction NMHC	--	Carbon Weight Fraction HC	--
Exhaust Carbon Weight Fraction	--	Fuel Methanol Volume Fraction	--
Fuel Density (grams/cubic ft)	--	Fuel Specific Gravity	0.74
Fuel Ethanol Volume Percent (%)	9.9	Fuel Net Heating Value / Fuel Net Heat of Combustion (E0) (BTU/lb)	--
Fuel Net Heat of Combustion (E10) (MJ/kg)	41.528	Fuel Carbon Mass Fraction (E10)	0.825
Fuel Blend Carbon Weight Fraction / Fuel Carbon Mass Fraction (E0)	--	Weight Fraction CO2	--
Fuel Batch ID	1L6-07	Fuel Calibration Number	1
Test Fuel Type	48 - Tier 3 E10 Regular Gasoline (9 RVP @Low Alt.)	Fuel Batch Calibration Date	11/12/2016
Fuel Batch Calibration Effective Date	01/07/2017	Fuel Batch Calibration Ineffective Date	01/31/2017
Carbon Weight Fraction NMHC	--	Carbon Weight Fraction HC	--
Exhaust Carbon Weight Fraction	--	Fuel Methanol Volume Fraction	--
Fuel Density (grams/cubic ft)	--	Fuel Specific Gravity	0.739
Fuel Ethanol Volume Percent (%)	9.8	Fuel Net Heating Value / Fuel Net Heat of Combustion (E0) (BTU/lb)	17843
Fuel Net Heat of Combustion (E10) (MJ/kg)	--	Fuel Carbon Mass Fraction (E10)	--
Fuel Blend Carbon Weight Fraction / Fuel Carbon Mass Fraction (E0)	0.825	Weight Fraction CO2	--
Fuel Batch ID	2M3A01	Fuel Calibration Number	23
Test Fuel Type	28 - Cold CO E10 Regular Gasoline (Tier 3)	Fuel Batch Calibration Date	12/22/2023
Fuel Batch Calibration Effective Date	03/01/2026	Fuel Batch Calibration Ineffective Date	03/31/2026
Carbon Weight Fraction NMHC	--	Carbon Weight Fraction HC	0.825
Exhaust Carbon Weight Fraction	--	Fuel Methanol Volume Fraction	--
Fuel Density (grams/cubic ft)	--	Fuel Specific Gravity	0.735
Fuel Ethanol Volume Percent (%)	9.6	Fuel Net Heating Value / Fuel Net Heat of Combustion (E0) (BTU/lb)	--
Fuel Net Heat of Combustion (E10) (MJ/kg)	41.552	Fuel Carbon Mass Fraction (E10)	0.825
Fuel Blend Carbon Weight Fraction / Fuel Carbon Mass Fraction (E0)	--	Weight Fraction CO2	--

Certification Summary Information Report

Test Group		VTYXV02.0V2A			Evaporative/Refueling Family		VTYXR0130P42		
Consolidated List of Standards									
Exhaust Standards									
Cert Region		California + CAA Section 177 states			Cert/In-Use Code		Cert		
Vehicle Class		LDV/Passenger Car			Standard Level		California LEV-IV SULEV20		
Fuel		Gasoline			Test Procedure		Federal fuel 2-day exhaust (w/can load)		
Useful Life	Emission Name	Rounded Result	RAF	NMOG / NMHC	Upward Diesel Adjustment Factor	Downward Diesel Adjustment Factor	Mult DF	Add DF	Std
150,000 miles	CO	--	--	--	--	--	--	0.18	1.0
150,000 miles	HCHO	--	--	--	--	--	--	--	0.004
150,000 miles	NMOG	--	1	1.10	--	--	--	0.0066	999.999
150,000 miles	NMOG+NOX	--	1	1.10	--	--	--	0.0069	0.020
150,000 miles	NOX	--	--	--	--	--	--	0.0003	999.999
150,000 miles	PM	--	--	--	--	--	--	0.0000	0.001
Cert Region		Federal			Cert/In-Use Code		Cert		
Vehicle Class		LDV/Passenger Car			Standard Level		Federal Tier 3 Bin 20		
Fuel		Gasoline			Test Procedure		Federal fuel 2-day exhaust (w/can load)		
Useful Life	Emission Name	Rounded Result	RAF	NMOG / NMHC	Upward Diesel Adjustment Factor	Downward Diesel Adjustment Factor	Mult DF	Add DF	Std
150,000 miles	CO	--	--	--	--	--	--	0.18	1.0
150,000 miles	CO-COMP	--	--	--	--	--	--	0.18	4.2
150,000 miles	CREE	--	--	--	--	--	--	0.028	999.9999
150,000 miles	HCHO	--	--	--	--	--	--	--	0.004
150,000 miles	METHANE	--	--	--	--	--	--	0.0100	0.030
150,000 miles	N2O	--	--	--	--	--	--	0.0006	0.010
150,000 miles	NMOG	--	1	1.10	--	--	--	0.0066	999.999
150,000 miles	NMOG+NOX	--	1	1.10	--	--	--	0.0069	0.020
150,000 miles	NMOG+NOX-COMP	--	1	1.03	--	--	--	0.0069	0.040
150,000 miles	NOX	--	--	--	--	--	--	0.0003	999.999
150,000 miles	PM	--	--	--	--	--	--	0.0000	0.001

Certification Summary Information Report

Test Group		VTYXV02.0V2A			Evaporative/Refueling Family			VTYXR0130P42	
Cert Region		California + CAA Section 177 states			Cert/In-Use Code			Cert	
Vehicle Class		LDV/Passenger Car			Standard Level			California LEV-IV SULEV20	
Fuel		Gasoline			Test Procedure			US06	
Useful Life	Emission Name	Rounded Result	RAF	NMOG / NMHC	Upward Diesel Adjustment Factor	Downward Diesel Adjustment Factor	Mult DF	Add DF	Std
150,000 miles	CO	--	--	--	--	--	--	0.18	9.6
150,000 miles	NMOG	--	1	1.03	--	--	--	0.0066	999.999
150,000 miles	NMOG+NOX	--	1	1.03	--	--	--	0.0069	0.030
150,000 miles	NOX	--	--	--	--	--	--	0.0003	999.999
150,000 miles	PM	--	--	--	--	--	--	0.0000	0.003
Cert Region		California + CAA Section 177 states			Cert/In-Use Code			Cert	
Vehicle Class		LDV/Passenger Car			Standard Level			California LEV-IV SULEV20	
Fuel		Gasoline			Test Procedure			SC03	
Useful Life	Emission Name	Rounded Result	RAF	NMOG / NMHC	Upward Diesel Adjustment Factor	Downward Diesel Adjustment Factor	Mult DF	Add DF	Std
150,000 miles	CO	--	--	--	--	--	--	0.18	1.0
150,000 miles	NMOG	--	1	1.03	--	--	--	0.0066	999.999
150,000 miles	NMOG+NOX	--	1	1.03	--	--	--	0.0069	0.020
150,000 miles	NOX	--	--	--	--	--	--	0.0003	999.999
Cert Region		California + CAA Section 177 states			Cert/In-Use Code			Cert	
Vehicle Class		LDV/Passenger Car			Standard Level			California LEV-IV SULEV20	
Fuel		Gasoline			Test Procedure			Cold CO	
Useful Life	Emission Name	Rounded Result	RAF	NMOG / NMHC	Upward Diesel Adjustment Factor	Downward Diesel Adjustment Factor	Mult DF	Add DF	Std
50,000 miles	CO	--	--	--	--	--	--	0.06	10.0

Certification Summary Information Report

Test Group		VTYXV02.0V2A			Evaporative/Refueling Family			VTYXR0130P42	
Cert Region		California + CAA Section 177 states			Cert/In-Use Code			Cert	
Vehicle Class		LDV/Passenger Car			Standard Level			California LEV-IV SULEV20	
Fuel		Gasoline			Test Procedure			Quick-Driveway (QD)	
Useful Life	Emission Name	Rounded Result	RAF	NMOG / NMHC	Upward Diesel Adjustment Factor	Downward Diesel Adjustment Factor	Mult DF	Add DF	Std
150,000 miles	NMOG	--	1	1.10	--	--	--	0.0066	999.999
150,000 miles	NMOG+NOX	--	1	1.10	--	--	--	0.0069	0.032
150,000 miles	NOX	--	--	--	--	--	--	0.0003	999.999
Cert Region		California + CAA Section 177 states			Cert/In-Use Code			Cert	
Vehicle Class		LDV/Passenger Car			Standard Level			California LEV-IV SULEV20	
Fuel		Gasoline			Test Procedure			HWFE	
Useful Life	Emission Name	Rounded Result	RAF	NMOG / NMHC	Upward Diesel Adjustment Factor	Downward Diesel Adjustment Factor	Mult DF	Add DF	Std
150,000 miles	NMOG	--	1	1.03	--	--	--	0.0066	999.999
150,000 miles	NMOG+NOX	--	1	1.03	--	--	--	0.0069	0.020
150,000 miles	NOX	--	--	--	--	--	--	0.0003	999.999
Cert Region		Federal			Cert/In-Use Code			Cert	
Vehicle Class		LDV/Passenger Car			Standard Level			Federal Tier 3 Bin 20	
Fuel		Gasoline			Test Procedure			US06	
Useful Life	Emission Name	Rounded Result	RAF	NMOG / NMHC	Upward Diesel Adjustment Factor	Downward Diesel Adjustment Factor	Mult DF	Add DF	Std
150,000 miles	PM	--	--	--	--	--	--	0.0000	0.006

Certification Summary Information Report

Test Group	VTYXV02.0V2A				Evaporative/Refueling Family			VTYXR0130P42	
Cert Region	California + CAA Section 177 states				Cert/In-Use Code			Cert	
Vehicle Class	LDV/Passenger Car				Standard Level			California LEV-IV SULEV20	
Fuel	Gasoline				Test Procedure			CA fuel 50 Deg(F) exhaust test	
Useful Life	Emission Name	Rounded Result	RAF	NMOG / NMHC	Upward Diesel Adjustment Factor	Downward Diesel Adjustment Factor	Mult DF	Add DF	Std
4,000 miles	CO	--	--	--	--	--	--	--	1.0
4,000 miles	HCHO	--	--	--	--	--	--	--	0.008
4,000 miles	NMOG	--	1	1.10	--	--	--	--	999.999
4,000 miles	NMOG+NOX	--	--	1.10	--	--	1	--	0.060
4,000 miles	NOX	--	--	--	--	--	--	--	999.999

Cert Region	Federal				Cert/In-Use Code			Cert	
Vehicle Class	LDV/Passenger Car				Standard Level			Federal Tier 3 Bin 20	
Fuel	Gasoline				Test Procedure			HWFE	
Useful Life	Emission Name	Rounded Result	RAF	NMOG / NMHC	Upward Diesel Adjustment Factor	Downward Diesel Adjustment Factor	Mult DF	Add DF	Std
150,000 miles	CREE	--	--	--	--	--	--	0.028	999.9999
150,000 miles	NMOG	--	1	1.03	--	--	--	0.0066	999.999
150,000 miles	NMOG+NOX	--	1	1.03	--	--	--	0.0069	0.020
150,000 miles	NOX	--	--	--	--	--	--	0.0003	999.999

Cert Region	Federal				Cert/In-Use Code			Cert	
Vehicle Class	LDV/Passenger Car				Standard Level			Federal Tier 3 Bin 20	
Fuel	Gasoline				Test Procedure			Cold CO	
Useful Life	Emission Name	Rounded Result	RAF	NMOG / NMHC	Upward Diesel Adjustment Factor	Downward Diesel Adjustment Factor	Mult DF	Add DF	Std
50,000 miles	CO	--	--	--	--	--	--	0.06	10.0
120,000 miles	HC-NM	--	--	--	--	--	--	0.01	0.2

Evaporative/Refueling Standards

Certification Summary Information Report

Test Group	VTYXV02.0V2A		Evaporative/Refueling Family	VTYXR0130P42	
Evaporative/Refueling Family	VTYXR0130P42		Cert Region	Federal	
Cert/In-Use Code	Cert		Standard Level	Federal Tier 3 Evap	
Test Procedure	2-day evap				
Fuel	Useful Life	Emission Name	Rounded Result	Std	Add DF
Gasoline	150,000 miles	HC-TOTAL-EQUIV	--	0.300	0.0000
Evaporative/Refueling Family	VTYXR0130P42		Cert Region	California + CAA Section 177 states	
Cert/In-Use Code	Cert		Standard Level	California LEV-IV Zero Evap (Option 2)	
Test Procedure	Evap Canister Bleed Test				
Fuel	Useful Life	Emission Name	Rounded Result	Std	Add DF
Gasoline	150,000 miles	HC-TOTAL-EQUIV	--	0.020	0.0000
Evaporative/Refueling Family	VTYXR0130P42		Cert Region	California + CAA Section 177 states	
Cert/In-Use Code	Cert		Standard Level	California LEV-IV Zero Evap (Option 2)	
Test Procedure	Federal fuel refueling test (ORVR)				
Fuel	Useful Life	Emission Name	Rounded Result	Std	Add DF
Gasoline	150,000 miles	HC-TOTAL-EQUIV	--	0.20	0.000
Evaporative/Refueling Family	VTYXR0130P42		Cert Region	California + CAA Section 177 states	
Cert/In-Use Code	Cert		Standard Level	California LEV-IV Zero Evap (Option 2)	
Test Procedure	2-day evap				
Fuel	Useful Life	Emission Name	Rounded Result	Std	Add DF
Gasoline	150,000 miles	HC-TOTAL-EQUIV	--	0.300	0.0000
Evaporative/Refueling Family	VTYXR0130P42		Cert Region	Federal	
Cert/In-Use Code	Cert		Standard Level	Federal Tier 3 Evap	
Test Procedure	Federal fuel refueling test (ORVR)				
Fuel	Useful Life	Emission Name	Rounded Result	Std	Add DF
Gasoline	150,000 miles	HC-TOTAL-EQUIV	--	0.20	0.000

Certification Summary Information Report

Test Group		VTYXV02.0V2A		Evaporative/Refueling Family		VTYXR0130P42	
Evaporative/Refueling Family		VTYXR0130P42		Cert Region		Federal	
Cert/In-Use Code		Cert		Standard Level		Federal Tier 3 Evap	
Test Procedure		Federal fuel 3-day evap					
Fuel	Useful Life	Emission Name	Rounded Result	Std	Add DF		
Gasoline	150,000 miles	HC-TOTAL-EQUIV	--	0.300	0.0000		
Evaporative/Refueling Family		VTYXR0130P42		Cert Region		California + CAA Section 177 states	
Cert/In-Use Code		Cert		Standard Level		California LEV-IV Zero Evap (Option 2)	
Test Procedure		Federal Fuel Running Loss					
Fuel	Useful Life	Emission Name	Rounded Result	Std	Add DF		
Gasoline	150,000 miles	HC-TOTAL-EQUIV	--	0.01	0.000		
Evaporative/Refueling Family		VTYXR0130P42		Cert Region		California + CAA Section 177 states	
Cert/In-Use Code		Cert		Standard Level		California LEV-IV Zero Evap (Option 2)	
Test Procedure		Federal fuel 3-day evap					
Fuel	Useful Life	Emission Name	Rounded Result	Std	Add DF		
Gasoline	150,000 miles	HC-TOTAL-EQUIV	--	0.300	0.0000		
Evaporative/Refueling Family		VTYXR0130P42		Cert Region		Federal	
Cert/In-Use Code		Cert		Standard Level		Federal Tier 3 Evap	
Test Procedure		Federal Fuel Running Loss					
Fuel	Useful Life	Emission Name	Rounded Result	Std	Add DF		
Gasoline	150,000 miles	HC-TOTAL-EQUIV	--	0.05	0.000		
Evaporative/Refueling Family		VTYXR0130P42		Cert Region		Federal	
Cert/In-Use Code		Cert		Standard Level		Federal Tier 3 Evap	
Test Procedure		Evap Canister Bleed Test					
Fuel	Useful Life	Emission Name	Rounded Result	Std	Add DF		
Gasoline	150,000 miles	HC-TOTAL-EQUIV	--	0.020	0.0000		

Certification Summary Information Report

Test Group		VTYXV02.0V2A		Evaporative/Refueling Family		VTYXR0130P42	
Evaporative/Refueling Family		VTYXR0130P42		Cert Region		Federal	
Cert/In-Use Code		Cert		Standard Level		Federal Tier 3 Evap	
Test Procedure		Spitback					
Fuel		Useful Life		Emission Name		Rounded Result	
Std		Add DF					
Gasoline		4,000 miles		SPITBACK		--	
1.0						--	

Certification Summary Information Report

Test Group		VTYXV02.0V2A	Evaporative/Refueling Family		VTYXR0130P42
Glossary					
Useful Life					
4	4,000 miles		120	120,000 miles	
50	50,000 miles		150	150,000 miles	
100	100,000 miles				
Emission Name					
HC-TOTAL	Total Hydrocarbon		COMB-CREE	Combined Carbon-Related Exhaust Emissions	
CO	Carbon Monoxide		COMB-OPT-CREE	Combined Optional Carbon-Related Exhaust Emissions	
CO2	Carbon dioxide		HC-TOTAL-EQUIV	Total Hydrocarbon equivalent - Evap only	
CREE	Carbon-Related Exhaust Emissions		METHANE-COMB	Combined CH4 for HD 2b/3 vehicles only	
OPT-CREE	Optional Carbon-Related Exhaust Emissions		N2O-COMB	Combined Nitrous Oxide for HD 2b/3 vehicles only	
NOX	Nitrogen Oxide		LEAK-DIA	Effective Leak Diameter (inches)	
PM	Particulate Matter		LEAK-GAS CAP	Gas Cap Leakage (cc/min)	
PM-COMP	SFTP Composite Particulate Matter		CO2-COMB	Combined Carbon Dioxide for HD 2b/3 Vehicles Only	
HC-NM	Non-methane Hydrocarbon		KW-HRS	Integrated DC KW-HRS	
OMHCE	Organic material Hydrocarbon Equivalent		CH4 BAG 1	Bag 1 Methane	
OMNMHCE	Organic material non-methane HC equivalent		CH4 BAG 2	Bag 2 Methane	
NMOG	Non-methane organic gases		CH4 BAG 3	Bag 3 Methane	
HCHO	Formaldehyde		CH4 BAG 4	Bag 4 Methane	
H3C2HO	Acetaldehyde		CO BAG 1	Bag 1 Carbon Monoxide	
HC-NM+NOX	SFTP Non-methane Hydrocarbon + Nitrogen Oxides for US06 or SC03		CO BAG 2	Bag 2 Carbon Monoxide	
HC-NM+NOX-COMP	SFTP Composite Non-methane Hydrocarbon + Nitrogen Oxides		CO BAG 3	Bag 3 Carbon Monoxide	
CO-COMP	SFTP Composite Carbon Monoxide		CO BAG 4	Bag 4 Carbon Monoxide	
ETHANOL	C2H5OH - Ethanol		NMOG BAG 1	Bag 1 Non-methane organic gases	
FE BAG 1	Bag 1 Fuel Economy		NMOG BAG 2	Bag 2 Non-methane organic gases	
FE BAG 2	Bag 2 Fuel Economy		NMOG BAG 3	Bag 3 Non-methane organic gases	
FE BAG 3	Bag 3 Fuel Economy		NMOG BAG 4	Bag 4 Non-methane organic gases	
FE BAG 4	Bag 4 Fuel Economy		ACT-DISTANCE BAG 1	Bag 1 Actual Distance	
MFR FE	Manufacturer Fuel Economy		ACT-DISTANCE BAG 2	Bag 2 Actual Distance	
HC	Hydrocarbon for Running Loss and ORVR		ACT-DISTANCE BAG 3	Bag 3 Actual Distance	
METHANE	CH4 - Methane		ACT-DISTANCE BAG 4	Bag 4 Actual Distance	
METHANOL	CH3OH - Methanol		HC-TOTAL BAG 1	Bag 1 Total Hydrocarbon	
N2O	Nitrous Oxide		HC-TOTAL BAG 2	Bag 2 Total Hydrocarbon	
SPITBACK	Spitback Hydrocarbon in grams		HC-TOTAL BAG 3	Bag 3 Total Hydrocarbon	
AMP-HRS	Integrated Amp-hours		HC-TOTAL BAG 4	Bag 4 Total Hydrocarbon	
START-SOC	System Start State of Charge Watt-hours		WATT-HRS BAG 1	Bag 1 Watt Hours	
END-SOC	System End State of Charge Watt-hours		WATT-HRS BAG 2	Bag 2 Watt Hours	

Certification Summary Information Report

Test Group		VTYXV02.0V2A	Evaporative/Refueling Family		VTYXR0130P42
ACT-DISTANCE	Actual Distance Driven (miles)		WATT-HRS BAG 3	Bag 3 Watt Hours	
AS-VOLT	Average System Voltage		WATT-HRS BAG 4	Bag 4 Watt Hours	
CO2 BAG 1	Bag 1 Carbon Dioxide		WATT-HRS	Watt Hours	
CO2 BAG 2	Bag 2 Carbon Dioxide		HC-NM BAG 1	Bag 1 Non-methane Hydrocarbon	
CO2 BAG 3	Bag 3 Carbon Dioxide		HC-NM BAG 2	Bag 2 Non-methane Hydrocarbon	
CO2 BAG 4	Bag 4 Carbon Dioxide		HC-NM BAG 3	Bag 3 Non-methane Hydrocarbon	
NMOG+NOX	Non-methane organic gases plus Nitrogen Oxides		HC-NM BAG 4	Bag 4 Non-methane Hydrocarbon	
NMOG+NOX-COMP	SFTP Composite Non-methane Organic Gases + Nitrogen Oxides		N2O BAG 1	Bag 1 Nitrous Oxide	
DT-IWRR	Drive Trace Inertia Work Ratio Rating		N2O BAG 2	Bag 2 Nitrous Oxide	
DT-ASCR	Drive Trace Absolute Speed Change Rating		N2O BAG 3	Bag 3 Nitrous Oxide	
DT-EER	Drive Trace Energy Economy Rating		N2O BAG 4	Bag 4 Nitrous Oxide	
Certification Region					
CA	California + CAA Section 177 states		FA	Federal	
Exhaust Emission Standard Level					
B1	Federal Tier 2 Bin 1		HDV2B340	Federal Tier 3 HD Class 2b Transitional Bin 340	
B2	Federal Tier 2 Bin 2		HDV2B250	Federal Tier 3 HD Class 2b Bin 250	
B3	Federal Tier 2 Bin 3		HDV2B200	Federal Tier 3 HD Class 2b Bin 200	
B4	Federal Tier 2 Bin 4		HDV2B170	Federal Tier 3 HD Class 2b Bin 170	
B5	Federal Tier 2 Bin 5		HDV2B150	Federal Tier 3 HD Class 2b Bin 150	
B6	Federal Tier 2 Bin 6		HDV2B0	Federal Tier 3 HD Class 2b Bin 0	
B7	Federal Tier 2 Bin 7		HDV3B630	Federal Tier 3 HD Class 3 Transitional Bin 630	
B8	Federal Tier 2 Bin 8		HDV3B570	Federal Tier 3 HD Class 3 Transitional Bin 570	
B9	Federal Tier 2 Bin 9		HDV3B400	Federal Tier 3 HD Class 3 Bin 400	
B10	Federal Tier 2 Bin 10		HDV3B270	Federal Tier 3 HD Class 3 Bin 270	
B11	Federal Tier 2 Bin 11		HDV3B230	Federal Tier 3 HD Class 3 Bin 230	
HDV1	HDV1 (Federal HD chassis Class 2b GVW 8501-10000)		HDV3B200	Federal Tier 3 HD Class 3 Bin 200	
HDV2	HDV2 (Federal HD chassis Class 3 GVW 10001-14000)		HDV3B0	Federal Tier 3 HD Class 3 Bin 0	
L2	California LEV-II LEV		L4SULEV100	California LEV-IV SULEV100	
L2OP	California LEV-II LEV Optional		L4SULEV125	California LEV-IV SULEV125	
U2	California LEV-II ULEV		L4SULEV15	California LEV-IV SULEV15	
S2	California LEV-II SULEV		L4SULEV150	California LEV-IV SULEV150	
ZEV	California ZEV		L4SULEV170	California LEV-IV SULEV170	
OT	Other		L4SULEV175	California LEV-IV SULEV175	
T1	Federal Tier 1		L4SULEV20	California LEV-IV SULEV20	
PZEV	California PZEV		L4SULEV200	California LEV-IV SULEV200	
L2LEV160	California LEV-II LEV160		L4SULEV230	California LEV-IV SULEV230	
L2ULEV125	California LEV-II ULEV125		L4SULEV25	California LEV-IV SULEV25	
L2SULEV30	California LEV-II SULEV30		L4SULEV30	California LEV-IV SULEV30	
L2LEV395	California LEV-II LEV395		L4SULEV75	California LEV-IV SULEV75	

Certification Summary Information Report

Test Group		VTYXV02.0V2A	Evaporative/Refueling Family		VTYXR0130P42
L2ULEV340	California LEV-II ULEV340		L4SULEV85	California LEV-IV SULEV85	
L2LEV630	California LEV-II LEV630		L4ULEV125	California LEV-IV ULEV125	
L2ULEV570	California LEV-II ULEV570		L4ULEV200	California LEV-IV ULEV200	
L3LEV160	California LEV-III LEV160		L4ULEV250	California LEV-IV ULEV250	
L3ULEV125	California LEV-III ULEV125		L4ULEV270	California LEV-IV ULEV270	
L3ULEV70	California LEV-III ULEV70		L4ULEV40	California LEV-IV ULEV40	
L3ULEV50	California LEV-III ULEV50		L4ULEV400	California LEV-IV ULEV400	
L3SULEV30	California LEV-III SULEV30		L4ULEV50	California LEV-IV ULEV50	
L3SULEV20	California LEV-III SULEV20		L4ULEV60	California LEV-IV ULEV60	
L3LEV395	California LEV-III LEV395		L4ULEV70	California LEV-IV ULEV70	
L3ULEV340	California LEV-III ULEV340		T4B170	Federal Tier 4 MDV Bin 170	
L3ULEV250	California LEV-III ULEV250		T4B150	Federal Tier 4 MDV Bin 150	
L3ULEV200	California LEV-III ULEV200		T4B125	Federal Tier 4 MDV Bin 125	
L3SULEV170	California LEV-III SULEV170		T4B100	Federal Tier 4 MDV Bin 100	
L3SULEV150	California LEV-III SULEV150		T4B85	Federal Tier 4 MDV Bin 85	
L3LEV630	California LEV-III LEV630		T4B75	Federal Tier 4 MDV Bin 75	
L3ULEV570	California LEV-III ULEV570		T4B70	Federal Tier 4 Bin 70	
L3ULEV400	California LEV-III ULEV400		T4B65	Federal Tier 4 Bin 65	
L3ULEV270	California LEV-III ULEV270		T4B60	Federal Tier 4 Bin 60	
L3SULEV230	California LEV-III SULEV230		T4B55	Federal Tier 4 Bin 55	
L3SULEV200	California LEV-III SULEV200		T4B50	Federal Tier 4 Bin 50	
T3B160	Federal Tier 3 Bin 160		T4B45	Federal Tier 4 Bin 45	
T3B125	Federal Tier 3 Bin 125		T4B40	Federal Tier 4 Bin 40	
T3B110	Federal Tier 3 Transitional Bin 110		T4B35	Federal Tier 4 Bin 35	
T3B85	Federal Tier 3 Transitional Bin 85		T4B30	Federal Tier 4 Bin 30	
T3SULEV30	Federal Tier 3 Transitional LEV-II SULEV30 Carryover		T4B25	Federal Tier 4 Bin 25	
T3B70	Federal Tier 3 Bin 70		T4B20	Federal Tier 4 Bin 20	
T3B50	Federal Tier 3 Bin 50		T4B15	Federal Tier 4 Bin 15	
T3B30	Federal Tier 3 Bin 30		T4B10	Federal Tier 4 Bin 10	
T3B20	Federal Tier 3 Bin 20		T4B5	Federal Tier 4 Bin 5	
T3B0	Federal Tier 3 Bin 0		T4B0	Federal Tier 4 Bin 0	
HDV2B395	Federal Tier 3 HD Class 2b Transitional Bin 395				
Transmission Type Code					
AMS	Automated Manual- Selectable (e.g. Automated Manual with paddles)	M	Manual		
A	Automatic	OT	Other		
AM	Automated Manual	SA	Semi-Automatic		
CVT	Continuously Variable	SCV	Selectable Continuously Variable (e.g. CVT with paddles)		
Drive System Code					
4	4-Wheel Drive	P	Part-time 4-Wheel Drive		

Certification Summary Information Report

Test Group		VTYXV02.0V2A	Evaporative/Refueling Family		VTYXR0130P42
F	2-Wheel Drive, Front		A	All Wheel Drive	
R	2-Wheel Drive, Rear				
Additional Terms and Acronyms					
AFC	Alternative Fuel Converter		ICI	Independent Commercial Importer	
CSI	Certificate Summary Information		ORVR	Onboard Refueling Vapor Recovery	
DF	Deterioration Factor		SIL	Shift Indicator Light	
Evap	Evaporation, Evaporative		Trans	Transmission	

7. Test Results

Test group: VTYXV02.0V2A

1. Litmus test result

Test Group Fuel	FTP	US06	SC03	Cold CO	Highway	City Litmus Value	City Litmus Threshold	Highway Litmus Value	Highway Litmus Threshold
Gasoline	VTYX10093719	VTYX10093720	VTYX10093768	VTYX10093721	VTYX10093722	25.3	23.5	32.9	30.0

2. Interim/In-Use Standard

	Federal	California
FTP	Not applicable	PM
FTP (QDA)	-	NMOG+Nox
SFTP (Composite)	Not applicable	-
SFTP (US06)	-	NMOG+Nox,PM

8. Emission testing waiver statements

Please refer to the FOI common file for the following test waiver statements:

- High Altitude Exhaust Emissions
- High Altitude Evap/Refueling Emissions
- 91 RON fuel testing
- Formaldehyde (HCHO)
- Spitback
- 2DBL Evap Emissions
- Tier 4/LEVIV Evaporative Leak Standard
- LEVIV Partial Soak

9. **OBD System Description**

Please refer to OBD documents.

Toyota states that the OBD application meets the requirements of 40 CFR 86.1806-17 and 86.1844-01(d)(9) and is considered part of the Part 1 certification application.

10. Description of Alternate-fueled Vehicles

Please refer to the FOI common file.

11. AECD Descriptions

11.1 AECD and EI-AECD Descriptions

Confidential information

11.2 SFTP / Lean Best Torque (LBT) Air fuel Ratio Information

Please refer to the CBI common file.

12. Description of Vehicles Covered by Certificate and Test Parameters**12.1 Vehicle parameters**

Durability Group : VTYXGPGNN626
 Test Group : VTYXV02.0V2A
 Evap./Refueling Family : VTYXR0130P42
 Emission Control System : DFI+SFI, EGR, EGRC, WR-HO2S(2), TWC(2)

Carline	Model name	Model code	Engine Code	Valves/ cyl	Engine Disp. (L)	Sales Area	Trans- mission*2/ Overdrive	SIL	Tire*1	N/V	ETW (lb.)	Fuel tank vol. (L)	Rated HP
COROLLA	TOYOTA COROLLA SE	MZEA12L-AEXSBA	02	4	1.987	50	K121-A (AV-3) / N/A	N/A	225/40R18 AS	23.3	3375	50	169@6600
		MZEA12L-DEXSBA	02	4	1.987	50	K121-A (AV-3) / N/A	N/A	225/40R18 AS	23.3	3375	50	169@6600
	TOYOTA COROLLA XSE	MZEA12L-AEXYBA	02	4	1.987	50	K121-A (S10-3) / N/A	N/A	225/40R18 AS	23.3	3500	50	169@6600
		MZEA12L-DEXYBA	02	4	1.987	50	K121-A (S10-3) / N/A	N/A	225/40R18 AS	23.3	3500	50	169@6600
	TOYOTA COROLLA LE	MZEA18L-AEXLBA	02	4	1.987	50	K121-A (AV-1) / N/A	N/A	205/55R16 AS	23.7	3250	47	169@6600
		MZEA18L-DEXLBA	02	4	1.987	50	K121-A (AV-1) / N/A	N/A	205/55R16 AS	23.7	3250	47	169@6600

Note*1: AS :All-season tire

*2: The number after “-” indicates the number of transmission mode.

12.2 Test Parameters

Please refer to the FOI common file.

13. Projected Sales and Compliance Plans

Please refer to the CBI common file.

14. Request for Certificate

Test group : VTYXV02.0V2A
 Evap/refueling family : VTYXR0130P42

TOYOTA MOTOR CORPORATION requests that EPA/CARB issue a 2027 model year certificate of conformity and Executive Order for the above specified test group/evaporative family combination more fully described in this application. This combination complies with the following emission standards:

	low-altitude	high altitude	Bin No
Federal: Interim Tier4	<u>X</u>	<u>X</u>	<u>20</u>

California:

	FTP	PS* ¹	QDA* ²	US06		SC03
					Interim	
ULEV125						
ULEV70						
ULEV60						
ULEV50						
ULEV40						
SULEV30						
SULEV25						
SULEV20	LEV IV	LEV IV	LEV IV	LEV IV		LEV IV
SULEV15						

*1: Partial Soak

*2: Quick Drive-Away

This combination meet all applicable regulations contained within 40 CFR Part 85, 86, and 600, within Title 13 of the California Code of Regulation, the application is current as of this date.



Kevin Webber
 General Manager
 Regulatory Affairs & Environmental Sustainability
 Toyota Motor North America, Inc.

15 **Other Information**

15.1 Fee filing form

Invoice No.:EPA2027MY006

US EPA Fee Form

Tracking Information

Pay.gov Tracking ID: 281Q4EMH

Agency Tracking ID: 77370546013

[Help and EPA Instructions](#)

* Required Field

General Information

Date: 04/28/2026

Process Code *

Submit New Fee Filing Form

Manufacturer Code *

TYX

Manufacturer Name *

Toyota Motor Corporation

Contact Name *

Keisha Anderson

Contact Email Address *

keisha.anderson@toyota.com

Contact Phone *

734-995-3552

Calendar Year complete application submitted to EPA *

2026

PLEASE NOTE: These fees apply to complete certification applications received by EPA from January 1, 2026, through December 31, 2026. The applicable fee is determined by the

Payment Information

Amount Owed

\$32,317.00

Payment Type *

Offline ACH

Comments

EPA Form Number 3520-29

OMB Control No. 2060-0545

Approval expires 7/31/2027

The public reporting and recordkeeping burden for this collection of information is estimated to average 12 minutes per response. Send comments on the Agency's need for this information, the accuracy of the provided burden estimates, and any suggested methods for minimizing respondent burden, including through the use of automated collection techniques to the Director, Collection Strategies Division, U.S. Environmental Protection Agency (2822T), 1200 Pennsylvania Ave., NW, Washington, D.C. 20460. Include the OMB control number in any correspondence. Do not send the completed forms to this address.

The content of this document may contain Sensitive But Unclassified (SBU) data and/or Controlled Unclassified Information (CUI).

calendar year in which the complete certification application is received, not the model year.

Engine Family / Evaporative Family / Test Group *

VTYXV02.0V2A

Certificate Request Type (Industry Sector Code)

Certificate Request Type *

- ☒ On-Highway LDV, LTD, MDVPV, HDV Chassis Cert (Federal) (A, B, D, J, T, V)
- ☐ On-Highway HDE Dyno Cert (Federal) (E, H)
- ☐ On-Highway LD ICI, MDPV ICI, HDV ICI (A, B, D, J, T, V)
- ☐ On-Highway Motorcycle (C)
- ☐ On-Highway HDV Evap (F)
- ☐ On-Highway LDV, LTD, MDVPV, HDV Chassis Cert (California-Only) (A, B, D, J, T, V)
- ☐ On-Highway HDE Dyno Cert (California-Only) (E, H)
- ☐ Nonroad CI (L)
- ☐ Nonroad SI (B, S)
- ☐ Locomotive (G, K)
- ☐ All Nonroad Recreational, excluding Marine engines (X, Y)
- ☐ All Marine (Including IMO) (M, N, W)
- ☐ Component Certification for Evaporative Emissions (P)

IMO Name (Required for dual US/IMO Marine Only)

ICI VIN Number (Required for ICIs Only)

Do you qualify for a Reduced Fee? *

No

16 Confidential Information

Please refer to the CBI common file.

17. California ARB Information

- 17.1 Statement of Compliance
- 17.2 High-Altitude Test Requirements
- 17.3 Compliance with fuel fill pipe specifications
- 17.4 Compliance with the location requirement of the vent tube opening in the fill pipe
- 17.5 Supplemental information and data for compliance with the enhanced evaporative requirements for California
- 17.6 New unique or changed emission control technology
- 17.7 Service literature

Please refer to the FOI common file.

In addition to the Statement of Compliance in the FOI Common file above, pursuant to 13 CCR §1961.4(d)(4), Toyota states that the vehicles meet the SC03 NMOG+NO_x and CO exhaust emissions for vehicles tested using the SC03 test procedures incorporated in the "California 2026 and Subsequent Model Year Criteria Pollutant Exhaust Emission Standards and Test Procedures for Passenger Cars, Light-Duty Trucks, and Medium-Duty Vehicles".

17.8 Emission Control Information Labels



17.9 Service Information Availability

17.10 Identification of AB71-Qualified Vehicles (Mail-Out #MSO-2000-04)

Please refer to the FOI common file.

2027 MODEL-YEAR AIR RESOURCES BOARD SUPPLEMENTAL DATA SHEET
PASSENGER CARS, LIGHT-DUTY TRUCKS AND MEDIUM-DUTY VEHICLES

Manufacturer: <u>TOYOTA</u>		Exh Test Group: <u>VTYXV02.0V2A</u>		Evap Fam: <u>VTYXR0130P42</u>	
All Eng Codes in Eng Fam: CA <u> </u>		49S <u> </u>	50S <u>x</u>	AB965 <u> </u>	, ORVR: YES <u>x</u> NO <u> </u>
Exh Std:	CA LEVIII: LEV160 <u> </u>	ULEV125 <u> </u>	ULEV70 <u> </u>	US EPA Interim Tier4 <u>x</u>	
		ULEV50 <u> </u>	SULEV30 <u> </u>	SULEV20 <u> </u>	
	LEVIV: ULEV125 <u> </u>	ULEV70 <u> </u>	ULEV60 <u> </u>	ULEV50 <u> </u>	ULEV40 <u> </u>
	SULEV30 <u> </u>	SULEV25 <u> </u>	SULEV20 <u>x</u>	SULEV15 <u> </u>	
Evap Std:	LEVIII (Option 1) <u> </u>	LEVIII (Option 2) <u> </u>	LEVIV <u>x</u>		
Veh Class(es):	PC <u>x</u>	LDT1 <u> </u>	LDT2 <u> </u>	MDV1 <u> </u>	MDV2 <u> </u> MDV3 <u> </u> MDV4 <u> </u> MDV5 <u> </u>
Single Cert Std for Multi-Class Eng Fam:		<u>N/A</u> (specify: N/A, LDT1, MDV1, MDV2, MDV3, MDV4)			
Fuel Type(s):	Dedicated <u>x</u>	Flex-Fuel <u> </u>	Dual-Fuel <u> </u>	Bi-Fuel <u> </u>	Gasoline <u>x</u> Diesel <u> </u>
	CNG <u> </u>	LNG <u> </u>	LPG <u> </u>	M85 <u> </u>	Other (specify) <u> </u>
Exh Emiss Test Fuel(s):	Indo <u> </u>	CBG <u>x</u>	CNG <u> </u>	LPG <u> </u>	M85 <u> </u> Other (specify) <u> </u>
	Diesel:	13 CCR 2282 <u> </u>	40 CFR 86.113-90 <u> </u>	40 CFR 86.113-94 <u> </u>	
Evaporative Emission Test Procedure:		California <u> </u>	Federal <u>x</u>		
Service Accum:	Std AMA <u> </u>	Mod AMA <u> </u>	Mfr ADP <u>x</u>	Other (specify) <u> </u>	
NMOG Test Procedure:	N/A <u> </u>	Std <u> </u>	Equiv <u>x</u>	R/L Test Proc: SHED <u>x</u>	Pt Source <u> </u>
Engine Configuration:	<u>I4</u>	Displacement: <u>2.0 Liters</u>		<u>121.3 Cubic Inches</u>	
Valves per Cylinder:	<u>4</u>	Rated HP1: <u>169@6600</u> RPM			
Engine:	Front <u>x</u>	Mid <u> </u>	Rear <u> </u>	Drive: FWD <u>x</u>	RWD <u> </u> 4WD-FT <u> </u> 4WD-PT <u> </u>
Exhaust ECS (e.g., MFL, EGR, TC, CAC):		<u>DFI+SFI,EGR,EGRC,WR-HO2S(2),TWC(2)</u> (use abbreviations per SAE J1930 JUN93)			

Engine Code (also list CA/49S/ 50ST	Vehicle Models (if coded see attachment)	Trans. (M5, A4, etc.)*	ETW or Test Wt	DPA or RLHP
02	MZEA12L-AEXSBA	AV-3	3375	10.7
	MZEA12L-DEXSBA			
	MZEA12L-AEXYBA	S10-3	3500	10.9
	MZEA12L-DEXYBA			
	MZEA18L-AEXLBA	AV-1	3250	9.6
	MZEA18L-DEXLBA			

Comments : Please refer to manufacturer's HP list for correct dyno test HP setting based on model and equipment.
Note *: The number after "--" indicates the number of transmission mode.

2027 MODEL-YEAR AIR RESOURCES BOARD SUPPLEMENTAL DATA SHEET
PASSENGER CARS, LIGHT-DUTY TRUCKS AND MEDIUM-DUTY VEHICLES

VEHICLE MODELS

COROLLA

MZEA12L-AEXSBA
MZEA12L-AEXYBA
MZEA12L-DEXSBA
MZEA12L-DEXYBA
MZEA18L-AEXLBA
MZEA18L-DEXLBA

Manufacturer: <u>TOYOTA</u>		Exh Test Group: <u>VTYXV02.0E4A</u>		Evap Fam: <u>VTYXR0130P42</u>	
All Eng Codes in Eng Fam: CA <u> </u>		49S <u> </u>	50S <u>x</u>	AB965 <u> </u>	, ORVR: YES <u>x</u> NO <u> </u>
Exh Std: CA	LEVIII: LEV160 <u> </u>	ULEV125 <u> </u>	ULEV70 <u> </u>	US EPA Interim Tier4 <u>x</u>	
	ULEV50 <u> </u>	SULEV30 <u> </u>	SULEV20 <u> </u>		
	LEVIV: ULEV125 <u> </u>	ULEV70 <u> </u>	ULEV60 <u> </u>	ULEV50 <u> </u>	ULEV40 <u> </u>
	SULEV30 <u> </u>	SULEV25 <u> </u>	SULEV20 <u>x</u>	SULEV15 <u> </u>	
Evap Std: LEVIII (Option 1) <u> </u>	LEVIII (Option 2) <u> </u>	LEVIV <u>x</u>			
Veh Class(es): PC <u>x</u>	LDT1 <u> </u>	LDT2 <u> </u>	MDV1 <u> </u>	MDV2 <u> </u>	MDV3 <u> </u> MDV4 <u> </u> MDV5 <u> </u>
Single Cert Std for Multi-Class Eng Fam: <u>N/A</u>		(specify: N/A, LDT1, MDV1, MDV2, MDV3, MDV4)			
Fuel Type(s): Dedicated <u>x</u>	Flex-Fuel <u> </u>	Dual-Fuel <u> </u>	Bi-Fuel <u> </u>	Gasoline <u>x</u>	Diesel <u> </u>
CNG <u> </u>	LNG <u> </u>	LPG <u> </u>	M85 <u> </u>	Other (specify) <u> </u>	
Exh Emiss Test Fuel(s): Indo <u> </u>	CBG <u>x</u>	CNG <u> </u>	LPG <u> </u>	M85 <u> </u>	Other (specify) <u> </u>
	Diesel: 13 CCR 2282 <u> </u>	40 CFR 86.113-90 <u> </u>	40 CFR 86.113-94 <u> </u>		
Evaporative Emission Test Procedure: California <u> </u>		Federal <u>x</u>			
Service Accum: Std AMA <u> </u>	Mod AMA <u> </u>	Mfr ADP <u>x</u>	Other (specify) <u> </u>		
NMOG Test Procedure: N/A <u> </u>	Std <u> </u>	Equiv <u>x</u>	R/L Test Proc: SHED <u>x</u>	Pt Source <u> </u>	
Engine Configuration: <u>I4</u>	Displacement: <u>2.0 Liters</u>	<u>121.3 Cubic Inches</u>			
Valves per Cylinder: <u>4</u>	Rated HP1: <u>169@6600</u> RPM				
Engine: Front <u>x</u>	Mid <u> </u>	Rear <u> </u>	Drive: FWD <u>x</u>	RWD <u> </u>	4WD-FT <u> </u> 4WD-PT <u> </u>
Exhaust ECS (e.g., MFI, EGR, TC, CAC): <u>DFI+SFI,EGR,EGRC,WR-HO2S(2),TWC(2)</u>		(use abbreviations per SAE J1930 JUN93)			

<u>Section #</u>		<u>Section #</u>	
1	Authorized Representative	FOI-1.2	22 Gen std, increase in Emiss,
2	Fuel Specifications	-	Safety, Meets all Reqm
3	Test Equipment	-	23 Driveability Statement
4	Test Procedure	-	24 Adjustable Parameters
5	Mileage Accumulation Route	CBI-4	25 Tamper Resistance Method(s)
6	Emission Warranty Statement	Part2 FOI-6.00.01	26 Fill Pipe Specifications
7	Maint: Cert/Req'd/Recm'd	-	27 High Altitude Compliance
8	Emiss Label/Vac Hose Diag	-	28 OBD Sys incl Marked Revisions
9	Evap Control System	FOI-3	29 I & M Test Procedure & Data
10	Engine Parameters	5	30 50 Degree F Compliance
11	Fuel System	-	31 Manufacturer's RAF
12	Ignition System	-	32 Phase-In Plans
13	Exhaust Control System	FOI-5	33 NMOG+NOx Fleet Average
14	Proj Sales(LDT/MDV Split)	CBI-17.1	Calculation
15	Vehicle Description	12.1	34 AB965 Credits/Withdrawals
16	Evap Bench Test Procedure	-	35 EPA Certificate
17	R/L Temp & Press Profiles	FOI-4.3	36 Equiv NMOG Proc-ARB Approval
18	EDV Selection	-	
19	Prod Veh same as Test Veh	FOI-17.1	
20	Emission Label Durability	-	
	Durability	Emission	Emission
21	Data Vehicle	Data Vehicle	Data Vehicle
	27-ME1C	27-ME1C	18-AV1A
	Vehicle Log Page(s)	6	6
	Zero Mile Book Page(s)	7	7
	Maint Logs & Engr Eval	-	-

Continued on next page

2027 MODEL-YEAR AIR RESOURCES BOARD CERTIFICATION REVIEW SHEET
PASSENGER CARS, LIGHT-DUTY TRUCKS AND MEDIUM-DUTY VEHICLES

Projected Emissions/ Evaporative

Manufacturer: TOYOTA

Exhaust Test Group: VTYXV02.0V2A

Evaporative Family: VTYXR0130P42

Detailed information for certification is also submitted by E-Cert.

17.11.00


Attestation of compliance with California Inspection and Maintenance emission standards

Toyota states that the models in this test group comply with the California Inspection and Maintenance emission requirements base on our good engineering evaluation.

- 17.12 Test group and Evaporative family sales for California
- 17.13 California Phase-in Compliance
- 17.14 Compliance with OBD-II Phase-in Requirements
- 17.15 Hybrid Electric Vehicle information (if applicable)
- 17.16 Warranty information (draft)

Please refer to the CBI common file.

17.17 Engine Control System Schematic

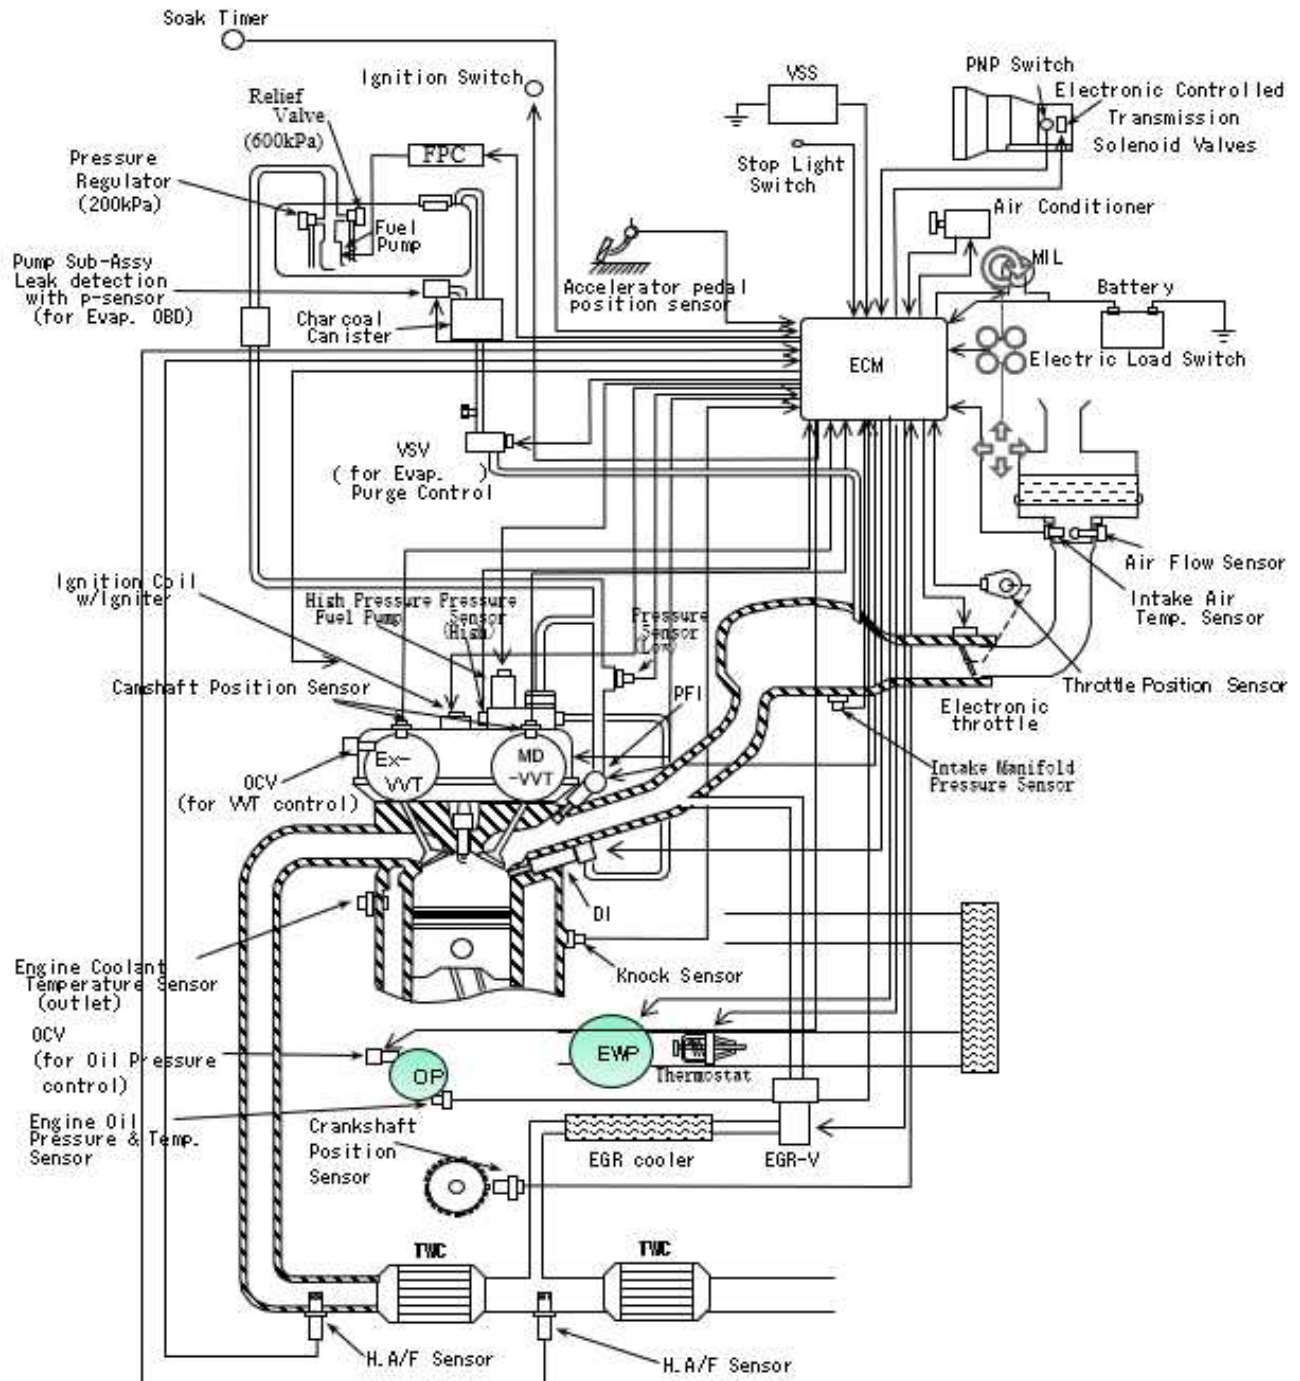

18. Information on Service of Process

Please refer to Section 1 of the FOI common file.