

61-183

PM 21

1069

US ENVIRONMENTAL PROTECTION AGENCY OFFICE OF PESTICIDES PROGRAMS REGISTRATION DIVISION (TS-767) WASHINGTON, DC 20460  <b>NOTICE OF PESTICIDE:</b> <input type="checkbox"/> REGISTRATION <input type="checkbox"/> REREGISTRATION <i>(Under the Federal Insecticide, Fungicide,          and Rodenticide Act, as amended)</i>	EPA REGISTRATION NO. 61-183	DATE OF ISSUANCE
	TERM OF ISSUANCE DEC 17 1986	
	NAME OF PESTICIDE PRODUCT Coal Tar Creosote (Non-Pressure Application)	
NAME AND ADDRESS OF REGISTRANT (Include ZIP code)		
Koppers Company, Inc. 1201 Koppers Building Pittsburgh, PA 15219  <div style="text-align: right;"> <del>186269</del> / 2  18 / 300 </div>		
<p><b>NOTE:</b> Changes in labeling formula differing in substance from that accepted in connection with this registration must be submitted to and accepted by the Registration Division prior to use of the label in commerce. In any correspondence on this product always refer to the above U.S. EPA registration number.</p> <p>On the basis of information furnished by the registrant, the above named pesticide is hereby Registered/Reregistered under the Federal Insecticide, Fungicide, and Rodenticide Act.</p> <p>A copy of the labeling accepted in connection with this Registration/Reregistration is returned herewith.</p> <p>Registration is in no way to be construed as an indorsement or approval of this product by this Agency. In order to protect health and the environment, the Administrator, on his motion, may at any time suspend or cancel the registration of a pesticide in accordance with the Act. The acceptance of any name in connection with the registration of a product under this Act is not to be construed as giving the registrant a right to exclusive use of the name or to its use if it has been covered by others.</p> <p>This product is conditionally registered in accordance with FIFRA section 3(c)(7)(A) provided that you:</p> <ol style="list-style-type: none"> <li>1. Submit/cite all data required for registration/reregistration of your product under FIFRA section 3(c)(5) when the Agency requires all registrants of similar products to submit such data.</li> <li>2. Add the phrase "EPA Registration No. 61-183" to your label before you release the product for shipment.</li> <li>3. Submit five (5) copies of your final printed labeling before you release the product for shipment. Refer to the A-79 Enclosure for a further description of final printed labeling.</li> </ol> <p>If these conditions are not complied with, the registration will be subject to cancellation in accordance with FIFRA section 6(e). Your release for shipment of the product constitutes acceptance of these conditions.</p> <p>A stamped copy of the label is enclosed for your records.</p> <div style="text-align: right;">         Lois A. Rossi          Acting Product Manager (21)          Fungicide-Herbicide Branch          Registration Division (TS-767C)       </div> <p>Enclosures</p> <p><input type="checkbox"/> ATTACHMENT IS APPLICABLE</p>		
SIGNATURE OF APPROVING OFFICIAL		DATE



Applicators must wear long sleeve shirts, long pants and an impermeable apron during the application process (e.g. brush on) and mixing process and all situations where dermal contact is expected.

Work clothing and protective clothing must be changed when it shows signs of contamination. Dispose of worn-out work clothing, protective clothing and work shoes or boots in any general landfill, in the trash, or in any other manner approved for pesticide disposal.

Launder work clothing separately from other household laundry.

**HOUSE AND FARM USE PRECAUTIONS:**

Spray applicators must wear protective clothing (including overalls, jackets, gloves, boots, and head covering) impervious to the wood treatment formulation, and a respirator and goggles when spraying.

Avoid inhaling vapors. If inhalation of vapors cannot be avoided, applicators must wear a properly fitted, well-maintained half-mask canister or cartridge respirator which is MSHA/NIOSH-approved for polynuclear aromatics and organic vapors.

Do not apply where there may be direct contact with domestic animals or livestock, and where there may be contamination of food, feed, or drinking and irrigation water.

Do not apply in interiors. Do not apply to wood intended for use in interiors except for those support structures which are in contact with the soil in barns, stables, and similar sites and which are subject to decay or insect infestation. Interior surfaces of the treated wood should be sealed with two coats of an appropriate sealer. Sealers may be applied at the installation site.

Do not apply creosote to wood intended for farrowing or brooding facilities. Do not apply creosote to wood intended to be used in the interiors of farm buildings where there may be direct contact with domestic animals or livestock which may crib (bite) or lick the wood. Creosote may be used to treat wood intended to be used in interiors of farm buildings where domestic animals or livestock are unlikely to crib or lick the wood, if two coats of an appropriate sealer will be applied. Sealers may be applied at the installation site.

Do not apply to wood intended to be used in a manner in which the preservative may become a component of food or animal feed. Examples of such sites would be structures or containers for storing silage or food.

Do not use this product to treat wood intended to be used for cutting boards or counter tops.

Do not use this product to treat wood intended for construction of those portions of beehives which may come into contact with the honey.

OML 0350  
5 and 55

Do not use this product to treat wood intended for use where it may come into direct or indirect contact with public drinking water, except for those uses involving incidental contact such as docks and bridges.

Do not use this product to treat wood intended to be used where it may come into direct or indirect contact with drinking water for domestic animals or livestock, except for uses involving incidental contact such as docks and bridges.

Wood to be treated with this product should be cut to size before treatment. If it is necessary to saw or machine wood after treatment, wear goggles to protect the eyes from flying particles and a dust mask to avoid inhaling sawdust from the treated wood. If oily preservatives or sawdust accumulate on clothes, launder before re-use.

Contact with treated surfaces should be avoided even after the preservative has dried. When handling treated wood wear long-sleeved shirts, long pants and impervious gloves (e.g., vinyl coated).

This product should not be used to treat wood which will be in frequent or prolonged contact with skin, unless the wood will be treated with an effective sealer.

**Note to user:** As used on this label, the term "respirators" means properly fitting, well-maintained, half-mask canister or cartridge respirators which are MSHA/NIOSH-approved for polynuclear aromatics and organic vapors. Examples of acceptable impervious materials for protective clothing (e.g., gloves, overalls, head covering, jackets and boots) required during application and handling of creosote are polyvinyl acetate (PVA), polyvinyl chloride (PVC), Neoprene and NBR (BUNA-N), Urethane, epoxy and shellac are acceptable sealers for all creosote-treated wood.

**ENVIRONMENTAL HAZARDS:**

This product is toxic to fish and wild life. Do not apply directly to any body of water or wetlands. Do not contaminate water by cleaning of equipment or disposal of wastes.

**PHYSICAL AND CHEMICAL HAZARDS**

Do not store near heat or open flame. Close container after each use.

**DIRECTIONS FOR USE**

It is a violation of federal law to use this product in a manner inconsistent with its labeling. Contents for use only in groundline treatment of utility poles, home and farm use and non-pressure treatment plants. Do not use this product on interiors of residential homes or on wood that is intended for such applications. This creosote material must be used as is with no dilution. In thermal dip applications, DO NOT heat open container above 190°F. DO NOT use an open flame when heating container. The creosote is to be used as a wood preservative. Application shall be by brushing or dipping. The wood surface prior to creosote applications should be clean and dry. Field treatment shall be made using heavy applications of preservative until no visible evidence of further penetration occurs. Depending on surface conditions and the type of wood grain, the user can expect 1 gallon of creosote to cover between 50 and 150 square feet.

**STORAGE AND DISPOSAL**

**STORAGE:** Keep closures tight and upright to prevent leakage. Keep container closed when not in use. In case of spillage, absorb and dispose of in accordance with local applicable regulations. Do not contaminate water, food, or feed by storage or disposal.

**PESTICIDE DISPOSAL:**

"Pesticide wastes are toxic. Improper disposal of excess pesticide, spray mixture, or rinsate is a violation of Federal Law. If these wastes cannot be disposed of by use according to label instructions, contact your State Pesticide or Environmental Control Agency, or the Hazardous Waste representative at the nearest EPA Regional Office for guidance."

**CONTAINER DISPOSAL:**

For household/domestic products: Securely wrap original pesticide container in several layers of newspaper and discard in the trash. Do not reuse empty containers.


**WOOD DISPOSAL:**

Wood which has been treated with this product should be disposed of by burial or ordinary trash collection. Do not burn treated wood in an outdoor fire or in stoves or fireplaces because toxic chemicals may be produced as part of the smoke and ashes.

**WARRANTY:** We warrant this material to comply with our published specifications and to be of good merchantable quality and such as will regularly pass in the trade for goods within the description, and further warrant such goods to be fit for normal purposes for which goods are used. We assume no responsibility that the goods concerned in this contract are fit for any particular purpose for which they are being bought outside of the general purposes of goods of the description.

Medical Emergencies: 1 800 553-5631 In Pennsylvania Call: 1 800 323-6571

OML 0350-R04

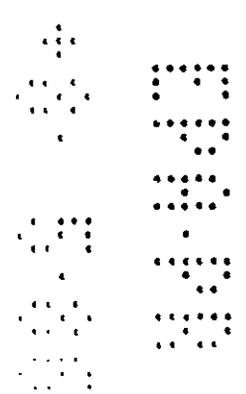

OML 0314  
Tank Label

**TANK TRUCK AND TANK CAR SHIPPING LABEL**

**IMPORTANT: FOR TANK TRUCKS: ATTACH TO SHIPPING PAPERS AND GIVE TO USER AT TIME OF DELIVERY.**

**FOR TANK CARS: ATTACH TO OUTSIDE DOME COVER.**

**RESTRICTED USE PESTICIDE**

For sale to and use only by certified applicators or by persons under their supervision and only for those uses covered by the certified applicators' certification.

RECEIVED  
with COE  
by EPA

**COAL TAR CREOSOTE (NON-PRESSURE APPLICATIONS)**

**INGREDIENTS:**

**Active Ingredients:**

Coal Tar Creosote	98.5%
Inert Ingredients (Max)	1.5%
Total	100.0%

DEC 18 1985

Under the Federal Insecticide, Fungicide, and Rodenticide Act, this product is registered for the pesticide use under EPA Reg. 609  
61-183

**KEEP OUT OF REACH OF CHILDREN**

**DANGER**

**FIRST AID:** If swallowed, call a physician or Poison Control Center. Drink 1 or 2 glasses of water and induce vomiting by touching back of throat with finger. Do not induce vomiting or give anything by mouth to an unconscious person.

If inhaled, remove to fresh air, if not breathing give artificial respiration, preferably mouth-to-mouth. Get medical attention.

In case of eye contact, flush immediately with plenty of water for 15 minutes and get medical attention.

For skin contact, wash thoroughly with soap and water. Get medical attention. (See side panel for additional precautionary statements.)

Koppers Company, Inc., Pittsburgh, PA 15219

EPA Reg. No. 61-RIG

EPA Establishment No. (To be stamped on at each plant).

Net Contents \_\_\_\_\_.

**PRECAUTIONARY STATEMENT: Hazards to humans (and domestic animals).**

**DANGER: MAY BE FATAL IF SWALLOWED, INHALED OR ABSORBED THROUGH SKIN. CAUSES SKIN AND EYE IRRITATION. MAY CAUSE SEVERE BURNS.** Do not get in eyes, on skin or on clothing. Do not breathe vapors or spray mist. Use with adequate ventilation. Do not take internally. Wash thoroughly after skin contact, before eating, drinking, or use of tobacco products, or using restrooms.

**GENERAL PRECAUTIONS:**

Applicators must wear gloves impervious to the wood treatment formulations (e.g., polyvinyl acetate (PVA), polyvinyl chloride (PVC), or neoprene) in all situations where dermal contact is expected (e.g., during the actual application process and when handling freshly treated wood).

Applicators must not eat drink, or use tobacco products during those parts of the application process that may expose them to the wood treatment formulation.

Applicators must wear long sleeve shirts, long pants and an impermeable apron during the application process (e.g. brush on) and mixing process and all situations where dermal contact is expected.

Work clothing and protective clothing must be changed when it shows signs of contamination. Dispose of worn-out work clothing, protective clothing and work shoes or boots in any general landfill, in the trash, or in any other manner approved for pesticide disposal.

Launder work clothing separately from other household laundry.

**HOUSE AND FARM USE PRECAUTIONS:**

Spray applicators must wear protective clothing (including overalls, jackets, gloves, boots, and head covering) impervious to the wood treatment formulation, and a respirator and goggles when spraying.

Avoid inhaling vapors. If inhalation of vapors cannot be avoided, applicators must wear a properly fitted, well-maintained half-mask canister or cartridge respirator which is MSHA/NIOSH-approved for polynuclear aromatics and organic vapors.

Do not apply where there may be direct contact with domestic animals or livestock, and where there may be contamination of food, feed, or drinking and irrigation water.

Do not apply in interiors. Do not apply to wood intended for use in interiors except for those support structures which are in contact with the soil in barns, stables, and similar sites and which are subject to decay or insect infestation. Interior surfaces of the treated wood should be sealed with two coats of an appropriate sealer. Sealers may be applied at the installation site.

Do not apply creosote to wood intended for farrowing or brooding facilities. Do not apply creosote to wood intended to be used in the interiors of farm buildings where there may be direct contact with domestic animals or livestock which may crib (bite) or lick the wood. Creosote may be used to treat wood intended to be used in interiors of farm buildings where domestic animals or livestock are unlikely to crib or lick the wood, if two coats of an appropriate sealer will be applied. Sealers may be applied at the installation site.

Do not apply to wood intended to be used in a manner in which the preservative may become a component of food or animal feed. Examples of such sites would be structures or containers for storing silage or food.

Do not use this product to treat wood intended to be used for cutting boards or counter tops.

Do not use this product to treat wood intended for construction of those portions of beehives which may come into contact with the honey.

8069

OML 0314  
Tank Label

Do not use this product to treat wood intended for use where it may come into direct or indirect contact with public drinking water, except for those uses involving incidental contact such as docks and bridges.

Do not use this product to treat wood intended to be used where it may come into direct or indirect contact with drinking water for domestic animals or livestock, except for uses involving incidental contact such as docks and bridges.

Wood to be treated with this product should be cut to size before treatment. If it is necessary to saw or machine wood after treatment, wear goggles to protect the eyes from flying particles and a dust mask to avoid inhaling sawdust from the treated wood. If oily preservatives or sawdust accumulate on clothes, launder before re-use.

Contact with treated surfaces should be avoided even after the preservative has dried. When handling treated wood wear long-sleeved shirts, long pants and impervious gloves (e.g., vinyl coated).

This product should not be used to treat wood which will be in frequent or prolonged contact with skin, unless the wood will be treated with an effective sealer.

**Note to user:** As used on this label, the term "respirators" means properly fitting, well-maintained, half-mask canister or cartridge respirators which are MSHA/NIOSH-approved for polynuclear aromatics and organic vapors. Examples of acceptable impervious materials for protective clothing (e.g., gloves, overalls, head covering, jackets and boots) required during application and handling of creosote are polyvinyl acetate (PVA), polyvinyl chloride (PVC), Neoprene and NBR (BUNA-N), Urethane, epoxy and shellac are acceptable sealers for all creosote-treated wood.

**ENVIRONMENTAL HAZARDS:**

This product is toxic to fish and wild life. Do not apply directly to any body of water or wetlands. Do not contaminate water by cleaning of equipment or disposal of wastes.

**PHYSICAL AND CHEMICAL HAZARDS**

Do not store near heat or open flame. Close container after each use.

**DIRECTIONS FOR USE**

It is a violation of federal law to use this product in a manner inconsistent with its labeling. Contents for use only in groundline treatment of utility poles, home and farm use and non-pressure treatment plants. Do not use this product on interiors of residential homes or on wood that is intended for such applications. This creosote material must be used as is with no dilution. In thermal dip applications, DO NOT heat open container above 190°F. DO NOT use an open flame when heating container. The creosote is to be used as a wood preservative. Application shall be by brushing or dipping. The wood surface prior to creosote applications should be clean and dry. Field treatment shall be made using heavy applications of preservative until no visible evidence of further penetration occurs. Depending on surface conditions and the type of wood grain, the user can expect 1 gallon of creosote to cover between 50 and 150 square feet.



4067

OML 0314  
Tank Label

**STORAGE AND DISPOSAL**

**STORAGE:** Keep closures tight and upright to prevent leakage. Keep container closed when not in use. In case of spillage, absorb and dispose of in accordance with local applicable regulations. Do not contaminate water, food, or feed by storage or disposal.

**PESTICIDE DISPOSAL:**

"Pesticide wastes are toxic. Improper disposal of excess pesticide, spray mixture, or rinsate is a violation of Federal Law. If these wastes cannot be disposed of by use according to label instructions, contact your State Pesticide or Environmental Control Agency, or the Hazardous Waste representative at the nearest EPA Regional Office for guidance."

**WOOD DISPOSAL:**

Wood which has been treated with this product should be disposed of by burial or ordinary trash collection. Do not burn treated wood in an outdoor fire or in stoves or fireplaces because toxic chemicals may be produced as part of the smoke and ashes.

**WARRANTY:** We warrant this material to comply with our published specifications and to be of good merchantable quality and such as will regularly pass in the trade for goods within the description, and further warrant such goods to be fit for normal purposes for which goods are used. We assume no responsibility that the goods concerned in this contract are fit for any particular purpose for which they are being bought outside of the general purposes of goods of the description.

**Medical Emergencies: 1 800 553-5631 In Pennsylvania Call: 1 800 323-6571**

OML 0314

