

464-700

11/20/2007

1097

NOV 20 2007

UNITED STATES ENVIRONMENTAL PROTECTION AGENCY
WASHINGTON, D.C. 20460



United States
Environmental Protection
Agency

Office of Pesticide Programs

The Dow Chemical Company
1803 Building
Midland, MI 48674

Attention: Maureen Mikszal
Senior Regulatory Specialist

Subject: UCARACIDE 14 Antimicrobial
EPA Registration No. 464-700
Notification Dated October 24, 2007

This will acknowledge receipt of your notification of minor label change, submitted under the provisions of FIFRA Section 3(c)(9). Based on a review of the submitted material, the following comments apply.

The Notification is in compliance with PR Notice 98-10 and is acceptable. This information has been made a part of your file.

If you have any questions concerning this letter, please contact Martha Terry at (703) 308-6217.

Sincerely

Marshall Swindell
Product Manager (33)
Regulatory Management Branch 1
Antimicrobials Division (7510P)

2007



United States
Environmental Protection Agency
Washington, DC 20460

Registration
 Amendment
 Other

OPP Identifier Number

Application for Pesticide - Section I

1. Company/Product Number 464-700	2. EPA Product Manager M. Swindell	3. Proposed Classification <input checked="" type="checkbox"/> None <input type="checkbox"/> Restricted
4. Company/Product (Name) UCARCIDE 14 Antimicrobial	PM# 33	
5. Name and Address of Applicant (Include ZIP Code) The Dow Chemical Company 1803 Building Midland, MI 48674 <input type="checkbox"/> Check if this is a new address	6. Expedited Review. In accordance with FIFRA Section 3(c)(3) (b)(i), my product is similar or identical in composition and labeling to: EPA Reg. No. _____ Product Name _____	

Section - II

<input type="checkbox"/> Amendment - Explain below.	<input type="checkbox"/> Final printed labels in response to Agency letter dated _____
<input type="checkbox"/> Resubmission in response to Agency letter dated _____	<input type="checkbox"/> "Me Too" Application.
<input checked="" type="checkbox"/> Notification - Explain below.	<input type="checkbox"/> Other - Explain below.

Explanation: Use additional page(s) if necessary. (For section I and Section II.)

The Dow Chemical Company is submitting a notification to the label to clarify that Dow is not the producer. The text, "produced for:" has been added to the label. This notification is consistent with the provisions of PR Notice 98-10 and EPA regulations at 40CFR 152.46, and no other changes have been made to the labeling or the confidential statement of formula of this product. I understand that it is a violation of 18U.S.C. Sec. 1001 to willfully make any false statement to EPA. I further understand that if this notification is not consistent with the terms of PR Notice 98-10 and 40CFR 152.46, this product may be in violation of FIFRA and I may be subject to enforcement action and penalties under section 12 and 14 of FIFRA.

Section - III

1. Material This Product Will Be Packaged In:				2. Type of Container	
Child-Resistant Packaging <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No	Unit Packaging <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No	Water Soluble Packaging <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No		<input checked="" type="checkbox"/> Metal	<input checked="" type="checkbox"/> Plastic
* Certification must be submitted		If "Yes" Unit Packaging wgt.	No. per container	If "Yes" Package wgt.	No. per container
3. Location of Net Contents Information <input checked="" type="checkbox"/> Label <input type="checkbox"/> Container		4. Size(s) Retail Container 5 and 55 gallon and bulk		5. Location of Label Directions <input checked="" type="checkbox"/>	
6. Manner in Which Label is Affixed to Product <input checked="" type="checkbox"/> Lithograph Paper glued Stenciled			<input type="checkbox"/> Other _____		

Section - IV

1. Contact Point (Complete items directly below for identification of individual to be contacted, if necessary, to process this application.)					
Name Maureen Miksztal		Title Senior Regulatory Specialist		Telephone No. (Include Area Code) 732-563-5580	
<p align="center">Certification</p> <p>I certify that the statements I have made on this form and all attachments thereto are true, accurate and complete. I acknowledge that any knowingly false or misleading statement may be punishable by fine or imprisonment or both under applicable law.</p>					6. Date Application Received (Stamped)
2. Signature 			3. Title Senior Regulatory Specialist		
4. Typed Name Maureen Miksztal			5. Date 9/17/07		



3097

October 24, 2007

The Dow Chemical Company
171 River Road
Piscataway, NJ 08854
USA

Overnight Delivery

Document Processing Desk (NOTIF)
Office of Pesticides Programs (7504P)
Antimicrobials Division
U. S. Environmental Protection Agency
Room S-4900, One Potomac Yard
2777 South Crystal Drive
Arlington, VA 22202-4501

Subject UCARCIDE™ 14 Antimicrobial EPA Reg. No. 464-700

Notification of Minor Label Change

Dear Sir/Madam:

Per PR Notice 98-10, The Dow Chemical Company is submitting a notification to the registration for UCARCIDE™ 14 Antimicrobial EPA Reg. No. 464-700. This notification includes a minor change to the UCARCIDE™ 14 Antimicrobial EPA Reg. No. 464-700 labeling. Please find enclosed the following documentation in support of this application:

- Application Form, EPA Form 8570-1
- Draft label with highlighted changes


Please contact me at 732-563-5586 with questions or comments regarding this submission. Thank you for your assistance.

Sincerely,

Maureen Miksztal
Senior Regulatory Specialist
The Dow Chemical Company
miksztm@dow.com

cc: Mr. Marshall Swindell, PM-33

Enclosure

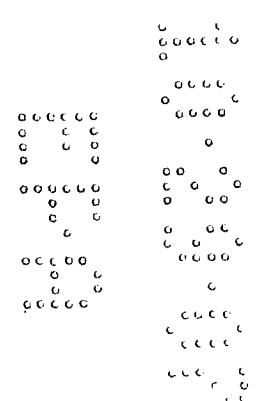

4047

UCARCIDE™ 14

Antimicrobial

A HIGHLY EFFECTIVE MICROBIOCIDIC FOR USE IN CONTROLLING BACTERIA INCLUDING SLIME FORMING BACTERIA AND SULFATE-REDUCING BACTERIA AND FUNGI (YEAST AND MOLDS) AND ALGAE IN AIR WASHERS AND INDUSTRIAL SCRUBBING SYSTEMS, RECIRCULATING COOLING AND PROCESS WATER SYSTEMS INCLUDING THOSE THAT CONTAIN REVERSE OSMOSIS MEMBRANES AND IN SERVICE WATER AND AUXILIARY SYSTEMS AND HEAT TRANSFER SYSTEMS AND IN WASTEWATER SYSTEMS INCLUDING WASTEWATER SLUDGE AND HOLDING TANKS, AND IN PAPER MILLS AND PAPER MILL PROCESS WATER SYSTEMS AND WATER BASED COATINGS FOR PAPER AND PAPERBOARD AND IN OIL WELL DRILLING, OIL FIELD PROCESSING APPLICATIONS, OIL FIELD WATER SYSTEMS, GAS PRODUCTION AND TRANSMISSION PIPELINES AND SYSTEMS, AND GAS STORAGE FIELDS AND EQUIPMENT; SUCH AS, STEAM-INJECTION WATER HOLDING TANKS, FLOOD WATER, INJECTION WATER, HOLDING POND WATER, DISPOSAL-WELL WATER, WATER HOLDING TANKS, FUEL STORAGE TANKS AND RELATED REFINERY AND OIL FIELD CLOSED, INDUSTRIAL RECIRCULATING WATER HANDLING SYSTEMS AND AN INDUSTRIAL SANITIZER FOR USE IN CONTROLLING MICROBIAL CONTAMINATION IN ANIMAL PRODUCTION FACILITIES AND FARM EQUIPMENT SUCH AS POULTRY & TURKEY HOUSES, SWINE HOUSING AND FARROWING AREAS, BARN AND LARGE ANIMAL BUILDINGS, HATCHERS, SETTERS, AND CHICK PROCESSING FACILITIES, CAGES AND TRANSPORT VEHICLES, AND HATCHING EGGS AND FOR SANITIZING INDUSTRIAL OR NON-FOOD CONTACT SURFACES SUCH AS EQUIPMENT FOR MIXING, PACKING, OR PACKAGING PRODUCTS, PRODUCT TRANSFER LINES, STORAGE TANKS, FLOORS AND WALLS AND FOR USE BY MANUFACTURERS AND FORMULATORS IN FORMULATING PRODUCTS FOR ANIMAL HOUSING AND INDUSTRIAL SANITIZING APPLICATIONS. FORMULATORS USING THIS PRODUCT ARE RESPONSIBLE FOR THE EPA REGISTRATION OF THEIR FORMULATING PRODUCTS.

Active Ingredient: Glutaraldehyde 14.0%
Alkyl (C₁₄ 50%, C₁₂ 40%, C₁₆ 10%)
dimethyl benzyl ammonium chloride 2.5%
Inert Ingredients: 83.5%
Total: 100.0%

KEEP OUT OF REACH OF CHILDREN
DANGER
FIRST AID

If swallowed:

- Call a poison control center or a doctor immediately for treatment advice.
- DO NOT INDUCE VOMITING.
- Do not give anything to drink.

If in eyes:

- Wash immediately and continuously with flowing water for at least 30 minutes.
- Remove contact lenses after the first 5 minutes and continue washing. Obtain prompt medical consultation, preferably from an ophthalmologist.
- Call a poison control center or a doctor immediately for treatment advice.

If on skin or clothing:

- Take off contaminated clothing.
- Rinse skin immediately with plenty of water for 15-20 minutes.
- Call a poison control center or a doctor for treatment advice.

If inhaled:

- Move person to fresh air.
- If person is not breathing, call 911 or an ambulance, and then give artificial respiration, preferably mouth-to-mouth if possible.
- Call a poison control center or a doctor for further treatment advice.

NOTE TO PHYSICIAN: Aspiration may cause lung damage. Probable mucosal damage may contraindicate the use of gastric lavage.

Have the MSDS and, if available, the product container or label with you when calling a poison control center or a doctor, or going for treatment.

SEE SIDE PANEL FOR ADDITIONAL PRECAUTIONARY STATEMENTS

Produced for:



The Dow Chemical Company
Midland, Michigan 48674 U.S.A.
(989)636-4400

®™ Trademark of The Dow Chemical Company
("Dow") or an affiliated company of Dow
Made in U.S.A.

EPA Reg. No. 464-700
EPA Est. No. 10352-WV-2 (A) ; 464-WV-1 (B)
EPA Est. No. 10352-WV-1 (C)
(A) 5 gallon pails in pallets; all drums; bulk
(B) Single 5 gallon pails only.
(C) Bulk Shipments

(J 0907)
PE0907

Net Contents: 5, 55 gallons or Bulk

CONTAINER SIZE	CONTAINER SIZE	CONTAINER SIZE
TOTE	55 GALLONS	5 GALLONS
260.8 GALLONS		
2,290 POUNDS	470 POUNDS	44 POUNDS
NET WEIGHT	NET WEIGHT	NET WEIGHT

IN CASE OF AN EMERGENCY endangering life or property involving this product, call collect, (989)636-4400.

50 of 7

**PRECAUTIONARY STATEMENTS
HAZARDS TO HUMANS AND DOMESTIC ANIMALS**

DANGER

KEEP OUT OF REACH OF CHILDREN

Corrosive. Causes irreversible eye damage. Causes skin irritation. Harmful if inhaled. Harmful if swallowed. Harmful if absorbed through skin. Prolonged or frequently repeated skin contact may cause allergic reactions in some individuals. Causes asthmatic signs and symptoms in hyper-reactive individuals.

Do not get in eyes, on skin, on clothing.
Avoid breathing vapor. Do not swallow.
Wear goggles, protective clothing, and butyl or nitrile gloves.
Wash thoroughly with soap and water after handling.
Remove contaminated clothing and wash before reuse.

ENVIRONMENTAL HAZARDS

This pesticide is toxic to fish. Do not discharge effluent containing this product into lakes, streams, ponds, estuaries, oceans or other waters unless in accordance with the requirements of a National Pollutant Discharge Elimination System (NPDES) permit and the permitting authority has been notified in writing prior to discharge. Do not discharge effluent containing this product to sewer systems without previously notifying the local sewage treatment plant authority. For guidance, contact your State Water Board or Regional Office of the EPA.

STORAGE AND HANDLING

UCARCIDE 14 Antimicrobial is incompatible with many commonly used materials of construction such as steel, galvanized iron, aluminum, tin, and zinc. UCARCIDE 14 Antimicrobial can be stored and handled in baked phenolic-lined steel, polyethylene, stainless steel, or reinforced epoxy-plastic equipment. This product freezes at about 27° F (-3° C). Therefore, unless the storage tank is inside or underground, heating and insulation may be required. If heating is needed, exposure to high temperatures should be avoided. For short storage times (up to about 1 month), temperatures of up to 100° F (37.8° C) can be tolerated but the preferred maximum storage temperature is about 80° F (26.7° C).

A stainless steel centrifugal pump is suggested for transfer service. Spiral-wound stainless steel with TEFLON® Polymer is suitable for gaskets and packing.

Handle in a well-ventilated area. If vapors are irritating to the nose or eyes, special ventilation or respiratory protection (MSHA/NIOSH approved air purifying respirator equipped with an organic vapor cartridge) may be required.

LIMITED WARRANTY AND DISCLAIMER

Seller warrants that the product conforms to its chemical description as contained on this label and is reasonably fit for the purposes stated on this label when used in accordance with directions under normal conditions of use. THE WARRANTIES MADE IN THIS PARAGRAPH ARE SELLER'S SOLE WARRANTIES WITH RESPECT TO THE PRODUCT AND ARE MADE EXPRESSLY IN LIEU OF AND EXCLUDE ANY IMPLIED WARRANTIES OF MERCHANTABILITY OR OF FITNESS FOR A PARTICULAR PURPOSE AND ALL OTHER EXPRESS OR IMPLIED REPRESENTATIONS AND WARRANTIES.

**BEFORE HANDLING OR USING THIS PRODUCT,
SEE YOUR EMPLOYER AND READ CURRENT
MATERIAL SAFETY DATA SHEET.**

STORAGE AND DISPOSAL

PESTICIDE DISPOSAL: Do not contaminate water, food or feed by storage or disposal. Open dumping is prohibited. Pesticide wastes are toxic. Improper disposal of excess pesticide, spray mixture or rinsate is a violation of Federal law. If these wastes cannot be disposed of by use according to label instructions, contact your State Pesticide or your Environmental Control Agency, or the Hazardous Waste representative at the nearest EPA Regional Office for guidance.

CONTAINER DISPOSAL: Metal Containers or Plastic Containers: Triple rinse (or equivalent). Then offer for recycling or reconditioning, or puncture and dispose of in a sanitary landfill, or other procedures approved by state and local authorities. **Plastic Containers:** May be incinerated, or, if allowed by state and local authorities, by burning. If burned, stay out of smoke. **Metal Containers:** Must not be incinerated. Do not cut or weld on or near metal containers.



NOTICE

Do Not Ship or Store with Food,
Feeds, Drugs, or Clothing

65672-9/14/2007-1588

6097

DIRECTIONS FOR USE

It is a violation of Federal Law to use this product in a manner inconsistent with its labeling.

AIR WASHERS AND INDUSTRIAL SCRUBBING SYSTEMS/ RECIRCULATING COOLING AND PROCESS WATER SYSTEMS

This product may be used only in industrial air washers and air washer systems which have mist-eliminating components.

UCARCIDE 14 Antimicrobial should be added at the application rates described below to a water treatment system at a convenient point of uniform mixing such as the basin area. Addition may be made intermittently (SLUG DOSE) or continuously. Badly fouled systems can be shock treated with UCARCIDE 14 Antimicrobial. Under these conditions, blowdown should be discontinued for up to 24 hours.

UCARCIDE 14 Antimicrobial can be used in industrial process water systems that contain ultra filtration units and non-medical reverse osmosis membranes (where approved for compatibility by the membrane manufacturer) and associated distribution systems.

INTERMITTENT (SLUG DOSE) METHOD

Initial Dose: When the system is noticeably fouled, apply 4.2 to 8.5 fluid ounces of UCARCIDE 14 Antimicrobial per 100 gallons of water in the system. Repeat until control is achieved.

Subsequent Dose: When microbial control is evident, add 1.7 to 4.2 fluid ounces of UCARCIDE 14 Antimicrobial per 100 gallons of water in the system weekly, or as needed to maintain control.

Badly fouled systems must be cleaned before treatment is begun.

CONTINUOUS FEED METHOD

Initial Dose: When the system is noticeably fouled, apply 4.2 to 8.5 fluid ounces of UCARCIDE 14 Antimicrobial per 100 gallons of water in the system.

Subsequent Dose: Maintain this treatment level by starting a continuous feed of 0.8 to 4.2 fluid ounces of UCARCIDE 14 Antimicrobial per 100 gallons of water in the system per day.

Badly fouled systems must be cleaned before treatment is begun.

SERVICE WATER AND AUXILIARY SYSTEMS

UCARCIDE 14 Antimicrobial should be used at the same application rates, and in the same manner as described above. It should be added to the system at a point that will allow for uniform mixing throughout the system.

HEAT TRANSFER SYSTEMS

(Evaporative Condensers, Dairy Sweetwater Systems, Hydrostatic Sterilizers and Retorts, and Pasteurizers and Warmers and Once-Through Cooling Water Systems)

UCARCIDE 14 Antimicrobial should be used at the same application rates, and in the same manner as described above. It should be added to the system at a point of uniform mixing such as a basin area, sump area or other reservoir or collecting area from which the treated water will be circulated uniformly throughout the system.

INDUSTRIAL WASTEWATER SYSTEMS

(Wastewater Systems, Wastewater Sludge and Wastewater Holding Tanks)

UCARCIDE 14 Antimicrobial should be added to a wastewater system or sludge at a convenient point of uniform mixing such as the digester. Add 20 to 96 fluid ounces (1.25 pints to 3 quarts) (1,600 to 7,600 ppm) UCARCIDE 14 Antimicrobial per 1000 gallons of wastewater or sludge.

PAPER MILLS AND PAPER MILL PROCESS WATER SYSTEMS

UCARCIDE 14 Antimicrobial should be added to a paper making system at a point of uniform mixing such as the thin or thick stock chest, save-all tank, process tank or white-water tank.

Initial Treatment: When the system is noticeably contaminated, add 1.5 to 9.0 lb of UCARCIDE 14 Antimicrobial per ton or 0.76 to 4.5 Kg of UCARCIDE 14 Antimicrobial per metric ton of pulp or paper (dry basis) as a continuous or slug dose. Repeat until control is achieved. Heavily fouled systems should be boiled out prior to initial treatment.

Subsequent Dose: When microbial control is evident, add 0.9 to 6.0 lb of UCARCIDE 14 Antimicrobial per ton or 0.46 to 3.0 kg of UCARCIDE 14 Antimicrobial per metric ton of pulp or paper (dry basis) as necessary to maintain control.

WATER BASED COATINGS, PIGMENTS AND FILLER SLURRIES FOR PAPER AND PAPERBOARD

NOTE: For use in non-food contact coatings only.

Add 0.3 to 1.8 lbs of UCARCIDE 14 Antimicrobial per 1,000 lbs dry powder or 0.3 to 1.8 Kg UCARCIDE 14 Antimicrobial per metric ton of dry slurry to produce a concentration of 300 to 1800 ppm as product (based on slurry solids) in the mixed slurry.

WATER FLOODS

UCARCIDE 14 Antimicrobial should be added to a water flood system at a point of uniform mixing.

Initial Treatment: When the system is noticeably contaminated, add 300 to 15,000 ppm UCARCIDE 14 Antimicrobial to the system (0.3 to 14.5 gallons UCARCIDE 14 Antimicrobial per 1,000 gallons flood water). Repeat until control is achieved.

Subsequent Dose: When microbial control is evident, add 60 to 15,000 ppm UCARCIDE 14 Antimicrobial (0.06 to 14.5 gallons UCARCIDE 14 Antimicrobial per 1,000 gallons flood water) to the system weekly, or as needed to maintain control.

DRILLING, COMPLETION, AND WORKOVER FLUIDS

UCARCIDE 14 Antimicrobial should be added to a drilling fluid system at a point of uniform mixing such as the circulating mud tank.

Initial Treatment: Add 150 to 3,000 ppm UCARCIDE 14 Antimicrobial (0.6 to 12.2 gallons UCARCIDE 14 Antimicrobial per 100 barrels of fluid) to a freshly prepared fluid depending on the severity of contamination.

Maintenance Dosage: Maintain a concentration of 150 to 3,000 ppm UCARCIDE 14 Antimicrobial by adding 0.6 to 12.2 gallons of UCARCIDE 14 Antimicrobial per 100 barrels of additional fluid, or as needed, depending on the severity of contamination.

PACKER FLUIDS

UCARCIDE 14 Antimicrobial should be added to a packer fluid at a point of uniform mixing such as a circulating holding tank. Add 150 to 1,800 ppm UCARCIDE 14 Antimicrobial (0.6 to 7.3 gallons UCARCIDE 14 Antimicrobial per 100 barrels of fluid) to a freshly prepared fluid depending on the severity of contamination. Seal the treated packer fluid in the wall between the casing and production tube.

GAS PRODUCTION AND TRANSMISSION PIPELINES AND SYSTEMS

UCARCIDE 14 Antimicrobial should be added to a gas production or transmission pipeline via direct injection. The application should be conducted to ensure maximum distribution of the UCARCIDE 14 Antimicrobial through the entire internal surface of the pipeline. To facilitate application, it may be desirable to dilute the UCARCIDE 14 Antimicrobial with an appropriate solvent immediately before use. Injections to the system should be weekly, or as needed to maintain control.

GAS STORAGE WELLS AND SYSTEMS

Individual injection wells should be treated with a sufficient quantity of UCARCIDE 14 Antimicrobial to produce a concentration of 1,500 to 15,000 ppm UCARCIDE 14 Antimicrobial when diluted by the water present in the formation. Injection should take place before gas is injected (during the summer). Injections should be repeated yearly, or as needed to maintain control.

Individual drips should be treated with a sufficient quantity of UCARCIDE 14 Antimicrobial to produce a concentration of 600 to 6,000 ppm UCARCIDE 14 Antimicrobial when diluted by the water present in the drip. Injectors should be repeated yearly, or as needed to maintain control.

HYDROTESTING

Water used to hydrotest pipelines or vessels should contain 300 to 12,000 ppm UCARCIDE 14 Antimicrobial (0.3 to 11.6 gallons UCARCIDE 14 Antimicrobial per 1,000 gallons water), depending on water quality and length of time the equipment will remain idle.

PIPELINE PIGGING AND SCRAPING OPERATIONS

Add UCARCIDE 14 Antimicrobial to a slug of water immediately following the scraper (ideally this water volume can be kept to a minimum and contained between the scraper and a trailing pig). Sufficient UCARCIDE 14 Antimicrobial should be added to produce a concentration of 0.3 to 3.0% (0.3 to 2.9 gallons UCARCIDE 14 Antimicrobial per 100 gallons water), depending on the length of the pipeline and the severity of biotailing.

SANITIZING NON-FOOD CONTACT SURFACES, FARM, ANIMAL, AND POULTRY HOUSING FACILITIES AND EQUIPMENT

***Not for use in the state of California**

DO NOT USE THIS PRODUCT ON FOOD OR FEED

UCARCIDE 14 Antimicrobial is suitable for use on a wide variety of surfaces including stainless steel, aluminum, painted and unpainted concrete, plastic, glazed and unglazed tile and wood.

Product Dilution:

To sanitize vegetative pathogens (including *Klebsiella pneumoniae*, *Salmonella choleraesuis*, *Staphylococcus aureus*, and *Pseudomonas aeruginosa*) and viruses (including *Infectious bursal disease*, *Avian influenza (H6N2 and H5N1)*, *SARS Associated Coronavirus*, *Porcine circovirus* and *lungus* (including *Aspergillus fumigatus*):

1. Remove filth and soil deposits from surfaces prior to treatment. Pre-clean surfaces with a suitable detergent and rinse with water.
2. Thoroughly saturate all surfaces using a mop or by spraying with a solution prepared by mixing 0.45 to 1.8 fluid ounces of UCARCIDE 14 Antimicrobial per gallon of water (3.5 to 14.1 milliliters per liter) to produce a solution containing 0.06% to 0.24% active ingredient. For application against *Porcine circovirus* mix 0.9 to 2.2 fluid ounces of UCARCIDE 14 Antimicrobial per gallon of water (6.9 to 17.3 milliliters per liter) to produce a solution containing 0.1 to 0.25% active glutaraldehyde ingredient.
3. Immerse all halters, ropes, and other types of equipment used in handling and restraining animals, as well as forks, shovels, and scraper used for removing litter and manure.
4. Allow to stand for at least 5 minutes, or until thoroughly dried.
5. Ventilate thoroughly before reuse.
6. Fresh solution should be prepared daily or more often if the solution becomes diluted or soiled.

Farm Equipment and Animal Housing Buildings

(poultry & turkey grow-out houses, laying houses, swine production and housing, barns and large animal buildings) Before applying UCARCIDE 14 Antimicrobial:

1. Remove all poultry and other animals and feed from the premises. Remove all portable equipment and empty all feeders and water troughs. If not removed, all treated feeders and waterers must be thoroughly rinsed with potable water prior to re-use.
2. Remove all litter and manure from floors and other surfaces. If litter is not removed, allow to stand after treatment with UCARCIDE 14 Antimicrobial for at least ten minutes before repopulation.
3. Using suitable commercially available equipment, saturate all surfaces with diluted UCARCIDE 14 Antimicrobial (see Product Dilution, above).
4. Allow to stand for at least 5 minutes, or for longer depending on the organisms being treated (see Product Dilution, above).
5. Ventilate enclosed spaces.
6. Do not repopulate with poultry or other animals, or use equipment until treatment has been absorbed or dried.

Hatchers, Setters, and Chick Processing Facilities

1. General sanitizing of environmental surfaces prior to introduction of eggs: Remove all animals from the area. Clean out feathers, fluff, or other debris. Thoroughly saturate all surfaces with a solution prepared by mixing the appropriate amount (see Product Dilution, above) of UCARCIDE 14 Antimicrobial with water. Allow to stand for at least 5 minutes, or for longer depending on the organisms being treated. (See Product Dilution, above.) Ventilate thoroughly before reuse.

2. Treatment of air and surfaces after introduction of eggs in high humidity hatchers and setters with water spray cooling: Prepare a solution by mixing the appropriate amount of UCARCIDE 14 Antimicrobial with water. Allow to stand for at least 5 minutes, or for longer depending on the organisms being treated. (See Product Dilution, above.) Fog or atomize this solution into setters or hatchers, using appropriate application equipment.

Treatment of air and surfaces after introduction of eggs in low humidity hatchers with chilled coil cooling: Fog or atomize this product using appropriate application equipment.

Trays, Racks, Carts, Chick Boxes, Cages, and other Hard Surfaces:

Remove all filth and heavy debris from surfaces by scraping or washing. Prepare a solution by mixing the appropriate amount (see Product Dilution, above) of UCARCIDE 14 Antimicrobial with water. Apply by spraying or immersion, and allow to drain and air dry. Allow to stand for at least 5 minutes, or for longer depending on the organisms being treated. (See Product Dilution, above.)

Trucks and other Vehicles

Remove all filth and heavy debris from surfaces by scraping or washing. Spray surfaces with a solution prepared by mixing the appropriate amount (see Product Dilution, above) of UCARCIDE 14 Antimicrobial with water. Allow to air-dry.

Egg Sanitization

(for treating hatching eggs only)

Prepare a solution by mixing one fluid ounce of UCARCIDE 14 Antimicrobial with one gallon of water. Place in a bath at 105° to 115°F (40° to 45°C). Place freshly laid eggs in plastic trays and dip briefly (10 to 15 seconds), then allow to drain and air-dry.

SANITIZING NON-FOOD CONTACT SURFACES, INDUSTRIAL EQUIPMENT AND BUILDINGS

***Not for use in the state of California**

Before applying UCARCIDE 14 Antimicrobial, remove heavy filth and soil deposits from surfaces using a suitable cleaner. Dilute UCARCIDE 14 Antimicrobial to 0.06% to 0.24% active ingredient by mixing 0.45 to 1.8 fluid ounces of UCARCIDE 14 Antimicrobial per gallon of water (3.5 to 14.1 milliliters per liter). Using suitable commercially available equipment, saturate all surfaces with diluted UCARCIDE 14 Antimicrobial. Allow to stand for at least 5 minutes, or for longer time depending on the organisms being treated. (See Product Dilution, above.) Ventilate enclosed spaces.