



UNITED STATES ENVIRONMENTAL PROTECTION AGENCY
WASHINGTON, D.C. 20460

DEC 27 2011

Julie Porter
AMVAC
4695 MacArthur Court
Suite 1250
Newport Beach, CA 92660

OFFICE OF CHEMICAL SAFETY
AND POLLUTION PREVENTION

Subject: Metam 376
EPA Reg. No. 5481-458
Phase 2 RED Mitigation Amendment Label Dated July 29, 2011
EPA Decision Number 459172

Dear Ms. Porter:

The amended label referred to above, submitted in connection with reregistration of metam sodium under the Federal Insecticide, Fungicide and Rodenticide Act as amended is acceptable provided the following label revisions are made and the following conditions are met:

LABEL REVISION

1. Page 2
 - a. In the Table of Contents, the word "Requirements" is misspelled in Agricultural Use Requirements.
2. Page 5
 - a. In the Agricultural Use Requirements box, fix the spelling of "requirements".
 - b. At the end of "application is complete" add the following: "For applications with water seals, the application is complete at the time at which the fumigant has stopped being delivered/dispensed into the soil."
3. Page 7
 - a. Under Certified Applicator Training, delete the "(s)" in "ingredient(s)".
4. Page 8
 - a. Under Air-Purifying Respirator Availability, in the exception, delete "After the application is complete,". The exception should read as follows: "Exception: Air-purifying respirators do not need to be made available for handlers performing fumigant site monitoring tasks outside of the buffer zone."
 - b. In the sentence directly under Respiratory Protection and Stop Work Triggers, after the word "task", add the following: "(except for fumigant site monitoring

outside of the buffer zone)". The sentence should read as follows: ""The following procedures must be followed to determine whether an air-purifying respirator is required or if operations must cease for any person performing a handling task (except for fumigant site monitoring outside of the buffer zone) as stated in this label."

- 6. Pages 22-23
 - a. In the Calculation the Broadcast Equivalent Application Rate section, delete all instances of "pounds". Only gallons of product should be mentioned in these two pages.
- 7. Pages 27-31
 - a. The minimum font size for the entire labeling is 12 pt. Make sure the buffer zone tables meet this requirement.
- 8. Page 33
 - a. At the end of the Posting Fumigant Buffer Zones section, in the Exception, the last sentence should be revised to state: "The signs must remain posted until the last buffer zone period expires and signs must be removed within 3-days after the buffer zone period for the last block has expired."
 - b. Under Restrictions for Difficult to Evacuate Sites, reformat the section like this:

"Difficult to evacuate sites are pre-K to grade 12 schools, state licensed daycare centers, nursing homes, assisted living facilities, hospitals, in-patient clinics, and prisons.

- No fumigant application with a buffer zone greater than 300 feet is permitted within 1/4 mile (1320 feet) of difficult to evacuate sites unless the site is not occupied by children from state-licensed day care centers, students (pre-K to grade 12), patients, or prisoners during the application and the 36-hour period following the end of the application.
- No fumigant application with a buffer zone of 300 feet or less is permitted within 1/8 mile (660 feet) of difficult to evacuate sites unless the site is not occupied by children from state-licensed day care centers, students (pre-K to grade 12), patients, or prisoners during the application and the 36-hour period following the end of the application."

- 9. Pages 38-47
 - Replace the text in the Product Instructions section with the text for that section from the previously accepted METAM 376 label, stamped April 30, 2010. The Product Instructions section should read as follows. Please note that there are additional changes in the Uses, Rates, and Application Methods section to clarify that the product can only be used prior to planting.

"PRODUCT INSTRUCTIONS

Apply METAM 376 at planting time using the furrow, shank/spray blade injection, soil incorporation (e.g., rotary tiller), or drip method. Use promptly after mixing with water. Do not allow solution to stand after mixing. Flush all equipment with water after each days use. Disassemble valves and clean carefully.

Product Information

METAM 376 is a water soluble liquid. When applied to soil, the liquid is converted into a volatile fumigant (Methylisothiocyanate, MITC). After a sufficient interval of time, the gas degrades/dissipates, leaving the soil.

When To Use Maximum and Minimum Rates

The application rate of METAM 376 is dependent on the soil type to be treated. Generally a light sandy soil requires a lower application rate than a heavier mineral soil. When a range of application rates is given in this label, consult your local agricultural extension service or your local distributor for more specific information.

Use Precautions

Keep children and pets out of treated areas. All METAM 376 uses described on this label are intended for pre-plant soil preparation only. Keep the product off of any desirable plants. Do not apply within 3 feet of the drip line of desirable plants, shrubs or trees. Keep container tightly closed when not in use. Do not store near feed or food.

NOTE: METAM 376 will suppress only those pests in the fumigation zone at the time of treatment. Reinfestation may occur subsequent to the fumigant degradation/dissipation from the soil.

Treatment Guidelines

For optimum results, certain procedures should be observed at designated times in the treatment program. Described below are important guidelines for each of the four stages of the treatment process. Pre-Application planning. Field preparation prior to application. Application. Consult your sales representative for the appropriate treatment program for your particular needs.

Planning an Application

METAM 376 is applied using the furrow, shank/spray blade injection, soil incorporation (e.g., rotary tiller), or drip method. Soil temperature must be between 35°F and 90°F in the treatment zone.

Application Rate

Apply 3.5 to 10 gallons of this product per broadcast/overall acre depending on crop, target pest and soil properties. Some of the soil properties to consider when determining the application rate include soil texture, percent organic matter and depth of soil to be treated.

Target Pest and Depth of Treatment

When application rates for this product are given in ranges, use the higher rate if pests (insects, nematodes, etc.) are present in high numbers or if the area to be treated has a history of pest problems. Consult with your State Nematologist to determine if crop rotation is more feasible or desirable than fumigation.

Soil Characteristics

Soil properties to consider when determining the application rate of this product include the soil texture, and percent organic matter.

Plant materials under the soil surface should be thoroughly decomposed before application. Due to the absorbing effect of humus, soils with high levels of organic matter under the surface require higher rates. For example, muck soils require twice the rate that would be used in mineral soils.

Application rates will also vary with soil texture. For instance, heavy clay soils require a higher rate than light sandy soil.

Application of Metam 376

Apply according to the methods and rates outlined in the Good Agricultural Practices section and below under the section "USES, RATES, and APPLICATION METHODS"

Use of Diluted Metam 376

Do not store the diluted product. Do not allow the diluted solution to stand overnight. Use the diluted solution promptly after mixing with water. Flush all equipment with water after each day's use, disassemble valves and clean carefully.

Compatibility with Other Products

METAM 376 is compatible with a wide range of pesticides (fungicides, herbicides, insecticides). The mixture should be field tested on a small scale to ensure compatibility, product performance and plant safety before large scale field use. Observe all cautions and limitations on labeling of all products used in mixtures.

DO NOT APPLY TANK MIX COMBINATIONS UNLESS YOUR PREVIOUS EXPERIENCE INDICATES THE MIXTURE IS EFFECTIVE AND WILL NOT RESULT IN APPLICATION PROBLEMS OR PLANT INJURY.

Application in Tank Mix with Liquid Fertilizer

METAM 376 may be injected in a mixture with liquid fertilizers. Since the composition of liquid fertilizers vary considerably, the physical compatibility of each METAM 376/fertilizer tank mix should be checked by using the following procedure:

Mix a small quantity of METAM 376 and liquid fertilizer in the same ratio as they will be applied to the field, i.e., if 40 gallons of METAM 376 and 40 gallons of liquid fertilizer are to be applied per acre, then the mixture should be mixed in a 40:40 or 1:1 ratio. Mix in a glass container and agitate the liquids to attain a complete uniform mixture.

If a uniform mix cannot be made, the mixture should not be used! If the mixture remains uniform for 30 minutes, without agitation, the combination may be used. Should the mixture separate after 30 minutes, but is readily remixed with agitation, the mixture can be used if adequate agitation is maintained in the tank.

DO NOT PLACE CAPS ON MIX JAR AS INCOMPATIBLE MIXES MAY EVOLVE HYDROGEN SULFIDE GAS. USE PROMPTLY AFTER MIXING WITH WATER OR FERTILIZER. DO NOT ALLOW THE SOLUTION TO STAND. FLUSH ALL EQUIPMENT WITH WATER AFTER EACH DAY'S USE. DISASSEMBLE VALVES AND CLEAN CAREFULLY.

Statements Concerning Chemigation of METAM 376

When applying by chemigation methods, the following directions or warnings must be observed. Apply this product only through drip (trickle) irrigation systems. Do not apply this product through any other type of irrigation system. Crop injury, lack of effectiveness, or illegal pesticide residues in the crop can result from non-uniform distribution of treated water. If you have questions about calibration, you should contact State Extension Service specialists, equipment manufacturers or other experts. Do not connect an irrigation system used for pesticide application to a public water system unless the pesticide label prescribed safety devices for public water systems are in place. A person knowledgeable of the chemigation system and responsible for its operation or under the supervision of the responsible person, shall shut the system down and make necessary adjustments should the need arise.

Chemigation Using a Public Water System

NOTE: AMVAC CHEMICAL CORPORATION DOES NOT ENCOURAGE CONNECTION OF CHEMIGATION SYSTEMS TO PUBLIC WATER SYSTEMS. THE FOLLOWING INFORMATION IS PROVIDED FOR USERS WHO HAVE

EVALUATED ALTERNATIVE APPLICATION AND WATER SOURCE OPTIONS BEFORE CHOOSING TO MAKE SUCH A CONNECTION.

Public water system is defined as a system for the provision to the public of piped water for human consumption if such system has at least 15 service connections or regularly serves an average of at least 25 individuals daily at least 60 days out of a year.

Chemigation systems connected to public water systems must contain a functional, reduced-pressure zone (RPZ), backflow preventer or the functional equivalent in the water supply line upstream from the point of pesticide introduction. As an option to the RPZ, the water from the public water system should be discharged into a reservoir tank prior to pesticide introduction. There shall be a complete physical break (air gap) between the outlet end of the fill pipe and the top of overflow rim of the reservoir tank of at least twice the inside diameter of the fill pipe. The pesticide injection pipeline must contain a functional, automatic, quick-closing check valve to prevent the flow of fluid toward the injection pump.

Any alternatives to the required safety devices in this label must conform to the list of EPA-approved alternative devices.

Effects of Rain

If METAM 376 application is rained on less than 24 hours after treatment, lack of control at and near the soil surface may occur.

Recontamination

Precautions must be taken to prevent recontamination of treated fields with plant pathogenic fungi, plant parasitic nematodes or weed seed. Use clean seed or plants. Before farm equipment is driven into the treated areas, it should be rinsed free of untreated soil and weed seeds from other fields.

USES, RATES AND APPLICATION METHODS

Field Application Where Entire Area is Being Treated

Shank/Spray Blade Injection: Apply with injectors (shanks) blades and etc. NOTE: It may be necessary to stagger the injector placement on two or more tool bars to prevent soil build up during application. Apply METAM 376 3 to 6 inches deep at the rate of 3.5 to 10 gallons per broadcast/overall acre. The soil surface must be compacted immediately and prior to seeding with a basket or smooth roller.

Rotary Tiller or Power Mulcher: Spray diluted METAM 376 immediately in front of tiller or mulcher. Use 3.5 to 10 gallons per broadcast/overall acre. Incorporate 4 to 6 inches deep. The treated surface must be compacted immediately and prior to seeding with a basket or smooth roller.

Band Treatment: METAM 376 can be applied as a band treatment. Apply at the rate of 10.3 to 29.4 fluid ounces per 1,000 feet of 12 inch band (3.5 to 10 gallons per broadcast/overall acre). (See method of determining fluid ounces per 100 feet of linear band.) Spray fumigant immediately in front of (1) a rotary tiller equipped with either "L" or sweep blades; (2) opposing disks 4 to 6 inches deep or; (3) any mechanical device that will mix the soil 4 to 6 inches deep. Following the incorporation the soil surface must be immediately compacted with a basket or smooth roller prior to planting time.

In-Furrow Treatment

Dilute METAM 376 in sufficient water to allow for uniform metering of the solution into the seed furrow.

Seed Furrow Spraying or Drag Tubes: Apply diluted fumigant through low pressure tips spraying the soil covering the seed or through drag tubes directly into the seed furrow. Using the drag tube method the fumigant can be applied in the seed furrow prior to the seed dropping. Apply at the rate of 0.4 to 1.6 fluid ounces per 1,000 feet of seed row using the drag tube method and 0.8 to 4.2 fluid ounces per 1,000 ft. of row using the spraying method. The rate with the spray method should be increased with the increasing volume of soil being treated, the wider the spray band the higher the rate.

DRIP APPLICATION

METAM 376 must be applied through a drip irrigation system to wet the soil thoroughly in the desired treatment zone. Apply at the rate of 3.5 to 10 gallons per broadcast/overall acre. The fluid ounces per treated row will depend on the width of the desired treated band (See: method of determining fluid ounces per 100 feet of linear band.).

Method of Determining Fluid Ounces per 100 Feet of Linear Band

- 1) Determine width of band in feet by dividing width of band in inches by 12. Example: 5 inch band = 5 inches divided by 12 = 0.4166 feet.
- 2) Determine square feet in 100 linear feet of band by multiplying the width of the band by 100. Example: 0.4166 x 100 feet = 41.66 square feet.
- 3) Determine the treated acres per 100 linear feet of band by dividing the square feet by 43,560 (square feet in acre). Example: 41.66 square feet divided by 43,560 = 0.00096 acre

- 4) To determine the fluid ounces per 100 linear feet.
- 1 gallon = 128 fluid ounces; 50 gallons = 6,400 fluid ounces; 75 gallons = 9,600 fluid ounces.
 - Multiply fluid ounces by acres. Example: 50 gallons = 6,400 fluid ounces x 0.00096 = 6.14 fluid ounces per 100 linear feet row.

ADDITIONAL INFORMATION

Seed Treatment


A suitable fungicide should be used to treat all crop seed being planted into the treated soil.”

CONDITIONS

1. EPA has determined that the risk mitigation measures on the revised label for this product are necessary to adequately protect human health and the environment. Therefore, pursuant to 40 CFR § 152.130(d), EPA has decided that no product bearing previously approved labeling may be sold or distributed (released for shipment) by its registrant after December 1, 2012. Wherever state approval is required for sale or distribution of this product with this new labeling, EPA strongly encourages you to submit an application to the state authority as soon as possible. You should be aware that the Agency does not intend to modify the December 1, 2012, deadline because of any failure to obtain state approvals.
2. Submit one copy of the final printed label that incorporates the required changes before the product is released for shipment.

One copy of the label stamped “Accepted with comments” is enclosed for your records. If you have any questions, please contact Jose Gayoso by phone at (703) 347-8652 or via email at gayoso.jose@epa.gov or Shaja Joyner by phone at (703) 308-3194 or email at joyner.shaja@epa.gov.

Sincerely,

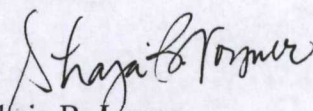

Shaja B. Joyner
Product Manager (20)
Fungicide Branch
Registration Division (7504P)

9/56

RESTRICTED USE PESTICIDE

(DUE TO ACUTE INHALATION TOXICITY TO HUMANS)

For retail sale to and use only by Certified Applicators or persons under their direct supervision, and only for those uses covered by the Certified Applicator's Certification.

METAM 376

FOR CROP USE

A SOIL FUMIGANT SOLUTION FOR CONTROL OR SUPPRESSION OF
SOIL-BORNE DISEASES: SUCH AS RHIZOCTONIA, PYTHIUM, PHYTOPHTHORA,
VERTICILLIUM, SCLEROTINIA, OAK ROOT FUNGUS AND CLUB ROOT OF CRUCIFERS.
NEMATODES: SUCH AS ROOTKNOT, CYST, ROOT LESION, RING AND SPIRAL.
INSECTS: SUCH AS MITES, ROOT APHIDS AND PHYLLOXERA.
ON COTTON, SOYBEANS AND SUGARBEETS

ACTIVE INGREDIENT:

Sodium methyldithiocarbamate (anhydrous).....38.0%

OTHER INGREDIENTS:.....62.0%

TOTAL:100.0%

Contains 3.76 lbs. METAM SODIUM per gallon

U.S. Patent No. 4,994,487 AND 5,075,332.

KEEP OUT OF REACH OF CHILDREN

DANGER - PELIGRO

Si usted no entiende la etiqueta, busque a alguien para que se la explique a usted en detalle.
(If you do not understand the label, find someone to explain it to you in detail.)

FIRST AID	
If on skin or clothing:	<ul style="list-style-type: none"> Take off contaminated clothing. Rinse skin immediately with plenty of water for 15-20 minutes. Call a poison control center or doctor for treatment advice.
If in eyes:	<ul style="list-style-type: none"> Hold eye open and rinse slowly and gently with water for 15-20 minutes. Remove contact lenses, if present, after the first 5 minutes, then continue rinsing eye. Call a poison control center or doctor for treatment advice.
If inhaled:	<ul style="list-style-type: none"> Move person to fresh air. If person is not breathing, call 911 or an ambulance, then give artificial respiration, preferably mouth-to-mouth if possible. Call a poison control center or doctor for further treatment advice.
If swallowed:	<ul style="list-style-type: none"> Call a poison control center or doctor immediately for treatment advice. Have a person sip a glass of water if able to swallow. Do not induce vomiting unless told to do so by a poison control center or doctor. Do not give anything by mouth to an unconscious person.

EMERGENCY INFORMATION

Have the product container or label with you when calling a poison control center or doctor, or going for treatment.
FOR THE FOLLOWING EMERGENCIES, PHONE 24 HOURS A DAY:

Transportation: CHEMTREC1-800-424-9300
Other: AMVAC1-323-264-3910

NOTE TO PHYSICIAN

Possible mucosal damage may contraindicate the use of gastric lavage. This product may pose an aspiration pneumonia hazard.

SEE SIDE/BACK PANEL FOR ADDITIONAL PRECAUTIONARY STATEMENTS AND DIRECTIONS FOR USE.

EPA Reg. No. 5481-458

EPA Est. No. 5481-CA-01

Net Weight:

As Marked on Container



4100 E. Washington Blvd.
Los Angeles, CA 90023 U.S.A
1-323-264-3910

ACCEPTED
with COMMENTS
In EPA Letter Dated

12/27/2011

Under the Federal Insecticide,
Fungicide, and Rodenticide Act,
as amended, for the pesticide
registered under EPA Reg. No.
5481-458

TABLE OF CONTENTS

PRECAUTIONARY STATEMENTS3
 HAZARDS TO HUMANS AND DOMESTIC ANIMALS3
 PERSONAL PROTECTIVE EQUIPMENT (PPE)3
 PERSONAL PROTECTIVE EQUIPMENT (PPE) FOR RESPIRATORY PROTECTION.....4
 USER SAFETY REQUIREMENTS.....4
 USER SAFETY RECOMMENDATIONS4
 ENVIRONMENTAL HAZARDS.....4
 DIRECTIONS FOR USE4
 AGRICULTURAL USE REQUIRMENTS5
 TERMS USED IN THIS LABELING5
 USE SITES.....6
 USE METHOD RESTRICTIONS7
 CERTIFIED APPLICATOR TRAINING.....7
 HANDLERS.....7
 PROTECTION FOR HANDLERS8
 Supervision Of Handlers8
 Exclusion of Non Handlers from Application Block and Buffer Zone8
 Providing, Cleaning, and Maintaining PPE.....8
 Air-Purifying Respirator Availability.....8
 Respirator Fit Testing, Medical Qualification, And Training9
 Respiratory Protection And Stop Work Triggers9
 TARP PERFORATION AND/OR REMOVAL10
 ENTRY RESTRICTED PERIOD AND NOTIFICATION10
 Entry Restricted Period.....10
 Notification.....11
 MANDATORY GOOD AGRICULTURAL PRACTICES (GAPs).....11
 MAXIMUM APPLICATION RATES FOR PRE-PLANT SOIL FUMIGATION22
 CALCULATING THE BROADCAST EQUIVALENT APPLICATION RATE.....22
 BUFFER ZONE REQUIREMENTS25
 Buffer Zone Proximity25
 Structures Under The Control Of The Owner Of The Application Block.....25
 Areas Not Under The Control Of The Owner Of The Application Block25
 BUFFER ZONE DISTANCES26
 Buffer Zone Tables.....27
 BUFFER ZONE CREDITS.....32
 POSTING FUMIGANT BUFFER ZONES32
 RESTRICTIONS FOR DIFFICULT TO EVACUATE SITES33
 EMERGENCY PREPAREDNESS AND RESPONSE MEASURES33
 Triggers for Emergency Preparedness and Response Measures33
 Fumigant Site Monitoring33
 Response Information For Neighbors.....34
 NOTICE TO STATE AND TRIBAL LEAD AGENCIES34
 EMERGENCY RESPONSE PLAN.....34
 SITE-SPECIFIC FUMIGATION MANAGEMENT PLAN (FMP)34
 Record-Keeping Procedures37
 POST-APPLICATION SUMMARY37
 Record-Keeping Procedures38
 PRODUCT INSTRUCTIONS.....38

**PRECAUTIONARY STATEMENTS
HAZARDS TO HUMANS AND DOMESTIC ANIMALS**

DANGER. Corrosive, causes skin burns. May be fatal if absorbed through the skin. Harmful if swallowed or inhaled. Causes moderate eye irritation. Do not get in eyes, on skin or on clothing. Wear the Personal Protective Equipment as specified on this label. Avoid breathing vapor or spray mist. Prolonged or frequently repeated skin contact may cause allergic reactions in some individuals. Wash thoroughly with soap and water after handling and before eating, drinking, or using tobacco. Remove contaminated clothing and wash before reuse.

PERSONAL PROTECTIVE EQUIPMENT (PPE)

Some materials that are chemical-resistant to this product are barrier laminate or viton ≥ 14 mils. For more options, follow the instructions for category H on the chemical-resistance category selection chart.

Handlers who may be exposed to liquid spray while repairing a malfunctioning chemigation system or shutting off equipment must wear:

- Chemical-resistant coveralls over long-sleeve shirt and long pants,
- Chemical-resistant gloves,
- Chemical-resistant footwear plus socks,
- Chemical-resistant headgear, and
- Respirator of the type specified in the respiratory protection section in the PPE requirements on this label.

Handlers wearing chemical-resistant attire are limited to 30 minutes of exposure in any 60-minute period to prevent heat illness, and, as required by the Worker Protection Standard for Agricultural Pesticides, employers of these handlers must take any necessary steps to avoid heat illness.

Except as required above, handlers transferring or loading liquid formulations, handlers operating motorized ground equipment with open cabs, handlers repairing or inactivating irrigation or chemigation equipment during application, and handlers cleaning up spills or equipment must wear:

- Coveralls over long-sleeve shirt and long pants,
- Chemical-resistant gloves,
- Chemical-resistant footwear plus socks,
- Chemical-resistant apron if transferring or loading the fumigant or cleaning up spills or equipment,
- Protective eyewear, and
- Respirator of the type specified in the PPE requirements for respiratory protection section in the PPE requirements on this label if triggered.

All other handlers including handlers operating motorized ground equipment with closed cabs (except for handlers who set up and calibrate chemigation and irrigation equipment and start the application from inside the application block) as stated in this labeling must wear:

- Long-sleeve shirt and long pants,
- Shoes plus socks, and
- Respirator of the type specified in the respiratory protection section in the PPE requirements on this label if triggered.

All handlers who set-up and calibrate chemigation and irrigation equipment and start the application from inside the application block must wear:

- Long-sleeve shirt and long pants,
- Shoes plus socks,
- Protective eyewear, and
- Respirator of the type specified in the respiratory protection section in the PPE requirements on this label if triggered.

PERSONAL PROTECTIVE EQUIPMENT (PPE) FOR RESPIRATORY PROTECTION

When an air-purifying respirator is required under this label's Directions for Use, Protection for Handlers, Respiratory Protection and/or Stop Work Triggers section, handlers must wear at minimum either:

- A NIOSH-certified full facepiece air-purifying respirator equipped with an organic vapor (OV, NIOSH approval prefix TC-23C) cartridge and a particulate pre-filter (Type N, R, P, or HE, NIOSH approval number prefix TC-84A), or
- A gas mask with a canister approved for organic vapor (NIOSH approval number prefix TC-14G).

Cartridges or canisters must be replaced when odor or sensory irritation from this product becomes apparent during use, if the measured concentration of MITC is greater than 6000 ppb (6 ppm), or, in the absence of any other instructions or indications of service life, at the end of each day's work period, whichever occurs first.

USER SAFETY REQUIREMENTS

Follow manufacturer's instructions for cleaning/maintaining PPE. If no such instructions for washables exist, use detergent and hot water. Keep and wash PPE separately from other laundry.

Discard clothing and other absorbent materials that have been drenched or heavily contaminated with this product's concentrate. Do not reuse them.

DO NOT transport contaminated clothing inside a closed vehicle unless stored in a sealed container. Wash or dispose as specified.

USER SAFETY RECOMMENDATIONS

Users should:

- Wash hands before eating, drinking, chewing gum, using tobacco, or using the toilet.
- Remove clothing immediately if pesticide gets inside. Then wash thoroughly and put on clean clothing.
- Remove PPE immediately after handling product. Wash the outside of gloves before removing. As soon as possible, wash thoroughly and change into clean clothing.

ENVIRONMENTAL HAZARDS

This pesticide is toxic to mammals, birds, aquatic invertebrates and fish. Do not apply directly to water, or to areas where surface water is present or to intertidal areas below the mean high water mark. Do not contaminate water when disposing of equipment wash waters or rinsate.

Metam sodium has certain properties and characteristics in common with chemicals that have been detected in groundwater (highly soluble in water and has low adsorption to soil).

For untarped applications, leaching and runoff may occur if there is heavy rainfall after soil fumigation.

DIRECTIONS FOR USE

Restricted Use Pesticide

It is a violation of Federal law to use this product in a manner inconsistent with its labeling. Do not apply this product through any irrigation system unless the chemigation instructions on this label are followed. Do not apply this product in a way that will contact workers or other persons, either directly or through drift. Do not apply when wind speed favors drift beyond the area intended for treatment. Only handlers may be in the application block from the start of the application until the entry restricted period ends, and in the buffer zone during the buffer zone period. For any requirements specific to your State or Tribe, consult the agency responsible for pesticide regulation.

AGRICULTURAL USE REQUIRMENTS

Use this product only in accordance with its labeling and with the Worker Protection Standard 40 CFR Part 170. This Standard contains requirements for the protection of agricultural workers on farms, forests, nurseries, greenhouses, and handlers of agricultural pesticides. It contains requirements for training, decontamination, notification, and emergency assistance. For the entry-restricted period and notification requirements, see the *Entry Restricted Period* and *Notification* sections of this labeling.

PPE For Entry During the Entry-Restricted Period: PPE for entry that is permitted by this labeling is listed in the *Personal Protective Equipment (PPE)* section of this labeling.

The requirements in this box only apply to uses of this product that are covered by the Worker Protection Standard (WPS).

TERMS USED IN THIS LABELING

Soil Fumigant Training Program: Certified applicator training that provides information on (1) how to correctly apply the fumigant, including how to comply with new label requirements; (2) how to protect handlers and bystanders; (3) how to determine buffer zone distances; (4) how to complete an FMP and the post-application summary; (5) how to determine when weather and other site-specific factors are not favorable for fumigant application; (6) how to comply with required GAPs and how to document compliance with GAPs in the FMP; and (7) how to develop and implement emergency response plans.

Fumigant Safe Handling Information: Information that must be provided annually to handlers that must include the following: (1) what fumigants are and how they work, (2) safe application and handling of soil fumigants, (3) air monitoring and respiratory protection requirements for handlers, (4) early signs and symptoms of exposure, (5) appropriate steps to take to mitigate exposures, (6) what to do in case of an emergency, and (7) how to report incidents.

Application Block: Area within the perimeter of the fumigated portion of a field (including furrows, irrigation ditches, roadways). The perimeter of the application block is the border that connects the outermost edges of total area treated with the fumigant product.

Application Rate: The ratio of fumigant mass applied compared to the soil surface area (e.g., lbs of product per acre). The application rate is expressed on this labeling in terms of either the "treated area application rate" or the "broadcast equivalent application rate." The "treated area application rate" relates to only the rate of fumigant applied to the portion of the field that is fumigated (e.g., rate within the bed or strips). The "broadcast equivalent application rate" relates to the rate of fumigant applied within the entire perimeter of the application block. For bedded and strip applications, the "broadcast equivalent application rate" must be calculated to determine the buffer zone distance required by this labeling.

Start of the Application: The time at which the fumigant is first delivered/dispensed into the soil in the application block.

Application is Complete: The time at which the fumigant has stopped being delivered/dispensed into the soil and the soil has been sealed; drip lines have been purged (if applicable).

Entry Restricted Period: This period begins at the start of the application and expires depending on the application method and if tarps are used when the tarps are perforated and removed. Entry into the application block during this period is only allowed for appropriately PPE-equipped handlers performing handling tasks. See the *Entry Restricted Period and Notification* section for additional information.

Buffer Zone: An area established around the perimeter of each application block. The buffer zone must extend outward from the edge of the application block perimeter equally in all directions.

Buffer Zone Period: Begins at the start of the application and lasts for a minimum of 48-hours after the application is complete. Non-handlers must be excluded from the buffer zone during the buffer zone period.

Difficult to Evacuate Sites: Pre-K to Grade 12 schools, state licensed daycare centers, nursing homes, assisted living facilities, hospitals, in-patient clinics, and prisons.

Owner: Any person who has a present possessory interest (fee, leasehold, rental, or other) in an agricultural establishment. A person who has both leased such agricultural establishment to another person and granted that same person the right and full authority to manage and govern the use of such agricultural establishment is not an owner. See definition of "owner" in WPS (40 CFR §170.3).

Roadway: Portion of a street or highway improved, designed or ordinarily used for vehicular travel, exclusive of the sidewalk or shoulder even if such sidewalk or shoulder is used by persons riding bicycles. In the event a highway includes two or more separated roadways, the term *roadway* shall refer to any such roadway separately.

Representative Handling Task: For air monitoring, the locations and handler activities sampled must represent each handler's exposure occurring within the application block. For example, for an application consisting of a seven-handler crew (1 tractor driver, 1 tractor co-pilot, 4 shovelers, and 1 certified applicator supervising) two breathing zone samples could be collected: one sample for the tractor co-pilot and one sample for a downwind shoveler. Results of previous sampling may indicate which tasks and locations are worst case and therefore representative of all handlers."

USE SITES

Only for use on the following:

Cover crops (i.e., crops planted between periods of regular crop production to prevent soil erosion). The terminated crop must not be used for any food or feed purposes after METAM 376 has been applied; Crops grown solely for seed; as well as pre-plant soil uses for (in alphabetical order): alfalfa; amaranth (including leafy amaranth, Chinese spinach, tampala); anise; apple (including: balsam, crabapple); apricot; artichokes; arugula (roquette); asparagus (nursery production only); barley; basil; beans (including: lima, green, fava, seed beans); beet (including garden); berry (including black satin berry, blackberry, blueberry, boysenberry, chesterberry, lowberry, wild raspberry, youngberry, darrowberry, dewberry, cloudberry, elderberry, Cherokee blackberry, coryberry, European barberry, huckleberry, hullberry, gooseberry, cranberry, highbush cranberry, Himalayaberry, jostaberry, juneberry, saskatoon berry, lingonberry, loganberry, lavacaberry, lucretiaberry, mammoth blackberry, marionberry, bingleberry, mountain pepper berries, mulberry, olallieberry, dirksen thornless berry, nectarberry, Oregon evergreen berry, partridgeberry, phenomenalberry, rangeberry, raspberry (black and red), ravenberry, riberry, rossberry, schisandra berry, serviceberry, Shawnee blackberry, strawberry) bok choy; broccoli; brussels sprouts; cabbage (including Napa); calabaza; calamondin; cardoon; carrot; casaba; cauliflower; celeriac; celery (including: Chinese); celtuce; chayote (fruit); che; cherry (including: sweet and tart, chokecherry, pincherry); chervil; cheyenne; Chilean guava; Chinese greens; Chinese okra; Chinese waxgourd (Chinese preserving melon); chinquapin; chironja; chrysanthemum; cilantro; citrus citron; citrus hybrids; collard; corn salad; corn; cotton; cress (including: upland, yellow rocket, winter cress); cucumber (including: Chinese cucumber); cucuzza; currant, (including: black, red, native and other varieties and hybrids); dandelion; dill; dock (sorrel); eggplant; endive (escarole); fennel, Florence (finochio); forest seedlings; garland; garlic; gherkin; ginger; gourd; grape; grapefruit; hechima; herbs (all); honey balls; honeysuckle; hyotan; kale; kiwifruit (including: fuzzy and hardy); kohlrabi; kumquat; leek; lemon; lettuce (including: head and leaf); lime; loquat; mandarin (including: tangerine and satsuma); mango; mayhaw; maypop; melon (including: bitter melon, cantaloupe, hybrids and/or cultivars, citron melon, crenshaw melon, golden pershaw melon, mango melon, honeydew melon, muskmelon, Persian melon, pineapple melon, Santa Claus melon, snake melon, watermelon); mint; muntries; mustard; nectarine; nursery stock (fruit seedlings and rose bushes only); nursery tree crops (including crops like maple, ash, dogwood); nut (including: almond, beech nut, cashew, chestnut, hickory nut, Brazil nut, macadamia nut (bush nut), filbert (hazelnut), pecan, pistachio, walnut (black and English/Persian); onion; orach; orange (including: sour and sweet); ornamentals; parsley; peas (including: English and garden); peach; peanut; pear (including: oriental and balsam); pepper; phalsa; plum (including: Chickasaw and Damson); plumcot; potato; prune (fresh); pummelo; pumpkin; purslane (including: garden and winter); quince; radicchio (red chicory); radish (including Oriental); rappini;

rhubarb; rye; salal; sea buckthorn; soybean; spinach (including: New Zealand, Malabar, Indian); squash, (including: summer, winter, butternut, straightneck, Acorn, crookneck, hubbard, scallop, spaghetti); sugar beet; sweet potato; swiss chard; tangelo; tangor; tobacco; tomatoes; tree nuts (orchard replant only); turf (including golf courses); turnip; vegetable marrow; wheat; yams; zucchini.

USE METHOD RESTRICTIONS

The use of this product is restricted to the methods described in this label.

Use in greenhouses or any other enclosed structure or confined area is prohibited. Application with handheld equipment is prohibited. Application with cement grinder and shredder equipment is prohibited. Open pour applications are prohibited. Do not apply this product through traveler or big gun application systems.

CERTIFIED APPLICATOR TRAINING

Any certified applicator supervising a soil fumigant application must have successfully completed one of the soil fumigant training programs listed on the following EPA website <http://www.epa.gov/fumiganttraining> for the active ingredient(s) in this product. The training must be completed in the time frames listed on the website. The FMP must document the date and location where the soil fumigant training program was completed.

HANDLERS

The following activities are prohibited from being performed by anyone other than persons who have been appropriately trained and equipped as handlers in accordance with the requirements in the Worker Protection Standard (40 CFR Part 170):

- Monitoring fumigant air concentrations;
- Cleaning up fumigant spills (this does not include emergency personnel not associated with the fumigation application);
- Handling or disposing of fumigant containers;
- Cleaning, handling, adjusting, or repairing the parts of fumigation equipment that may contain fumigant residues; and
- Performing any handling tasks as defined by the Worker Protection Standard (40 CFR 170).

The following activities are prohibited from being performed in the application block from the start of the application until the entry restricted period ends and in the buffer zone during the buffer zone period by anyone other than persons who have been appropriately trained and equipped as handlers in accordance with the requirements in WPS (40 CFR Part 170). (NOTE: persons repairing and monitoring tarps are considered handlers for the duration listed below). Prohibited activities (except for trained and equipped handlers) include:

- Participating in the application as supervisors, loaders, drivers, tractor co-pilots, shovelers, cross ditchers, or as other direct application participants;
- Installing, repairing, operating, or removing irrigation equipment;
- Performing scouting, crop advising, or monitoring tasks;
- Installing, perforating (cutting, punching, slicing, poking), or removing tarps; and
- Repairing or monitoring tarps until 14 days after application is complete if tarps are not perforated and removed during those 14 days. NOTE: See *Tarp Perforation and/or Removal* section on this labeling for requirements about when tarps are allowed to be perforated.

Handlers do not include local, state, or federal officials performing inspection, sampling, or other similar official duties.

PROTECTION FOR HANDLERS

Supervision Of Handlers

For all applications, except water run, from the start of the application until the application is complete a certified applicator must be at the application block in the line of sight of the application and must directly supervise all persons performing handling activities.

For water-run applications (i.e., drip), a certified applicator must be in the line of sight of the application at the start of the application, including set-up, calibration, and initiation of the application. A certified applicator may leave but must return at least every two hours to visually inspect the equipment to ensure proper functioning, and must directly supervise all WPS-trained handlers until the application is complete. WPS-trained handlers may perform these monitoring functions in place of a certified applicator but they must be under the supervision of a certified applicator and be able to communicate with a certified applicator at all times during monitoring activities via cell phone or other means.

For handling activities that take place after the application is complete until the entry restricted period expires, the certified applicator is not required to be on-site, but must have communicated in a manner that can be understood by the site owner and handlers responsible for carrying out those activities the information necessary to comply with the label and procedures described in the FMP (e.g., emergency response plans and procedures).

IMPORTANT: This requirement does not override the requirements in the Worker Protection Standard for Agricultural Pesticides for information exchange between operators of agricultural establishments and commercial pesticide applicators.

The certified applicator must provide **Fumigant Safe Handling Information** to each handler or confirm that within the past 12 months, each handler has received **Fumigant Safe Handling Information** in a manner that he/she can understand. **Fumigant Safe Handling Information** will be provided where this product is purchased or at <http://www.epa.gov/fumigantraining>.

Exclusion of Non Handlers from Application Block and Buffer Zone

The certified applicator supervising the application and the owner of the establishment where the application is taking place must make sure that all persons who are not trained and PPE-equipped and who are not performing one of the handling tasks as stated in this labeling are:

- excluded from application block during the entry restricted period, and
- excluded from the buffer zone during the buffer zone period (see buffer zone exemption for transit on roadways in Buffer Zone Requirements section).

Local, state, or federal officials performing inspection, sampling, or other similar official duties are not excluded from the application block or the buffer zone by this labeling. The certified applicator supervising the application and the owner of the establishment where the application is taking place are not authorized to, or responsible for, excluding those officials from the application block or the buffer zone.

Providing, Cleaning, and Maintaining PPE

The employer of any handler (as stated in this label) must make sure that all handlers are provided and correctly wear the required PPE. The PPE must be cleaned and maintained as required by the Worker Protection Standard for Agricultural Pesticides.

Air-Purifying Respirator Availability

The employer of any handler must confirm that an air-purifying respirator and appropriate cartridges of the type specified in the *PPE* section of this labeling are immediately available for each handler who will wear one. At least one handler must have the appropriate air-purifying respirator and cartridges available (see *Respirator Fit Testing, Medical Qualification, and Training* section for additional requirements).

Exception: After the application is complete, air-purifying respirators do not need to be made available for handlers performing fumigant site monitoring tasks outside of the buffer zone.

Respirator Fit Testing, Medical Qualification, And Training

Using a program that conforms to OSHA’s requirements (see 29 CFR Part 1910.134), employers must verify that any handler who uses a respirator is:

- Fit-tested and fit-checked;
- Trained; and
- Examined by a qualified medical practitioner to ensure physical ability to safely wear the style of respirator to be worn. A qualified medical practitioner is a physician or other licensed health care professional who will evaluate the ability of a worker to wear a respirator. The initial evaluation consists of a questionnaire that asks about medical conditions (such as a heart condition) that would be problematic for respirator use. If concerns are identified, then additional evaluations, such as a physical exam, might be necessary. The initial evaluation must be done before respirator use begins. Handlers must be reexamined by a qualified medical practitioner if their health status or respirator style or use-conditions change.

Upon request by local/state/federal/tribal enforcement personnel, employers must provide documentation demonstrating how they have complied with these requirements.

Respiratory Protection And Stop Work Triggers

The following procedures must be followed to determine whether an air-purifying respirator is required or if operations must cease for any person performing a handling task as stated in this label.

- If at any time any handler experiences sensory irritation (tearing, burning of the eyes or nose), then either:
 - An air-purifying respirator must be worn by all handlers who remain in the application block or surrounding buffer zone, or
 - Operations must cease and handlers not wearing an air-purifying respirator must leave the application block and surrounding buffer zone.
- Handlers can remove air-purifying respirators or resume operations if two consecutive breathing-zone samples taken at the handling site at least 15 minutes apart show that levels of MITC have decreased to less than 600 ppb (0.6 ppm), provided that handlers do not experience sensory irritation. During the collection of air samples, an air-purifying respirator must be worn by the handler taking the air samples. Samples must be taken at the location where the irritation was first experienced.
- When using monitoring devices to monitor air concentration levels, a direct read detection device, such as an electronic device or a colorimetric device (e.g., Draeger, Sensidyne) must be used. The devices must have sensitivity of at least 600 ppb (0.6 ppm) for MITC. Persons using direct read detection devices must follow the manufacturer’s directions.
- When breathing zone samples are required, they must be taken outside respiratory protection equipment and within a 10 inch radius of handler’s nose and mouth.
- When air-purifying respirators are worn, air monitoring samples must be collected at least every 2 hours in the breathing zone of a handler performing a representative handling task.
- If at any time: (1) a handler experiences sensory irritation when wearing an air-purifying respirator, or (2) a MITC air sample is greater than or equal to 6,000 ppb (6 ppm), then all handler activities must cease and handlers must be removed from the application block and surrounding buffer zone.
- Handlers can resume work activities without air-purifying respirators if two consecutive breathing-zone samples taken at the handling site at least 15 minutes apart show levels of MITC have decreased to less than 600 ppb (0.6 ppm), provided that handlers do not experience sensory irritation. During the collection of air samples an air-purifying respirator must be worn by the handler taking the air samples. Samples must be taken at the location where the irritation was first experienced or where sample(s) were greater than or equal to 6,000 ppb (6 ppm).
- Handlers can resume work activities if all of the following conditions exist provided that the appropriate air-purifying respirator is worn:

- Two consecutive breathing zone samples for MITC taken at the handling site at least 15 minutes apart must be less than 6,000 ppb (6 ppm),
- Handlers do not experience sensory irritation while wearing an air-purifying respirator, and
- Filter cartridges/canisters have been changed.
- During the collection of air samples an air-purifying respirator must be worn by the handler taking the air samples. Samples must be taken at the location where the irritation was first experienced or where sample(s) were greater than or equal to 6,000 ppb (6 ppm).

TARP PERFORATION AND/OR REMOVAL

IMPORTANT: Persons perforating, repairing, removing, and/or monitoring tarps are defined, within certain time limitations, as handlers (see *Handlers* section) and they must be provided the PPE and other protections for handlers as required on this labeling and in the Worker Protection Standard for Agricultural Pesticides.

- Tarps must not be perforated until a minimum of 5 days (120 hours) have elapsed after the application is complete, unless a weather condition exists which necessitates early tarp perforation or removal (see *Early Tarp Removal for Broadcast Applications Only* and *Early Tarp Perforation during Flood Prevention Activities for Bedded Applications Only* requirements).
- If tarps are perforated within 14 days after the application is complete, tarp removal must not begin until at least 2 hours after tarp perforation is complete.
- If tarps are perforated but not removed within 14 days after the application is complete, planting or transplanting must not begin until at least 48 hours after the tarp perforation is complete.
- If tarps are not perforated or removed within 14 days after the application is complete, planting or transplanting may take place while the tarps are being perforated.
- Each tarp panel used for broadcast fumigation must be perforated.
- Tarps may be perforated manually **ONLY** for the following situations:
 - At the beginning of each row where a coulter blade (or other device which performs similarly) is used on a motorized vehicle such as an ATV.
 - In fields that are 1 acre or less.
 - During flood prevention activities.
- In all other instances tarps must be perforated (cut, punched, poked or sliced) only by mechanical methods.
- Tarp perforation for broadcast fumigations must be completed before noon.
- For broadcast fumigations, tarps must not be perforated if rainfall is expected within 12 hours.
- Early Tarp Removal for Broadcast Applications Only:
 - Tarps may be removed before the required 5 days (120 hours) if adverse weather conditions have compromised the integrity of the tarp, provided that the compromised tarp poses a safety hazard. *Adverse weather* includes high wind, hail, or storms that blow tarps off the field and create a hazard, e.g., tarps blowing into power lines and onto roads. A *compromised tarp* is a tarp that due to an adverse weather condition is no longer performing its intended function and is creating a hazard.
- Early Tarp Perforation during Flood Prevention Activities for Bedded Applications Only:
 - Tarp perforation is allowed before the 5 days (120 hours) have elapsed.
 - Tarps must be immediately retucked and packed after soil removal.

ENTRY RESTRICTED PERIOD AND NOTIFICATION

Entry Restricted Period

Entry into the application block (including early entry that would otherwise be permitted under the WPS) by any person – other than a correctly trained and PPE-equipped handler who is performing a handling task listed on this labeling – is **PROHIBITED** from the start of the application until:

- 5 days (120 hours) after the application is complete for untarped applications, or
- 5 days (120 hours) after application is complete if tarps are not perforated and removed for at least 14 days after the application is complete, or
- 48 hours after tarp perforation is complete if tarps will be perforated within 14 days after the application is complete and will not be removed for at least 14 days after the application is complete, or

- Tarp removal is completed if tarps are both perforated and removed less than 14 days after the application is complete.

NOTE:

- See *Tarp Perforation and/or Removal* section on this labeling for requirements about when tarps are allowed to be perforated.
- If early tarp removal occurs for a broadcast application the entry restricted period is a minimum of 5 days after the application is complete.
- When listing application information for soil fumigant applications to comply with part 170.122 of the WPS, list the entry restricted period time frame in place of the REI.

Notification

Notify workers of the application by warning them orally and by posting Fumigant Treated Area signs. The signs must bear the skull and crossbones symbol and state:

- "DANGER/PELIGRO,"
- "Area under fumigation, DO NOT ENTER/NO ENTRE,"
- "Metam Sodium in USE,"
- The date and time of fumigation,
- The date and time entry restricted period is over,
- "METAM 376", and
- Name, address, and telephone number of the certified applicator in charge of the fumigation.

Post the Fumigant Treated Area sign instead of the WPS sign for this application but follow all WPS requirements pertaining to location, legibility, text size, and sign size (40 CFR § 170.120).

Post the Fumigant Treated Area signs at all entrances to the application block no sooner than 24 hours prior to application.

Fumigant Treated Area signs must remain posted for no less than the duration of the entry restricted period. Fumigant Treated Area signs must be removed within 3 days after the end of the entry restricted period.

MANDATORY GOOD AGRICULTURAL PRACTICES (GAPs)

The following GAPs must be followed during all fumigant applications.

Shank Applications

Weather Conditions

- To determine if unfavorable weather conditions exist or are predicted (see Identifying Unfavorable Weather Conditions section) and whether an application should proceed, the National Weather Service weather forecast must be checked by the certified applicator supervising the application:
 - on the day of, but prior to the start of the application, and
 - on a daily basis during the application if the time period from the start of the application until the application is complete is greater than 24 hours.
- Do not apply if an air stagnation advisory issued by the National Weather Service is in effect for the area in which the application is planned, during the application, or the 48 hours after the application is complete.
- Do not apply if light wind conditions (< 2 mph) are forecast to persist for more than 18 consecutive hours from the time the application starts until 48 hours after the application is complete.
- Detailed National Weather Service forecasts for local weather conditions, wind speed, and air stagnation advisories may be obtained on-line at: <http://www.nws.noaa.gov>, on NOAA weather radio, or by contacting your local National Weather Service Forecasting Office.

Identifying Unfavorable Weather Conditions

- Unfavorable weather conditions block upward movement of air, which results in trapping fumigant vapors near the ground. The resulting air mass can move off-site in unpredictable directions. These conditions typically exist within an hour prior to sunset and continue past sunrise and may persist as late as noontime. Unfavorable conditions are common on nights with limited cloud cover and light to no wind and their presence can be indicated by ground fog or smog and can also be identified by smoke from a ground source that flattens out below a ceiling layer and moves laterally in a concentrated cloud.

Soil Conditions, Injection Depth, and Soil Sealing

- Soil must be in good tilth, free of large clods, and tilled at a minimum to the depth of the treatment zone. Large clods can prevent effective soil sealing and reduce effectiveness of the application. If subsurface soil compaction layers (hardpans) are present within the intended fumigation treatment zone, a deep tillage to fracture these layers must occur prior to or during the soil fumigant application.
- Plant residue that is present must not interfere with the application or the soil seal. Non-decomposed plant material may harbor pests that will not be controlled by fumigation. Crop residue that is present must lie flat to permit the soil to be sealed effectively and limit the natural “chimneys” that may occur in the soil when plant residue is present. These “chimneys” allow the soil fumigants to move through the soil quickly and escape into the atmosphere. This may create potentially harmful conditions for workers and bystanders and limits the efficacy of the fumigant. Plant residue on the field serves to prevent soil erosion from both wind and water.

The injection point for bedded and broadcast shank injection applications shall be a minimum of 3 inches from the final soil/air interface. Chisel traces must be eliminated following an application and the soil surface must be sealed immediately after application using one or more of the following methods:

- Compaction with a bed-shaper, roller, press wheel, coil packer, ring packer, or similar device, OR
- Covering the treated soil with 3-6 inches of untreated soil, OR
- Applying a minimum of a 1/4-inch of water beginning immediately after application begins and completing the water treatment within four hours, OR
- Covering treated area with a tarp.

Tarps (when tarps are used in METAM 376 applications)

- A written tarp plan must be developed and included in the FMP.
- Once a tarp is perforated, the application is no longer considered tarped.
- Tarps must be installed immediately after the fumigant is applied to the soil.

Soil Temperature

- At the beginning of the application, the soil temperature at the injection depth must be between 35° and 90°F.
- If air temperatures have been above 100°F in any of the three days prior to application, then soil temperature must be measured and recorded in the FMP. Record temperature measurements at the application depth or 12 inches, whichever is shallower.

Soil Moisture

- The soil moisture in the top six inches of soil must be between 60% to 80% of available water capacity immediately prior to the application, subject to the exception below.
- EXCEPTION: In areas where soil moisture must exceed available water capacity to form a bed (e.g., certain regions in Florida), soil moisture content may exceed 80%.
- If appropriate measuring equipment is not used to determine whether the soil moisture in the top six inches of soil is between 60% to 80% available water capacity immediately prior to the application, the

USDA Feel and Appearance Method test may be used to estimate whether the 60% to 80% soil moisture content requirement is met:

- For **coarse** textured soils (fine sand and loamy fine sand), there must be enough moisture (50% to 75% of available water capacity) to form a weak ball with loose and clustered sand grains on fingers, darkened color, moderate water staining on fingers, will not ribbon.
- For **moderately coarse** textured soils (sandy loam and fine sandy loam), there must be enough moisture (50% to 75% of available water capacity) to form a ball with defined finger marks, very light soil/water staining on fingers, darkened color will not stick.
- For **medium** textured soils (sandy clay loam, loam, and silt loam), there must be enough moisture (50% to 75% of available water capacity) to form a ball, very light staining on fingers, darkened color, pliable, and forms a weak ribbon between the thumb and forefinger.
- For **fine** textured soils (clay, clay loam, and silty clay loam), there must be enough moisture (50% to 75% of available water capacity) to form a smooth ball with defined finger marks, light soil/water staining on fingers, ribbons between thumb and forefinger.
- For **fields with more than one soil texture**, soil moisture content in the lightest textured (most sandy) areas must comply with this soil moisture requirement. The field may be divided into areas of similar soil texture and the soil moisture of each area should be adjusted as needed. Coarser textured soils can be fumigated under conditions of higher soil moisture than finer textured soils; however, if the soil moisture is too high, fumigant movement will be retarded and effectiveness of the treatment will be reduced. Previous and/or local experience with the soil to be treated or the crop to be planted can often serve as a guide to conditions that will be acceptable. If there is uncertainty in determining the soil moisture content of the area to be treated, a local extension service or soil conservationist or pest control advisor (agriculture consultant) should be consulted for assistance.
- If there is insufficient moisture throughout the top six inches of soil immediately prior to the application, the soil moisture must be adjusted. If there is adequate soil moisture below six inches, soil moisture can be brought to the surface by tillage before or during injection. To conserve existing soil moisture, tillage should be done as close to the time of application as possible.

Application and Equipment Considerations

- Do not apply or allow fumigant to spill onto the soil surface. Injectors must be below the soil surface before product flow begins. Each injection line must either have a check valve located as close as possible to the final injection point, or drain/purge the line of any remaining fumigant prior to lifting injection shanks from the ground. Do not lift injection shanks from the soil until the shut-off valve has been closed and the fumigant has been depressurized (passively drained) or purged (actively forced out via air compressor) from the system.
- Application equipment must be in good working order.
- All tanks, hoses, fittings, valves and connections must be serviceable, tightened, sealed and not leaking.
- Dry disconnect couplings (closed transfer system) must be installed on tanks and transfer hoses.
- Sight gauges and pressure gauges must be properly functioning.
- Nozzles and metering devices must be the correct size and sealed and unobstructed.
- Use only tanks, hoses and fittings designed to withstand the pressure of the system and resistant to metam.
- Each nozzle must be equipped with a flow monitor, e.g. mechanical, electronic, or Red-ball type monitor.
- For undiluted product, aluminum, brass, copper, galvanized iron, and zinc materials cannot be used.
- All rigs must include a filter to remove any particulates from the fumigant, and a check valve that is

visible to the tractor driver during application to prevent backflow of the fumigant into the pressurizing cylinder.

- All rigs must include a flow meter or a flow monitoring device.
- All rigs must have a constant pressure system with orifice plates to ensure the proper amount of fumigant is applied.
- Valves (e.g., backflow, shut-off), vacuum relief valves, and low pressure drains must be in place, operational, and leak free.
- Use only positive displacement pumps. Do NOT use impellers made of brass, aluminum, or galvanized material.
- Before using a fumigation rig for the first time, or when preparing it for use after storage, the operator must check the following items carefully:
 - Check the filter, and clean or replace the filter element as required.
 - Check all tubes and chisels/shanks to make sure they are free of debris and obstructions.
 - Check and clean the orifice plates.

Spray Blade Applications (includes bed-top blade and soil cap applications)

Weather Conditions

- To determine if unfavorable weather conditions exist or are predicted (see Identifying Unfavorable Weather Conditions section) and whether application should proceed, the National Weather Service weather forecast must be checked by the certified applicator supervising the application:
 - on the day of, but prior to the start of the application, and
 - on a daily basis during the application if the time period from the start of the application until the application is complete is greater than 24 hours.
- Do not apply if an air stagnation advisory issued by the National Weather Service is in effect for the area in which the application is planned, during the application, or the 48 hours after the application is complete.
- Do not apply if light wind conditions (< 2 mph) are forecast to persist for more than 18 consecutive hours from the time the application starts until 48 hours after the application is complete.
- Detailed National Weather Service forecasts for local weather conditions, wind speed, and air stagnation advisories may be obtained on-line at: <http://www.nws.noaa.gov>, on NOAA weather radio, or by contacting your local National Weather Service Forecasting Office.

Identifying Unfavorable Weather Conditions

- Unfavorable weather conditions block upward movement of air, which results in trapping fumigant vapors near the ground. The resulting air mass can move off-site in unpredictable directions. These conditions typically exist prior to sunset and continue past sunrise and persist as late as noontime. Unfavorable conditions are common on nights with limited cloud cover and light to no wind and their presence can be indicated by ground fog or smog and can also be identified by smoke from a ground source that flattens out below a ceiling layer and moves laterally in a concentrated cloud.

Soil Conditions, Injection Depth, and Soil Sealing

- Soil must be in good tilth, free of large clods, and tilled at a minimum to the depth of the treatment zone. Large clods can prevent effective soil sealing and reduce effectiveness of the application. If subsurface soil compaction layers (hardpans) are present within the intended fumigation treatment zone, a deep tillage to fracture these layers must occur prior to or during the soil fumigant application.
- Plant residue that is present must not interfere with the application or the soil seal. Non-decomposed plant material may harbor pests that will not be controlled by fumigation. Crop residue that is present must lie

flat to permit the soil to be sealed effectively and limit the natural "chimneys" that may occur in the soil when plant residue is present. These "chimneys" allow the soil fumigants to move through the soil quickly and escape into the atmosphere. This may create potentially harmful conditions for workers and bystanders and limits the efficacy of the fumigant. Plant residue on the field serves to prevent soil erosion from both wind and water.

Apply the product mixture on the soil immediately ahead of the bed-shaping equipment or tiller. The soil surface must be compacted immediately after application using one or more of the following methods:

- Compaction with a bed-shaper, roller, press wheel, coil packer, ring packer, or similar device, OR
- Covering the treated soil with 3-6 inches of untreated soil, OR
- Applying a minimum of a 1/4-inch of water beginning immediately after application begins and completing the water treatment within four hours, OR
- Covering treated area with a tarp.

Tarps (when tarps are used in METAM 376 applications)

- A written tarp plan must be developed and included in the FMP.
- Once a tarp is perforated, the application is no longer considered tarped.

Soil Temperature

- At the beginning of the application, the soil temperature at the injection depth must be between 35° and 90°F.
- If air temperatures have been above 100°F in any of the three days prior to application, then soil temperature must be measured and recorded in the FMP. Record temperature measurements at the application depth or 12 inches, whichever is shallower.

Soil Moisture

- The soil moisture in the top six inches of soil must be between 60% to 80% of available water capacity immediately prior to the application, subject to the exception below.
- EXCEPTION: In areas where soil moisture must exceed available water capacity to form a bed (e.g., certain regions in Florida), soil moisture content may exceed 80%.
- If appropriate measuring equipment is not used to determine whether the soil moisture in the top six inches of soil is between 60% to 80% available water capacity immediately prior to the application, the USDA Feel and Appearance Method test may be used to estimate whether the 60% to 80% soil moisture content requirement is met:
 - For **coarse** textured soils (fine sand and loamy fine sand), there must be enough moisture (50% to 75% of available water capacity) to form a weak ball with loose and clustered sand grains on fingers, darkened color, moderate water staining on fingers, will not ribbon.
 - For **moderately coarse** textured soils (sandy loam and fine sandy loam), there must be enough moisture (50% to 75% of available water capacity) to form a ball with defined finger marks, very light soil/water staining on fingers, darkened color will not stick.
 - For **medium** textured soils (sandy clay loam, loam, and silt loam), there must be enough moisture (50% to 75% of available water capacity) to form a ball, very light staining on fingers, darkened color, pliable, and forms a weak ribbon between the thumb and forefinger.
 - For **fine** textured soils (clay, clay loam, and silty clay loam), there must be enough moisture (50% to 75% of available water capacity) to form a smooth ball with defined finger marks, light soil/water staining on fingers, ribbons between thumb and forefinger.
 - For **fields with more than one soil texture**, soil moisture content in the lightest textured (most sandy) areas must comply with this soil moisture requirement. The field may be divided into areas of similar soil texture and the soil moisture of each area should be adjusted as needed. Coarser textured soils can be fumigated under conditions of higher soil moisture than finer textured soils; however, if the soil moisture is too high, fumigant movement will be retarded and effectiveness of the treatment will be reduced. Previous and/or local experience with the soil to be treated or the crop to be planted can often serve as a guide to conditions that will be acceptable. If

there is uncertainty in determining the soil moisture content of the area to be treated, a local extension service or soil conservationist or pest control advisor (agriculture consultant) should be consulted for assistance.

- If there is insufficient moisture throughout the top six inches of soil immediately prior to the application, the soil moisture must be adjusted. If there is adequate soil moisture below six inches, soil moisture can be brought to the surface by tillage before or during injection. To conserve existing soil moisture, tillage should be done as close to the time of application as possible.

Application and Equipment Considerations

- Do not apply or allow fumigant to drain or drip onto the soil surface
- Application equipment must be in good working order.
- All tanks, hoses, fittings, valves and connections must be serviceable, tightened, sealed and not leaking.
- Dry disconnect couplings (closed transfer system) must be installed on all tanks and transfer hoses.
- Sight gauges and pressure gauges must be properly functioning.
- Nozzles and metering devices must be the correct size and sealed and unobstructed.
- Use only tanks, hoses and fittings designed to withstand the pressure of the system and resistant to metam.
- Each nozzle must be equipped with a flow monitor, e.g. mechanical, electronic, or Red-ball type monitor.
- For undiluted product, aluminum, brass, copper, galvanized iron, and zinc materials cannot be used.
- All rigs must include a filter to remove any particulates from the fumigant, and a check valve that is visible to the tractor driver during application to prevent backflow of the fumigant into the pressurizing cylinder.
- Before using a fumigation rig for the first time, or when preparing it for use after storage, the operator must check the following items carefully:
 - Check the filter, and clean or replace the filter element as required.
 - Check all tubes and chisels to make sure they are free of debris and obstructions.
 - Check and clean the orifice plates.

Rotary Tiller Applications

Weather Conditions

- To determine if unfavorable weather conditions exist or are predicted (see Identifying Unfavorable Weather Conditions section) and whether application should proceed, the National Weather Service weather forecast must be checked by the certified applicator supervising the application:
 - on the day of, but prior to the start of the application, and
 - on a daily basis during the application if the time period from the start of the application until the application is complete is greater than 24 hours.
- Do not apply if an air stagnation advisory issued by the National Weather Service is in effect for the area in which the application is planned, during the application, or the 48 hours after the application is complete.
- Do not apply if light wind conditions (< 2 mph) are forecast to persist for more than 18 consecutive hours from the time the application starts until 48 hours after the application is complete.
- Detailed National Weather Service forecasts for local weather conditions, wind speed, and air stagnation

advisories may be obtained on-line at: <http://www.nws.noaa.gov>, on NOAA weather radio, or by contacting your local National Weather Service Forecasting Office.

Identifying Unfavorable Weather Conditions

- Unfavorable weather conditions block upward movement of air, which results in trapping fumigant vapors near the ground. The resulting air mass can move off-site in unpredictable directions. These conditions typically exist prior to sunset and continue past sunrise and persist as late as noontime. Unfavorable conditions are common on nights with limited cloud cover and light to no wind and their presence can be indicated by ground fog or smog and can also be identified by smoke from a ground source that flattens out below a ceiling layer and moves laterally in a concentrated cloud.

Soil Conditions, Injection Depth, and Soil Sealing

- Soil must be in good tilth, free of large clods, and tilled at a minimum to the depth of the treatment zone. Large clods can prevent effective soil sealing and reduce effectiveness of the application. If subsurface soil compaction layers (hardpans) are present within the intended fumigation treatment zone, a deep tillage to fracture these layers must occur prior to or during the soil fumigant application.
- Plant residue that is present must not interfere with the application or the soil seal. Non-decomposed plant material may harbor pests that will not be controlled by fumigation. Crop residue that is present must lie flat to permit the soil to be sealed effectively and limit the natural "chimneys" that may occur in the soil when plant residue is present. These "chimneys" allow the soil fumigants to move through the soil quickly and escape into the atmosphere. This may create potentially harmful conditions for workers and bystanders and limits the efficacy of the fumigant. Plant residue on the field serves to prevent soil erosion from both wind and water.

Spray or drip the product mixture on the soil immediately ahead of the bed-shaping equipment or tiller. The soil surface must be compacted immediately after application using one or more of the following methods:

- Compaction with a bed-shaper, roller, press wheel, coil packer, ring packer, or similar device, OR
- Covering the treated soil with 3-6 inches of untreated soil, OR
- Applying a minimum of a 1/4-inch of water beginning immediately after application begins and completing the water treatment within four hours, OR
- Covering treated area with a tarp.

Tarps (when tarps are used in METAM 376 applications)

- A written tarp plan must be developed and included in the FMP.
- Once a tarp is perforated, the application is no longer considered tarped.

Soil Temperature

- At the beginning of the application, the soil temperature at the injection depth must be between 35° and 90°F.
- If air temperatures have been above 100°F in any of the three days prior to application, then soil temperature must be measured and recorded in the FMP. Record temperature measurements at the application depth or 12 inches, whichever is shallower.

Soil Moisture

- The soil moisture in the top six inches of soil must be between 60% to 80% of available water capacity immediately prior to the application, subject to the exception below.
- EXCEPTION: In areas where soil moisture must exceed available water capacity to form a bed (e.g., certain regions in Florida), soil moisture content may exceed 80%.
- If appropriate measuring equipment is not used to determine whether the soil moisture in the top six inches of soil is between 60% to 80% available water capacity immediately prior to the application, the

USDA Feel and Appearance Method test may be used to estimate whether the 60% to 80% soil moisture content requirement is met:

- For **coarse** textured soils (fine sand and loamy fine sand), there must be enough moisture (50% to 75% of available water capacity) to form a weak ball with loose and clustered sand grains on fingers, darkened color, moderate water staining on fingers, will not ribbon.
- For **moderately coarse** textured soils (sandy loam and fine sandy loam), there must be enough moisture (50% to 75% of available water capacity) to form a ball with defined finger marks, very light soil/water staining on fingers, darkened color will not stick.
- For **medium** textured soils (sandy clay loam, loam, and silt loam), there must be enough moisture (50% to 75% of available water capacity) to form a ball, very light staining on fingers, darkened color, pliable, and forms a weak ribbon between the thumb and forefinger.
- For **fine** textured soils (clay, clay loam, and silty clay loam), there must be enough moisture (50% to 75% of available water capacity) to form a smooth ball with defined finger marks, light soil/water staining on fingers, ribbons between thumb and forefinger.
- For **fields with more than one soil texture**, soil moisture content in the lightest textured (most sandy) areas must comply with this soil moisture requirement. The field may be divided into areas of similar soil texture and the soil moisture of each area should be adjusted as needed. Coarser textured soils can be fumigated under conditions of higher soil moisture than finer textured soils; however, if the soil moisture is too high, fumigant movement will be retarded and effectiveness of the treatment will be reduced. Previous and/or local experience with the soil to be treated or the crop to be planted can often serve as a guide to conditions that will be acceptable. If there is uncertainty in determining the soil moisture content of the area to be treated, a local extension service or soil conservationist or pest control advisor (agriculture consultant) should be consulted for assistance.
- If there is insufficient moisture throughout the top six inches of soil immediately prior to the application, the soil moisture must be adjusted. If there is adequate soil moisture below six inches, soil moisture can be brought to the surface by tillage before or during injection. To conserve soil moisture, tillage should be done as close to the time of application as possible.

Application and Equipment Considerations

- Do not apply or allow fumigant to drain or drip onto the soil surface.
- Dry disconnect couplings (closed transfer system) must be installed on all tanks and transfer hoses.
- Application equipment must be in good working order.
- All tanks, hoses, fittings, valves and connections must be serviceable, tightened, sealed and not leaking.
- Sight gauges and pressure gauges must be properly functioning.
- Nozzles and metering devices must be the correct size and sealed and unobstructed.
- Use only tanks, hoses and fittings designed to withstand the pressure of the system and resistant to metam.
- Each nozzle must be equipped with a flow monitor, e.g. mechanical, electronic, or Red-ball type monitor.
- For undiluted product, aluminum, brass, copper, galvanized iron, and zinc materials cannot be used.
- All rigs must include a filter to remove any particulates from the fumigant, and a check valve that is visible to the tractor driver during application to prevent backflow of the fumigant into the pressurizing cylinder.
- Before using a fumigation rig for the first time, or when preparing it for use after storage, the operator must check the following items carefully:

- Check the filter, and clean or replace the filter element as required.
- Check all tubes and chisels shanks to make sure they are free of debris and obstructions.
- Check and clean the orifice plates.

Drip Applications

Weather Conditions

- To determine if unfavorable weather conditions exist or are predicted (see *Identifying Unfavorable Weather Conditions* section) and whether application should proceed, the National Weather Service weather forecast must be checked by the certified applicator supervising the application:
 - on the day of, but prior to the start of the application, and
 - on a daily basis during the applications if the time period from the start of the application until the application is complete is greater than 24 hours.
- Do not apply if an air-stagnation advisory issued by the National Weather Service is in effect for the area in which the application is planned, during the application, or the 48 hours after the application is complete.
- Do not apply if light wind conditions (< 2 mph) are forecast to persist for more than 18 consecutive hours from the time the application starts until 48 hours after the application is complete.
- Detailed National Weather Service forecasts for local weather conditions, wind speed, and air stagnation advisories may be obtained on-line at: <http://www.nws.noaa.gov>, on NOAA weather radio, or by contacting your local National Weather Service Forecasting Office.

Identifying Unfavorable Weather Conditions

- Unfavorable weather conditions block upward movement of air, which results in trapping fumigant vapors near the ground. The resulting air mass can move off-site in unpredictable directions. These conditions typically exist prior to sunset and continue past sunrise and persist as late as noontime. Unfavorable conditions are common on nights with limited cloud cover and light to no wind, and their presence can be indicated by ground fog or smog and can also be identified by smoke from a ground source that flattens out below a ceiling layer and moves laterally in a concentrated cloud.

Soil Conditions

- Soil must be in good tilth, free of large clods, and tilled at a minimum to the depth of the treatment zone. Large clods can prevent effective soil sealing and reduce effectiveness of the application. If subsurface soil compaction layers (hardpans) are present within the intended fumigation treatment zone, a deep tillage to fracture these layers must occur prior to or during the soil fumigant application.
- Plant residue that is present must not interfere with the application or the soil seal. Non-decomposed plant material may harbor pests that will not be controlled by fumigation. Crop residue that is present must lie flat to permit the soil to be sealed effectively and limit the natural "chimneys" that may occur in the soil when plant residue is present. These "chimneys" allow the soil fumigants to move through the soil quickly and escape into the atmosphere. This may create potentially harmful conditions for workers and bystanders and limits the efficacy of the fumigant. Plant residue on the field serves to prevent soil erosion from both wind and water.

Soil Temperature

- At the beginning of the application, the soil temperature must be between 35° and 90°F, measured at 3 inches in depth.
- If air temperatures have been above 100°F in any of the three days prior to application, then soil temperature must be measured and recorded in the FMP. Record temperature measurements at the application depth or 12 inches, whichever is shallower.

Soil Moisture

- The soil moisture in the top six inches of soil must be between 60% to 80% of available water capacity immediately prior to the application, subject to the exception below.
- EXCEPTION: In areas where soil moisture must exceed available water capacity to form a bed (e.g., certain regions in Florida), soil moisture content may exceed 80%.
- If appropriate measuring equipment is not used to determine whether the soil moisture in the top six inches of soil is between 60% to 80% available water capacity immediately prior to the application, the USDA Feel and Appearance Method test may be used to estimate whether the 60% to 80% soil moisture content requirement is met:
 - For **coarse** textured soils (fine sand and loamy fine sand), there must be enough moisture (50% to 75% of available water capacity) to form a weak ball with loose and clustered sand grains on fingers, darkened color, moderate water staining on fingers, will not ribbon.
 - For **moderately coarse** textured soils (sandy loam and fine sandy loam), there must be enough moisture (50% to 75% of available water capacity) to form a ball with defined finger marks, very light soil/water staining on fingers, darkened color will not stick.
 - For **medium** textured soils (sandy clay loam, loam, and silt loam), there must be enough moisture (50% to 75% of available water capacity) to form a ball, very light staining on fingers, darkened color, pliable, and forms a weak ribbon between the thumb and forefinger.
 - For **fine** textured soils (clay, clay loam, and silty clay loam), there must be enough moisture (50% to 75% of available water capacity) to form a smooth ball with defined finger marks, light soil/water staining on fingers, ribbons between thumb and forefinger.
 - For **fields with more than one soil texture**, soil moisture content in the lightest textured (most sandy) areas must comply with this soil moisture requirement. The field may be divided into areas of similar soil texture and the soil moisture of each area should be adjusted as needed. Coarser textured soils can be fumigated under conditions of higher soil moisture than finer textured soils; however, if the soil moisture is too high, fumigant movement will be retarded and effectiveness of the treatment will be reduced. Previous and/or local experience with the soil to be treated or the crop to be planted can often serve as a guide to conditions that will be acceptable. If there is uncertainty in determining the soil moisture content of the area to be treated, a local extension service or soil conservationist or pest control advisor (agriculture consultant) should be consulted for assistance.
- If there is insufficient moisture throughout the top six inches below the surface of soil immediately prior to the application, the soil moisture must be adjusted. If there is adequate soil moisture below six inches, soil moisture can be brought to the surface by tillage prior to the application. To conserve soil moisture tillage should be done as close to the time of application as possible.

Tarps (when tarps are used in METAM 376 applications)

- A written tarp plan must be developed and included in the FMP.
- Application to blocks with previously laid and perforated tarps is allowed, but once a tarp is perforated, the application is no longer considered tarped. Therefore, the application would not be eligible for tarp buffer zone credits.

Flushing Drip Irrigation Lines

- After application of the fumigant, continue to irrigate the area with water to flush the injection and irrigation system with untreated water. Do not allow fumigant to remain in the irrigation system after the application is complete. The total volume of water must be adequate to completely remove the fumigant from the irrigation system, but should be less than the amount that could over-saturate the beds. If common lines are used for both the fumigant application and the water treatment/seal (if applied), these lines must be adequately flushed before starting the water treatment/seal and/or normal irrigation practices.

Application and Equipment Considerations

- Anti-siphon and backflow prevention devices must be installed and in working order.
- Tanks must be in good condition to ensure product does not spill or leak.
- Tanks must have sealable covers on access ports.
- Tanks must have proper pesticide labels affixed to them.
- All tanks, hoses, fittings, valves and connections must be serviceable, tightened, sealed and not leaking.
- Use only tanks, hoses and fittings designed to withstand the pressure of the system and resistant to metam.
- For undiluted product, aluminum, brass, copper, galvanized iron, and zinc materials cannot be used.
- The drip irrigation system (main lines, headers, drip tape) must be thoroughly checked for leaks before the start of the application. An adequate run-time and pressure are needed to detect leaks. Look for puddling along major pipes (holes on pipes or leaky joints), at the top and ends of rows (leaky connections, open drip tape), in the furrows and on the bed surface (damaged drip tape, malfunctioning emitters).
- To inject fumigant, use a metering system, effectively designed and constructed of materials that are compatible with the fumigant and capable of being fitted with system interlocking controls.
- Nozzles and metering devices are of correct size and are sealed and unobstructed.
- The system must contain a functional check valve, vacuum relief valve, inspection port, and low-pressure drain appropriately located on the irrigation pipeline to prevent water source contamination from backflow.
- The pesticide injection pipeline must contain a functional, automatic, quick-closing check valve to prevent the flow of fluid toward the injection pump.
- The pesticide injection pipeline must also contain a functional, normally-closed, solenoid-operated valve located on the intake side of the injection pump and connected to the system interlock to prevent fluid from being withdrawn from the supply tank when the irrigation system is either automatically or manually shut down.
- The system must contain functional interlocking controls to automatically shut off the pesticide injection pump when the water pump motor stops.
- The irrigation line or water pump must include a functional pressure switch that will stop the water pump motor when the water pressure decreases to the point where pesticide distribution is adversely affected.
- Systems must use a metering pump such as a positive displacement injection pump (e.g., diaphragm pump) effectively designed and constructed of materials that are compatible with pesticides and capable of being fitted with a system interlock.
- Any alternatives to the required safety devices in this label must conform to the list of EPA-approved alternative devices.

MAXIMUM APPLICATION RATES FOR PRE-PLANT SOIL FUMIGATION

Maximum Application Rates for Pre-Plant Soil Uses

- Maximum application rate is 320 lbs metam sodium/A (85 gallons per treated acre).

CALCULATING THE BROADCAST EQUIVALENT APPLICATION RATE


To calculate the broadcast equivalent rate for bedded or strip applications the following information is needed:

- pounds (or gallons) of product per treated acre
- strip or bed bottom width (inches)
- center-to-center row spacing (inches)
- application block size (acres)

Pounds (or gallons) of product **per treated acre** is the ratio of total amount of product applied to the size of the **total area treated** (e.g., the rate of product applied in the bed). For bedded or strip applications, the **total area treated** is the summation of the area (i.e., length x width) of each treated bed bottom or strip that is located within the application block as shown by the black areas in Figure 1 (e.g., black areas are 0.6A or 60% of the area within the application block). The area of the space between the beds/strips is not factored in the total area treated.

The **application block size** is the acreage within the perimeter of the fumigated portion of a field (including furrows, irrigation ditches, roadways). The perimeter of the application block is the border that connects the outermost edges of total area treated with the fumigant product.

Figure 1. Bedded/Strip Application (1 acre application block)

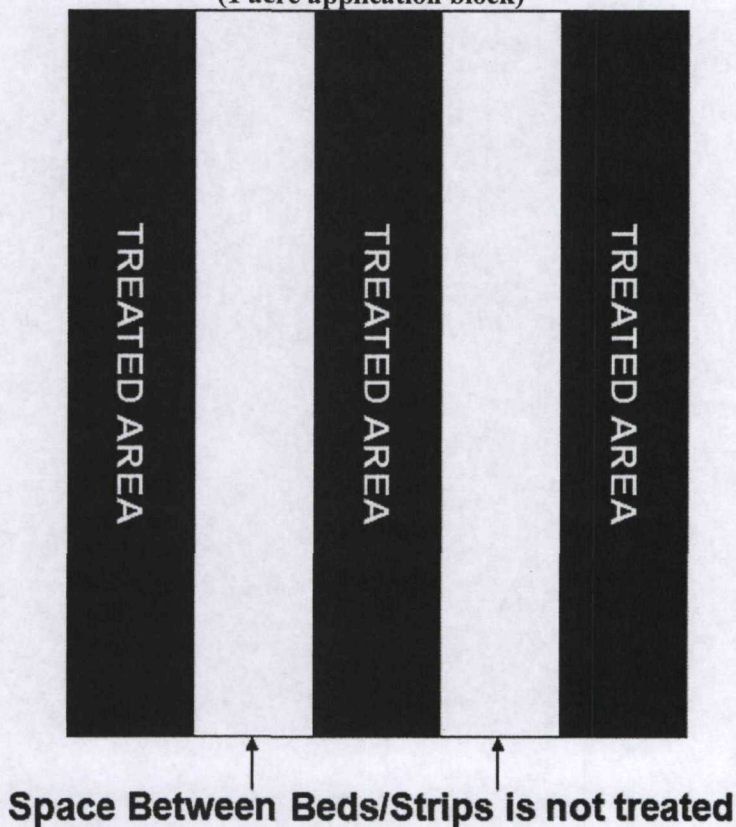


The "broadcast equivalent rate" must be calculated with the following formula:

$$\begin{array}{l}
 \text{Broadcast equivalent rate} \\
 \text{(pounds (or gallons)} \\
 \text{product/acre)}
 \end{array}
 =
 \frac{\text{strip or bed bottom width} \\
 \text{(inches)}}{\text{center-to-center row} \\
 \text{spacing} \\
 \text{(inches)}}
 \times
 \begin{array}{l}
 \text{pounds (or} \\
 \text{gallons) of} \\
 \text{product/} \\
 \text{treated acre} \\
 \text{applied in the} \\
 \text{strip or bed}
 \end{array}$$

- The bed width must be measured from the bottom of the bed.
- The center-to-center row spacing must be calculated as shown in Figure 2.
- If there are any ditches, waterways, drive rows and other areas that are not fumigated that are in the application block, multiply the above broadcast equivalent equation by **(total area of strips or beds + row spacing)/(application block size)**. A sample calculation is provided below.


Figure 2. Center Row Spacing

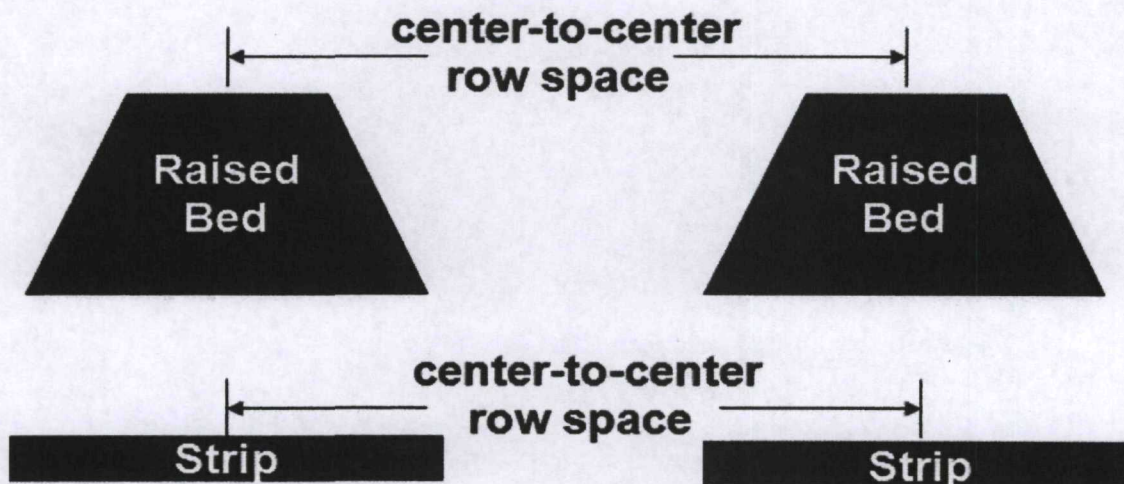

Sample broadcast equivalent rate calculation

Assumptions:

- Application method is shank bedded
- Bed width is 30 inches (measured at the bottom of bed)
- Center-to-center row spacing is 60 inches
- 200 pounds of product per treated acre is applied in the beds
- Total application block size is 10 acres
- Ditch in the middle of application block is 0.25 acres
- Area of beds + row spacing is 9.75 acres

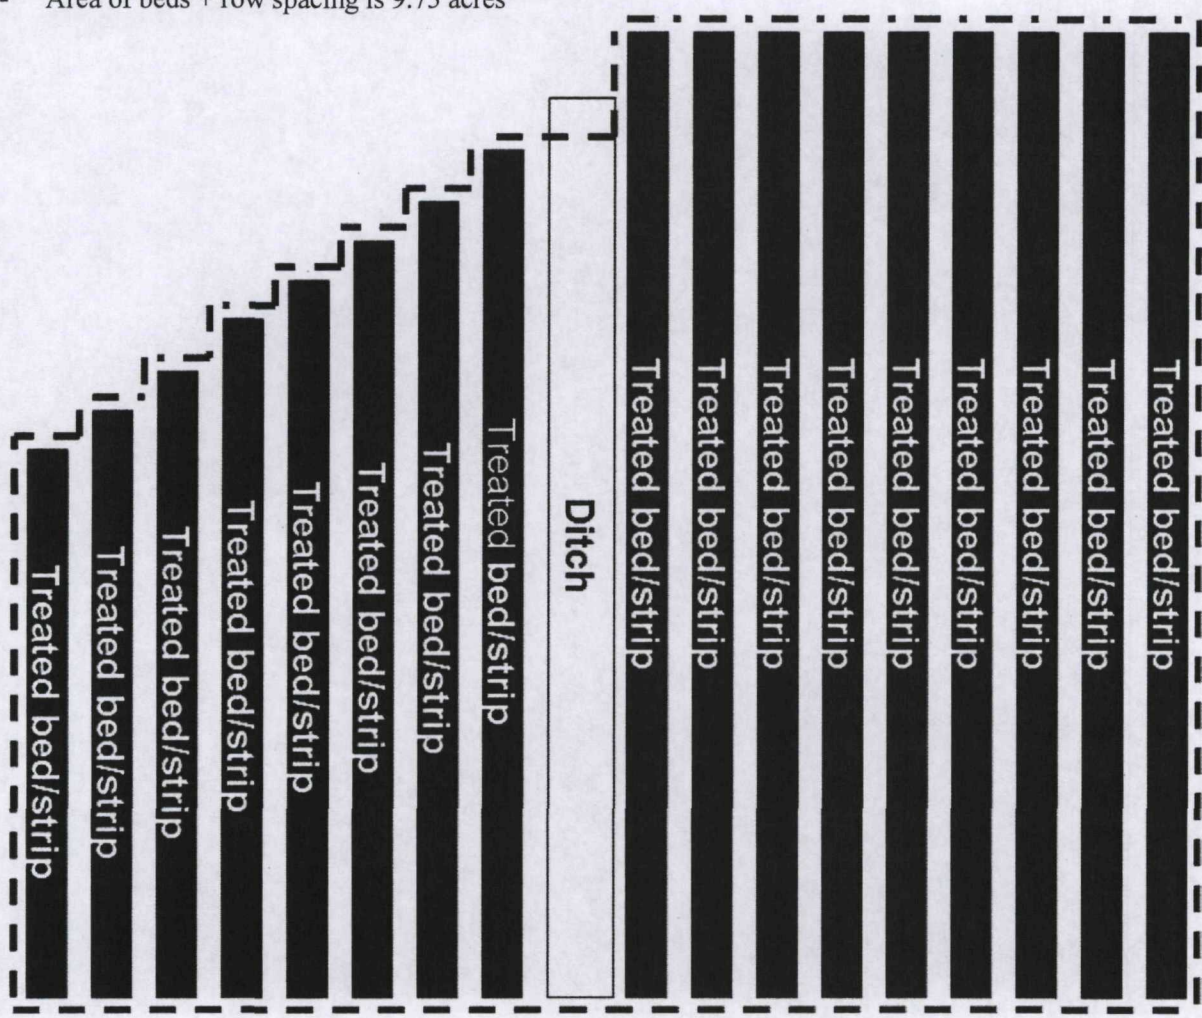

$$\begin{aligned}
 \text{broadcast equivalent rate} &= \frac{\text{strip or bed bottom width (inches)}}{\text{center-to-center row spacing (inches)}} \times \frac{\text{area of strips or beds + row spacing}}{\text{application block size}} \times \frac{\text{pounds product/ treated acre applied in the bed}}{\text{bed}} \\
 &= \frac{30 \text{ inch width beds}}{60 \text{ inch row spacing}} \times \frac{9.75 \text{ acres}}{10 \text{ acres}} \times 200 \text{ pounds product/ treated acre} \\
 &= 97.5 \text{ pounds product/acre}
 \end{aligned}$$

BUFFER ZONE REQUIREMENTS

A buffer zone must be established for every fumigant application. The following describes the general buffer zone requirements:

- An area established around the perimeter of each application block. The buffer zone must extend outward from the edge of the application block perimeter equally in all directions.
- All non-handlers, including field workers, residents, pedestrians, and other bystanders, must be excluded from the buffer zone during the buffer zone period except for transit (see *Buffer Zone Exemptions for Transit on Roadways*).
 - Local, state, or federal officials performing inspection, sampling, or other similar official duties are not excluded from the application block or the buffer zone by this labeling. The certified applicator supervising the application and the owner of the establishment where the application is taking place are not authorized to, or responsible for, excluding those officials from the application block or the buffer zone.
- The buffer zone period begins at the start of the application and lasts for a minimum of 48-hours after the application is complete.

Buffer Zone Proximity

- Before the start of application, the certified applicator must determine whether their buffer zone will overlap any metam sodium or metam potassium (or other MITC generating pesticides) buffer zone(s).
- To reduce the potential for off-site movement from multiple fumigated fields, buffer zones from multiple metam sodium or metam potassium (or other MITC generating pesticides) application blocks must not overlap UNLESS:
 1. A minimum of 12 hours have elapsed from the time the earlier application(s) is complete until the start of the later application, and
 2. *Fumigant Site Monitoring* or *Response Information for Neighbors* have been implemented if there are any residences or businesses within 300 feet of any of the buffer zones.

Structures Under The Control Of The Owner Of The Application Block

- Buffer zones must not include buildings used for storage (e.g., sheds, barns, garages), UNLESS:
 - The storage buildings are not occupied during the buffer zone period, and
 - The storage buildings do not share a common wall with an occupied structure.

Areas Not Under The Control Of The Owner Of The Application Block

- Buffer zones must not include residential areas (e.g., employee housing, private property), buildings (e.g., commercial, industrial), outdoor residential areas (e.g., lawns, gardens, play areas) and other areas that people may occupy, UNLESS:
 1. The occupants provide written agreement, prior to the start of the application, that they will voluntarily vacate the buffer zone during the entire buffer zone period, and
 2. Reentry by occupants and other non-handlers must not occur until,
 - The buffer zone period has ended, and
 - Sensory irritation is not experienced upon re-entry.
- Buffer zones must not include agricultural areas owned and/or operated by persons other than the owner of the application block, UNLESS:
 1. The owner of the application block can ensure that the buffer zone will not overlap with a metam sodium or metam potassium (or other MITC generating pesticides) buffer zone from any other property owners, except as provided in the *Buffer Zone Proximity* section, and
 2. The owner of the other property provides written agreement to the applicator that they, their employees, and other persons will stay out of the buffer zone during the entire buffer zone period.

- Buffer zones must not include roadways and rights of way UNLESS:
 1. The area is not occupied during the buffer zone period, and
 2. Entry by non-handlers is prohibited during the buffer zone period.

Buffer Zone Exemptions for Transit on Roadways

Vehicular and bicycle traffic on public and private roadways through the buffer zone is permitted. (NOTE: Buffer zones are not permitted to include bus stops or other locations where persons wait for public transit.)

- For all other publicly owned and/or operated areas such as parks, sidewalks, permanent walking paths, playgrounds, and athletic fields, buffer zones must not include these areas UNLESS:
 1. The area is not occupied during the buffer zone period,
 2. Entry by non-handlers is prohibited during the buffer zone period, and
 3. Written permission to include the public area in the buffer zone is granted by the appropriate state and/or local authorities responsible for management and operation of the area.

Certified applicators must comply with all local laws and regulations.

See the *Posting* section for additional requirements that may apply.

BUFFER ZONE DISTANCES

Buffer zone distances must be calculated using the application rate and the size of the application block.

- Buffer zone distances must be based on look-up tables in this labeling (25 feet is the minimum distance regardless of site-specific application parameters).
- If after applying all applicable buffer zone credits the buffer zone is greater than ½ mile (2,640 ft), then the application is prohibited.
- Tables 1-5 as appropriate for the method of application must be used to determine the minimum buffer distances. Round up to the nearest rate and block size, where applicable. Applications are prohibited for rates or block sizes that exceed what is presented in the buffer zone tables.

Table 3. Shank Injection Application - Bedded Buffer Zone Distances in Feet

Gal/A	Application Block Size (bars)																Broadcast Equivalent Application Rate (Gallons product/A)									
	1	2	3	4	5	6	7	8	9	10	15	20	25	30	35	40		50	60	70	80	90	100	110	120	140
20	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25
21	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25
22	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25
23	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25
24	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25
25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25
26	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25
27	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25
28	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25
29	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25
30	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25
31	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25
32	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25
33	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25
34	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25
35	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25
36	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25
37	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25
38	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25
39	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25
40	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25
41	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25
42	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25
43	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25
44	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25
45	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25
46	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25
47	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25
48	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25
49	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25
50	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25
51	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25
52	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25
53	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25
54	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25
55	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25
56	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25
57	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25
58	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25
59	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25
60	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25
61	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25
62	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25
63	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25
64	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25

Table 4. Drip Application Buffer Zone Distances in Feet

Gal/A	Application Block Size (acres)																
	1	2	3	4	5	6	7	8	9	10	20	30	40	50	60	70	80
4	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25	25
7	25	25	25	25	25	25	25	25	25	25	38	38	50	50	63	76	88
11	25	25	25	25	25	25	25	25	25	25	50	50	75	75	100	125	150
13	25	25	25	25	25	26	28	29	31	32	57	57	82	82	113	140	163
16	25	25	25	25	25	28	30	33	35	38	63	63	88	88	125	150	175
19	25	25	25	25	25	29	33	36	40	44	69	69	94	94	138	163	188
21	25	25	25	25	25	30	35	40	45	50	75	75	100	100	150	175	200
24	25	27	29	30	32	37	42	47	52	57	82	94	113	125	175	207	238
27	25	28	32	35	38	43	48	53	58	63	88	113	125	150	200	250	275
29	25	30	35	39	44	49	54	59	64	69	94	132	138	175	225	269	313
32	25	31	38	44	50	55	60	65	70	75	100	150	150	200	250	300	350
35	32	37	41	46	50	56	63	69	76	82	125	188	200	250	300	350	400
37	38	41	44	47	50	58	65	73	80	88	150	225	250	300	350	400	450
40	44	46	47	49	50	59	68	76	85	94	175	263	300	350	400	450	500
43	50	50	50	50	50	60	70	80	90	100	200	300	350	400	450	500	550
45	51	52	53	54	55	64	74	85	96	106	213	319	372	425	478	531	584
48	52	54	56	58	60	68	79	90	101	113	225	338	394	450	506	563	634
51	53	56	59	62	65	71	83	95	107	119	238	356	416	475	534	594	684
53	54	58	62	66	70	75	88	100	113	125	250	375	438	500	563	625	734
56	55	60	65	70	75	79	92	105	118	131	263	394	459	525	591	656	784
59	56	62	68	74	80	83	96	110	124	138	275	413	481	550	619	688	834
61	57	64	71	78	85	86	101	115	129	144	288	431	503	575	647	719	884
64	58	66	75	82	90	90	105	120	135	150	300	450	525	600	675	750	934

Broadcast Equivalent Application Rate (Gallons product/A)

39/56

Table 5. Rotary Tiller and Spray Blade Applications Buffer Zone Distance in Feet

Gal/A	Application Block Size (acres)														
	1	5	6	7	8	9	10	20	30	40	50	60	70	80	
9	25	25	25	25	25	25	25	25	25	25	25	25	25	25	
15	25	25	25	25	25	25	25	25	25	25	25	25	25	25	
21	25	25	25	25	25	25	25	25	25	25	25	25	25	25	
27	25	25	25	25	25	25	25	25	25	25	25	25	25	25	
32	25	25	25	25	25	25	25	25	25	25	25	25	25	25	
37	25	25	25	25	25	25	25	25	25	25	25	25	25	25	
43	25	25	25	25	25	25	25	25	25	25	25	25	25	25	
48	25	25	25	25	25	25	25	25	25	25	42	57	64	72	
53	25	25	25	25	25	25	25	25	25	25	58	88	103	118	
59	25	25	25	25	25	25	25	25	25	25	74	119	142	164	
64	25	25	25	25	25	25	25	25	25	25	90	150	180	210	
69	25	25	27	29	30	32	34	49	64	75	135	188	218	248	
74	25	25	29	32	36	39	43	73	103	125	180	225	255	285	
80	25	25	30	36	41	47	52	97	142	275	225	263	293	323	
85	25	25	32	39	46	53	60	120	180	225	270	300	330	360	

Broadcast Equivalent Application Rate (Gallons product/A)

BUFFER ZONE CREDITS

The buffer zone distances for METAM 376 applications may be reduced by the percentages listed below. Credits may be added, but credits cannot exceed 80%. Also, the minimum buffer zone distance is 25 feet regardless of buffer zone credits available.

- See www.tarpcredits.epa.gov for a list of tarps that have been tested and determined to qualify for buffer reduction credits. Only tarps listed on this website qualify for buffer reduction credits.
- 10% reduction in buffer zone distance, IF the organic content of the soil in the application block is $\geq 1\%$ - 2% ; a 20% reduction in buffer zone distance, IF the organic content of the soil in the application block is $>2\%$ - 3% ; and a 30% reduction in the buffer zone distance, IF the organic content of the soil in the application block is $>3\%$.
- 10% reduction in buffer zone distance, IF the soil temperature is measured to be 50°F or less. Record temperature measurements at the application depth or 12 inches, whichever is shallower.
- 10% reduction in the buffer zone distance, IF the clay content of the soil in the application block is greater than 27% .

Examples of Buffer Zone Calculations with Credits Applied

If the buffer zone is 50 feet and the application qualifies for a buffer zone reduction credit since the soil organic content is 1.5% , then the buffer zone can be reduced by 10% , i.e., reduced by 5 feet based on the following calculation: $50 \text{ feet} - (50 \text{ feet} \times 10\%) = 45 \text{ feet}$.

If the buffer zone is 50 feet and the application qualifies for two buffer zone credits since the soil organic content is 1.5% and the clay content is greater than 27% , then the buffer zone can be reduced by 20% (10% organic content credit + 10% clay content credit), i.e., reduced by 10 feet based on the following calculation $50 \text{ feet} - (50 \text{ feet} \times 20\%) = 40 \text{ feet}$.

POSTING FUMIGANT BUFFER ZONES

- Posting of a **buffer zone** is required unless there is a physical barrier that prevents bystander access to the buffer zone.
- Buffer Zone signs must be placed along or outside the perimeter of the buffer zone, at all usual points of entry and along likely routes of approach from areas where people not under the owner's control may approach the buffer zone.
 - Some examples of points of entry include, but are not limited to, roadways, sidewalks, paths, and bike trails.
 - Some examples of likely routes of approach include, but are not limited to, the area between a buffer zone and a roadway, or the area between a buffer zone and a housing development.
 - When posting, the certified applicator supervising the application must ensure compliance with all local laws and regulations.
- Buffer Zone signs must meet the following criteria:
 - The printed side of the sign must face away from the application block toward areas from which people could approach.
 - Signs must remain legible during the entire posting period and must meet the general standards outlined in the WPS for sign size, text size, and legibility (see 40 CFR §170.120).
 - Signs must be posted no sooner than 24 hours prior to the start of the application and remain posted until the buffer zone period has expired.
 - Signs must be removed within 3 days after the end of the buffer zone period.
 - Buffer Zone signs which meet the criteria above will be provided at points of sale for applicators to use.
 - Templates may be downloaded from http://www.epa.gov/pesticides/reregistration/soil_fumigants/.
 - The Buffer Zone signs must contain the following information:
 - The 'Do Not Walk' symbol
 - DO NOT ENTER/NO ENTREE,
 - Metam Sodium METAM 376 Fumigant BUFFER ZONE,
 - Contact information for the certified applicator in charge of the fumigation.

Exception: If multiple contiguous blocks are fumigated within a 14-day period, the entire periphery of the contiguous blocks' buffer zones may be posted. Buffer Zone signs must be posted no sooner than 24-hours prior to the start of the first application. The signs must remain posted until the last buffer zone period expires and signs may remain posted until 3-days after the buffer zone period for the last block has expired.

RESTRICTIONS FOR DIFFICULT TO EVACUATE SITES

- Difficult to evacuate sites are pre-K to grade 12 schools, state licensed daycare centers, nursing homes, assisted living facilities, hospitals, in-patient clinics, and prisons.No fumigant application with a buffer zone greater than 300 feet is permitted within 1/4 mile (1320 feet) of difficult to evacuate sites unless the site is not occupied by children from state-licensed day care centers, students (pre-K to grade 12), patients, or prisoners during the application and the 36-hour period following the end of the application.
- No fumigant application with a buffer zone of 300 feet or less is permitted within 1/8 mile (660 feet) of difficult to evacuate sites unless the site is not occupied by children from state-licensed day care centers, students (pre-K to grade 12), patients, or prisoners during the application and the 36-hour period following the end of the application.

EMERGENCY PREPAREDNESS AND RESPONSE MEASURES

If the buffer zone is 25 feet, then the *Emergency Preparedness and Response Measures* requirements are not applicable.

Triggers for Emergency Preparedness and Response Measures

The certified applicator must either follow the directions under the *Fumigant Site Monitoring* section or follow the directions under the *Response Information for Neighbors* section if:

- the buffer zone is greater than **25 feet** but less than or equal to **100 feet**, and there are residences or businesses within **50 feet** from the outer edge of the buffer zone, or
- the buffer zone is greater than **100 feet** but less than or equal to **200 feet**, and there are residences or businesses within **100 feet** from the outer edge of the buffer zone, or
- the buffer zone is greater than **200 feet** but less than or equal to **300 feet**, and there are residences or businesses within **200 feet** from the outer edge of the buffer zone, or
- the buffer zone is greater than **300 feet** or the **buffer zones overlap**, and there are residences or businesses within **300 feet** from the outer edge of the buffer zone.

Fumigant Site Monitoring

NOTE: *Fumigant Site Monitoring* is ONLY required if the *Emergency Preparedness and Response Measures* are triggered AND directions from the *Response Information for Neighbors* section are not followed.

From the start of the application until the buffer zone period expires, a certified applicator or handler(s) under his/her supervision must:

- Monitor for sensory irritation in areas between the buffer zone outer perimeter and residences and businesses that trigger this requirement.
- Monitoring for sensory irritation must begin in the evening on the day of application and continue until the buffer zone period expires. Monitor a minimum of 8 times during the buffer zone period, including these periods:
 - 1 hour before sunset,
 - during the night,
 - 1 hour after sunrise, and
 - during daylight hours.

Implement the emergency response plan immediately if a handler monitoring experiences sensory irritation.

Response Information For Neighbors

NOTE: *Response Information for Neighbors* is ONLY required if the *Emergency Preparedness and Response Measures* are triggered AND directions from the *Fumigant Site Monitoring* section are not followed.

The certified applicator supervising the application must ensure that residences and businesses that trigger the requirement have been provided the response information at least **1 week** before the application starts. The information provided may include application dates that range for no more than **4 weeks**. If the application does not occur when specified, the information must be delivered again.

Information that must be included:

- The location of the application block.
- Fumigant(s) applied including the active ingredient, name of the fumigant product(s), and the EPA Registration number.
- Contact information for the applicator and property owner.
- Time period in which the application is planned to take place (must not range more than 4 weeks).
- Early signs and symptoms of exposure to the fumigant(s) applied, what to do, and who to call if you believe you are being exposed (911 in most cases).
- How to find additional information about fumigants.

The method used to share the response information for neighbors can be accomplished through mailings, door hangers, or other methods that will effectively inform the residences and businesses within the required distance from the edge of the buffer zone.

NOTICE TO STATE AND TRIBAL LEAD AGENCIES

If your state and/or tribal lead agency requires notice, information must be provided to the appropriate state or tribal lead agency prior to the application. Please refer to www.epa.gov/fumigantstaternotice for a list of states and tribal lead agencies that require notice and information on how to submit the information.

The information that must be provided to state and tribal lead agencies includes the following:

- Location of the application blocks,
- Fumigant(s) applied including EPA registration number,
- Applicator and property owner contact information, and
- Time period that fumigation may occur.

EMERGENCY RESPONSE PLAN

The certified applicator must include in the FMP a written emergency response plan that identifies:

- evacuation routes,
- locations of telephones,
- contact information for first responders and local/state/federal/tribal personnel, and
- emergency procedures/responsibilities (e.g., adding water to the field, repairing tarps, fixing equipment, evacuating upwind) if:
 - there is an incident,
 - sensory irritation is experienced outside of the buffer zone, and/or there are equipment/tarp/seal failure or complaints, or other emergencies.

SITE-SPECIFIC FUMIGATION MANAGEMENT PLAN (FMP)

Prior to the start of application, the certified applicator supervising the application must verify that a site-specific FMP exists for each application block. In addition, an agricultural operation fumigating multiple application blocks may format the FMP in a manner whereby all of the information that is common to all the application

blocks is captured once, and any information unique to a particular application block or blocks is captured in subsequent sections.

The FMP must be prepared by the certified applicator, the site owner, registrant, or other party.

The certified applicator must verify in writing (sign and date) that the site-specific FMP(s) reflects current site conditions before the start of application.

Each site specific FMP must contain the following elements:

- ❖ Certified Applicator Supervising the Application
 - Name,
 - Phone number,
 - Pesticide applicator license and/or certificate number,
 - Specify if commercial or private applicator,
 - Employer name,
 - Employer address, and
 - Date and location of completing EPA approved soil fumigant training program.
- ❖ General site information
 - Application block location (e.g., county, township-range-section quadrant), address, or global positioning system (GPS) coordinates
 - Name, address, and phone number of application block owner
 - Map, aerial photo, or detailed sketch showing:
 - application block location
 - application block dimensions
 - buffer zone dimensions
 - property lines
 - roadways
 - rights-of-ways
 - sidewalks
 - permanent walking paths
 - bus stops
 - nearby application blocks
 - surrounding structures (occupied and non-occupied)
 - locations of Buffer Zone signs, and
 - locations of difficult to evacuate sites with distances from the application block labeled.
- ❖ General application information
 - Target application date/window,
 - Fumigant Product Name, and
 - EPA registration number.
- ❖ Tarp Plan (if tarp is used)
 - Schedule for checking tarps for damage, tears, and other problems,
 - Minimum size of damage that will be repaired,
 - Factors used to determine when tarp repair will be conducted,
 - Equipment/methods used to perforate tarps,
 - Target dates for perforating tarps, and
 - Target dates for removing tarps.
- ❖ Soil conditions
 - Description of soil texture and moisture in application block,
 - Method used to determine soil moisture, and
 - Soil temperature measurement if air temperatures were above 100°F in any of the 3 days prior to the application
- ❖ Buffer zones
 - Application method,
 - Injection depth,
 - Application rate from lookup table on label,
 - Application block size from lookup table on label,

- Credits applied and measurements taken (if applicable),
 - Tarp brand name, lot number, thickness, manufacturer, batch number, and part number
 - Organic matter content
 - Clay content
 - Soil temperature
- Buffer zone distance, and
- Description of areas in the buffer zone that are not under the control of the owner of the application block. If buffer zones extend onto areas not under the control of the owner, attach the written agreement and keep it with the FMP.
- ❖ Record Emergency Response Plan as described in the *Emergency Response Plan* section.
- ❖ Posting of Fumigant Treated Area and Buffer Zone
 - Person(s) who will post and remove (if different) Fumigant Treated Area and Buffer Zone signs, and
 - Location of Buffer Zone signs.
- ❖ Emergency Preparedness and Response Measures (if applicable)
 - Fumigant site monitoring (if applicable):
 - When and where it will be conducted;
 - Response information for neighbors (if applicable):
 - List of residences and businesses informed,
 - Name and phone number of person providing information, and
 - Method of providing the information.
- ❖ State and/or tribal lead agency advance notification (if state and/or tribal lead agency requires notice, provide a list of contacts that were notified and date notified)
- ❖ Plan describing how communication will take place between the certified applicator supervising the application, the owner, and other on-site handlers (e.g., tarp perforators/removers, irrigators) for complying with label requirements (e.g., buffer zone location, buffer zone start and end times, timing of tarp perforation and removal, PPE).
 - Name and phone number of persons contacted by the certified applicator, and
 - Date contacted.
- ❖ Handler (including Certified Applicators) Information and PPE
 - Names, addresses and phone numbers of handlers
 - Names, addresses, and phone numbers for employers of handlers
 - Tasks that each handler is authorized and trained to perform
 - Date of PPE training for each handler
 - Applicable handler PPE including:
 - Long-sleeved shirts/long pants, shoes, socks
 - Chemical-resistant apron
 - Chemical-resistant footwear and socks
 - Protective eyewear (not goggles)
 - Chemical-resistant gloves
 - Air-purifying respirators
 - Respirator make, model, type, style, size, and cartridge/canister type
 - Other PPE
 - For handlers: Confirmation of receipt of Fumigant Safe Handling Information.
 - For certified applicator(s) supervising the application: Completion date and location of the soil fumigant training program listed on the following EPA website <http://www.epa.gov/fumiganttraining> for the active ingredient(s) in this product.
 - For handlers designated to wear air-purifying respirators:
 - date of medical qualification to wear a respirator,
 - date of respirator training, and
 - date of fit-testing for the respirator.
 - Unless exempted in the *Protection of Handlers* section, verify that:
 - at minimum 1 handler has the appropriate respirators and cartridges/canisters during handler activities, and
 - the employer has confirmed that the appropriate respirator and cartridges/canisters are immediately available for each handler who will wear one.

- ❖ Air monitoring plan
 - If sensory irritation is experienced, indicate whether operations will cease or operations will continue with use of an air-purifying respirator
 - For monitoring the breathing zone:
 - Representative handler tasks to be monitored,
 - Monitoring equipment to be used, and
 - Timing of the monitoring.
- ❖ Good Agricultural Practices (GAPs)
 - Identify (e.g., list, attach applicable label section) applicable mandatory GAPs.
- ❖ Pesticide Product Labels and Material Safety Data Sheets (MSDS)
 - Ensure that labels and MSDS are on-site and readily available for employees to review.

Record-Keeping Procedures

The owner of the application block as well as the certified applicator supervising the application must keep a signed copy of the site-specific FMP for 2 years from the date of application.

For situations where an initial FMP is developed and certain elements do not change for multiple application blocks (e.g., applicator information, certified applicator, handlers, record-keeping procedures, emergency procedures) only elements that have changed need to be updated in the site-specific FMP provided the following:

- The certified applicator supervising the application has verified that those elements are current and applicable to the application block before it is fumigated.
- Record-keeping requirements are followed for the entire FMP (including elements that do not change).

The certified applicator must make a copy of the FMP immediately available for viewing by handlers involved in the fumigation. The certified applicator or the owner of the application block must provide a copy of the FMP to any local/state/federal/tribal enforcement personnel who request the FMP. In the case of an emergency, the FMP must be made immediately available when requested by local/state/federal/tribal emergency response and enforcement personnel. The certified applicator supervising the application must ensure the FMP is at the application block during all handler activities.

Within 30 days after the application is complete, the certified applicator supervising the application must complete a Post-Application Summary.

POST-APPLICATION SUMMARY

The Post-Application Summary must contain the following elements:

- ❖ Actual date and time of the application,
- ❖ Application rate
- ❖ Size of application block
- ❖ Weather Conditions
 - Summary of the National Weather Service weather forecast during the application and the 48- hours after the application is complete including:
 - wind speed, and
 - air stagnation advisory (if applicable).
 - Forecast must be checked on the day of, but prior to the start of the application, and on a daily basis during the application if the time period from the start of the application until the application is complete is greater than 24 hours.
- ❖ Tarp damage and repair information (if applicable):
 - Date of tarp damage discovery,
 - Location and size of tarp damage,
 - Description of tarp/tarp seal/tarp equipment failure, and
 - Date and time of tarp repair completion.
- ❖ Tarp perforation/removal details (if applicable):
 - Date and time tarps were perforated,
 - Date and time tarps were removed, and

- Record if tarps were perforated and/or removed early. Describe the conditions that caused early tarp perforation and/or removal.
- ❖ Complaint details (if applicable):
 - Person filing complaint (e.g., on-site handler, person off-site),
 - If off-site person, name, address, and phone number of person filing complaint, and
 - Description of control measures or emergency procedures followed after complaint.
- ❖ Description of incidents, equipment failure, or other emergency and emergency procedures followed (if applicable).
- ❖ Air monitoring results:
 - When sensory irritation was experienced:
 - Date, time, location, and handler task/activity where irritation was observed and
 - Resulting action (e.g., implement emergency response plan, cease operations, continue operations with air-purifying respirators).
 - When using a direct read detection device:
 - Sample date(s), time(s), location(s), and concentration(s),
 - Handler task/activity monitored (if applicable), and
 - Resulting action (e.g., cease operations, continue operations with air-purifying respirators).
- ❖ Drip application monitoring
 - Record monitoring date(s) and time(s)
 - Name of person(s) monitoring
 - Record observations:
 - Is the equipment functioning properly,
 - Description of corrective action (if applicable), and
 - Other comments
- ❖ Fumigant Treated Area and Buffer Zone Signs:
 - Dates of posting and removal.
- ❖ Any deviations from the FMP (e.g., changes in emergency response actions, changes in handler information, changes in handlers responsible for completing emergency tasks, changes in communication between certified applicator, owner, and other handlers).

Record-Keeping Procedures

The owner of the application block, as well as the certified applicator supervising the application, must keep a signed copy of the Post-Application Summary for 2 years from the date of application.

PRODUCT INSTRUCTIONS

Apply Metam 376 at planting time using the furrow, soil injection or soil incorporation method using the drip irrigation method. Use only at times when temperature is moderate. Use promptly after mixing with water. Do not allow solution to stand after mixing. Flush all equipment with water after each days use. Disassemble valves and clean carefully.

PRODUCT INFORMATION

METAM 376 is a water soluble liquid. When applied to soil, the liquid is converted into a volatile fumigant (Methylisothiocyanate, MITC). After a sufficient interval of time, the fumigant degrades/dissipates leaving the soil ready for planting.

WHEN TO USE MAXIMUM AND MINIMUM RATES

The application rate of METAM 376 is dependent on the soil type to be treated. Generally a light sandy soil requires a lower application rate than a heavier mineral soil. When a range of application rates is given in this label consult your local agricultural extension service or your local distributor for more specific information.

USE PRECAUTIONS

Keep children and pets out of treated areas. METAM 376 uses described on this label are intended for pre-plant soil preparation only. All plant foliage and any established plants growing on the treatment sites will be either severely damaged or destroyed. Keep the product off of any desirable turf or plants. Do not apply within 3 feet

of the drip line of desirable plants, shrubs, or trees. Keep container tightly closed when not in use. Do not store near feed or food. NOTE: METAM 376 will suppress and/or control only those pests in the fumigation zone at the time of treatment. Reinfestation may occur subsequent to the fumigants degradation/dissipation from the soil.

TREATMENT GUIDELINES

For optimum results, certain procedures should be observed at designated times in the treatment program. Described below are important guidelines for each of the four stages of the treatment process. Consult your Sales Representative for the appropriate treatment program for your particular needs.

- Pre-Application
- Field Preparation Prior to Application
- Application
- Pre-Planting After Application of METAM 376

PRE-APPLICATION

METAM 376 is applied post-harvest and 14 to 21 days before a new crop is planted (see "Testing of Treated Soil Before Planting" section). In some areas, fall application is preferred as the product will degrade/dissipate over the winter that allows planting to begin as soon as favorable springtime conditions arrive.

Application Rate

Apply 3.5 to 10 gallons of this product per broadcast/overall acre depending on crop, target pest and soil properties. Some of the soil properties to consider when determining the application rate include soil texture, percent organic matter and depth of soil to be treated.

Target Pest and Depth of Treatment

When application rates for this product are given in ranges, use the higher rate if pests (insects, nematodes, etc.) are present in high numbers or if the area to be treated has a history of pest problems. Consult with your State nematologist, entomologist and plant pathologist to determine if crop rotation is more feasible or desirable than fumigation. NOTE: This product will only suppress or control pests that are in the fumigated zone at time of treatment. For control of weeds and fungi which cause seed or seedling diseases, treatment of only the top 2 to 4 inches of soil may be required (see application specific requirements in the Good Agricultural Practices section of this label). Treatment depths greater than 4 inches may be required for control of nematodes and fungi which occur throughout the rhizosphere. The required application rate should be increased proportionately with the depth of the treatment required. Always choose the appropriate application method to evenly distribute this product throughout the soil to the required treatment depth.

Soil Characteristics

Soil properties to consider when determining the application rate of this product include the depth of soil to be treated, soil texture, and percent organic matter. Due to the absorbing effect of humus, soils with high levels of organic matter under the surface require higher rates. For example, muck soil may require twice the rate that would be used in mineral soils. Application rates will also vary with soil texture. For example, heavy clay soils require a higher rate than light sandy soils.

Phytotoxicity

METAM 376 is phytotoxic. Protect valuable, non-target plants by stopping soil applications of this product at least three feet short of the drip line of trees, shrubs and other desirable plants. For drip application, crop injury and lack of effectiveness can result from non-uniform distribution of the treated water.

APPLICATION OF METAM 376

Apply according to the methods and rates outlined under the Good Agricultural Practices section and below under the section "USES, RATES AND APPLICATION METHODS."

USE OF DILUTED METAM 376

Do not store the diluted product. Do not allow the diluted solution to stand overnight. Use the diluted solution promptly after mixing with water. Flush all equipment with water after each day's use; disassemble valves and clean carefully.

Metam 376 is compatible with a wide range of pesticides (fungicides, herbicides, insecticides). The mixture should be field tested on a small scale to ensure compatibility, product performance and plant safety before large scale field use. Observe all cautions and limitations on labeling of all products used in mixtures.

DO NOT APPLY TANK MIX COMBINATIONS UNLESS YOUR PREVIOUS EXPERIENCE INDICATES THE MIXTURE IS EFFECTIVE AND WILL NOT RESULT IN APPLICATION PROBLEMS OR PLANT INJURY.

Application in Tank Mix with Liquid Fertilizer

METAM 376 may be injected in a mixture with liquid fertilizers, however, a dual injection system is preferred. Since the composition of liquid fertilizers vary considerably, the physical compatibility of each METAM 376/fertilizer tank mix should be checked by using the following procedure:

Mix a small quantity of Metam 376 and liquid fertilizer in the same ratio as they will be applied to the field, i.e., if 40 gallons of Metam 376 and 40 gallons of liquid fertilizer are to be applied per acre, then the mixture should be mixed in a 40:40 or 1:1 ratio. Mix in a glass container and agitate the liquids to attain a complete uniform mixture. **IF A UNIFORM MIX CANNOT BE MADE, THE MIXTURE SHOULD NOT BE USED!** If the mixture remains uniform for 30 minutes without agitation, the combination may be used. Should the mixture separate after 30 minutes but is readily remixed with agitation, the mixture can be used if adequate agitation is maintained in the tank.

DO NOT PLACE CAPS ON MIX JAR AS INCOMPATIBLE MIXES MAY EVOLVE HYDROGEN SULFIDE GAS. USE PROMPTLY AFTER MIXING WITH WATER OR FERTILIZER. DO NOT ALLOW THE SOLUTION TO STAND. FLUSH ALL EQUIPMENT WITH WATER AFTER EACH DAY'S USE. DISASSEMBLE VALVES AND CLEAN CAREFULLY.

GENERAL PRECAUTIONS FOR IRRIGATION SYSTEMS

Posting of areas to be chemigated is required when (1) any part of a treated area is within 300 feet of sensitive areas such as residential areas, labor camps, businesses, day care centers, hospitals, in-patient clinics, nursing homes or any public areas such as schools, parks, playgrounds, or other public facilities not including public roads, or (2) when chemigated area is open to the public such as golf courses. Posting must conform to the following requirements:

- Treated areas shall be posted with signs at all usual points of entry and along likely routes of approach from the listed sensitive areas.
- When there are no usual points of entry, signs must be posted in the corners of the treated areas and in any other location affording maximum visibility to sensitive areas.
- The printed side of the sign should face away from the treated area towards the sensitive area. The signs shall be printed in English.
- Signs must be posted prior to application and must remain posted until foliage has dried and soil surface water has disappeared.
- Signs may remain in place indefinitely as long as they are composed of materials to prevent discoloration and maintain legibility for the duration of the posting period.

All words shall consist of letters of at least 2-1/2 inches tall and all letters and the symbol shall be a color which sharply contrasts with their immediate background. At the top of the sign shall be the words KEEP OUT, followed by an octagonal stop sign symbol of a least 8 inches in diameter containing the word STOP. Below the symbol shall be the words: "PESTICIDES IN IRRIGATION WATER". This sign is in addition to any sign posted to comply with the Worker Protection Standard.

49/56

STATEMENTS CONCERNING CHEMIGATION OF METAM 376

When applying by chemigation methods, the following directions or warnings must be observed:

Apply this product only through drip (trickle) irrigation systems. DO NOT APPLY this product through any other type of irrigation system. Crop injury, lack of effectiveness, or illegal pesticide residues in the crop can result from non-uniform distribution of treated water. If you have questions about calibration, you should contact your State Extension Service Specialists, equipment manufacturers or other experts. Do not connect an irrigation system used for pesticide application to a public water system unless prescribed safety devices for public water systems stated on the pesticide label are in place. A person knowledgeable of the chemigation system and responsible for its operation or under the supervision of the responsible person shall shut the system down and make necessary adjustments should the need arise.

Chemigation Using a Public Water System

NOTE: AMVAC does not encourage connection of chemigation systems to public water systems. The following information is provided for users who have evaluated alternative application and water source options before choosing to make such a connection.

OBSERVE THE FOLLOWING PRECAUTIONS IF YOUR CHEMIGATION SYSTEM IS CONNECTED TO A PUBLIC WATER SYSTEM: Public water system is defined as a system for the provision to the public of piped water for human consumption if such system has at least 15 service connections or regularly serves an average of at least 25 individuals daily at least 60 days out of the year. Chemigation systems must contain a functional, reduced pressure zone (RPZ), backflow preventer or the functional equivalents in the upstream water supply line from the point of pesticide introduction. As an option to the RPZ, the water from the public water system should be discharged into a reservoir tank prior to pesticide introduction. There shall be a complete physical break (air gap) between the outlet end of the fill pipe and top of overflow rim of the reservoir tank of at least twice the inside diameter of the fill pipe. The pesticide injection pipeline must contain a functional, automatic, quick-closing check valve to prevent the flow of fluid toward the injection pump.

Any alternatives to the required safety devices in this label must conform to the list of EPA-approved alternative devices.

Sprinkler & Drip Chemigation Systems

See "Field Application Where Entire Area is Being Treated" under Use, Rates and Application Methods section of this label.

PRE-PLANTING AFTER APPLICATION OF METAM 376

Effects of Rain

If rain occurs within 24 hours after a METAM 376 application, lack of control at and near the soil surface may occur.

Recontamination

Precautions must be taken to prevent recontamination of treated fields with plant pathogenic fungi, plant parasitic nematodes or weed seed. Use clean seeds or plants. Before farm equipment is driven into the treated area, it should be rinsed free of untreated soil and weed seeds from other fields.

Days to Cultivating or Planting After Application

Because METAM 376 is harmful to germinating seeds and living plants, an appropriate interval must be observed between treatments and planting. On well-drained soils which have a light to medium texture and which are not excessively wet or cold following the application, planting can begin 14 to 21 days after treatment. If soils are heavy or especially high in organic matter or if the soil remains wet and/or cold (below 35°F) following the application, a minimum interval of 21 days or greater should be observed. The interval before planting should be extended until the soil is sufficiently dry to allow for cultivation.

Cultivation of Soil Before Planting

IMPORTANT: Heavier soils including soils high in clay or organic matter should be allowed to aerate and dry thoroughly after treatment with METAM 376. During cold and/or wet weather, frequent shallow cultivation can aid dissipation of METAM 376 from the treated soil.

On heavy, wet soils, light surface cultivation to break up crusting and promote drying should be done 5 to 7 days after treatment if planting is to occur within 14 to 21 days after treatment. This cultivation may be repeated as necessary.

NOTE OF CAUTION: To avoid contaminating treated soils, care should be taken to assure that untreated soils are not mixed with treated soils.

Testing of Treated Soils Before Planting

Fields are fumigated to control soil-borne fungi, nematodes, insects, and weeds. The length of time required for fumigants to dissipate/escape from the soil before plants can safely be planted varies greatly. Typically 14 to 21 days are needed under typical conditions; however, circumstances which do not favor evaporation of the fumigant can greatly lengthen the waiting period as much as up to 30 days. The release period is short with (1) low rates of fumigants, (2) light soil, (3) high soil temperatures, (4) low soil moisture, (5) shallow application depth, and (6) repeated cultivations after fumigation. Seeded crops are less susceptible to residual soil fumigant injury than transplanted crops. In general, fumigants escape slowly from cold, wet, heavy soils.

If in doubt, perform either the lettuce seed test or the tomato transplant test as described elsewhere in this label. If germination occurs in 1 to 3 days or if tomato plant shows signs of wilting or root burn in 2 days, the product is still available and an extended wait period must be observed.

PACIFIC NORTHWEST STATES OF IDAHO, NEVADA, OREGON AND WASHINGTON

NOTE: When applied in the spring, allow a minimum of 14 to 21 days before planting providing no fumes are detectable. When the soil temperature is below 35°F allow a minimum of 21 days before planting. Check for fumes and aerate as needed. Use a seedling indicator plant with a hot cap to check for activity or fumes (or follow instructions in preceding paragraph). DO NOT plant if fumes are detectable or injury to plant has occurred. Re-aerate the soil and check again.

The information below describes two simple tests to assay for harmful residual soil fumigants before planting.

Lettuce Seed Test

1. With a trowel, dig into the treated soil to or just below the depth of application. Remove 2 to 4 small (1 to 2 oz) soil samples, mix lightly, and immediately place a portion in an air-tight jar so that fumes will not escape. Use mason, wheat germ or similar jars with gas-tight lids.
2. Sprinkle lettuce seeds on the moistened surface of the soil and recap immediately. Prepare a similar jar with untreated soil (untreated check) for comparison.
3. Keep the jars at 65°F to 85°F; do not place in direct sunlight. Direct sunlight may kill the seed by overheating. Lettuce seed will not germinate in the dark.
4. Inspect the jars for germination in 1 to 3 days.
5. The soil is safe for planting if seeds in the treated jar germinate the same as seeds in the untreated jar.

IMPORTANT: Be sure (1) to sample the field properly in several areas, particularly low, wet areas; (2) that the lids are air tight and have no grit under the seal; and (3) that the jars are placed in indirect sunlight.

Tomato Transplant Test

Transplant 5 to 10 succulent, fast-growing tomato seedlings into fumigated beds approximately 4 to 6 inches deep. Do the same in a non-fumigated area. If there is variation in the field, plant into the heaviest, wettest soil. Inspect the seedlings in 2 days for wilting or "root burn". If plants in the fumigated zone look the same as those in the non-fumigated zone, it is safe to plant.

Which Test is Best?

Both the lettuce seed and tomato transplant tests can serve the purpose. The response of tomato seedlings varies somewhat depending on how succulent they are, the relative humidity, soil moisture and temperature. Relative differences between plants in fumigated and non-fumigated areas are key to detecting low level residues. High concentrations should produce clear-cut symptoms. Lettuce seed tested in jars are not subjected to the variations in the field that can affect the response of tomato transplants. However, the process of collecting a soil sample allows some fumigant to escape prior to sealing the jar. In addition, excess soil moisture can inhibit normal lettuce seed germination reducing the sensitivity of the test.

USES, RATES AND APPLICATION METHODS

Field Application Where Entire Area is Being Treated

Shank Applications

Apply METAM 376 at the rate of 3.5 to 10 gallons per treated acre (or see crop-specific considerations in the Additional Information section of this label). Follow immediately with a roller to smooth and compact the soil surface. Light watering or tarping after rolling helps prevent fumigant escape.

When setting up your soil injection equipment with either spray blades, injection knives or coulters make sure they are evenly and closely placed to create an even application width and depth. To accomplish this, it may require multiple tool bars with the injection tools staggered. This will help prevent build up of trash and aid in the soil sealing. For example, apply METAM 376 through injectors placed 4 inches below the soil surface and 5 inches apart.

Spray Blade Applications (includes bed-top blade and soil cap applications)

Apply METAM 376 at the rate of 3.5 to 10 gallons per treated acre (or see crop-specific considerations in the Additional Information section of this label). Follow immediately with a roller to smooth and compact the soil surface. Light watering or tarping after rolling helps prevent fumigant escape. It may be necessary to stagger the injector placement on two or more tool bars to prevent soil build up during application.

When setting up your soil injection equipment with either spray blades, injection knives or coulters make sure they are evenly and closely placed to create an even application width and depth. To accomplish this, it may require multiple tool bars with the injection tools staggered. This will help prevent build up of trash and aid in the soil sealing. For example, apply METAM 376 through injectors placed 4 inches below the soil surface and 5 inches apart.

Spray METAM 376 immediately in front of the tiller or mulcher, set to the depth to where control is desired. Use 3.5 to 10 gallons per treated acre (or see crop-specific considerations in the Additional Information section of this label). Follow immediately with a roller, power roller or bed shaper to seal soil surface. Light watering or a tarp after rolling may be used to help prevent fumigant escape.

Drip Applications

METAM 376 must be applied through a drip irrigation system designed to wet the soil thoroughly in the area being treated. Meter 3.5 to 10 gallons of METAM 376 per treated acre (or see crop-specific considerations in the Additional Information section of this label) into the drip system during the entire irrigation period. Flush irrigation system with adequate water after completion of application.

Important: WEED ELIMINATION WILL NOT BE SATISFACTORY IF TOO MUCH WATER IS APPLIED. AN ADEQUATE CONCENTRATION OF METAM 376 MUST BE PRESENT AT THE TIME OF WEED SEED GERMINATION IN ORDER TO BE EFFECTIVE.

NOTE: If METAM 376 is applied to established plant beds under plastic tarps to terminate growth of a previous crop and to fumigate the bed in preparation of planting a subsequent crop, the terminated crop must not be used for any food or feed purposes after METAM 376 has been applied.

Soil Injection: Apply with injectors (shanks) blades and etc. NOTE: It may be necessary to stagger the injector placement on two or more tool bars to prevent soil build up during application. Apply Metam 376 3 to 6 inches

deep at the rate of 3.5 to 10 gallons per broadcast/overall acre. The soil surface must be compacted immediately and prior to seeding with a basket or smooth roller.

Rotary Tiller or Power Mulcher: Spray dilute Metam 376 immediately in front of tiller or mulcher. Use 3.5 to 10 gallons per broadcast/overall acre. Incorporate 4 to 6 inches deep. The treated surface must be compacted immediately and prior to seeding with a basket or smooth roller.

METAM 376 may be applied as a broadcast application immediately in front of soil covering equipment such as bed shapers, rotary tillers, discs, etc. to a minimum depth of 6 inches using a single pass to incorporate. Use 3.5 to 10 gallons of METAM 376 per treated acre (or see crop-specific considerations in the Additional Information section of this label) followed immediately by a roller/packer to smooth and compact the soil surface.

Band Treatment: Metam 376 can be applied as a band treatment. Apply at the rate of 10.3 to 29.4 fluid ounces per 1,000 feet of 12 inch band (3.5 to 10 gallons per broadcast/overall acre). (See method of determining fluid ounces per 100 feet of linear band.) Spray fumigant immediately in front of (1) a rotary tiller equipped with either "L" or sweep blades; (2) opposing disks 4 to 6 inches deep or; (3) any mechanical device that will mix the soil 4 to 6 inches deep. Following the incorporation the soil surface must be immediately compacted with a basket or smooth roller prior to planting time.

IN-FURROW TREATMENT

Dilute Metam 376 in sufficient water to allow for uniform metering of the solution into the seed furrow.

Seed Furrow Spraying or Drag Tubes: Apply diluted fumigant through low pressure tips spraying the soil covering the seed or through drag tubes directly into the seed furrow. Using the drag tube method the fumigant can be applied in the seed furrow prior to the seed ropping. Apply at the rate of 0.4 to 1.6 fluid ounces per 1,000 feet of seed row using the drag tube method and 0.8 to 4.2 fluid ounces per 1,000 ft. of row using the spraying method. The rate with the spray method should be increased with the increasing volume of soil being treated, the wider the spray band the higher the rate.

Shank Injection Method: Apply diluted fumigant solution with thin soil injection shanks 3 to 4 inches below the seed and 1 inch to the side of the seed. Set shanks to run in front of the planters on the same equipment. Apply at the rate of 0.6 to 3.0 fluid ounces per 1,000 feet of seed row.

DRIP IRRIGATION APPLICATION

Metam 376 must be applied through a drip irrigation system to wet the soil thoroughly in the desired treatment zone. Apply at the rate of 3.5 to 10 gallons per broadcast/overall acre. The fluid ounces per treated row will depend on the width of the desired treated band (See: method of determining fluid ounces per 100 feet of linear band.). Application must be continuously supervised. This is very important. Ground must be in seed-condition, no clods larger than 1/2" in diameter.

METHOD OF DETERMINING FLUID OUNCES PER 100 FEET OF LINEAR BAND

- 1) Determine width of band in feet by dividing width of band in inches by 12. Example: 5" band = 5" divided by 12 = 0.4166 feet.
- 2) Determine square feet in 100 linear feet of band by multiplying the width of the band by 100. Example: 0.4166 x 100 feet = 41.66 square feet.
- 3) Determine the treated acres per 100 linear feet of band by dividing the square feet by 43,560 (square feet in acre). Example: 41.66 square feet divided by 43,560 = 0.00096 acre
- 4) To determine the fluid ounces per 100 linear feet.
 - a) 1 gallon = 128 fluid ounces; 50 gallons = 6,400 fluid ounces; 75 gallons = 9,600 fluid ounces.
 - b) Multiply fluid ounces by acres. Example: 50 gallons = 6,400 fluid ounces x 0.00096 = 6.14 fluid ounces per 100 linear feet row.

ADDITIONAL RECOMMENDATIONS

SEED TREATMENT

A suitable fungicide should be used to treat all crop seed being planted into the treated soil.

THE PACIFIC NORTHWEST, IF THE FIELD HISTORY OR SOIL SAMPLING SHOWS HIGH POPULATIONS OF NEMATODES, FUMIGATION USING BOTH METAM 376 AND TELONE II SHOULD BE USED. CONSULT YOUR AMVAC OR DOW AGROSCIENCES LLC REPRESENTATIVE FOR ADDITIONAL INFORMATION.

NOTE: Read the label affixed to the container of TELONE II before applying. Carefully follow all precautionary statements and applicable use directions. Except as specified in this section, the labels affixed to the containers for TELONE II and METAM 376 are subject to all user precautions and limitations imposed.

USE DIRECTIONS FOR SEQUENTIAL GROUND APPLICATION OF TELONE II AND METAM 376

Sequential application of TELONE II and METAM 376 for suppression of *Verticillium dahliae* and control of *Root Knot* and *Lesion* nematodes in soils to be planted to potatoes in the Pacific Northwest.

The following use directions provide information for a sequential treatment program of applications of TELONE II soil fumigant and METAM 376 soil fumigant. For best results, apply both TELONE II and METAM 376 in the fall. Alternative treatment schedules include a fall application of TELONE II followed by a spring application of METAM 376, a fall application of METAM 376 followed by a spring application of TELONE II, or a spring application of both products. Due to time constraints resulting from varying weather conditions, a spring application may result in delayed planting.

APPLICATION DIRECTIONS FOR TELONE II

Soil conditions at the time of application of TELONE II that allow rapid diffusion of the fumigant as a gas through the soil normally give best results. Compacted soil layers within the desired treatment zone must be fractured before or during application of the fumigant. Soil temperature must be between 40°F and 80°F at the depth of injection, moist from 2 inches below the soil surface to at least 12 inches deep as determined by the feel method, free of clods, and with crop residue thoroughly incorporated into the soil at least at the time of application and sealing.

Apply TELONE II as a broadcast treatment at the minimum rate of 15 gallons per treated acre (44.3 fl oz/1000 feet of row/outlet based on 12-inch centers) using either chisel (shank), Noble Plow (sweep) or modified Para Till application equipment. Chisel equipment must have ripper-type shanks. Para Till equipment must be modified so that outlet spacing is evenly distributed under the tool bar. With chisel and Para Till equipment, a shank spacing of 12 to 24 inches is recommended. Do not exceed a shank spacing of 24 inches. Outlet depth should be at least 18 inches below the final soil surface. Noble Plow equipment may be used only when either shallow soils (those less than 18 inches deep) or soils containing excessive live root material such as alfalfa or corn stubble prevents the use of shank application. Noble Plow outlet spacing should not exceed 12 inches and application should be made to a depth of at least 15 inches. Fumigant penetration may be limited if a plow pan exists below the depth of the Noble blade. Do not use plow-sole application. Immediately after application of TELONE II, use a disc, paddle wheel or similar device to uniformly mix the top 4-6 inches of soil to effectively eliminate chisel traces. Then follow immediately with a ring roller or multi-packer to seal the soil surface. Little or no crop residue should be exposed at the surface following the sealing operation. Any remaining crop residue should lie flat following sealing. Following application and sealing, leave soil undisturbed for 7-14 days. The longer undisturbed interval may be necessary if the soil is or becomes cold or wet during this period.

APPLICATION DIRECTIONS FOR METAM 376

Soil conditions at the time of application of METAM 376 must be between 35°F and 90°F in the treated zone and at 60% to 80% field capacity. If necessary, pre-irrigate about a week prior to treatment to adjust soil moisture to desired levels. Immediately before application, cultivate lightly if the soil has crusted.

Apply METAM 376 either by chemigation or by soil injection or surface incorporation as a sequential application with TELONE II. When METAM 376 is used prior to TELONE II, allow a minimum of 7 days between treatments. When TELONE II is applied prior to METAM 376, allow a minimum of 7 days before disturbing the soil or beginning any pre-irrigation for the application of METAM 376.

For chemigation, apply METAM 376 at the minimum rate of 30 gallons per treated acre in a minimum of 0.5 acre-inch of water to the desired depth of treatment. Heavier soils may require a higher amount of water. Use only those sprinkler systems that give large water droplets to prevent excessive fumigant loss. If for any reason chemigation is interrupted prior to completion (e.g., excessive wind, equipment malfunction, etc.), back the system up prior to restarting to ensure full application to the area affected prior to shutting down the system and to allow full distribution of the METAM 376 solution throughout the irrigation system prior to moving over untreated soil. After application is completed, flush equipment until all METAM 376 is eliminated from the system.

For soil injection, apply METAM 376 at the minimum rate of 30 gallons per treated acre using either shanks, sweep blades, double-winged shanks, or a Noble Plow Blade combined with a surface application. Single shanks should be spaced no more than 6 inches apart with either single injection outlets no more than 6 inches deep or dual injection outlets spaced at 6 and 12 inches deep. Single sweep blades should be spaced no more than 12 inches apart with sweeps 12 inches wide and a spray nozzle that will provide broadcast coverage from sweep tip to sweep tip. Double-winged shanks should be spaced no more than 12 inches apart with no more than 9 inches between adjacent wings and with spray nozzles that provide uniform coverage. The Noble Plow blade should have spray nozzles spaced 6 inches apart to give uniform coverage, an injection depth set at 12 to 14 inches deep, and be combined with a surface application using a disc to immediately incorporate the METAM 376 placed on the surface. Follow all the above applications immediately with a roller/packer to smooth and compact the soil surface.

For surface incorporation, apply METAM 376 at the minimum rate of 30 gallons per treated acre as a broadcast application to the soil surface immediately in front of soil covering equipment such as rotary tillers, discs, etc., to a minimum depth of 6 inches using a single-pass incorporation followed immediately by a roller/packer to smooth and compact the soil surface.

SOIL FUMIGATION INTERVAL: Planting may take place only after odors of either TELONE II or METAM 376 are no longer present within the zone of fumigation. If METAM 376 follows TELONE II and is applied in the spring with the Noble Plow Blade, apply all fertilizers at least 7 days after the application of METAM 376. Thoroughly aerate the soil 5 to 7 days after the application of METAM 376 by shallow plowing and/or discing to allow the fumigant odors to dissipate. Wait 14 to 21 days after the application of METAM 376 before planting the crop. Use the 21-day interval if soil temperatures are below 35°F regardless of any other precautions that may have been taken. In addition to waiting 21 days, set indicator plants (e.g., tomato seedlings) in various places in the treated field and cover the plants with a "hot cap", plastic sheeting, bucket, etc., to trap and confine any fumes present. Leave the plants undisturbed for a minimum of 24 hours; then examine for injury before planting the crop. Do not plant the crop if injury to indicator plants is observed. If fumes are noticeable at time of planting, stop planting and rework the soil. If TELONE II follows METAM 376 and is applied in the spring, wait at least one week for each 10 gallons of TELONE II applied beyond the initial undisturbed period before planting the crop. If fumigant odors are present at planting, thoroughly aerate the soil following shallow ripping and/or discing to allow fumigant odors to dissipate. Do not till the soil so deep as to move untreated soil from below the treated zone into the treated soil.

Special Considerations and Precautions:

- Use of this sequential application program of reduced rates of TELONE II and METAM 376 does not guarantee pest-free potatoes at harvest.
- Use of TELONE II and METAM 376 according to these use directions will control *Root Knot* and *Lesion* nematode populations present within the fumigated zone at the time of fumigation. The fumigated zone can vary depending upon a number of factors such as fumigant rate, application methods used, depth of fumigant application, soil moisture, soil type, soil temperature and soil tilth (including soil compaction and soil porosity). The sequential combination of reduced rates of TELONE II and METAM 376 will not control or

prevent re-infestation subsequent to the treatments. Subsequent pest populations may infest the fumigated zone from irrigation water, equipment, potato seed or other sources of contamination or may invade the fumigated zone from surrounding untreated soil such as from beneath the fumigated zone or from non-fumigated pockets within the fumigated zone.

- In fields with a history of severe *Columbia Root Knot* nematode problems, the maximum Federal label rate of 20 gallons TELONE II per treated acre is recommended in sequential combination with a minimum of 37.5 gallons METAM 376 per treated acre per these label directions.
- If the application of TELONE II occurs in the fall and the application of METAM 376 is not planned until spring, a cover crop such as wheat or grass can be planted following the undisturbed soil interval associated with the application of TELONE II to reduce the potential for over-winter soil erosion.
- Refer to the product labels affixed to the containers for both TELONE II and METAM 376 for recommended soil conditions, product performance can be expected to improve as the soil conditions move toward optimum. Use of this sequential application program of TELONE II and METAM 376 under soil conditions outside the recommended range of soil conditions can be expected to yield less than satisfactory performance.

NOTE: Read the label affixed to the container of TELONE II before applying. Carefully follow all precautionary statements and applicable use directions. Except as specified in this section, use of TELONE II or METAM 376 is subject to all use precautions and limitations imposed by the labels affixed to the containers for TELONE II and METAM 376, respectively.

STORAGE AND DISPOSAL

Do not contaminate water, food or feed by storage or disposal.

STORAGE: Do not expose to extreme temperatures. Do not stack more than four drums high. Leaking or damaged drums should be placed in overpack drums for disposal. Spills should be absorbed in sawdust or sand and disposed of in a sanitary landfill. Keep container closed when not in use.

PESTICIDE DISPOSAL: Pesticide wastes are toxic. Improper disposal of excess pesticide spray mixture or rinsate is a violation of Federal law. If these wastes cannot be disposed of by use according to label instructions, contact your State Pesticide or Environmental Protection Agency or the Hazardous Waste representative at the nearest EPA Regional office for guidance.

CONTAINER DISPOSAL:

Nonrefillable container. Do not reuse or refill this container. Offer for recycling if appropriate. Triple rinse container (or equivalent) promptly after emptying. Triple rinse as follows: Empty the remaining contents into application equipment or a mix tank and drain for 10 seconds after the flow begins to drip. Fill the container ¼ full with water. Replace and tighten closures. Tip container on its side and roll it back and forth, ensuring at least one complete revolution, for 30 seconds. Stand the container on its end and tip it back and forth several times. Turn the container over onto its other end and tip it back and forth several times. Empty the rinsate into application equipment or a mix tank. Repeat this procedure two more times.

Refillable container. Refill this container with sodium or potassium methyldithiocarbamate only. Do not reuse this container for any other purpose. To clean the container before final disposal, empty the remaining contents from this container into application equipment or mix tank. Fill the container about 10 percent full with water. Agitate vigorously or recirculate water with the pump for 2 minutes. Pour or pump rinsate into application equipment or rinsate collection system. Repeat this rinsing procedure two more times.

LIMITED WARRANTY AND DISCLAIMER

The manufacturer warrants (a) that this product conforms to the chemical description on the label; (b) that this product is reasonably fit for the purposes set forth in the directions for use, subject to the inherent risks referred to herein, when it is used in accordance with such directions; and (c) that the directions, warnings, and other statements on this label are based upon responsible experts' evaluations of reasonable tests of effectiveness, of

toxicity to laboratory animals and to plants and residues on food crops, and upon reports of field experience. Tests have not been made on all varieties of food crops and plants, or in all states or under all conditions.

THERE ARE NO EXPRESS WARRANTIES OTHER THAN THOSE SET FORTH HEREIN. THE MANUFACTURER NEITHER MAKES NOR INTENDS, NOR DOES IT AUTHORIZE ANY AGENT OR REPRESENTATIVE, TO MAKE ANY OTHER WARRANTIES, EXPRESS OR IMPLIED, AND IT EXPRESSLY EXCLUDES AND DISCLAIMS TO THE EXTENT CONSISTENT WITH APPLICABLE LAW ALL IMPLIED WARRANTIES OF MERCHANTABILITY OF FITNESS FOR A PARTICULAR PURPOSE, OR ANY WARRANTY OF QUALITY OR PERFORMANCE. THIS WARRANTY DOES NOT EXTEND TO, AND THE BUYER SHALL BE SOLELY RESPONSIBLE FOR, ANY AND ALL LOSS OR DAMAGE WHICH RESULTS FROM THE USE OF THIS PRODUCT IN ANY MANNER WHICH IS INCONSISTENT WITH THE LABEL DIRECTIONS, WARNINGS OR CAUTIONS.

BUYER'S EXCLUSIVE REMEDY AND MANUFACTURER'S OR SELLER'S EXCLUSIVE LIABILITY FOR ANY AND ALL CLAIMS, LOSSES, DAMAGES, OR INJURIES RESULTING FROM THE USE OR HANDLING OF THIS PRODUCT, WHETHER OR NOT BASED IN CONTRACT, NEGLIGENCE, STRICT LIABILITY IN TORT OR OTHERWISE, SHALL BE LIMITED, AT THE MANUFACTURER'S OPTION, TO REPLACEMENT OF, OR THE REPAYMENT OF THE PURCHASE PRICE FOR, THE QUANTITY OF PRODUCT WITH RESPECT TO WHICH DAMAGES ARE CLAIMED. TO THE EXTENT CONSISTENT WITH APPLICABLE LAW, MANUFACTURER OR SELLER SHALL NOT BE LIABLE FOR SPECIAL, INDIRECT OR CONSEQUENTIAL DAMAGES RESULTING FROM THE USE OR HANDLING OF THIS PRODUCT.

AMVAC offers this product, and Buyer accepts it, subject to the foregoing Limited Warranty which may be varied only by agreement in writing signed by an authorized representative of AMVAC.

RO-NEET® and TILLIAM® are registered trademarks of Syngenta Crop Protection.
TELONE II® is a registered trademark of Dow AgroSciences LLC. TELONE II is a "Restricted Use" pesticide.
METAM 376® is a registered trademark of Amvac Chemical Corporation.

Amvac Chemical Corporation
4100 E. Washington Blvd.
Los Angeles, CA 90023 U.S.A.
1-323-264-3910