

D-1410 BLUE

D-1412 BLACK

DIRECTIONS FOR USE

This product is a ready to use clean oil solution useful for the protection of wood against fungus growths which cause rot and stain, termites, Lyctus (powder post) beetles and carpenter ants, and it stains water repellents to aid in the control of shrinking, swelling and checking, grain raising and warping.

WOOD PRESERVATION AND DIMENSIONAL CONTROL

For best results, this product should be applied so as to effect maximum penetration into the wood and heavy absorption especially at joints and wherever decay exists. Fence posts, poles, foundation timbers and other wooden members should be free of bark, dry at least one season and immersed in the product for a minimum of 12 to 48 hours to be an effective wood preserver.

For other open tank treatments, complete immersion of the wood in the solution is generally recommended for 24 to 48 hours per inch of thickness. For the control of dimensional changes, shrinkage and swelling, the treatment of the end grain is most important. Since the moisture pick up there is a hundred to a thousand times greater than at the flat or edge grain surface for most species of wood.

When open tank treating, spray or paint as in the case of a wall. For structure, two heavy brush applications of this product should be applied, cutting out and removing all decayed wood two feet behind any visible evidence of decay. All wood should be thoroughly dry and the framing or cutting completed before application of this product.

CVERAGE: Approximately 1 to 10 gallons per thousand board feet in open tank treating — 4 to 10 square feet per gallon for brush application on smooth walls. Textured surfaces absorb more solution.

This product is effective for application to wood for the control of termites, powder post, lyctus, beetles and carpenter ants. In all of these cases, it will be effective only in the areas of the wood contacted by the solution. Therefore, thoroughness of treatment is essential to good control.

TERMITE CONTROL: For protection of new wood prior to installation, see instructions above. For application to wood in place to protect against subterranean termite damage, apply the solution to run off, allow to soak in, and make at least one more application.

Trenches around foundation and trees are deep, but not too wide. The trench should be 12 to 18 inches deep, but not more than 6 inches wide. The trench should be 12 to 18 inches deep, but not more than 6 inches wide. The trench should be 12 to 18 inches deep, but not more than 6 inches wide.

Be sure to exercise care that the product does not get on asphaltic products. Tar paper in position shows evidence of water stain or that it is not applied in such a way that it will stain plaster or other surface. Treat wood of the wall is supplementary to the treatment.

POWDER POST-BEETLE CONTROL: For control of other forms infested with powder post beetles, control by immersing the wood in this product for a minimum of 48 hours per inch of thickness. Since there is a potential hazard from dermal contact after treatment of the surface and the like, re-waxing of these areas after treatment with heavy duty wax, after the solvent has evaporated, is necessary to insure against this hazard.

CARPENTER ANTS: This product applied by brushed wood, when by spraying into the wood into the cavity made by the ants, has proved useful for cleaning out ants living in the wood. Since poisoning of the colony at their source is the surest remedy, treatments of infested wood are usually supplemental.

DANGER

HARMFUL OR FATAL IF SWALLOWED OR ABSORBED THROUGH SKIN. CAUSES SKIN IRRITATION. MAY PRODUCE DELAYED CHEMICAL BURNS. COMBUSTIBLE.

Do not breathe spray. Use only with adequate ventilation. Do not get in eyes. Use skin protection. Wash thoroughly after handling.

Wear protective clothing and rubber gloves when handling the freshly treated lumber.

DO NOT USE FOR COOKING OR STORE NEAR HEAT OR OPEN FLAME.

FIRST AID: If swallowed, induce vomiting by sticking finger down throat or by giving sugar or strong salty water to drink. Repeat until vomit is clear. Call a physician. Never give anything by mouth to an unconscious person.

FIRST AID: In case of contact, wash skin with soap and water. If in eyes, flush with water for at least 15 minutes. Get medical attention.

NOTE TO PHYSICIAN: This product is a metabolic irritant, causes hyperthermia. Treat symptomatically.

ENVIRONMENTAL CAUTIONS: This product is toxic to fish and wildlife. Keep out of any body of water. Do not contaminate water by cleaning of equipment or disposal of wastes. Apply this product only as specified on this label.

Vapors may cause injury if adequate ventilation is not insured. Do not use this product indoors, or any other confined areas where the vapors may concentrate and cause injury to plant or animal life. Keep containers closed when not in use.

NOTICE

Avoid contamination of feed or foodstuffs. Do not reuse container. Return to dealer, recycler, or destroy and burn in a safe place. Do not contaminate water by cleaning equipment or disposal of waste and containers.


Treat sawdust and other wood wastes should not come in contact with domestic animals, or be used as mulch where it will come in contact with useful living plants.

LIMIT OF WARRANTY AND LIABILITY

This company warrants that this material conforms to the chemical description on the label and is reasonably fit for the purposes referred to in the directions for use. This product is sold subject to the understanding that the buyer assumes all risks of use or handling which may result in loss or damage which are beyond the control of the seller, such as for example incompatibility with other products or the improper use of application. NO OTHER EXPRESSED OR IMPLIED WARRANTY OF FITNESS OR MERCHANTABILITY IS MADE. The exclusive remedy of the buyer and the sole liability of this company or any other seller for any and all losses, injuries or damages resulting from the use or handling of this product shall be the purchase price paid by the user or buyer for the quantity of this product involved. The buyer and user are deemed to have accepted the terms of this notice when they purchase or use this material without objection.

EPA Reg. No. 7161-R
EPA EST. 7161 OH 1

MADE BY
NATIONAL SOLVENT CORPORATION
MEDINA, OHIO 44130

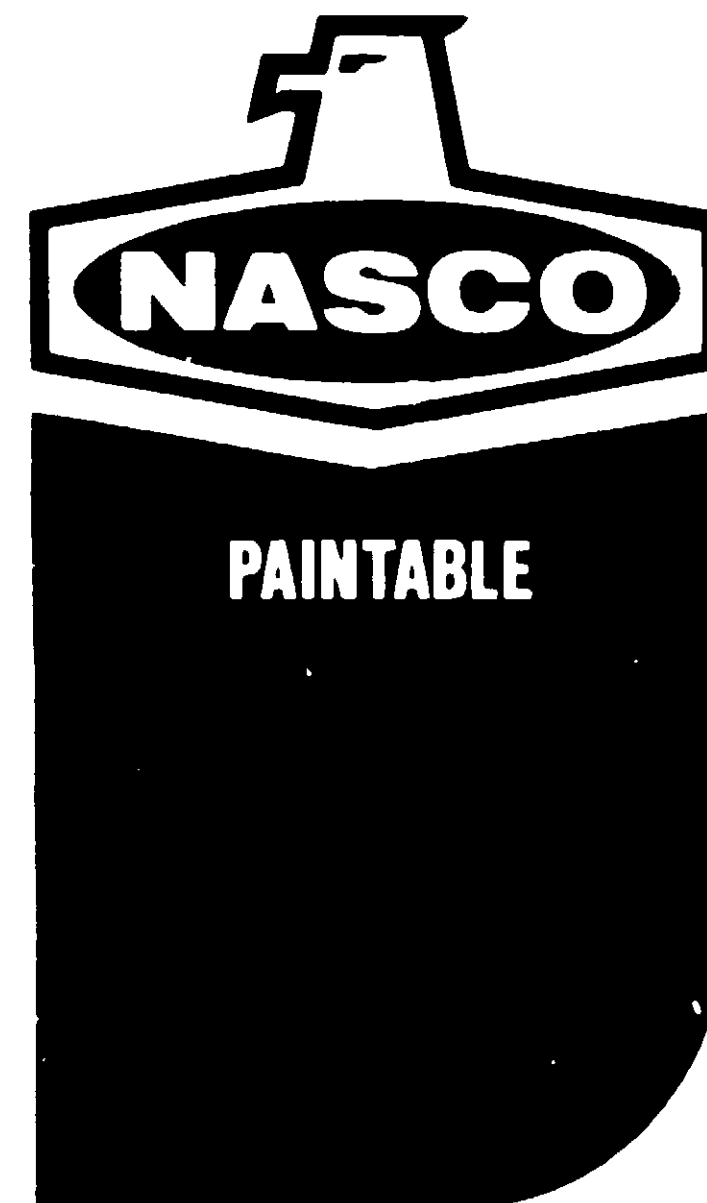

WATER REPELLENT & PENTA WOOD PRESERVATIVE

Preserves windows, flooring, siding, fences and all wood safe from rot, mildew, discoloration and Termites. Helps control shrinkage and swelling. Minimizes warping, grain raising and checking.

DOUBLE PROTECTION:

Long lasting water repellents keep out moisture which causes warping & swelling.
Long lasting PENTA fungicide protects against decay, staining, fungi and mold.

NET CONTENTS ONE U.S. GALLON (128 FL.OZ.)

CHANGES ARE COSTLY—Any Changes Will Require Additional Charges

CUSTOMER DRIVES CAN ORDER NO. 28
COLORS D-1410 Blue D-1411 Green D-1412 Red
BLANK SIZE 1/2" x 1/4" x 1/4" APPROVAL DATE

HARMED OR FATAL IF SWALLOWED OR ABSORBED
THROUGH SKIN. CAUSES SKIN IRRITATION. MAY PRO
DUCE DELAYED CHEMICAL BURNS. COMBUSTIBLE

Do not breathe vapors. Use only with adequate ventilation. Wash face and hands after use.

Year of the first publication of the article: _____

Month of the first publication of the article: _____

DO NOT USE IN CAR OR STORE NEAR HEAT OR
OPEN FLAME

FIRST AID: If you witness a seizure, do not restrain the person. Gently hold the person's head down to prevent injury. Do not put anything in the person's mouth. Do not try to force the person to drink. Repeat first aid until a health care professional arrives. Never give anything by mouth to an unconscious person.

FIRST AID: In case of contact, wash skin with soap and water. If in eyes, flush with water for at least 15 minutes, and get medical attention.

ENVIRONMENTAL CAUTIONS: This product is toxic to fish and wildlife. Keep out of any body of water. Do not contaminate water by leaching of equipment or disposal of wastes. Apply this product only as specified on the label.

Vapors may cause injury if adequate ventilation is not insured. Do not use this product indoors or any other confined areas where the vapors may concentrate and cause injury to plant or animal life. Keep containers closed when not in use.

NOTICE

not reuse containers for foodstuffs
destroy and bury or incinerate plates and containers
water by cleaning up spillage and disposal of waste and
containers



related sawflies and other wood-boring insects should not come in contact with the host materials. The user should wash hands here if a user comes in contact with user's body fluids.

LIMIT OF WARRANTY AND LIABILITY

[illegible]

EPA Reg No 71618
EPA EST 7161 OH 1

BY
T CORPORATION
S A 1111

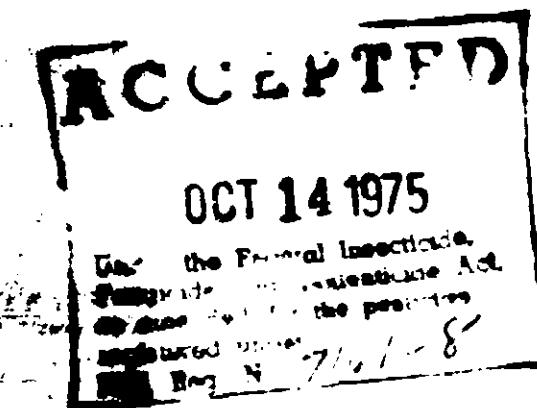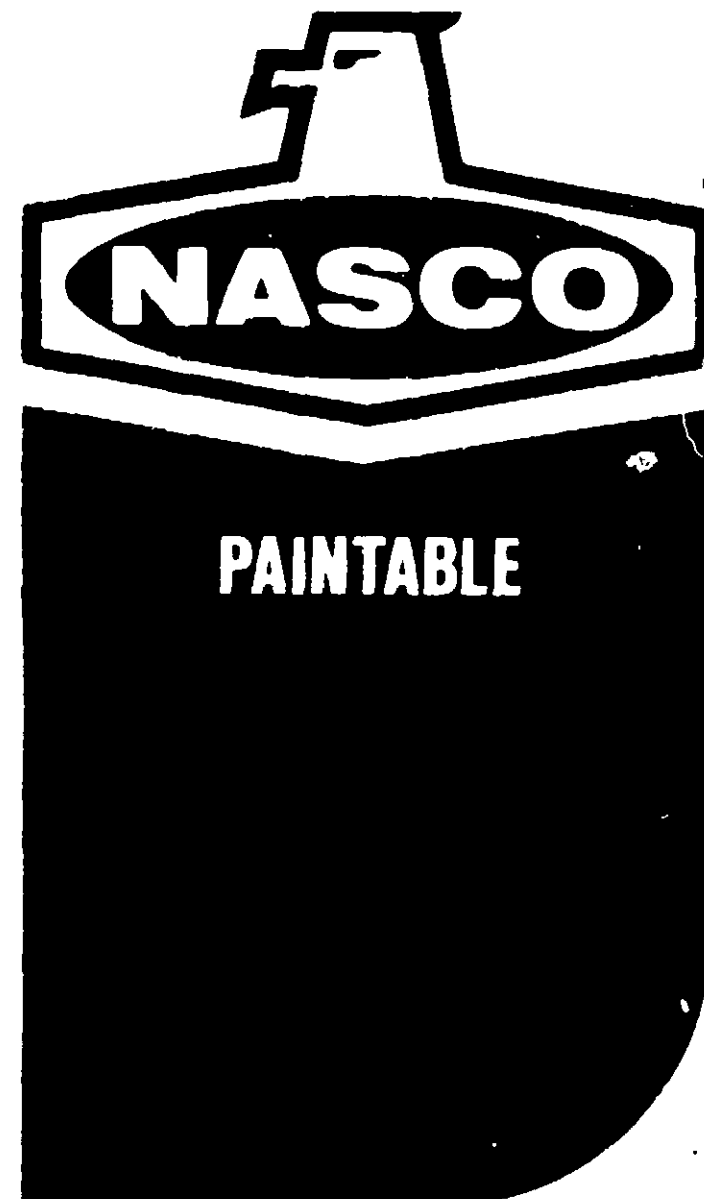

WATER REPELLENT & PENTA WOOD PRESERVATIVE

Preserves windows, flooring, siding, fences and all wood safe from rot, mildew discoloration and Termites. Helps control shrinkage and swelling. Minimizes warping, grain raising and checking.

DOUBLE PROTECTION:

Long lasting water repellents keep out moisture which cause warping & swelling
Long lasting PENTA fungicide protects against decay, staining fungi and mold.

NET CONTENTS ONE U.S. GALLON (128 FL.OZ.)

CHANGES ARE COSTLY—Any Changes Will Require Additional Charges

CUSTOMER	LOUIES CAM	ORDER NO	58	STATE	AL
COLORS	DIYLO BLUE DIYLO GREEN	DATE	12/1	LAST NO	
BLANK SIZE	411 CM WHITE	APPROVAL DATE		APPROVED BY	



THE UNIVERSITY OF CHICAGO