



SENTRY®

GRAIN PRESERVER

AN INHIBITOR FOR CONTROL OF MOLDS AND FUNGI IN HIGH MOISTURE STORED CORN, OATS, BARLEY, WHEAT OR SORGHUM



DIRECTIONS FOR USE

1. DO NOT use on seed grain or on grain for malting purposes. SENTRY Grain Preserver inhibits the germinating capability of grain. Grain preserved with organic acids is classified as "sample grade" due to persistent odors from the chemical treatment.
2. Determine moisture content of corn, oats, barley, wheat or sorghum.
3. Apply SENTRY Grain Preserver to freshly harvested grain based on moisture content according to the following table:

Moisture Content of Grain by Weight	U.S. Gallons of Grain Preserver Per Ton of Moist Grain	Pounds of Grain Preserver Per Ton of Moist Grain
16	1.33	11
18	1.57	13
20	1.81	15
22	2.05	17
24	2.29	19
26	2.54	21
28	2.78	23
30	3.02	25
32	3.26	27
34	3.50	29
36	3.74	31

4. Apply in manner to achieve thorough mixing and coverage of grain. Use of auger is recommended to convey grain to storage.
5. Protect treated grain from precipitation. Weather proof storage is recommended. Waterproof floor of storage area. Follow normal aeration procedures to prevent moisture migration.
6. Propionic acid is corrosive to metal. Clean application equipment thoroughly after each use. Paint all metal surfaces of the equipment used to store grain with an anticorrosive paint recommended by a paint manufacturer.
7. SENTRY Grain Preserver protects stored corn, oat, barley, wheat or sorghum up to 12 months.

NET WT. 437 LBS. NET VOL. 53 GALS. (U.S.)

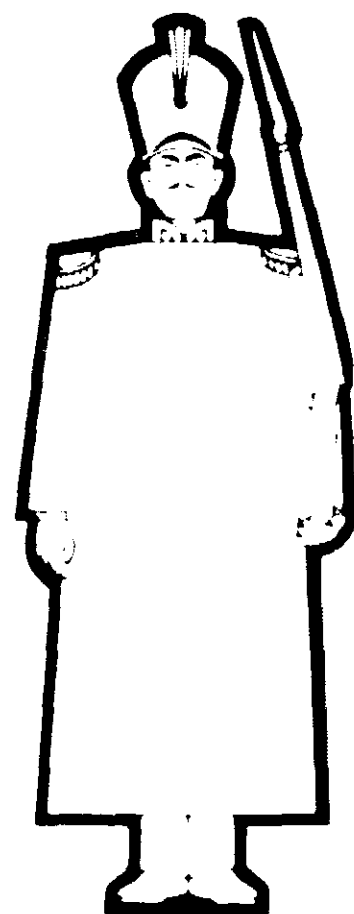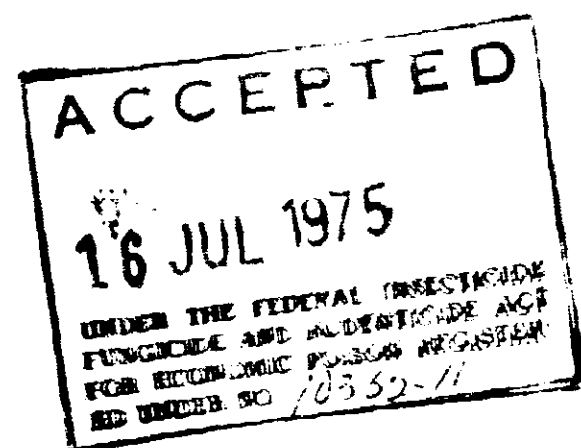

Active Ingredient: Propionic Acid* 100%

*This product meets specifications as set forth in the Food Chemicals Codex Compendium.

DANGER: KEEP OUT OF REACH OF CHILDREN

CAUSES BURNS.
MAY BE HARMFUL IF INHALED OR SWALLOWED.

COMBUSTIBLE.

Wear goggles or face shields, rubber gloves, and long-sleeved clothing when handling. Do not get in eyes, on skin or clothing. Wash thoroughly after handling. Avoid breathing vapors or mist. Keep container closed. Use with adequate ventilation. Keep away from heat and open flame.

FIRST AID: In case of contact, immediately flush eyes or skin with plenty of water for at least 15 minutes. For eyes, call a physician. Remove contaminated clothing and shoes at once. Wash thoroughly before reuse.

RINSE EMPTY CONTAINER THOROUGHLY WITH WATER. DO NOT REUSE. RETURN TO DRUM CONDITIONER OR DESTROY. AVOID CONTAMINATING POTABLE WATER BY CLEANING OF EQUIPMENT OR DISPOSAL OF WASTES.

WARRANTY:

1. The manufacturer guarantees and warrants that the active ingredient content and the total net weight are as stated within lawful limits, and that the directions are based upon responsible experts' evaluation of reasonable tests of effectiveness, and upon reports of field experience, and that the warranties are based upon responsible experts' evaluation of the individual ingredients of the material herein.
2. The manufacturer neither makes nor authorizes any agent or representative to make any other warranties, including warranties of FITNESS FOR A PARTICULAR PURPOSE OR MERCHANTABILITY, quality or representation, express or implied, concerning this material. Timing and method of application, weather and crop condition, and other influencing factors are beyond control of the manufacturer, so this product is sold only on the basis that buyer assumes all risks of use or handling which result in loss or damage and which are beyond manufacturer's control. No claim of any kind, and whether or not based on negligence, shall be in greater amount than the purchase price of the material in respect of which such claim is made. In no event shall manufacturer or seller be liable for special, indirect or consequential damages resulting from the use or handling of this material.
3. No modification of this warranty and disclaimer is authorized, except by specific reference to them in writing by an employee of the manufacturer.

UNION CARBIDE CORPORATION • CHEMICALS AND PLASTICS
270 PARK AVENUE, NEW YORK, N.Y. 10017

