



U.S. ENVIRONMENTAL PROTECTION AGENCY
 Office of Pesticide Programs
 Antimicrobials Division (7510P)
 1200 Pennsylvania Ave., N.W.
 Washington, D.C. 20460

EPA Reg. Number:

10707-66

Date of Issuance:

3/8/17

NOTICE OF PESTICIDE:

Registration
 Reregistration
 (under FIFRA, as amended)

Term of Issuance:

Conditional

Name of Pesticide Product:

X-CIDE 550 Industrial Bactericide

Name and Address of Registrant (include ZIP Code):

Baker Petrolite, LLC
 12645 West Airport Boulevard
 Sugar Land, TX 77478

Note: Changes in labeling differing in substance from that accepted in connection with this registration must be submitted to and accepted by the Antimicrobials Division prior to use of the label in commerce. In any correspondence on this product always refer to the above EPA registration number.

On the basis of information furnished by the registrant, the above named pesticide is hereby registered under the Federal Insecticide, Fungicide and Rodenticide Act.

Registration is in no way to be construed as an endorsement or recommendation of this product by the Agency. In order to protect health and the environment, the Administrator, on his motion, may at any time suspend or cancel the registration of a pesticide in accordance with the Act. The acceptance of any name in connection with the registration of a product under this Act is not to be construed as giving the registrant a right to exclusive use of the name or to its use if it has been covered by others.

This product is conditionally registered in accordance with FIFRA section 3(c)(7)(A). You must comply with the following conditions:

1. Submit and/or cite all data required for registration/reregistration/registration review of your product under FIFRA when the Agency requires all registrants of similar products to submit such data.

Signature of Approving Official:

John Hebert, Chief
 Regulatory Management Branch I, Antimicrobials Division
 (7510P)

Date:

3/8/17

2. Be aware that proposed data requirements have been identified in a Work Plan. For more information on these proposed data requirements, you may contact the Reevaluation Team Leader (Team 36): <http://www2.epa.gov/pesticide-contacts/contacts-office-pesticide-programs-antimicrobial-division>
3. The data requirements for storage stability and corrosion characteristics (Guidelines 830.6317 and 830.6320) are not satisfied. A one year study is required to satisfy these data requirements. You have 18 months from the date of registration to provide these data.
4. Make the following label changes before you release the product for shipment:
 - Revise the EPA Registration Number to read, “EPA Reg. No. 10707-66.”
5. Submit one copy of the final printed label for the record before you release the product for shipment.

Should you wish to add/retain a reference to the company’s website on your label, then please be aware that the website becomes labeling under the Federal Insecticide Fungicide and Rodenticide Act and is subject to review by the Agency. If the website is false or misleading, the product would be misbranded and unlawful to sell or distribute under FIFRA section 12(a)(1)(E). 40 CFR 156.10(a)(5) list examples of statements EPA may consider false or misleading. In addition, regardless of whether a website is referenced on your product’s label, claims made on the website may not substantially differ from those claims approved through the registration process. Therefore, should the Agency find or if it is brought to our attention that a website contains false or misleading statements or claims substantially differing from the EPA approved registration, the website will be referred to the EPA’s Office of Enforcement and Compliance.

If you fail to satisfy these data requirements, EPA will consider appropriate regulatory action including, among other things, cancellation under FIFRA section 6(e). Your release for shipment of the product constitutes acceptance of these conditions. A stamped copy of the label is enclosed for your records. Please also note that the record for this product currently contains the following CSFs:

- Basic CSF dated December 8, 2016

If you have any questions, please contact Terria Northern by phone at 703-347-0265, or via email at northern.terria@epa.gov.

Enclosure: Stamped label

X-CIDE™ 550 Industrial Bactericide

Alternate Brand Name(s): XC550, X-CIDE™ 550

FOR USE IN INDUSTRIAL PROCESSES ONLY.


NOT FOR DOMESTIC USE.

ACTIVE INGREDIENT:

Tetrakis(hydroxymethyl) phosphonium sulfate50.0%

INERT INGREDIENTS:50.0%

TOTAL:100.0%

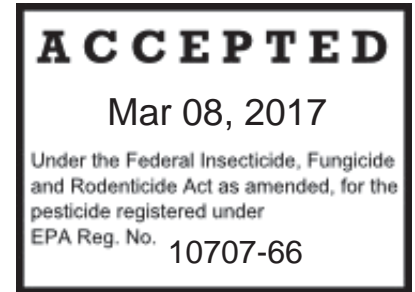

KEEP OUT OF REACH OF CHILDREN

DANGER

SEE SIDE PANEL FOR ADDITIONAL PRECAUTIONARY STATEMENTS.

FIRST AID	
<p>Call poison control center or doctor immediately for treatment advice. Have the product container or label with you when calling a poison control center doctor, or going for treatment.</p>	
IF IN EYES	<ul style="list-style-type: none"> ▪ Hold eye open and rinse slowly and gently with water for 15-20 minutes. ▪ Remove contacts lenses, if present, after the first 5 minutes, then continue rinsing eye. ▪ Call a poison control center or a doctor immediately for treatment advice.
IF ON SKIN OR CLOTHING	<ul style="list-style-type: none"> ▪ Take off contaminated clothing. ▪ Rinse skin immediately with plenty of water for 15-20 minutes. ▪ Call a poison control center or a doctor for treatment advice.
IF SWALLOWED	<ul style="list-style-type: none"> ▪ Call a poison control center or a doctor immediately for treatment advice. ▪ Have person sip a glass of water if able to swallow. Do not induce vomiting unless told to do so by the poison control center or doctor. ▪ Do not give anything by mouth to an unconscious person.

IF INHALED	<ul style="list-style-type: none"> ▪ Move person to fresh air. ▪ If person is not breathing, call 911 or an ambulance, and then give artificial respiration, preferably by mouth-to-mouth, if possible. ▪ Call a poison control center or a doctor for further treatment advice. If breathing is difficult, oxygen should be administered by a qualified professional.
HOT LINE NUMBER	
<p>IN CASE OF AN EMERGENCY endangering life or property involving this product, call (800)-231-3606</p>	
NOTE TO PHYSICIAN	
<p>Probably mucosal damage may contraindicate the use of gastric lavage. Maintain adequate ventilation and oxygenation of the patient. No specific antidote. Treatment of exposure should be directed at the control of symptoms and the clinical condition of the patient.</p>	

EPA Registration Number 10707-AA
 EPA Establishment Number: xxxxx-xx-xx

Manufactured by:
BAKER PETROLITE LLC
 12645 WEST AIRPORT BLVD.
 SUGAR LAND, TX 77478
EMERGENCY CONTACT (24 HOURS PER DAY): 800-231-3606

PRECAUTIONARY STATEMENTS
HAZARDS TO HUMANS AND DOMESTIC ANIMALS

Danger: Corrosive: Causes irreversible eye damage May be fatal if swallowed. Harmful if inhaled. Harmful if absorbed through the skin. Do not get in eyes, on skin, or on clothing. Prolonged or frequently repeated skin contact may cause allergic reactions in some individuals. Avoid breathing vapor or spray. Wear long sleeved shirt and pants or coveralls, goggles or face shield, and chemical resistant gloves. Wash thoroughly with soap and water after handling and before eating, drinking, chewing gum and using tobacco or using the toilet. Remove and wash contaminated clothing before use.

USER SAFETY RECOMMENDATIONS

Users must remove clothing immediately if pesticide gets inside. Then wash thoroughly and put on clean clothing. Users must wash hands before eating, drinking, chewing gum, or using the toilet. Users must remove PPE immediately after handling this product. Wash outside of gloves before removing. As soon as possible, wash thoroughly. If no such instructions exist for washables, use detergent and hot water. Keep and wash PPE separately from other laundry.

ENVIRONMENTAL HAZARDS

This pesticide is toxic to fish. Do not discharge effluent containing this product into lakes, streams, ponds, estuaries, oceans or other waters unless in accordance with the requirements of a National Pollutant Discharge Elimination System (NPDES) permit and the permitting

authority has been notified in writing prior to discharge. Do not discharge effluent containing this product to sewer systems without previously notifying the local sewage treatment plant authority. For guidance, contact your State Water Board or Regional Office of the EPA.

DIRECTIONS FOR USE

It is a violation of Federal Law to use this product in a manner inconsistent with the labeling.

OIL FIELD AND PETROCHEMICAL OPERATIONS

X-CIDE™ 550 Industrial Bactericide is effective in controlling the growth of sulfate reducing bacteria, general aerobic bacteria, and microorganisms that contribute to biofilm formation in oil field recovery, processing and distribution applications and supporting systems; such as injection water, water holding tanks, disposal well water, recirculating water handling systems, and pipelines. This product has been shown to dissolve iron sulfide and sequester iron when used under these conditions, leading to improvements in pump and filter life, injectivity, oil water separation, and reduction of sheen. This product is also effective for use in controlling microbial growth in fluids used for drilling and stimulation of oil and gas formations.

Produced and Injection Water Treatment (Water Floods)

This product must be added to a produced or injection water system at a point where uniform mixing will occur. **Initial Treatment:** For a noticeably fouled system, add 140-525 ppm of this product. When added to a flowing system, slug dose for 2-6 hours based on flow rates. Repeat as necessary until control is achieved. **Subsequent Treatment:** Once control has been achieved, add 21-147 ppm of this product weekly or as needed to maintain control. When added to a flowing system, slug dose for 2-6 hours based on flow rates. **Continuous Treatment:** This product can be dosed continuously at a level of 21-100 ppm.

Oil and Gas Transmission Pipelines and Systems

This product must be added at a point in the pipeline where uniform mixing will occur. The application should be conducted to ensure maximum distribution of product through the internal surface of the pipeline by adding an amount of biocide which eventually comes out the other end of the pipeline. Criteria for success of the treatment will be reduction in bacterial count and/or corrosion rates. **Slug Dosing:** Follow instructions for injection water (Water Flood) treatment. **Continuous Dosing:** This product can be dosed continuously at a level of 21-150 ppm.

Drilling Muds, Packer Fluids, Completion and Workover Fluids

Add this product at a point where uniform mixing will occur. Add 49-2,100 ppm of this product to a freshly prepared fluid depending on severity of contamination.

Hydraulic Fracturing

This product must be added to the frac water storage tanks or directly into the well head injection pipeline as the water is being pumped down-hole. Add 100-525 ppm of this product, depending on the degree of bacterial fouling in the source water.

Gas Storage Wells and Systems

Individual wells must be treated with this product in the same manner and at the same application rates as described under Water Floods. Individual drips must be treated with a sufficient quantity of this product to produce a concentration of 50-200 ppm when diluted by the water present in the drip. Repeat as needed to maintain control.

Well Remediation Operations

Individual production or injection wells may be bullheaded with this product to control bacteria and dissolve iron sulfide deposits. Pump the product into the well as an aqueous solution containing from 20 to 60% this product. The well should be shut in for at least 6 hours before putting it back into operation.

Hydrotesting: Water used to hydrotest pipelines or vessels should contain 100-1,000 ppm this product (50-500 ppm THPS) depending on water quality and length of time the equipment will remain idle.

Pipeline Pigging and Scraping

Add this product to a slug of water contained between the scraper and the trailing pig to produce a concentration of 0.011%-0.11% (100-1,000 ppm) of this product in the water at the discharge point or pig trap, depending on the length of the pipe and the severity of biofouling.

INDUSTRIAL AND/OR COMMERCIAL RECIRCULATING COOLING WATER SYSTEMS (for control of bacteria, fungi, and algae)

Note: For cooling water systems of equal to or greater than 4000 gallons, do not apply by open pouring of liquid to cooling water systems; a metering pump delivery system is required for this use and application method. **Initial Slug Dose:** Add 140-525 ppm of this product for 2-6 hours based on total water volume. Repeat until control is obtained. **Subsequent Treatment:** Add either intermittently 52.5-210 ppm of this product or continuously 28- 98 ppm of this product per day. Dirty systems must be cleaned prior to treatment.

HEAT TRANSFER SYSTEMS (Evaporative Condensers, Dairy Sweetwater Systems, Hydrostatic Sterilizers and Retorts, Brewery and Other Pasteurizers, and Warmers).

Add this product at the same application rates, and in the same manner as described for Recirculating Cooling Water Systems. Add this product to the system at a point where uniform mixing will occur such as a basin area, sump area, or other reservoir or collecting area from which the treated water will be circulated uniformly throughout the system.

SERVICE WATER AND AUXILIARY SYSTEMS

Add this product at the same application rates, and in the same manner as described for Recirculating Cooling Water Systems. Add this product to the system at a point where uniform mixing will occur such as a basin area, sump area, or other reservoir or collecting area from which the treated water will be circulated uniformly throughout the system.

AIR WASHER SYSTEMS (for control of bacteria and fungi)

For control of bacteria and fungi. This product may be used only in air washer systems which have mist eliminating components. Pre-clean the system with detergent and allow air washer to run with fan on for two hours. Flush and check nozzles, manually cleaning as necessary. Add 52.5-140 ppm of this product at a point where uniform mixing and even distribution will occur. Repeat as needed to maintain control.

MACROFOULING CONTROL

This product must be added continuously to maintain a level of 20 ppm active ingredient (THPS) in the system for a period of at least 96 hours. **Initial Dose:** When macrofouling is present in the system, apply 40 ppm of this product based on total water volume. **Maintenance**

dose: Continue to add this product as needed to maintain the 20 ppm active ingredient (THPS) level for a period of at least 96 hours.

FIRE PROTECTION SYSTEMS

This product is effective at controlling microbial growth in waters and on pipe surfaces in fire protection systems. Such microbial growth when combined with other forms of corrosion can lead to accelerated corrosion rates and pitting corrosion, commonly referred to as microbiologically influenced corrosion. This product also helps to remove free oxygen from the water, thus eliminating an important nutrient for bacteria and an important reactant in many corrosion reactions. This product must be added to a fire protection system using a chemical metering pump. Inject at a point, such as a riser, manifold, or makeup feed water line, where uniform mixing and even distribution will occur. Add 150-600 ppm of this product depending on severity of microbial contamination in the system. Repeat as needed based on the level of contamination in the system.

STORAGE AND HANDLING

Do not contaminate water, food, or feed by storage or disposal.

STORAGE: Store this product in a cool, dry area away from direct sunlight and heat to avoid deterioration. Keep container tightly closed when not in use. In case of a spill, flood the area with large quantities of water.

STORAGE AND DISPOSAL

PESTICIDE DISPOSAL: Do not contaminate water, food or feed by storage or disposal. Open dumping is prohibited. Pesticide wastes are toxic. Improper disposal of excess pesticide, spray mixture or rinsate is a violation of federal law. If these wastes cannot be disposed of by use according to label instructions, contact your State Pesticide Environmental Control Agency, or the Hazardous Waste Representative at the nearest EPA Regional Office for guidance.

Text for non-refillable containers

CONTAINER DISPOSAL: Non-refillable container. Do not reuse or refill this container. Offer for recycling, if available. Triple rinse container (or equivalent) promptly after emptying.

For containers of 5 gallons or less. Triple rinse as follows: Empty the remaining contents into application equipment or a mix tank and drain for 10 seconds after the flow begins to drip. Fill the container ¼ full with water and recap. Shake for 10 seconds. Pour rinsate into application equipment or a mix tank or store rinsate for later use or disposal. Drain for 10 seconds after the flow begins to drip. Repeat this procedure two more times.

For containers with capacities greater than 5 gallons. Triple rinse as follows: Empty the remaining contents into application equipment or a mix tank. Fill the container ¼ full with water. Replace and tighten closures. Tip container on its side and roll it back and forth, ensuring at least one complete revolution, for 30 seconds. Stand the container on its end and tip it back and forth several times. Empty the rinsate into application equipment or a mix tank or store rinsate for later use or disposal. Repeat this procedure two more times.

Text for refillable containers

CONTAINER DISPOSAL: Refillable container. Refill this container with pesticide only. Do not reuse this container for any other purpose. Cleaning the container before final disposal is the responsibility of the person disposing of the container. Cleaning before refilling is the responsibility of the refiller. To clean the container before final disposal, empty the remaining contents from this container into application equipment or mix tank. Fill the container about 10 percent full with water. Agitate vigorously or recirculate water with the pump for 2 minutes. Pour or pump rinsate into application equipment or rinsate collection system. Repeat this rinsing procedure two more times.

Net Contents: Bulk, Drum, Tote, pail, or as marked on label and/or container

Lot No.: as marked on label or container

Optional: DOT shipping classification info, NFPA symbol, statement to read SDS and warranty, instructions to affix DOT label(s), additional emergency telephone numbers.