)

23566-19

UNITED STATES ENVIRONMENTAL PROTECTION AGENCY

AUG 2 0 1999

International Paint Inc. 2270 Morris Avenue Union, NJ. 07083

Subject: Copperplus 661 Blue

EPA Registration No. 23566-19 Notification Per Pr-Notice95-2

Your Notification Dated August 13, 1999

Dear Mr. Pazdera:

This will acknowledge receipt of your notification to add the product descriptor "A Full Season of Protection at a money-saving price" to the front panel of your label submitted under the provisions of FIFRA section 3(c)9. Based on a review of the submitted material, the following comments apply.

The application is acceptable and the notification has been made a part of the records for this file.

Sincerely,

Marshall Swindell


Notification Coordinator

Regulatory Management Branch I Antimicrobials Division (7510C)

		CONC	URRENCES		 
SYMBOL					
SURNAME				•	
DATE		 	*******	 	 *

Printed on Recycled Paper

Please read instructions on reverse before completing form. Form Approved. QMB No., 2070-0060.											
United States  Environmental Protection  Washington, DC 204	<b>.</b>	Registration Amendment X Other	OPP Identifier Number								
Application for Pesticide - Section I											
1. Company/Product Number 23566-19		2. EPA Product Manager Marshall Swindell									
4. Company/Product (Name) Copperplus 661 Blue	PM# 33										
5. Name and Address of Applicant (Include ZIP Code) International Paint Inc. 2270 Morris Avenue Union, NJ 07083	(b)(i), my product to:	6. Expedited Review. In accordance with FIFRA Section 3(c)(3) (b)(i), my product is similar or identical in composition and labeling to:  EPA Reg. No.									
Check if this is a new address	Product Name										
	Section - II										
Amendment - Explain below.  Resubmission in response to Agency letter dated  X Notification - Explain below.	Agency let	Final printed labels in response to Agency letter dated "Me Too" Application.  Other - Explain below.									
Explanation: Use additional page(s) if necessary. (For section   and Section    .)  Notification - Add Product Descriptor - "A Full Season of Protection at a money-saving price"											
Section - III											
Material This Product Will Be Packaged In:											
Child-Resistant Packaging  Yes  No  * Certification must  Value  Ves  No  If "Yes" Unit Packaging  Yes  No. per Unit Packaging wgt.	Water Soluble Packaging  Yes  No  If "Yes"  No. per Package wgt  Containe	2. Type of Containe  Metal Plastic Glass Paper Other									
be submitted											
3. Location of Net Contents Information 4. Size(s) Re Label Container	tail Container	5. Location of Label Direct On Label On Labeling accord	mpanying product								
6. Manner in Which Label is Affixed to Product  Lithog Paper Stend	graph Othe glued iled	or	3 1								
Section - IV											
1. Contact Point (Complete items directly below for identification)	on of individual to be contacted	, if necessary, to process thi	s application.)								
Name John P. Pazdera	Title 77 Juptione No. (Include Area Code) Pesticide Registration Mgr. 908-964-2288										
Certification  I certify that the statements I have made on this form and all attachments thereto are true, accurate and complete.  I acknowledge that any knowingly false or misleading statement may be punishable by fine or imprisonment or both under applicable law.  6. Date-Application  Received  (Stamped)											
2. Signeture John P. Pazdra	3.Tide Pesticide Regist										
4. Typed Name	5. Date	•									
John P. Pazdera	8/13/99										

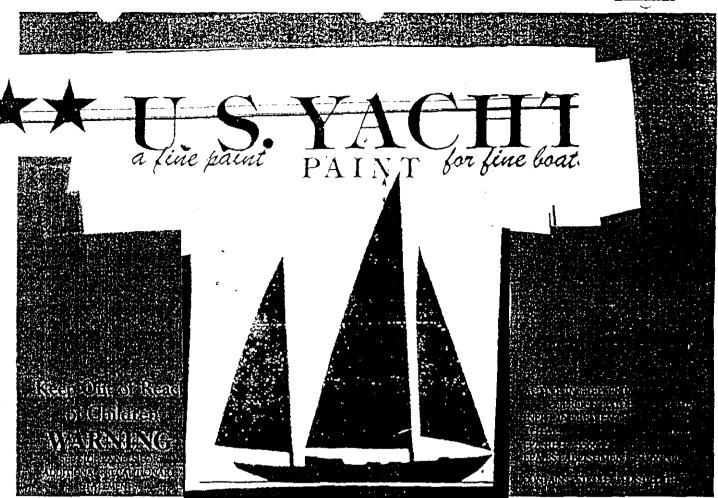

OISCUAIMER: The performance of any marine paint or coating depends on many factors outside the control of our company including surface preparation, proper application, and environmental condition. Therefore, we cannot guarantee this product's suitability for your particular purpose or application. Implied warranties or fitness for a particular purpose and of mechantability are excluded. We shalf not, under any circumstances, be table for incidental or consequential damages. By purchase or use of this product, buyer agrees that the sole and exclusive remedy, if any, is limited to the refund of the purchase price or replacement of the product, at the company's option.

## STORAGE AND DISPOSAL

STORE IN A DRY AREA AWAY FROM HEAT AND SEVERE COLD. KEEP PARTIALLY USED CONTAINER TIGHTLY SEALED. DO NOT CONTAMINATE WATER, FOOD OR FEED BY STORAGE OR DISPOSAL.

## PESTICIDE DISPOSAL

PESTICIDE WASTES ARE TOXIC. IMPROPER DISPOSAL OF EXCESS PESTICIDES OR RINSATE IS A VIOLATION OF FEDERAL LAW. IF THESE WASTES CANNOT BE DISPOSED OF BY USE ACCORDING TO LABEL INSTRUCTIONS, CONTACT YOUR STATE PESTICIDE OR ENVIRONMENTAL CONTROL AGENCY, OR HAZARDOUS WASTE REPRESENTATIVE AT THE NEAREST EPAREGIONAL OFFICE FOR GUIDANCE.

## CONTAINER DISPOSAL \*\*\*

TRIPLE RINSE CONTAINER, THEN OFFER IT FOR RECY-CLING OR RECONDITIONING, OR PUNCTURE AND DISPOSE OF IN A SANITARY LANDFILL, OR BY OTHER PROCEDURES APPROVED BY STATE AND LOCAL AUTHORITIES.

## FIBERGLASS ANTI-FOULING BOTTOM PAINT COURSE BERNELLIS

**661 BLUE** 

A Full Season of Protection at a money-saving price

NET CONTENTS ONE U.S. GALLON (3.785 LITERS)

W

1

PRECAUTIONARY STATEMENTS
HAZARDS TO HUMANS AND DOMESTIC ANIMALS

CAUSES EYE IRRITATION. HARMFUL IF ABSORBED THROUGH SKIN.
AVOID CONTACT WITH SKIN, EYES, OR CLOTHING. WEAR PROTECTIVE
CLOTHING SUCH AS GLOVES, LONG SLEEVED COTTON SHIRT, LONG
PANTS AND HAT. MAY BE FATAL IF SWALLOWED OR INHALED. DO NOT
BREATHE DUST, VAPOR, OR SPRAY MIST. WEAR A MASK OR RESPIRATOR JOINTLY APPROVED BY THE MINING ENFORCEMENT AND SAFETY
ADMINISTRATION AND BY THE NATIONAL INSTITUTE FOR OCCUPATIONAL SAFETY AND HEALTH WHILE SANDING BOAT SURFACES. REMOVE
CONTAMINATED CLOTHING AND WASH BEFORE REUSE. WASH THOROUGHLY WITH SOAP AND WATER AFTER HANDLING.

STATEMENT OF PRACTICAL TREATMENT

IF SWALLOWED: DRINK PROMPTLY A LARGE QUANTITY OF WATER.
-AVOID ALCOHOL, GET MEDICAL ATTENTION.

IF IN EYES: FLUSH WITH PLENTY OF WATER, GET MEDICAL ATTENTION.
IF ON SKIN: WASH WITH PLENTY OF SOAP AND WATER, GET MEDICAL
ATTENTION.

IF INHALED: REMOVE VICTIM TO FRESH AIR. IF NOT BREATHING, GIVE ARTIFICIAL RESPIRATION, PREFERABLY MOUTH TO MOUTH. GET MEDICAL ATTENTION.

ÉNVIRONMENTAL HAZARDS

THIS PAINT IS TOXIC TO FISH, DO NOT APPLY DIRECTLY TO WATER BY CLEANING OF EQUIPMENT OR DISPOSAL OF WASTES, DO NOT ALLOW CHIPS AND DUST FROM PAINT REMOVAL TO ENTER WATER. DISPOSE OF PAINT IN AN APPROVED LANDFILL

PHYSICAL AND CHÉMICAL HAZARDS TO NOT USE OR STORE NEAR HEAT OR OPEN FLAME. PRODUCT DESCRIPTION: THIS PRODUCT PROVIDES ANTIFOULING PROTECTION AGAINST BARNACLES, ALGAE, AND HYDROIDS IN SALT AND FRESH WATER ON BOAT BOTTOMS ONLY. ITS MODIFIED EPOXY BASE RENDERS A HARD, SMOOTH FINISH WITH DURABILITY AND ABRASION RESISTANCE. IT HAS UNIVERSAL APPLICATION OVER ALL TYPES OF PROPERLY PREPARED BOTTOM PAINTS (EXCEPT ALUMINUM). FOR USE ON FAST FIBERGLASS BOATS, AS WELL AS WOOD AND STEEL HULLS, WHERE A TOUGHER THAN NORMAL COATING IS DESIRED. MAY BE BURNISHED EVEN SMOOTHER FOR RACING SAIL AND POWER BOATS.

**DIRECTIONS FOR USE** 

IT IS A VIOLATION OF FEDERAL LAW TO USE THIS PRODUCT IN A MANNER INCONSISTENT WITH ITS LABELING.

SURFACE PREPARATION: SURFACE MUST ALWAYS BE CLEAN, DRY AND PROPERLY PREPARED PRIOR TO PAINTING. FAILURE TO DO SO WILL LEAD TO EVENTUALLY BLISTERING AND/OR PEELING. ALL SANDED SURFACES MUST BE WIPED CLEAN WITH 70021 REDUCTENTHINNER TO REMOVE SANDING RESIDUE.

GENERAL APPLICATION: FOR USE ON BOATS BELOW THE TRUE WATERLINE. CAN BE BRUSHED OR ROLLED ON FIBERGLASS, WOOD, STEEL AND PREVIOUSLY PAINTED SURFACES PER APPLICATION SYSTEMS BELOW, DO NOT USE ON ALUMINUM. TWO (2) COATS ARE RECOMMENDED FOR BEST PERFORMANCE.

MIXING AND THINNING: SHAKE OR MIX THOR-OUGHLY AND STIR CONTINUOUSLY WHILE USING. WHEN APPLYING WITH BRUSH OF ROLLER, DO NOT THIN BOTTOM PAINTS.

THEORETICAL COVERAGE: DEPENDING ON SURFACE AND CONDITIONS, ONE GALLON OF BOTTOM PAINT WILL USUALLY COVER OVER 350 SQUARE FEET OF SURFACE WHEN BRUSHED OR ROLLED.

CLEAN UP: USE 70021 REDUCER/THINNER FOR CLEANING EQUIPMENT AND PAINT BRUSHES.

ESTIMATED DRY TIMES: BOTTOM PAINTS ARE DESIGNED FOR OVERCOATING AFTER AN OVERNIGHT DRY. PRIOR TO LAUNCHING, ALLOW A MINIMUM DRY OF OVERNIGHT AND MAXIMUM OF 60 DAYS. IF DRYING CONDITIONS ARE POOR, OR IF PAINT WAS APPLIED TOO THICKLY, LONGER PERIODS OF DRYING WILL BE REQUIRED. FRESH COATS OF PAINT MUST BE THOROUGHLY DRY BEFORE OVERCOATING.

YEARLY REPAINTING: SCRUB BOTTOM CLEAN AT HAUL-OUT. REPAINT ONLY IF OLD PAINT IS SOUND AND TIGHT; IF NOT, REMOVE IT BY SANDING OR WITH PAINT REMOVER. IF OLD PAINT IS ROUGH, SAND IT WITH 100-150 GRIT SANDPAPER. PREPARE SEAMS, NICKS AND CHIPS AS BELOW. SPOTCOAT ANY SCUFFS WITH ANTIFOULANT. APPLY 1-2 COATS OF ANTIFOULANT.

ON BARE WOOD: IF SEAMS ARE NOT FLUSH, FILL THEM WITH SEAM COMPOUND. DRY SEVERAL DAYS UNTIL SKIN FORMS. DO NOT SAND. FILL NICKS WITH TROWEL CEMENT, DRY HARD, SAND, APPLY 3035 UNDERCOAT PRIMER, THEN APPLY 2 COATS OF ANTIFOULANT.

ON BARE FIBERGLASS: DEWAX BY WASHING WITH 70021 REDUCER, REMOVE DISSOLVED WAX AT ONCE WITH CLEAN PAPER TOWELS OR RAGS; REPEAT; SAND HARD TO A DULL FINISH WITH 80-100 GRIT SANDPAPER. FILL ANY CHIPS WITH TROWEL CEMENT, DRY HARD, SAND. APPLY 3035 SUPERCOAT WHITE PRIMER OR 3038 NON-SANDING GRAY PRIMER, THEN APPLY TWO COATS OF ANTIFOULANT.

ON BARE STEEL: SANDBLAST SURFACE TO A NEAR WHITE METAL: REMOVE BLAST RESIDUE WITH A BROOM AND AIRHOSE. WIPE OFF WITH 70021 REDUCER/THINNER. DO NOT SAND. FILL IN ANY PERFECTIONS WITH FAIRING COMPOUND. SAND SMOOTH AND WIPE CLEAN. APPLY 3 COATS OF 3037 RED OXIDE PRIMER OR 3039 ZINC CHROMATE PRIMER, FOLLOWED BY TWO COATS OF BOTTOM PAINT.

REV. 5/99

NAUTICAL PAINT A DIVISION OF INTERNATIONAL PAINT, INC. 2270 MORRIS AVENUE • UNION, NJ 07083 • 800-628-8422 454