5700 B CHRIS CRAFT COPPER BRONZE BOTTOM PAINT

A copper bronze bottom paint, containing a large portion of metallic copper bronze, producing a smooth, bright copper colored surface. Chris-Craft Copper Bronze Bottom Paint has good adhesion to painted or unpainted surfaces.

DIRECTIONS FOR USE — Stir well before using and see that the surface is well sanded, clean, dry and free from dirt and grease. Allow 12 hours drying time between coats. Wait 24 hours after last coat before launching. Metal surfaces must be well primed prior to applying Copper Bronze Bottom Paint.

NEW WORK -- Three coats are recommended without thinning.


OLD WORK — The old surface should be well sanded, all loose paint removed and bare spots touched up. Apply two coats of Chris-Craft Copper Bronze Bottom Paint without thinning. For a bright smooth finish, stir the paint well before using and occasionally while using.

WARNING — Contains Copper and Petroleum illate. Cannot be made non-poisonous. Harmful if swallowed or inha' ay cause skin irritation or delayed chemical burns. Do Not breathe vapor, dust or spray mist. If sprayed or sanded, wear a mask to prevent inhalation. Do Not get in eyes, on skin or clothing. Clothing should be washed with soap and hot water immediately after using. Keep away from heat and open flame. Use with adequate ventilation. Close container after each use.

KEEP OUT OF REACH OF CHILDREN

Note: Do not reuse empty container. Destroy it by perforating or crushing. Bury or discard in a safe place.

U.S.D.A. Registration No. 3658-23

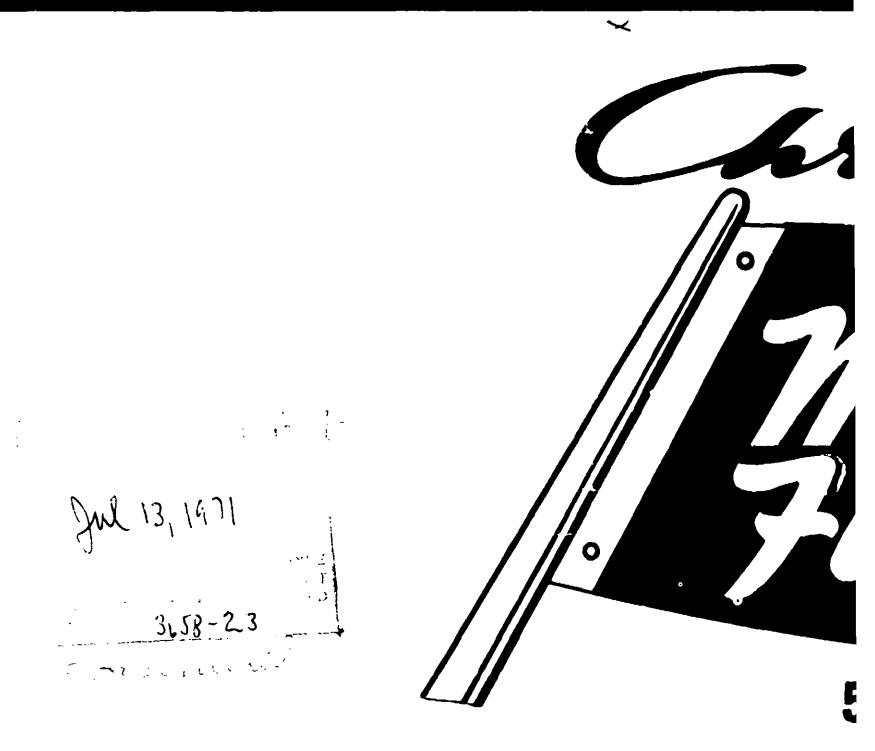

WARNING! COMBUSTIBLE!

HARMFUL OR FATAL IF SWALLOWED

KEEP OUT OF THE REACH OF CHILDREN USE GENUIN

SEE CAUTIONS ELSEWHERE ON LABEL

NET CONT. 128 FL. OZS. (1 GAL.)



NG! COMBUSTIBLE!

1971

OR FATAL IF SWALLOWED

THE REACH OF CHILDREN USE GENUINE CHRIS-CRAFT MARINE FINISHES

INS ELSEWHERE ON LABEL

T. 128 FL. OZS. (1 GAL.)



BOTTOM PAINT

5700 B COPPER BRONZE

Active Ingredients: 33.6% Copper as Metal—-33.6%

Inert Ingredients:

R

100.0% 33.6%

66.4%

30.4%

46.0%

Copper Flakes—100%

Vehicle:

Phenolic Resin, Ester Gum,

Hardened Rosin, Tung & Linseed Oils.

Volatiles:

Pigments:

Copper as Metallic—33.6%

Petroleum Thinner-100%

100.0%