

# PETTIT

marine  paint

## UNEPOXY

ANTI FOULING

1922 BRONZE

ATLANTIC FORMULA

32 FL.OZ. (1 QT.) 946 mL

KEEP OUT OF REACH OF CHILDREN.

**DANGER!** SEE SIDE PANEL FOR  
ADDITIONAL PRECAUTIONARY STATEMENTS.

40.8% Aromatic Hydrocarbons  
36.0% Copper Powder  
9.5% Epoxy Acrylic Ester  
6.4% Magnesium Silicate  
5.0% Resin  
3.5% Bis (Tributyltin) Oxide

100.0%

Active Ingredients  
36.0% Copper Powder  
3.5% Bis (Tributyltin) Oxide  
80.5% Inert Ingredients

100.0%

COPPER AS METALIC 35,70

This product contains  
petroleum distillates.

**PETTIT PAINT CO., INC.**

BOROUGH OF ROCKAWAY, N.J. 07866

# ETTIT

ine  paint

# NEPOXY

## ANTI FOULING

## 1922 BRONZE

## ANTIC FORMULA

KEEP OUT OF REACH OF CHILDREN.


**DANGER!** SEE SIDE PANEL FOR  
ADDITIONAL PRECAUTIONARY STATEMENTS.

40.4%	Aromatic Hydrocarbons
36.0	Copper Powder
9.5	Epoxy Acrylic Ester
6.4	Magnesium Silicate
5.0	Resin
3.5	Bis (Tributyltin) Oxide

100.0%	Active Ingredients
36.0%	Copper Powder
3.5	Bis (Tributyltin) Oxide
80.5	Inert Ingredients
100.0%	

COPPER AS METALIC 35,72

This product contains petroleum distillates.

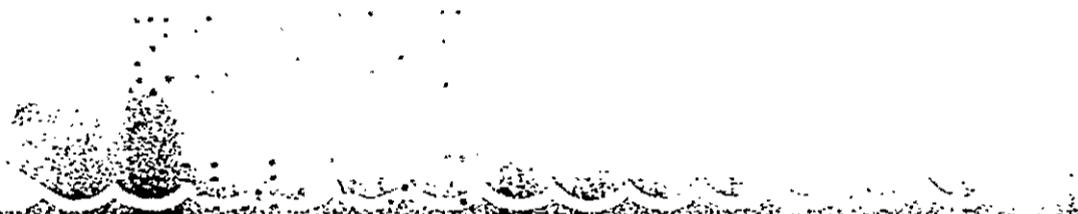

# PAINT CO., INC.

BOROUGH OF ROCKAWAY, N.J. 07866 - SPRING VALLEY, CALIF. 92077

PRECAUTIONARY STATEMENTS  
HAZARDS TO HUMANS AND DOMESTIC ANIMALS  
DANGER

Corrosive. Causes skin burns. Wear protective clothing such as gloves, long-sleeved cotton shirt, long pants, and hat. Causes eye irritation. May be fatal if swallowed. Harmful if absorbed through skin or inhaled. This product may be a dermal sensitizer. Avoid contact with skin, eyes, or clothing. Avoid breathing vapor; spray mist; dust or chips from sanding. Wash thoroughly with soap and water after handling and before eating or smoking. Use with adequate ventilation.

PRACTICAL TREATMENT

If swallowed: Drink promptly a large quantity of milk, egg whites, gelatin solution or, if these are not available, drink large quantities of water. Avoid alcohol. Get medical attention.

NOTE TO PHYSICIAN: Probably mucosal damage may contraindicate the use of gastric lavage.

If on skin: Wash with plenty of soap and water. Get medical attention.

If in eyes: Flush with plenty of water. Get medical attention if irritation persists.

ENVIRONMENTAL HAZARD

"This material is toxic to fish. Do not apply directly to water by cleaning of equipment or disposal of wastes. Do not allow chips and dust generated during paint removal to enter water. Dispose of paint debris in an approved landfill."

PHYSICAL OR CHEMICAL HAZARD

COMBUSTIBLE! Do not use or store near heat or open flame.

(continued on right hand panel)

BEST DOCUMENT AVAILABLE

(continued from left hand panel)

DIRECTIONS FOR USE

It is a violation of federal law to use this product in a manner inconsistent with its labeling.

NOTE - When product is used in confined areas or applied by spraying, wear a respirator jointly approved by the Mining Enforcement and Safety Administration (formerly the U.S. Bureau of Mines) and by the National Institute for Occupational Safety and Health under the provisions of 30 CFR 11.

GENERAL DESCRIPTION

The epoxy is an anti-fouling protective coating resistant to algae, barnacles and other marine fouling.


STORAGE & DISPOSAL

Pesticide, spray mixture, or rinse water that cannot be used according to label instructions must be disposed of according to Federal or approved state procedures under Subtitle C of the Resource Conservation and Recovery Act.

Container Disposal

Triple rinse or equivalent . . . . . or by other approved state and local procedures.

E.P.A. REG. NO. . . . . 390-13  
E.P.A. EST. NO. . . . . 390-NJ-1

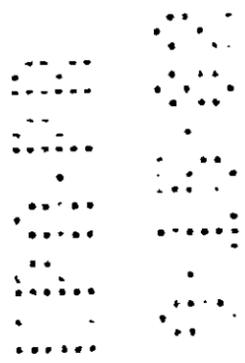

BEST DOCUMENT AVAILABLE

**PRODUCT DESCRIPTION:** Unepoxy antifouling is a hard protective paint for boat bottoms. It can be applied over most aged hard antifouling coatings. Soft antifouling paints should be removed for best adhesion.

**PREPARATION OF SURFACE:** The surface to be painted should be dry, clean, and oil free. It should be properly prepared by solvent cleaning and/or sanding before any primers or paints are applied. Follow the recommended systems below. When sanding old antifouling paint, use a face mask to prevent the inhalation of sanding dust.

**APPLICATION AND TEMPERATURE:** Unepoxy can be applied by brush, roller or spray. The work should be done between 9:00 a.m. and 4:00 p.m. under good drying conditions. The temperature range of application is 40° to 90° F. Two coats should be applied for best antifouling protection.

**PREPARATION OF PAINT:** It is necessary to thoroughly mix the paint before using. If possible shake the can of paint on a mechanical paint shaker. Before using check the sides and bottom of the can to make sure all the pigment has been mixed in. If mixing is going to be done with a wooden paddle or an electric drill mixer, pour off half of the liquid from the top of the can into another can and then properly mix in any settled pigment; then remix the two parts together thoroughly.

**THINNER:** Use Pettit's 12120 Brushing Thinner for thinning the Unepoxy on a warm, dry day or for cleaning up equipment. Do not over thin Unepoxy or inadequate paint application will occur. Use Pettit 12121 Spraying Thinner for spray application.

**DRY TIMES:** Let the first coat of Unepoxy dry between two to four hours minimum before applying the second coat. After the second coat is applied, let the paint dry at least eight hours or preferably overnight before immersing the boat. Under adverse drying conditions let the boat dry overnight to make sure all the solvent is out of the paint film. Maximum immersion time is two months.

**COVERAGE:** Unepoxy covers approximately 400 square feet per gallon.

**MAINTENANCE OF ANTIFOULING PAINT:** No antifouling paint can be effective under all conditions of exposure. Manmade pollution and natural occurrences can adversely affect antifouling paint performance. Extreme hot and cold water temperatures, silt, dirt, oil, brackish water, and even electrolysis can ruin an antifouling paint. Therefore, we strongly suggest that the boat be checked several times a month to make sure it is clean and that no growth is occurring. Lightly scrub the bottom with a soft brush to remove anything from the antifouling paint surface.

PAINT SYSTEMS

SEE DOCUMENT AVAILABLE

**FIBERGLASS:** Wash the fiberglass with Pettit's 12120 Brushing Thinner or 15095 Solvent to remove parting agent, grease, and dirt. Sand thoroughly with 80-110 sandpaper to dull the glossy fiberglass surface. Rewash the sanded surface and then apply two coats of Unepoxy. To skip the sanding operation after the surface has been washed, apply a coat of Pettit's 6004 Skip Sand primer. Then apply two coats of Unepoxy.

**BLISTERED GELCOTE:** Remove all antifouling paint by sanding or using Pettit's 6000 Fiberglass Paint & Varnish Remover. Sand the gelcote and fill any voids with Pettit's 7190 Polyester Mender. Sand smooth, apply a coat of Pettit's 4169 Polyepoxy Undercoater/4027 Polyepoxy Brush Hardener. Let dry 24 hours minimum, sand lightly and then apply two coats of Unepoxy.

WOODEN HULLS: Old antifouling paint should be thoroughly sanded or scraped to bare wood. If priming is necessary on bare wood, apply one coat of Pettit's Red Lead Primer and let dry for 24 hours. Sand lightly and apply two coats of Unepoxy.

DO NOT USE THIS PRODUCT ON STEEL OR ALUMINUM HULLS AND OUTDRIVES.

RESTOCKMENT AVAILABLE