

ACCEPTED

JAN 19 1983

Under the Federal Insecticide,
Fungicide, and Rodenticide Act
Registration No. 1622-346

PRECAUTIONARY
STATEMENTS
HAZARDS TO HUMANS AND
DOMESTIC ANIMALS
WARNING

Harmful or fatal if swallowed or absorbed through the skin. Do not get in eyes, on skin or on clothing. Avoid breathing spray mists or vapors. Wear goggles or face shield and rubber gloves when handling Penta WR.

FIRST AID

IF IN EYES - Immediately flush with large quantity of water and get medical attention.
IF ON SKIN - Flush with water. Remove and wash contaminated clothing before re-use.
IF SWALLOWED - do not induce vomiting. CALL A DOCTOR.

ENVIRONMENTAL HAZARDS

This product is toxic to fish. Do not apply directly to water. Do not contaminate water by cleaning of equipment or disposal of wastes.

PHYSICAL OR CHEMICAL HAZARDS

Do not store or use near heat or open flame.

STORAGE AND DISPOSAL

Do not reuse empty container.
Wrap container and put it in trash collection.

WARRANTY STATEMENT

Neither Chapman Chemical Company nor the seller makes any representation or warranty, expressed or implied, concerning the use of this material, other than indicated on the label. Neither shall be held responsible in any manner for any personal injury or property damage or other type of loss resulting from improper handling, storage or use of this material. The buyer accepts and uses this material on these conditions.

Panel 2

Penta WR RTU
FINAL 12/15/82
Page 2/3

AN OUTSTANDING GENERAL PURPOSE TREATMENT FOR ALL WOOD

LOGO

PENTA WR
WOOD Ready-to-Use
Preservative

(large type)
(large Wood -small RTU)

CLEAR
PENETRATING FORMULA

XXXXXXXXXXXXXXXXXX	XXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXX
X PAINT BRUSH X	X FENCES PICTURE X
X X	X STEPS X
XXXXXXXXXXXXXXXXXX	XXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXXX

REPELS WATER - STOPS ROT
AN IDEAL UNDERSEAL FOR PAINT/IMPROVES ADHESION
CONTROLS WARPING & SWELLING/RETARDS INSECT ATTACK

EPA Reg. No. 1022-356 KEEP OUT OF REACH OF CHILDREN
EPA Est. No. 1022-TN-1 WARNING
MEETS FED. SPEC. TT-W-572 B COMP. A.
See back panel for additional
precautionary statements

INGREDIENT STATEMENT


ACTIVE INGREDIENTS:	
Pentachlorophenol	4.47%
Other chlorinated phenols*	0.52%
Petroleum hydrocarbons	88.03%
INERT INGREDIENTS:	6.98%
Total	100.00%

*Equivalent to 5.2% Technical
Pentachlorophenol as defined
by Fed. Spec TT-W-570

1 gallon NOT FOR USE ON BROAD INTERIOR SURFACES SUCH AS WALLS OR FLOORS 3.785 liters

PANEL 2A

Universal Product Code	
28909	47619

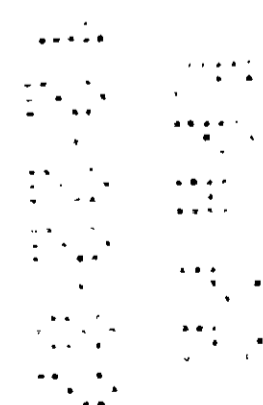

RECOMMENDED USES

PENTA WR is an outstanding general purpose wood preservative. It is recommended for windows, window frames, doors, stairs, porches, shingles, trellises, steps, subflooring, interior trim, fence pickets, fence rails, furring strips and arbors.

Neither PENTA WR nor any other product containing pentachlorophenol ("Penta") should be used on broad interior surfaces or wood in contact with foodstuffs.

Powderpost beetles and termites are killed by application of this preservative. These insects will not attack properly treated wood.

In addition to retarding decay, blue stain, and insect attack on wood this preservative controls warping, swelling, shrinking and end checking caused by changes in moisture content of lumber and plywood products.

DIRECTIONS FOR USE

It is a violation of Federal law to use this product in a manner inconsistent with its labeling.

The best results will be obtained if wood to be treated is immersed for 3 minutes or longer. If dipping is not possible, 2 liberal brush or spray applications should be applied. Allow at least 1 hour between applications. Make certain all areas are fully treated to get the maximum benefits. Allow 24 hours or longer after application of the preservative prior to painting. Less paint is needed over wood treated with this water-repellent wood preservative.

Fence posts, poles, foundation timbers and heavy wooden members should be free of bark, dry and well-seasoned and immersed in PENTA WR for a period of 12 to 48 hours to be effectively preserved. Wood should be treated before use in construction.

Wear rubber gloves and protective clothing when handling the freshly treated lumber. Avoid contamination of feed or foodstuff. Do not use on wood that may come in contact with food, feed or livestock.

Do not use PENTA WR inside any human or animal dwelling, or in any confined area where spray mist and vapors may concentrate. Do not use Penta WR on wood that is to be applied broadly to interior surfaces.

Treated sawdust and other wood waste should not come in contact with domestic animals or be used so they come in contact with useful living plants.