




# R. T. VANDERBILT COMPANY, INC.

310 W. 11th Street, Newark, N.J. 07102

NET WEIGHT 50 LBS.

# Vancide\* 89

## INDUSTRIAL PRESERVATIVE

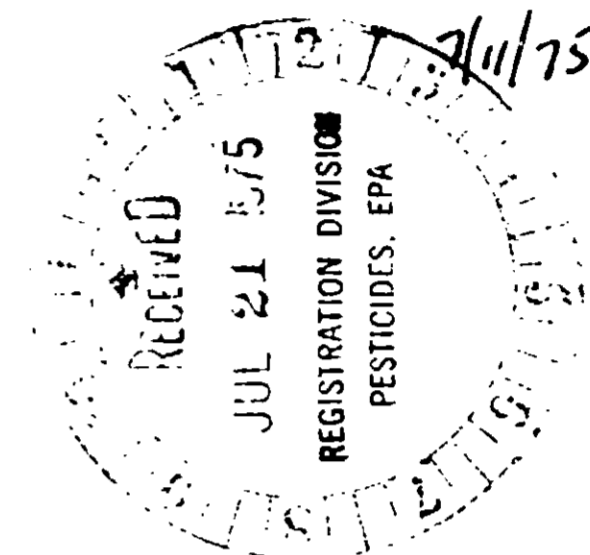

**ACTIVE INGREDIENTS:**

Captan (N-trichloromethylthio-4-cyclohexene-1,2-dicarboximide)

**INERT INGREDIENTS:**

*100 parts, by weight, of*  
90%  
10%  
100%

**DIRECTIONS FOR USE:**

**Vinyl** - To protect vinyl compounds from mildew growth and stiffening caused by bacteria and fungi, add 0.5 to 1 part VANCIDE 89 based on the resin content.

**Paint** - To protect paint from damage by mold mill in 0.25% to 1% VANCIDE 89 based on the weight of the paint. Not recommended for emulsion paints.

**Lacquer** - To protect lacquer used in coating electrical equipment from the growth of mildew, add 1% to 3% VANCIDE 89 based on the solids.

**Rubber and Rubber Coated Articles** - To prepare bacteriostatic latex for making cast or coated products, add 0.4% VANCIDE 89 based on the total dry weight of the latex compound.

**Polyethylene** - To protect polyethylene from the growth of fungi and bacteria, mill in 0.75% VANCIDE 89 by weight of the polyethylene.

**CAUTION:** Keep out of reach of children. Avoid contamination of feed and food stuffs. Avoid inhalation of dust or spray mist. Avoid contact with skin.

This product is toxic to fish. Treated effluent should not be discharged where it will drain into lakes, streams, ponds or public water. Do not contaminate water by cleaning of equipment, or disposal of wastes. Apply this product only as specified on this label.

Do not reuse empty container. Destroy when empty.

E.P.A. REG. NO. 1965-11 EPA EST. No. 239-NJ-1

*Form 4*

ACCEPTED

25 JUL 1975

Cameraman's Note  
Poor Copy

UNDER THE FEDERAL INSECTICIDE, FUNGICIDE AND RODENTICIDE ACT FOR ECONOMIC POISON REGISTRATION UNDER NO. 1965-11

