

DIRECTIONS FOR USE

SURFACES TO BE PAINTED—Dilute one (1) part Termi-Tox Concentrate with nine parts Naphtha (sometimes called Paint and Varnish Maker's Naphtha), Oleum Spirits or Mineral Spirits. Treat the wood members as described under directions for use.

OTHER USES—Dilute one (1) part Termi-Tox Concentrate with nine parts Distillate, Fuel Oil or Kerosene. Treat wood members as described under directions for use.


APPLY AS A SPRAY—Use a hand mist type or pressure sprayer. Two flowing coats of the diluted material are usually sufficient to protect joists, timbers and other wood from Termites, Lyctus Powder Pest Beetles and Wood Rotting Organisms. Treat all structures which will be placed in contact with the soil. Before construction spray all ends and joints of wood for a distance of 3 to 4 feet as well as soil around proposed chimneys, cellar stairs, vent pipes and porches.

APPLY WITH A BRUSH—When applying with a brush make sure that the material penetrates the wood. Make a second application to insure proper treatment. Allow the material to freely flow over the areas to be treated paying special attention to the ends and joints for a distance of 3 to 4 feet.

DIPPING OR SOAKING—To protect dry and well seasoned timbers, posts and other heavy wood members before construction or before placing wood in contact with the soil dip each wood member for 12 to 48 hours to give effective penetration of the wood. Fabricated products such as doors, windows, etc., should be dipped 3 to 30 minutes.

All wood members should be free of bark before receiving treatment.

952-866

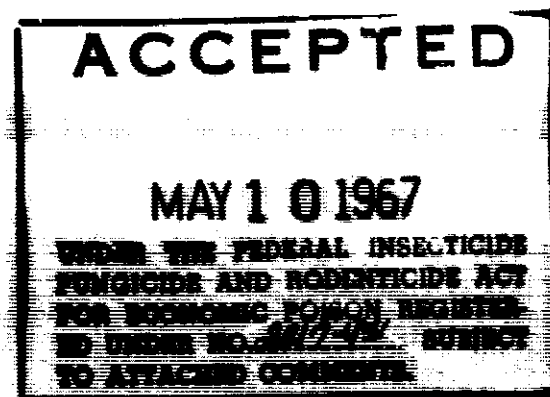

Termi-Tox

CONCENTRATE

A CONCENTRATE PENTA SOLUTION FOR USE IN THE PROTECTION OF WOOD

ACTIVE INGREDIENTS:

Pentachlorophenol	34%
Other Chlorophenols and related compounds	66%
Xylene-range aromatic solvent	17%
Pine Oil	10%
INERT INGREDIENTS:	33%

TOTAL.....100%

PROTECTS AGAINST TERMITES, WOOD ROTTING FUNGI, LYCTUS POWDER POST BEETLES AND OTHER WOOD DEGRADING ORGANISMS

WARNING: Keep Out of Reach of Children

See Side Panel for Additional Warnings

Contains 40% Technical Pentachlorophenol as defined in Federal Specifications TT-W-570

NET CONTENTS 1 GALLON

952-866

Manufactured by Private Brands, Inc. for various customers as sub-registered

DIRECTIONS FOR USE

TERMITE CONTROL IN HOUSES—When termites are known to exist in foundation structures such as supporting pillars, in steps and porches as well as in house sidings and upper structures the soil adjoining the wood or adjacent to termite runs should be treated. Since the Termite nest in the soil the natural thing to eliminate them is to cut them off from the nest. Open a trench around the foundation or the adjacent wood structures 30 inches deep and 6 inches wide, but not below the top of the footing if this is more shallow. Treat the bottom of the trench with 1 gallon of the diluted material per 2 linear feet and then replace the soil in the trench and treat the back fill at the same rate. Inspect treated areas annually for reinfestations. For trenches 15 inches deep and less use 5 gallons per 10 linear feet of the trench.

WARNING—Harmful if swallowed or absorbed through the skin. Causes skin irritation. Do not breathe vapor, fumes or spray mist. Do not get into eyes, on skin or on clothing. Wash thoroughly. Do not store or use near open flame. Plants or shrubbery should be removed within 3 feet of treatment area or protect plants with Tar Paper. Keep children and pets off of newly treated areas.

NON-WARRANTY—Seller makes no warranty, expressed or implied, regarding this product except the composition as set forth in the ingredient statement herein. Buyer and user assumes all risk of possession, handling or use, whether or not in accordance with any directions contained herein.

952-866

U.S. PAT. NO. 2,217-

Do not contaminate any body of water by cleaning of equipment, disposing of waste. This material is toxic to fish.