



X-255

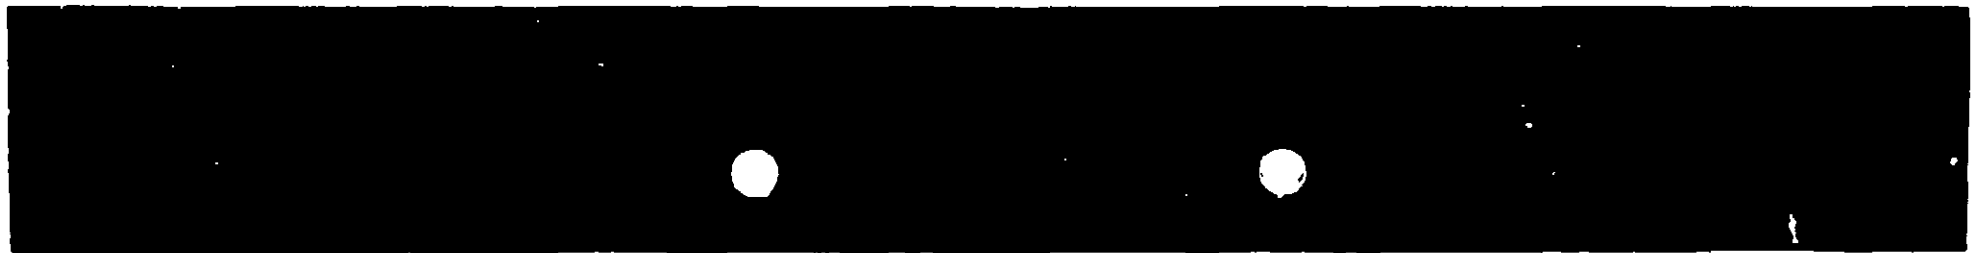

MANUFACTURED BY  
**JOTUN - BALTIMORE COPPER PAINT CO.**  
501 KEY HIGHWAY BALTIMORE, MD. 21230

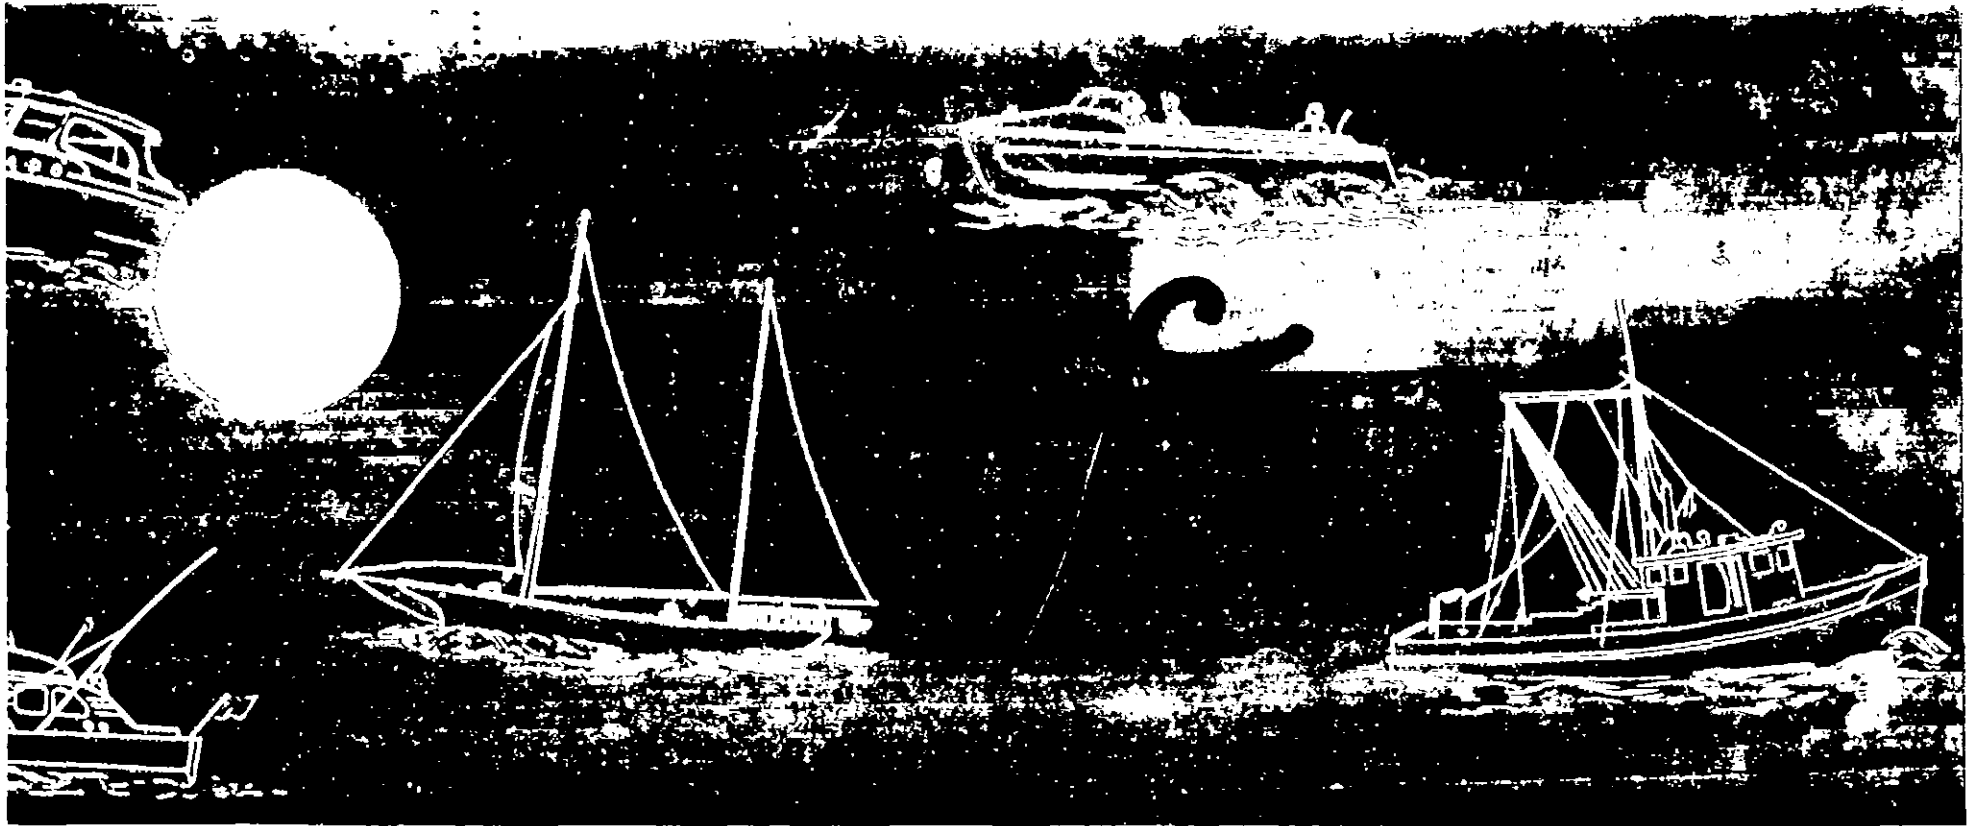

X-255

A. LABEL FACE

X-255 EVERTOX BLUE COPPER  
ANTI-FOULING

ACTIVE INGREDIENTS	
Cuprous Oxide	35.3%
INERT INGREDIENTS	64.7%
	<u>100.0%</u>
Copper as Metallic	31.9%

CONTAINS PETROLEUM DISTILLATES


KEEP OUT OF REACH OF CHILDREN

WARNING

SEE SIDE PANEL FOR ADDITIONAL PRECAUTIONARY STATEMENTS

EPA Reg. No. 2568-37  
EPA Est. No. 2568

Net Contents: One Gallon  
3.785 Liters

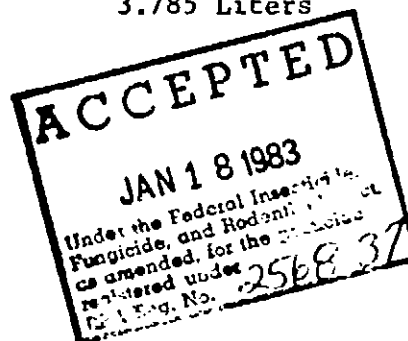

**B**

PRECAUTIONARY STATEMENTS  
HAZARDS TO HUMANS

WARNING

Causes eye irritation. Harmful if absorbed through skin. Avoid contact with skin, eyes or clothing. Wear protective clothing such as gloves, long-sleeved cotton shirt, long pants, and hat. May be fatal if swallowed or inhaled. Do not breathe vapor or spray mist. While spraying paint or sanding boat surface, wear a mask or respirator jointly approved by the Mining Enforcement and Safety Administration and the National Institute for Occupational Safety and Health. Remove contaminated clothing and wash before reuse. Wash thoroughly with soap and water after handling. This product is for commercial use only.

FIRST AID

If swallowed: Drink promptly a large quantity of milk, egg whites, gelatin solution or, if these are not available, drink large quantities of water. Avoid alcohol. Get medical attention.

If in eyes: Flush with plenty of water. Get medical attention.

If on skin: Wash with plenty of soap and water. Get medical attention.

If inhaled: Remove victim to fresh air. If not breathing, give artificial respiration, preferably mouth-to-mouth. Get medical attention.

ENVIRONMENTAL HAZARDS

This material is toxic to fish. Do not apply directly to water by cleaning of equipment or disposal of wastes. Do not allow chips and dust generated during paint removal to enter water. Dispose of paint debris in an approved landfill.

PHYSICAL OR CHEMICAL HAZARDS

Flammable. Keep away from heat and open flame.

commercial

X-253  
X-254  
X-255

#### C. DIRECTIONS FOR USE

It is a violation of Federal Law to use this product in a manner inconsistent with its labeling.

Seaproof Evertox contains only cuprous oxide as its toxicant, and is designed to prevent the growth of barnacles. It should be used in northern coastal waters. If proper surface preparation and priming are employed, it may be used on any type of hull.

Do not thin Evertox-it is ready-to-use as received. Mix contents thoroughly to insure the complete distribution of the cuprous oxide throughout the paint. Allow four to six hours drying time at 60°F between coats and before launching. Do not let the film dry more than 24 hours after final coat before launching.

WOOD-Applied directly to bare wood.

FIBERGLASS-Sand with 80 grit paper-wipe down with solvent to remove dust and debris, and apply Evertox directly to clean, dry surface. Regatta 3840 Fiberglass Solvent Wash will help in removing both dust and residual mold release.

STEEL and ALUMINUM-Prepare surface with Regatta Vinyltex 50/51 Wash Primer, followed by two coats of Epoxydur Black Mastic, 3630/3631.

#### STORAGE and DISPOSAL

Pesticide, spray mixture or solvent rinse that cannot be used according to label instructions, must be disposed of according to Federal or approved state procedures under subtitle C of the Resource Conservation and Recovery Act.


To dispose of container, triple rinse; then offer for recycling or reconditioning, or puncture and dispose of in a sanitary landfill or by other approved state and local procedures.

X-255

D. ANALYSIS

PIGMENTS		46.9%
Cuprous Oxide	35.3%	
Phthalo Blue	2.8%	
Titanium Dioxide	7.0%	
Inert Pigment	1.8%	
VEHICLE		53.1%
Rosin	24.6%	
Processed Rosin	2.6%	
Petroleum Resin	8.4%	
Pine Oil	1.4%	
Aromatic Hydrocarbons	16.1%	
		<u>100.0%</u>

(B-223-B)



Causes eye irritation. Harmful if absorbed through skin. Avoid contact with skin, eyes or clothing. Wear protective clothing such as gloves, long-sleeved cotton shirt, long pants, and hat. May be fatal if swallowed or inhaled. Do not breathe vapor or spray mist. Wear a mask or respirator jointly approved by the Mining Enforcement and Safety Administration and the National Institute for Occupational Safety and Health. Remove contaminated clothing and wash before reuse. Wash thoroughly with soap and water after handling.

#### FIRST AID

If swallowed: Drink promptly a large quantity of milk, egg whites, gelatin solution or, if these are not available, drink large quantities of water. Avoid alcohol. Get medical attention.

If in eyes: Flush with plenty of water. Get medical attention.

If on skin: Wash with plenty of soap and water. Get medical attention.

If inhaled: Remove victim to fresh air. If not breathing, give artificial respiration, preferably mouth-to-mouth. Get medical attention.

#### ENVIRONMENTAL HAZARDS

This material is toxic to fish. Do not apply directly to water by cleaning of equipment or disposal of wastes. Do not allow chips and dust generated during paint removal to enter water. Dispose of paint debris in an approved landfill.

#### PHYSICAL OR CHEMICAL HAZARDS

Do not use or store in heat or open flame.