

"TRI-LUX" ANTIFOULING PAINTS

"TRI-LUX" ANTIFOULING PAINTS are of the organotin type and will not corrode aluminum. "TRI-LUX" ANTIFOULING PAINTS will not cause pitting due to galvanic attack even if aluminum is scratched to bare metal during use.

DIRECTIONS

WOOD—Apply two to three coats of "TRI-LUX" ANTIFOULING PAINT to bare wood. Wood should be dry and clean before application of paint.

FIBERGLASS—Wipe fiberglass thoroughly with 202 "INTERLUX" FIBERGLASS SOLVENT WASH to remove mold release and apply one coat 202 "INTERLUX" FIBERGLASS PRIMER. After overnight drying time apply two coats "TRI-LUX" ANTIFOULING PAINT.

OR

Sand fiberglass thoroughly with 80 Grit Production Paper. Wipe surface clean with 355 VINYLUX SOLVENT. Apply two coats of "TRI-LUX" ANTIFOULING PAINT.



ALUMINUM—Roughen surface with medium grit Emery Cloth to a uniform bright finish. Wipe surface with a clean cloth wet with 216 "INTERLUX" SPECIAL THINNER until all residue is removed. Apply one coat of 352/354 VINYLUX PRIME-WASH (This step is absolutely necessary in order to obtain proper adhesion of the "TRI-LUX" PAINTS.) Follow with two coats of "TRI-LUX" ANTIFOULING PAINT of the desired color.

BOAT YACHTS—25 FEET AND OVER—Ask your "INTERLUX" representative for application directions.

Except when "TRI-LUX" PAINTS are applied over themselves, or to another known vinyl-type paint in good condition, they should always be applied to bare surfaces or recommended primed surfaces.

Under normal painting conditions, "TRI-LUX" FINISHES may be completed within four hours of application. "TRI-LUX" ANTIFOULING PAINTS need not be immediately immersed after painting. Several days, or even weeks, may transpire before hardening. However, because the paint film will deteriorate to some extent when exposed to atmospheric conditions, it is wise to keep the boat in the water, or under cover, to protect the paint film.

For application and equipment, or to replace solvent that has been used, use 355 VINYLUX SOLVENT. For application of "TRI-LUX" ANTIFOULING PAINTS.

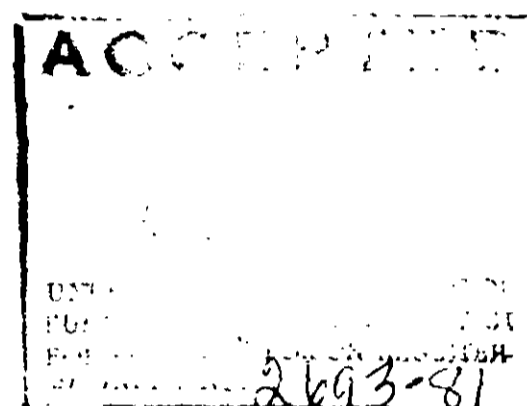

ACTIVE INGREDIENT	PERCENT
TRIBUTYL TIN FLUORIDE	13.8 %
INERT INGREDIENTS	86.2 %
	100.0 %

ELEMENTAL TIN-- 5.25 %



ONE U.S. GALLON

DANGER!

KEEP OUT OF REACH OF CHILDREN

See other warnings on back panel

Tri-LUX[®]
VINYL-BASE PAINT
CONTAINS **bioMET**
Antifouling Paint

WIDE SPECTRUM DARK BLUE (TBT[®])

66


MARK I

U.S.P.A. REG. NO. 2693-81

International Paint Company, Inc.
NEW YORK, N.Y. 10005 SAN FRANCISCO, CALIF. 94104

Cameraman's Note

Poor Copy

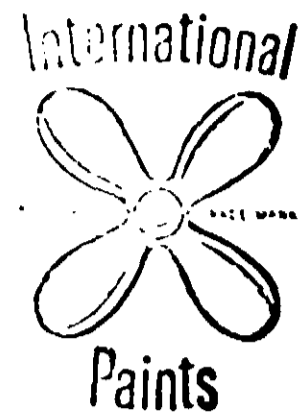

ONE U.S. GALLON

DANGER!

KEEP OUT OF REACH OF CHILDREN
See other warnings on back panel

Tri-Lux[®]
VINYL-BASE PAINT
CONTAINS **bioMET**[™]
Antifouling Paint

REPROD
2693-81

①	PERCENT
FLUORIDE	13.8 %
	86.2 %
	100.0 %

25 %

WIDE SPECTRUM DARK BLUE (TBTF)

66

MARK I

U.S.P.A. REG. NO. 2693-81

International Paint Company, Inc.

NEW YORK, N.Y. 10005 SAN FRANCISCO, CALIF. 94104 NEW BRUNSWICK, N.J. 08901

FACTORIES

U.S.A.	UNION, N. J.	HOLLAND	RIJSSWIJK
U.S.A.	SAN FRANCISCO	ITALY	GENOVA
U.S.A.	NEW ORLEANS	ITALY	TRIESTE
AUSTRALIA	SYDNEY	MEXICO	MEXICO CITY
BRAZIL	RIO DE JANEIRO	NEW ZEALAND	AUCKLAND
CANADA	MONTREAL	NEW ZEALAND	WELLINGTON
CANADA	REGINA	NIGERIA	IKEJA
CANADA	VANCOUVER	NORWAY	BERGEN
DENMARK	COPENHAGEN	PORTUGAL	SETUBAL
ENGLAND	FELLING-ON-TYNE	SCOTLAND	GLASGOW
FRANCE	ROUEN	SPAIN	BILBAO
GERMANY	HAMBURG	SWEDEN	GOTHENBURG
		VENEZUELA	MARACAIBO


DANGER!

May be fatal if swallowed. May be absorbed through skin. Causes skin irritation. Do not spray; apply by brush only.

Use with adequate ventilation.

Do not get in eyes, on skin, or clothing. In case of skin contact remove contaminated clothing and immediately wash skin with soap and water. If irritation persists, get medical attention. Wash contaminated clothing before reuse. For eyes, flush with plenty of water and get medical attention. Avoid storage near food and feed products. Flammable. Keep away from heat and open flame. Close container after each use.

⑧ Do not reuse empty container. Destroy it by perforating or crushing. Bury or discard in a safe place.



Camcraman's Note
Poor Copy