

2693-192

7/13/2001

184

# ULTRA™ with BIOLUX™

## BLUE

- Contains Biolux to resist slime
- High Copper Antifouling for Ultimate Protection
- Teflon® Added for Durability and Easy Cleaning
- Biolux Boosts Antifouling Performance by Controlling Slime

**KEEP OUT OF REACH OF CHILDREN**

### WARNING

See side panel for additional precautionary statements

NET CONTENTS: ONE U.S. GALLON (3.785 LITERS)

EPA Registration No. 2693-192  
EPA Establishment No. 2693-NJ

#### Active Ingredients:

Cuprous Oxide	= 66.65%
N-Cyclopropyl-N'-(1,1-dimethylethyl)-6-(methylthio)-1,3,5-triazine-2,4-diamine	= 1.59%

Inert Ingredients:	= 31.76%
	100.00%

Copper as Metallic	= 59.2%
--------------------	---------

**DISCLAIMER:** The performance of any marine coating depends on many factors outside the control of International Paint Inc. including the surface preparation, proper application and the environmental conditions. Therefore, International Paint Inc. cannot guarantee the suitability of this product for your particular purpose or application. **IMPLIED WARRANTIES OF FITNESS FOR A PARTICULAR PURPOSE AND MERCHANTABILITY ARE EXCLUDED.** INTERNATIONAL PAINT INC. SHALL NOT UNDER ANY CIRCUMSTANCES BE LIABLE FOR INCIDENTAL OR CONSEQUENTIAL DAMAGES. By purchase or use, of the product, buyer agrees that the sole and exclusive remedy, if any, is limited to the refund of the purchase price or replacement of the product at International Paint Inc.'s option.

International Paint Inc.  
Union, NJ

**ACCEPTED**  
JUL 13 2001  
Under the Federal Insecticide, Fungicide, and Rodenticide Act as amended, for the pesticide, registered under EPA Reg. No. 2693-192

274

**ACCEPTED**  
JUL 13 2001  
Under the Federal Insecticide, Fungicide, and  
Rodenticide Act as amended, for the  
pesticide, registered under  
EPA Reg. No. 2627-192

**PRECAUTIONARY STATEMENTS  
HAZARDS TO HUMANS AND DOMESTIC ANIMALS  
WARNING**

Causes eye irritation. Harmful if absorbed through skin. Avoid contact with skin, eyes or clothing. Wear protective clothing such as gloves, long-sleeved cotton shirt, long pants and hat. May be fatal if swallowed or inhaled. Do not breathe vapor or spray mist. While spraying paint or sanding or sandblasting boat surfaces wear a mask or respirator jointly approved by the Mining Enforcement and Safety Administration and the National Institute for Occupational Safety and Health. Remove contaminated clothing and wash before reuse. Wash thoroughly with soap and water after handling. Prolonged or frequently repeated skin contact may cause allergic reactions in some individuals.

**STATEMENT OF PRACTICAL TREATMENT**

**IF SWALLOWED:** Promptly drink large quantities of water. Avoid alcohol. Get medical attention.

**IF IN EYES:** Flush eyes with plenty of water. Get medical attention.

**IF ON SKIN:** Wash with plenty of soap and water. Get medical attention.

**IF INHALED:** Remove victim to fresh air. If not breathing give artificial respiration, preferably mouth-to-mouth. Get medical attention.

**ENVIRONMENTAL HAZARDS:** This material is toxic to fish. Do not apply directly to water by cleaning of equipment or disposal of wastes. Do not allow chips and dust generated during paint removal to enter water. Dispose of paint debris in an approved landfill. Do not discharge effluent containing this product into lakes, streams, ponds, estuaries, oceans and other waters unless in accordance with the requirements of a National Pollution Discharge Elimination System (NPDES) permit and the permitting authority has been notified in writing prior to discharge. Do not discharge effluent to sewer system without previously notifying the local sewage treatment plant authority. For guidance contact your State Water Board or Regional Office of the EPA.

**PHYSICAL OR CHEMICAL HAZARD:** Flammable. Keep away from heat, sparks and open flame.

**STORAGE AND DISPOSAL:** Do not contaminate water, food or feed by storage or disposal. Open dumping is prohibited.

**PESTICIDE DISPOSAL:** Pesticide wastes are toxic. Open dumping is prohibited. Pesticide, spray mixture, or rinsate that cannot be used or chemically reprocessed should be disposed of according to procedures approved by Federal, State or local disposal authorities.

**CONTAINER DISPOSAL:** Triple rinse (or equivalent). Then offer for recycling or reconditioning, or puncture and dispose of in a sanitary landfill, or by other procedures approved by state and local procedures.

**PRODUCT DESCRIPTION:** Ultra™ with Biolux™ provides excellent long term protection from shell and weed fouling. Ultra™ with Biolux™ contains a very high loading of cuprous oxide and an organic boosting biocide called Biolux™. The cuprous oxide works best against shell fouling such as barnacles and zebra mussels and the Biolux™ booster works to control slime and algae fouling. Ultra™ with Biolux™ also contains Teflon® for added durability and easy cleaning. Ultra™ with Biolux™ is recommended for use wherever the fouling challenge is severe, and can be used in fresh, salt and brackish water on fiberglass, wood and properly primed metal boat hulls and parts. Do not use on aluminum. Ultra™ with Biolux™ can be applied over hard well sanded antifouling paint. Even though Ultra™ with Biolux™ has a very high loading of cuprous oxide it has excellent color stability and resists changing color at the waterline.

**DIRECTIONS FOR USE:**

It is a violation of Federal law to use this product in a manner inconsistent with its labeling.

**COMPATIBILITY:** Ultra™ with Biolux™ can be applied over any other hard antifouling paint after sanding the surface. Soft antifouling paints will need to be removed or overcoated with Underwater Primer 360R before applying Ultra™ with Biolux™.

V.O.C.: Less than 290 grams/liter  
(2.40 lbs./gallon)

**THEORETICAL COVERAGE:** 530 sq. ft./ gallon  
yields 2 mils dry film thickness.


**THINNER:** Special Thinner 216 or  
Brush-Ease 433

**DRY TIMES:** Touch dry - 2 hours  
77°F (25°C) Dry to overcoat - 16 hours minimum  
Dry to launch - 16 hours minimum  
60 days maximum

**THINNING:** Thin only when necessary  
Do not exceed 10% maximum.

**APPLICATION TEMPERATURE:** 50°F (10°C)  
and above (air and hull)

**CLEAN-UP:** Special Thinner 216 or  
Brush-Ease 433

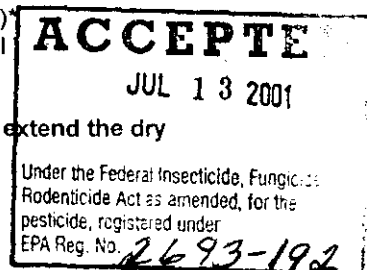

\*If either the air or hull temperature falls below 50°F (10°C) during the 16 hour dry time extend the dry times to 36 hours minimum.

**APPLICATION SYSTEMS**

**PREVIOUSLY PAINTED - GOOD CONDITION:** Remove all traces of loose paint and contamination by sanding the entire surface with 80 grit sandpaper, wipe surface clean with Special Thinner 216. Apply at least two coats of Ultra™ with Biolux™.

**PREVIOUSLY PAINTED - POOR CONDITION:** Completely remove all old antifouling paint, using Interstrip 299E. Sand and wipe clean with Fiberglass Solvent Wash 202.

**BARE FIBERGLASS - (POLYESTER OR VINYLESTER)**

**SURFACE PREPARATION:** It is very important that bare fiberglass be properly prepared to prevent delamination of the antifouling paint. Scrub the surface thoroughly with soap and water using a stiff brush. Flush well with water. Wipe a small area with a clean cloth that has been wetted with Interlux® Fiberglass

Solvent Wash 202. While the surface is still wet remove with a clean dry cloth. Repeat this process until the entire surface has been cleaned. To be certain that all of the contamination has been removed, run water over the surface. If the water beads up or separates, wipe again with Fiberglass Solvent Wash 202. When the water sheets off, all contamination has been removed. Sanding does not remove contamination. After the surface has been properly cleaned, proceed with the application system below.

**BARE FIBERGLASS - NO SAND SYSTEM:** Clean the surface following the preparation procedure above. Repair any surface imperfections using Interlux® Interprotect® Watertite® V135. Sand and wipe clean. Apply one thin, continuous coat of Interlux No Sand Primer by brush or roller. Follow application directions for primer and apply the first coat of Ultra™ with Biolux™. Apply a second coat allowing for the appropriate dry times.

**BARE FIBERGLASS - SANDING SYSTEM:** Clean the surface following the preparation procedure above. Sand the entire surface with 80 grit sandpaper and wipe clean with Fiberglass Solvent Wash 202 to remove sanding residue. Repair any surface imperfections with Interlux® Interprotect® Watertite® V135. Sand and wipe clean. Apply two coats of Ultra™ with Biolux™ allowing for appropriate dry times.

**BARE WOOD:** Sand the entire surface with 80 grit sandpaper, wipe surface clean with Interlux® Special Thinner 216. Repair imperfections with Interlux® Interprotect® Watertite® V135. Sand and wipe clean. Apply the first coat of Ultra with Biolux thinned 10% with Special Thinner 216 or Brush-Ease 433. Fill seams with Interlux® Seam Compound 30 (if necessary). Apply two more coats of Ultra with Biolux unthinned, allowing the appropriate dry times.

**UNDERWATER METALS:** Contact the Interlux® Technical Service Department at 1-800-468-7589 for full information on how to properly prime underwater metals. DO NOT USE ON ALUMINUM.

Teflon® is a trademark of DuPont. Only DuPont makes TEFLON.

