

NO. 67013 Penta Line of the Police of the Po

DILUTION

DILUTE WITH TEN PARTS BY VOLUME OF MINERAL SPIRITS, RANGE OIL, KEROSENE, LIGHT FUEL OIL OR PETROLEUM EQUIVALENT.

1 GALLON CONCENTRATE MAKES 11 GALLONS WOOD PRESERVER.

ASSAY


ACTIVE INGREDIENTS:

^p entachlorophenol	34.4%
Other Chlorophenols & Related Compounds	4.0°a
Aromatic Petroleum Hydrocarbons	38.2°
INERT INGREDIENTS:	23.4°∙

*Equivalent to 40.0% technical pentachlorophenol. Penta Concentrate, with clean solvent, produces a clean solution for protecting wood against fungus growths which cause rot and stain, termites, lyctus (powder post) beetles and carpenter ants.

Diluted Penta Concentrate is especially effective in termite control, both as a wood preservative and as a soil poision.

This wood preservative conforms to Western Pine Associations formulation and to the Standard established by the National Woodwork Manufacturers Association.

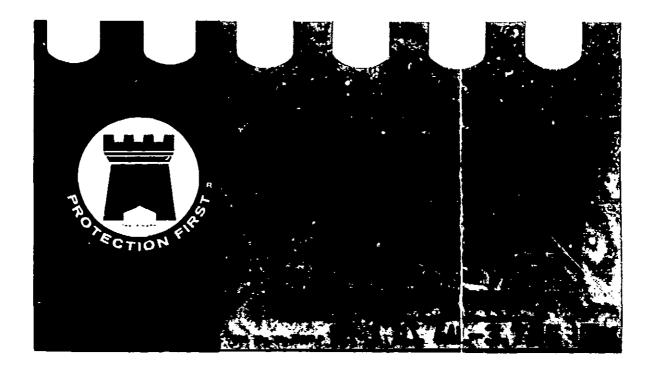

100.0%

ACCEPTED

9-14-72

BALIN ECTION
BOOKS (10E A)

nta

Ocentrate

United THE 1. RAL IN ECTION RODEN COME AS FLOWDER OF STREET AS STREET



WOOD PRESERVATION

NO. 67013 Penta

Before treatment, all wood should be normally dry. All unsound wood should be removed two feet beyond any visible evidence of decay.

For best results, diluted Penta Concentrate should be applied so as to effect maximum penetration into the wood and maximum absorption at joints and ends. Complete immersion, where possible, in an open tank is the best procedure for accomplishing this. At least five minutes immersion per inch thickness is recommended for all cases. Where wood will be in direct contact with the ground, such as in the case of fence posts, the immersion period should be from 12-48 hours, and the posts should be peeled of bark, dry and well seasoned.

Where the immersion treatment is impractical, heavy brush application may be used. Where the wood will be in direct contact with the ground, several brush applications should be given.

Permit preserver to dry at least 48 hours before applying paint. Estimated coverage: 5 to 10 gallons per 1000 board feet for open tank treatment; 200 square feet per gallon for brush application.

FISH AND WILDLIFE CAUTION
Th's product is toxic to fish and wildlife.
Apply this product only as specified on this label.

Do not reuse empty container. Destroy it by perforating or crushing. Bury or discard in a safe place away from water supplies. Drums may be returned to reconditioner.

COMBUSTIBLE

DO NOT USE, POUR, SPILL, OR STORE NEAR HEAT OR OPEN FLAME.

PRINTED IN U.S.A.

TERMITE CONTROL

Clean out carefully all loose wood and debris under or around infested buildings. Spray all ground under buildings at rate of two gallons of diluted Penta Concentrate per five square feet of ground. Break all wood-to-earth contacts, such as steps, door framus, etc., and replace with Penta treated wood or concrete. Where construction permits, dig a trench around all foundations to a depth of at least 30 inches but not below the top of the footings. If trench is up to 15 inches deep, five gallons of diluted Penta Concentrate should be used for 10 linear feet. If deeper than 15 inches, ten gallons should be used per 10 linear feet. In either case, one half of the amount should be added at bottom of trench and the rest added to the back-fill. Grass, flowers, trees, and shrubs within 3 feet of trench should be removed or protected by tar paper or heavy kraft paper.

WARNING: Do not breathe vapors or spray mist. Causes skin irritation. Is harmful or fatal if swallowed or absorbed through skin. Do not allow to contact skin, eyes, or clothing. Keep away from foodstuff, children, pets and livestock. To remove from skin wash with plenty of warm water and soap. Wear protective clothing and rubber gloves when handling the freshly treated lumber. In case of swallowing induce vomiting by administering an emetic. Call a physician.

COMBUSTIBLE

DO NOT USE, POUR, SPILL, OR STORE NEAR HEAT OR OPEN FLAME.

Manufactured by

FORTRESS PRODUCTS COMPANY

KANSAS CITY, MISSOURI 64111 UNITED STATFS OF AMERICA

NO. 67013 PCI READY TO COI DILUTE

DILU.

OIL, KEROSENE, LIGHT FUEL OIL

1 GALLON CONCENTRATE MAKES

ASSAY

ACTIVE INGREDIENTS:

Pentachlorophenol	34.4°°
Other Chlorophenols & Related Compounds Aromatic Petroleum	4.0°°
Hydrocarbons	38.2°°
INERT INGREDIENTS:	23.4°°
	100.0°

^{*}Equivalent to 40.0% technical pentachlorophenol.



9-14-72

3809-7

NO. 67013 Penta
READY TO Concentrate



WOOD PRESERVATION

Before treatment, all wood should be nor mally dry. All unsound wood should be removed two feet beyond any visible evidence of decay.

For best results, diluted Penta Concentrate should be applied so as to effect maximum penetration into the wood and maximum absorption at joints and ends. Complete immersion, where possible, in an open tank is the best procedure for accomplishing this. At least five minutes immersion per inch thickness is recommended for all cases. Where wood will be in direct contact with the ground, such as in the case of fence posts, the immersion period should be from 12-48 hours, and the posts should be peeled of bark, dry and well seasoned.

Where the immersion treatment is impractical, heavy brush application may be used. Where the wood will be in direct contact with the ground, several brush applications should be given.

Permit preserver to dry at least 48 hours before applying paint. Estimated coverage: 5 to 10 gallons per 1000 board feet for open tank treatment; 200 square feet per gallon for brush application.

FISH AND WILDLIFE CAUTION
This product is toxic to fish and wildlife
Apply this product only as specified on this label

Do not reuse empty container. Destroy it by perforating or crushing. Bury or discard in a safe place away from water supplies. Drums may be returned to reconditioner.

COMBUSTIBLE

DO NOT USE, POUR, SPILL, OR STORE NEAR HEAT OR OPEN FLAME.

PRINTED NUSA

TERMITE CONTROL

Clean out carefully all loose wood and de bris under or around infested buildings Spray all around under buildings at rate of two gallons of diluted Penta Concentrate per five square feet of ground. Break all wood-to-earth contacts, such as steps, door frames, etc., and replace with Penta treated wood or concrete. Where construction permits, dig a trench around all foundations to a depth of at least 30 inches but not below the top of the footings. If trench is up to 15 inches deep, five gallons of diluted intrate should be used for 10 Pentc deeper than 15 inches, ten linec ਾਡੇ be used per 10 linear feet. galle In either case, one half of the amount should be added at bottom of trench and the rest added to the back-fill. Grass, flowers, trees, and shrubs within 3 feet of trench should be removed or protected by tar paper or heavy krait paper.

WARNING: Do not breathe vapors or spray mist. Causes skin irritation. Is harmful or fatal if swallowed or absorbed through skin. Do not allow to contact skin, eyes, or clothing. Keep away from foodstuff, children, pets and livestock. To remove from skin wash with plenty of warm water and soap. Wear protective clothing and rubber gloves when handling the freshly treated lumber. In case of swallowing induce vomiting by administering an emetic. Call a physician.

COMBUSTIBLE

DO NOT USE, POUR, SPILL, OR STORE NEAR HEAT OR OPEN FLAME.

Manufactured by

FORTRESS PRODUCTS COMPANY

KANSAS CITY, MISSOURI 64111 UNITED STATES OF AMERICA