

106
10/21
10/21

FIRST AID:

If swallowed: Call a physician or Poison Control Center. Drink 1 or 2 glasses of water and induce vomiting by touching back of throat with finger. Do not induce vomiting or give anything by mouth to an unconscious person.

In case of contact wash skin with soap and water, for eyes, flush with water for at least 15 minutes and get medical attention.

If inhaled, remove to fresh air.

NOTE TO PHYSICIAN: Pentachlorophenol in this product is a metabolic stimulant, causes hyperthermia. Treat symptomatically.

ENVIRONMENTAL HAZARDS:

This product is toxic to fish and wildlife. Do not apply directly to water. Do not contaminate water by cleaning of equipment or disposal of wastes.

This product is toxic to domestic animals. Treated sawdust and other wood wastes should not come in contact with domestic animals or be used as mulch where it will come in contact with useful living plants. Care should be taken to prevent drip from contacting ornamental shrubs, trees, grass and other desirable vegetation.

Vapors may cause injury if adequate ventilation is not insured. Do not use this product indoors, or any other confined areas, where the vapors may concentrate or migrate indoors and cause injury to plant or animal life.

PHYSICAL AND CHEMICAL HAZARDS

Do not use or store near heat or open flame. Close container after each use.



LIMIT OF WARRANTY AND LIABILITY

This company warrants that this material conforms to the chemical description on the label and is reasonably fit for the purposes referred to in the directions for use. This product is sold subject to the understanding that the buyer assumes all risks of use or handling of this material not in strict accordance with the directions given herewith which are beyond the control of the seller, such as for example incompatibility with other products and the manner of its use of application. NO OTHER EXPRESSED OR IMPLIED WARRANTY OF FITNESS OR MERCHANTABILITY IS MADE. The exclusive remedy of the buyer, and the limit of liability of this company or any other seller for any and all losses, injuries or damages resulting from the use or handling of this product shall be the purchase price paid by the user or buyer for the quantity of this product involved. The buyer and all users are deemed to have accepted the terms of this notice which may not be varied by any verbal or written agreement.

Manufactured Expressly For

Asplundh Tree Expert Company
Pole Treating Division
Blair Mill Road
Willow Grove, PA 19090

Net Contents _____ Pounds _____

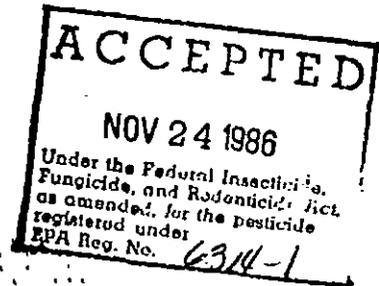

POLE-TOX PRESERVATIVE PASTE

RESTRICTED USE PESTICIDE

For sale to and use only for by certified applicators or by persons under their supervision and only for those uses covered by the certified applicators' certification.

DIRECTIONS:

It is a violation of Federal law to use this product in a manner inconsistent with its labeling.

**IMPORTANT! DO NOT DILUTE
FOR EXTERIOR USE ONLY.**

This product is a ready-to-use penetrating preservative coating, designed for the groundline treatment of standing poles and for the treatment of the groundline area of poles in the yard that will be relocated or that have been in storage for prolonged periods. This product is also useful for the treatment of piling cut-offs.

Standing Poles: Use this product only on poles-in-line found by qualified inspector to be satisfactory for continued service. Dig a trench around the pole to the depth determined by the inspector to be necessary for the application of the preservative treatment. This may vary from 18 inches in wet areas to 20 inches or more in arid regions. Scrape away dirt and decayed wood from pole surface. With a brush, paddle, scoop or mechanical applicator apply a coating a minimum of 1/16 inch thick from the bottom of the trench to a predetermined height -- 4 inches above the ground line to suit local conditions. Cover the treated area with a suitable plastic coated paper to increase the effectiveness of the treatment. Alternately, apply this product to a suitable wrapping material, and staple this wrapper to the pole before back-filling the trenched area.

For best results, in general the moisture content of wood should be less than 30% when the preservative coating is applied.

Piling Cut-Offs: Treat the cut-end with a coating 1/16 inch thick.

Yard Poles: Poles that have been held in storage for a prolonged period or used poles to be relocated, may be treated in decay vulnerable zones in a manner similar to that described for standing poles, taking care to remove dirt and decayed wood before applying treatment.

INGREDIENTS

Active Ingredients:

Pentachlorophenol*	8.96%
Other Chlorophenols and Related Compounds*	1.04%
Coal Tar Creosote Oil	35.00%
Sodium Fluoride	40.00%

Inert Ingredients


15.00%

Total

100.00%

*10.42% Technical Pentachlorophenol as defined in Federal Specification TT-W-570.

EPA Reg. No. 6314-1
EPA Est. 453-MO-1

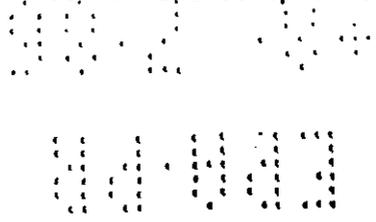

STORAGE AND DISPOSAL

Storage: Store in a closed, properly labeled container in a cool place. If static generating conditions exist, provide necessary grounding and bonding. Keep containers closed when not in use.

PESTICIDE DISPOSAL:

Do not contaminate water, food, or feed by storage or disposal. Pesticide wastes are toxic. Improper disposal of excess pesticide, spray mixture, or rinsate is a violation of Federal Law. If these wastes cannot be disposed of by use according to label instructions, contact your State Pesticide or Environmental Control Agency, or the Hazardous Waste representative at the nearest EPA Regional Office for guidance.

CONTAINER DISPOSAL:

Triple rinse (or equivalent). Then offer for recycling or reconditioning, or puncture and dispose of in a sanitary landfill, or by other procedures approved by state and local authorities.

APPLICATOR SAFETY:

The U.S. EPA has determined that pentachlorophenol can produce defects in the offspring of laboratory animals. Exposure to pentachlorophenol during pregnancy should be avoided.

Applicators must wear gloves impervious to the wood treatment formulations (e.g., polyvinyl acetate (PVA), polyvinyl chloride (PVC), or neoprene). In all situations where dermal contact is expected (e.g., during the actual application process and when handling freshly treated wood).

Applicators must wear long sleeved shirts, long pants, and an impermeable apron during the application and mixing processes and all situations where dermal contact is expected.

Work clothing must be changed when it shows signs of contamination. Launder work clothing separately from other household clothing. Dispose of worn-out work clothing and workshoes or boots in any general landfill, in the trash, or in any other manner approved for pesticide disposal.

Applicators must not eat, drink, or use tobacco products during those parts of the application process that may expose them to the wood treatment formulation.

Wash thoroughly after skin contact, and before eating, drinking, use of tobacco products, or using restrooms.

DANGER: CORROSIVE. CAUSES IRREVERSIBLE EYE DAMAGE. MAY BE FATAL IF SWALLOWED, INHALED OR ABSORBED THROUGH SKIN. CAUSES SKIN AND EYE IRRITATION. MAY CAUSE SEVERE BURNS. Do not get in eyes, on skin or on clothing. Do not breathe vapors or spray mist. Use with adequate ventilation. Do not take internally. Wash thoroughly after skin contact, before eating, drinking, use of tobacco products, or using restrooms. Wear goggles or face shield when handling or applying. Use only in well ventilated areas.

KEEP OUT OF REACH OF CHILDREN.

