

ACCEPTED

MAY 10 1967

UNDER THE FEDERAL INSECTICIDE
FUNGICIDE AND RODENTICIDE ACT
FOR ECONOMIC POISON REGISTERED
UNDER NO. 2651-11 SUBJECT
TO ATTACHED COMMENTS.

10 POUNDS NET



is intended for use as a control of "Sap Stain and Mold" in freshly cut softwood and hardwood lumber, logs, poles, posts and timbers.

DIRECTIONS

LUMBER. For lumber 2 inches or less in thickness, dissolve 10 lbs. of in 100 U. S. gallons of water. The freshly cut lumber should then be dipped or sprayed in this solution until complete surface wetting is accomplished.

LOGS. Spray the ends and barkless areas of the freshly cut logs with a solution of 20 lbs. of in 100 gallons of water.

POLES, POSTS & TIMBERS. Dissolve 20 lbs. of in 100 gallons of water and dip or spray in solution until all surfaces are wetted.

It is desirable that the logs be bright and free from infection at the time they are converted into lumber. For best protection during warm weather lumber should be dipped the day it is sawed, or at least, the following day.


should be thoroughly dissolved in a mixing tank of known capacity, such as a barrel, prior to being run into the dipping vat. The dipping vat should be protected from the rain to prevent dilution of the treating solution.

Treated lumber should not be exposed to heavy rains immediately after dipping. Lumber piles should be as narrow as practical, properly elevated, well spaced, and adequately roofed.

KEEP OUT OF THE REACH OF PETS, CHILDREN, OR OTHER IRRESPONSIBLE PERSONS

NON WARRANTY OF RESULTS

Seller makes no warranty, express or implied, concerning the use of this product. Buyer assumes all risk of use or handling, whether or not compliance with directions is not.

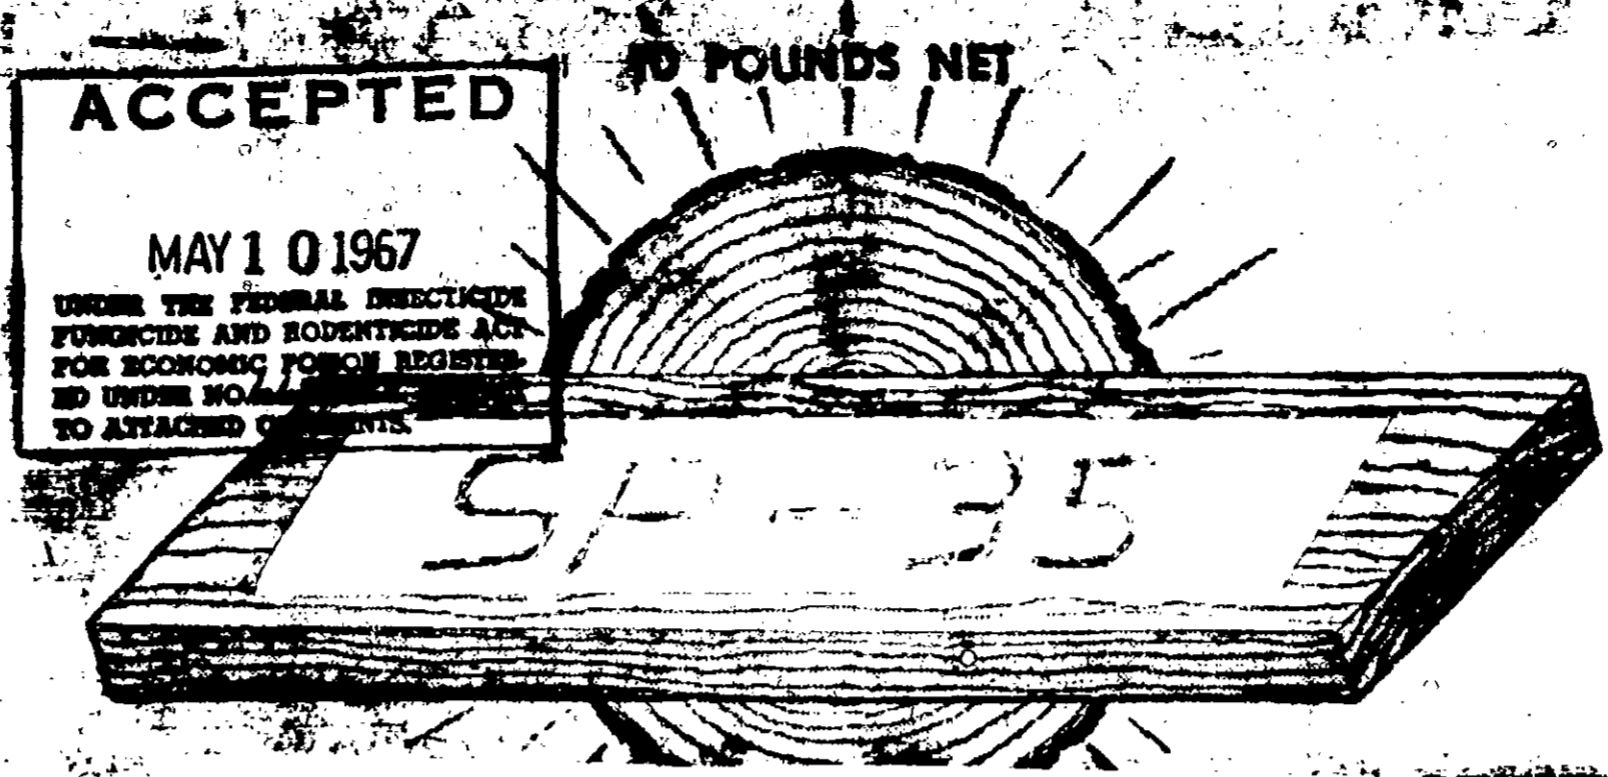

Active Ingredients:

Sodium Pentachlorophenate	26.3
Sodium Salts of other chlorinated phenols	4.5
Sodium tetraborate decahydrate	15.0

Inert Ingredients:

Equivalent to 25% technical sodium pentachlorophenate	4.2
---	-----

is intended for use as a control of "Sap Stain and Mold" in freshly cut softwood and hardwood lumber, logs, poles, posts and timbers.

DIRECTIONS

LUMBER. For lumber 2 inches or less in thickness, dissolve 10 lbs. of SAP-35 in 100 U. S. gallons of water. The freshly cut lumber should then be dipped or sprayed in this solution until complete surface wetting is accomplished.

LOGS. Spray the ends and barkless areas of the freshly cut logs with a solution of 20 lbs. of SAP-35 in 100 gallons of water.

POLES, POSTS & TIMBERS. Dissolve 20 lbs. of SAP-35 in 100 gallons of water and dip or spray in solution until all surfaces are wetted.

It is desirable that the logs be bright and free from infection at the time they are converted into lumber. For best protection during warm weather lumber should be dipped the day it is sawed, or at least, the following day. SAP-35 should be thoroughly dissolved in a mixing tank of known capacity, such as a barrel, prior to being run into the dipping vat. The dipping vat should be protected from the rain to prevent dilution of the treating solution.

Treated lumber should not be exposed to heavy rains immediately after dipping. Lumber piles should be as narrow as practical, properly elevated, well spaced, and adequately roofed.

CAUTION

KEEP OUT OF THE REACH OF PETS, CHILDREN, OR OTHER IRRESPONSIBLE PERSONS

WARNING

Do not breathe dust or spray mist. Do not get in eyes, on skin or on clothing, either dry material or its solution. Harmful if swallowed or inhaled. In case of contact with the eyes, flush with water for at least 15 minutes. In case of contact with the skin, wash immediately with soap and water. Get medical attention. Wash thoroughly after handling. For handling freshly dipped lumber waterproof aprons and gloves should be used.

NON-WARRANTY OF RESULTS

Seller makes no warranty of any kind, express or implied, concerning the use of this product. Buyer assumes all risk of use or handling, whether in accordance with directions or not.

A Product of

SONFORD PRODUCTS CORPORATION

SOUTHERN DIVISION
P. O. BOX 8474
JACKSON, MISSISSIPPI



NORTHERN DIVISION
RAND TOWER
MINNEAPOLIS, MINNESOTA

TRADE REGISTRATION NO.