



POISON



CONTENTS 5 GALLONS

POLE-AID NO. 3

**Wood Preserving Compound
For Professional Use Only
For the Prevention of Termites and
Decay in Standing Poles.**

ACTIVE INGREDIENTS:

Pentachlorophenol*	8.96%
Other Chlorophenols*	1.04%
Sodium Fluoride	41.00%
Potassium Dichromate	3.00%
Creosote	35.00%
Petroleum Solvent	8.33%

INERT INGREDIENTS	2.67%
Total	100.00%

*Equivalent to 10.42% Technical Pentachlorophenol.

WARNING: KEEP OUT OF REACH OF CHILDREN


See other warnings on side panel.

DIRECTIONS FOR USE

Stir well until entire contents have the same consistency. Before treating poles, all decayed wood should be removed. By means of a brush, trowel or other suitable device, apply a coating approximately 1/8-inch thick and over an area 18 inches to 24 inches wide. Usually not over 2 to 6 inches of the treatment extends above the ground line. When treatment is applied below ground line, that portion should be wrapped with suitable plastic coated paper. Covering all of the treatment with such paper is a recommended practice.

WARNING

May be fatal if swallowed. In case of accidental swallowing take an emetic to induce vomiting—CALL A PHYSICIAN. Do not breathe vapors. Do not get in eyes, on skin or on clothing. Harmful if absorbed through skin. Causes skin irritation. If accidentally contacts skin, wash thoroughly. Keep away from children. Must not be used near foodstuffs, pets or livestock. In handling, hands and arms should be protected with neoprene rubber gloves. Wash hands and arms with soap and warm water frequently.

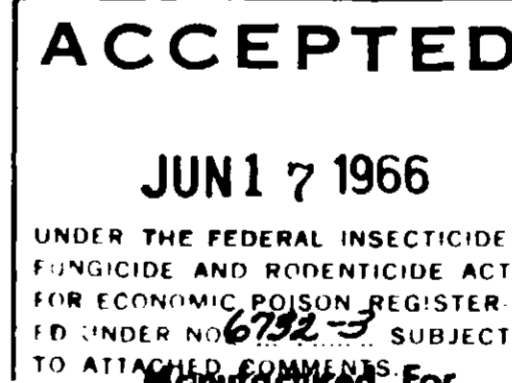

J. H. WEILER INSPECTION SERVICE, INC.
5909 North Washington Denver 16, Colo.

USDA Reg. No. 453-182

POISON

CONTENTS 5 GALLONS

POLE-AID NO. 3

**Wood Preserving Compound
For Professional Use Only
For the Prevention of Termites and
Decay in Standing Poles.**

ACTIVE INGREDIENTS:

Pentachlorophenol*	8.96%
Other Chlorophenols*	1.04%
Sodium Fluoride	41.00%
Potassium Dichromate	3.00%
Creosote	35.00%
Petroleum Solvent	8.33%
INERT INGREDIENTS	2.67%
Total	100.00%

*Equivalent to 10.42% Technical Pentachloropheno.

WARNING: KEEP OUT OF REACH OF CHILDREN

See other warnings on side panel.

DIRECTIONS FOR USE

Stir well until entire contents have the same consistency. Before treating poles, all decayed wood should be removed. By means of a brush, trowel or other suitable device, apply a coating approximately 1/8-inch thick and over an area 18 inches to 24 inches wide. Usually not over 2 to 6 inches of the treatment extends above the ground line. When treatment is applied below ground line, that portion should be wrapped with suitable plastic coated paper. Covering all of the treatment with such paper is a recommended practice.

ACCEPTED

JUN 17 1966

6792-3
Manufactured For

J. H. WEILER INSPECTION SERVICE, INC.

5909 North Washington

Denver 16, Colo.

USDA Reg. No. 453 182