

7313-13

8/8/2011

10 of 5

UNITED STATES ENVIRONMENTAL PROTECTION AGENCY
WASHINGTON, D.C. 20460



Office of Pesticide Programs

PPG Industries, Inc.
4325 Rosanna Drive
Pittsburgh, PA 15101

Attention: Natalie A. Gaydos
Senior EHS Specialist

AUG 8 2011

Subject: **Amercoat 214 Marine Antifouling Paint**
EPA Registration No. 7313-13
Notification Dated July 11, 2011

This will acknowledge receipt of your notification, submitted under the provisions of FIFRA Section 3(c)(9).

Proposed Notification

Label Changes per PR Notice 2007-4

General Comments

Based on a review of the submitted material, the following comments apply:

The Notification is in compliance with PR Notice 98-10 and is acceptable. This information has been added to your file.

If you have any questions concerning this letter, please feel free to contact Martha L. Terry at (703) 308-6217.

Sincerely,

A handwritten signature in black ink that reads "M. Swindell".

Marshall Swindell
Product Manager (33)
Regulatory Management Branch 1
Antimicrobials Division (7510P)

2015

	United States Environmental Protection Agency Washington, DC 20460	<input type="checkbox"/> Registration <input type="checkbox"/> Amendment <input checked="" type="checkbox"/> Other	OPP Identifier Number
--	---	--	-----------------------

Application for Pesticide – Section 1

1. Company/Product Number 7313-13	2. EPA Product Manager Marshall Swindell	3. Proposed Classification <input checked="" type="checkbox"/> None <input type="checkbox"/> Restricted
4. Company/Product (Name) PPG Architectural Finishes, Inc./ Amercoat® 214 Marine Antifouling Paint	PM# 33	
5. Name And Address Of Applicant (Include ZIP Code) PPG Industries, Inc. 4325 Rosanna Drive Pittsburgh, PA 15101 <input type="checkbox"/> Check if this is a new address		6. Expedited Review. In accordance with FIFRA Section 3(c)(3) (b)(i), my product is similar or identical in composition and labeling to: EPA Reg. No. _____ Product Name _____

Section II


<input type="checkbox"/> Amendment – Explain below.	<input type="checkbox"/> Final Printed labels in response to Agency letter dated _____
<input type="checkbox"/> Resubmission in response to Agency letter dated _____	<input type="checkbox"/> "Me Too" Application.
<input checked="" type="checkbox"/> Notification – Explain below.	<input type="checkbox"/> Other – Explain Below.

Explanation: Use Additional Page(S) If Necessary. (For Section I And Section II.)
 Notification of label change per PR Notice 2007-4. This notification is consistent with the guidance in PR Notice 2007-4 and the requirements of EPA's regulations at 40 CFR §§ 156.10, 156.140, 156.144, 156.146, and 156.156. No other changes have been made to the labeling or the Confidential Statement of Formula for this product. I understand that it is a violation of 18 U.S.C. Sec. 1001 to willfully make any false statement to EPA. I further understand that if the amended label is not consistent with the requirements of 40 CFR §§ 156.10, 156.140, 156.144, 156.146, and 156.156, this product may be in violation of FIFRA and I may be subject to enforcement action and penalties under sections 12 and 14 of FIFRA.

Section III

1. Material This Product Will Be Packaged In:			
Child Resistant Packaging <input type="checkbox"/> Yes* <input checked="" type="checkbox"/> No	Unit Packaging <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No	Water Soluble Packaging <input type="checkbox"/> Yes <input checked="" type="checkbox"/> No	2. Type of Container <input checked="" type="checkbox"/> Metal <input type="checkbox"/> Plastic <input type="checkbox"/> Glass <input type="checkbox"/> Paper <input type="checkbox"/> Other (Specify) _____
* Certification must be submitted-425# not CR EPA has data on file		If "Yes" No. per Unit Packaging wgt. Container	If "Yes" No. per Unit Packaging wgt. Container
3. Location of Net Contents Information <input checked="" type="checkbox"/> Label <input type="checkbox"/> Container		4. Size(S) Retail Container 1 gal., 5 gal.	5. Location of Label Directions <input checked="" type="checkbox"/> On Label <input type="checkbox"/> On Labeling accompanying product
6. Manner in Which Label is Affixed to Product <input checked="" type="checkbox"/> Lithographed <input checked="" type="checkbox"/> Paper glued <input type="checkbox"/> Stenciled		<input type="checkbox"/> Other _____	

Section IV

1. Contact Point (Complete items directly below for identification of individual to be contacted, if necessary, to process this application.)		
Name Natalie A. Gaydos	Title Sr. EHS Specialist	Telephone No. (Include Area Code) 412-462-5536
2. Signature 		6. Date Application Received _____
3. Title Sr. EHS Specialist		
4. Typed Name Natalie A. Gaydos		
5. Date July 11, 2011		

[EPA MASTER LABEL COPY]

Amercoat® 214 Marine Antifouling Paint

[Alternate color descriptors :]

RED – AT214-74

BLUE – AT214-41

INTENDED FOR USE IN COMMERCIAL SHIPYARDS ONLY.

**EPA Reg. No. 7313-13
EPA Est. No. XXXX-XX-X**

ACTIVE INGREDIENT: Cuprous Oxide . . . 38.46%

OTHER INGREDIENTS: 61.54%

Copper as metallic: 34.15%

Contains Petroleum Distillates

**KEEP OUT OF REACH OF CHILDREN
WARNING**

See other precautions on side panel and MSDS.

**Manufactured by
PPG Architectural Finishes, Inc.
PPG Industries, Inc.
One PPG Place
Pittsburgh, PA 15272
Emergency Telephone Number: 1-412-434-4515
Manufactured in the U.S.A.**

**[Alternate container weights :]
NET CONTENTS X US gallons (X.XX liters)**

Photochemically Reactive per SCAQMD Rule 102

Shelf life: 1 year from date of shipment


DOT: Paint, UN1263

VOC: 399 g/L, 3.33 lbs/gal

Thinned: T-10 (1 pt/gal) 447 g/L, 3.7 lbs/gal

Do not thin inconsistent with local VOC regulations.

[07/06/2011 pending EPA update, approved xxxxxx]



PRECAUTIONARY STATEMENTS

HAZARDS TO HUMANS AND DOMESTIC ANIMALS:

WARNING – Causes severe eye irritation. May cause moderate skin irritation. May be harmful if absorbed through the skin. Prolonged or repeated contact may cause an allergic skin reaction. Vapor irritates eyes, nose, and throat. Vapor and/or spray mist may be harmful if inhaled. May cause irritation and/or allergic respiratory reaction in lungs. Harmful or fatal if swallowed.

FIRST AID:

Have the product container or label with you when calling a poison control center or doctor, or going for treatment.

If in eyes: Hold eye open and rinse slowly and gently with water for 15-20 minutes. Remove contact lenses, if present, after the first 5 minutes, then continue rinsing eye. Call a poison control center or doctor for treatment advice.

If on skin or clothing: Take off contaminated clothing. Rinse skin immediately with plenty of water for 15-20 minutes. Call a poison control center or doctor for treatment advice.

If swallowed: Call poison control center or doctor immediately for treatment advice. Have person sip a glass of water if able to swallow. Do not induce vomiting unless told to do so by a poison control center or doctor. Do not give anything by mouth to an unconscious person.

If inhaled: Move person to fresh air. If person is not breathing, call 911 or an ambulance, then give artificial respiration, preferably by mouth to mouth, if possible. Call a poison control center or doctor for treatment advice.

For emergency medical information, call 1-412-434-4515.


Hygienic practices – Wash thoroughly after use and before eating, smoking or using washroom. Keep away from feed or food products. Launder contaminated clothing before use.

ENVIRONMENTAL HAZARDS: This product is toxic to fish. Do not apply directly to water by cleaning, equipment or disposal of wastes or allow chips and dust generated during paint removal to enter water.

PHYSICAL OR CHEMICAL HAZARDS: Flammable. Keep away from heat, sparks, arc and open flame. Avoid breathing vapor, dust, spray mist or contact with eyes and skin. Use only with adequate ventilation and wear protective equipment, such as goggles, face protection, gloves, full protective clothing and properly fitted, positive-pressure, air-supplied respirator, during mixing, spraying and drying, until all vapors and mists are gone. There are reports that associate repeated and prolonged occupational overexposure to solvents with permanent brain and nervous system damage. In confined, poorly ventilated areas, use airline, hood-type respirator and explosion- and spark-proof equipment. Welding and cutting can produce hazardous fumes and gases. **For fires**, blanket flames with foam, carbon dioxide, dry chemical. **For spills**, eliminate all sources of ignition or sparks. Use absorbent cleanup materials; place in separate, closed, metal container and dispose of in accordance with all applicable regulations. Wear NIOSH certified, self-contained air-supplied respirators to prevent overexposure to vapors.

DIRECTIONS FOR USE: It is a violation of Federal Law to use this product in a manner inconsistent with its labeling.

Surface Preparation – Dependent upon the condition of the hull and existing antifouling coatings, surface preparation will vary from low pressure water cleaning (1500-3000 psi) to abrasive blasting. Apply over a suitable primer system or clean, intact, existing antifouling coating. Substrates that are abrasive blasted should be prepared in accordance with the instructions for the anticorrosive coating to be used.

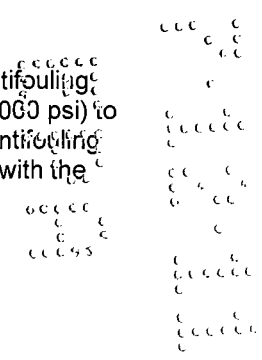

Application Equipment – Can be applied by brush, roller, airless spray, or conventional air spray equipment.

Application Instructions –

1. When applying antifouling coatings over epoxy anticorrosive coatings, apply the first coat of antifouling while the epoxy anticorrosive is tack free, but still soft to thumb pressure. If the epoxy is too hard, apply another thin coat of epoxy and then apply the antifouling after the epoxy is tack free but still soft to thumb pressure. Failure to apply the antifouling coating while the epoxy is thumbprint soft may result in poor adhesion of the antifouling coating and eventual delamination.
2. Clean all application equipment with T-10 thinner.
3. Stir material thoroughly and continue stirring occasionally during application to ensure pigment suspension.
4. Thin only for workability – no more than 1 pint thinner per gallon of material.
5. Apply a wet coat in even brush or roller strokes or spray passes, building the wet film thickness to achieve the recommended dry film thickness. Allow 4 hours dry time at 77°F (20°C) between coats. Allow 5 hours dry time at 77°F (20°C) before launching.
6. Clean application equipment immediately after use with thinner.

STORAGE AND DISPOSAL: Keep container closed when not in use. Store in cool, dry, well-ventilated area. Do not contaminate water, food or feed by storage or disposal. **Pesticide Disposal:** Pesticide wastes are toxic. Improper disposal of this product or its rinsate is a violation of Federal Law. If this product cannot be disposed of by use according to label instructions, contact your State Pesticide or Environmental Control Agency, or Regional EPA Office, Hazardous Waste. **Container Disposal:** Nonrefillable container. Do not reuse or refill this container. Offer for recycling, if available, or puncture and dispose of in a sanitary landfill, or by other procedures approved by state and local authorities.

LIMITED WARRANTY – PPG warrants your satisfaction with the performance properties of this product if it is properly applied to a properly prepared surface in accordance with label directions. PPG MAKES NO OTHER EXPRESS WARRANTIES. IN THE EVENT THE PRODUCT FAILS TO CONFORM TO THIS WARRANTY, PPG AS ITS SOLE LIABILITY AND IN LIEU OF ANY DIRECT OR INDIRECT, INCIDENTAL, SPECIAL OR CONSEQUENTIAL DAMAGES, WILL, AT YOUR OPTION, FURNISH REPLACEMENT PRODUCT OR REFUND THE PURCHASE PRICE - LABOR OR COSTS OF LABOR FOR THE APPLICATION OF ANY PRODUCT SPECIFICALLY ARE EXCLUDED. You must supply proof of purchase. This warranty gives you specific legal rights, and you may also have other rights which vary from state to state. Some states do not allow the exclusion or limitation of incidental or consequential damages, so the above limitation or exclusion may not apply to you. To make a claim under this warranty contact the store where you purchased the product or; PPG Industries, Inc., One PPG Place, Pittsburgh, PA 15272.

