

WESTERN

## WESTERN ALGAE & SLIME CONTROL NR-M


REGULAR LIQUID

Disodium Cvanodithioimidocarbonate .......... 3.68%

Potassium N-Methyldithiocarbamate . . . . . . . . . . . . . . . . 5.07%

INERT INGREDIENTS

Weight per gallon: 8.81 pounds

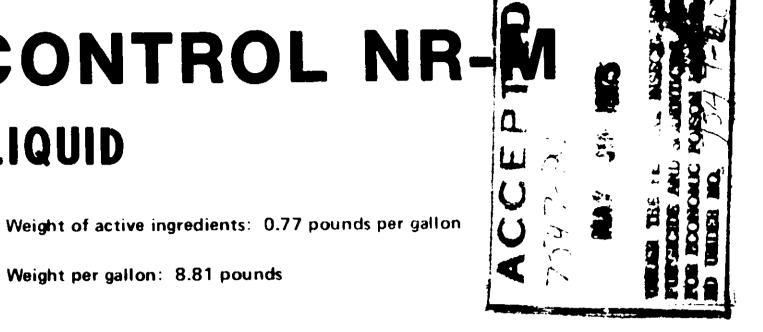

Changes in temperature create air pressure inside drums. Use proper caution in unscrewing plug. Unscrew plug slowly, allowing air to escape before completely removing.

91.25%

ARNING: KEEP OUT OF REACH OF CHILDREN. HARMFUL IF SWALLOWED. MAY CAUSE SKIN IRRITATION OR DAMAGE TO EYES.

ON NOT GET IN EYES, ON SKIN OR CLOTHING. Wear goggles and protective gloves and clothing. In case of contact with this material, wash skin with plenty of soap and warm water; flush eyes with plenty of water for at least 15 minutes and get medical attention. If this material is spilled on clothing, wash clothing thoroughly before re-wearing. If swallowed, call a physician immediately. Give patient doses of powdered charcoal immediately or all he can swallow of raw egg whites, milk, gruel, or flour and water. Then induce vomiting with salt, soap, or mustard in warm water. FOR INDUSTRIAL USE ONLY. Do not reuse empty drum. Recondition or destroy by perforating or crushing and burying in a safe place away from water supplies.

> DIRECTIONS FOR USE: For control of algae, in industrial recirculating water cooling towers. INITIAL DOSAGE: When microbial growth is evident, apply 6.9 to 13.9 fl. oz. per 1,000 gallons water contained in the system. Repeat dosage until control is evident. SUBSEQUENT DOSAGE: When control is evident, apply 2.3 to 13.9 fl. oz. per 1,000 gallons water contained, every 1 to 5 days, or as needed. Product may be applied at any point in the system where good mixing occurs. Badly fouled systems must be cleaned before the product is added.

CAUTION: This product is toxic to fish and wildlife. Treated effluent should not be discharged where it will drain into lakes, streams, ponds, or public water. Apply this product only as specified on this label. Do not contaminate water by cleaning of equipment, or disposal of wastes.

SOLD BY WESTERN CHEMICAL COMPANY

EPA REGISTRATION No. 7547-20 EPA ESTABLISHMENT NO. 7547-MO-1

PLEASE READ ANY CAUTION OR **DIRECTION LABELS** ON THIS DRUM

WESTERN CHEMICAL COMPANY NORTH KANSAS CITY, MO.
64116

**1345 TANEY**